General Land Office • Original Field Notes

Book Number

143

The images in this file are photographs of the notes of the original surveys of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The original surveys in Nebraska began in the mid 1850's and were completed in the mid 1880's. The Nebraska office of the Surveyor General was closed June 30, 1886.

Part I

Field notes of the section lines and the lines subdividing sections of fractional Township number 26 north of Range number 8 east of the 6th Principal Meridian included within the Winnebago Reservation Nebraska

Surveyed by John W. Beaman U.S. Deputy Surveyor under his contract No 87 bearing date October 6th 1874.

Survey Commenced May 12th 1875
Survey Completed May 20th 1875

PLAT S.S.

Township No 26 North of

Index.

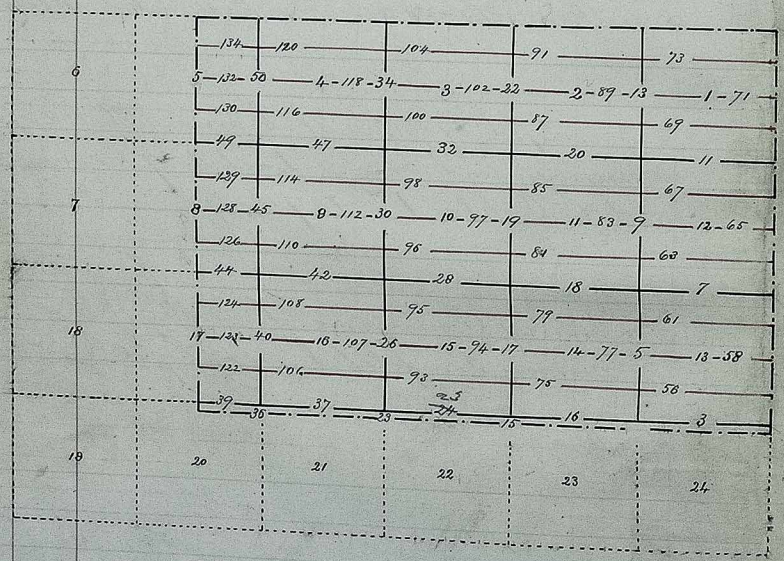

Range No 8 East of the 6th Principal Meridian

Chs	lks	
		The corner bet fractional sections 23 and 24 was found to be 15.91 chs. west of 6th Mile Cor on the South Boundary of Reservation. To reestablish the corner between Secs 23 and 24 on the South Boundary set charred post 4 ft long 3 in side 1 ft in ground in mound 4½ ft at base 2 ft high dug 3 pits 54 x 20 x 12 in and placed upon post additional marks S. B. M. R. & C. R. from which I run
		North on a true line bet fractional Secs 23 & 24 Va 11° 45' East.
5	54	To Corner to Secs 13 & 14 and fractional Secs 23 & 24. Reestablished corner by setting charred post 4 ft long 3 in sq 1 ft in ground in mound 4½ ft at base 2 ft high dug 2 pits 48 x 20 x 12 in, 2 pits 42 x 20 x 12 in
		Surface level prairie Soil, 2nd rate, pale clay loam best adapted to grazing.

Township No 26 North of Range

Chs	lks	
		East on a random line bet. Sec 13 and fractional Sec 24
		Va 12° East.
20	00	Fence chain S. 80° W. + N. 80° E.
20	00	Set temp 1/16 Sec cor.
39	00	Cross bottom chain N. and S.
39	73	To 1/4 Sec. Cor. Set chained post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base dig 2 pits 48 x 20 x 12 in 2 pits 20 x 20 x 12 in for 1/4 Sec. cor. from which corner I run
		East on a random line, same var.
4	10	Omaha Cross 20 lks wide runs N. E.
7	00	Leave Cross bottom chain N and S.
20	00	Set temp 1/16 Sec. cor.
39	41	To Cor. to Sec's 13 + 24 on East Boundary of Township. from which Corner I run
		N 89° 41' W. on a true line
		Va 12° 19' East.
19	72	Set Sand Stone 17 x 12 x 14 in 11 in in ground for 1/16 Sec. Cor.
39	44	1/4 sec cor.
		from which corner. I run
		N. 89° 41' West.

No 8 East of the 6th Principal Meridian

Chs.	lks	
		on a true line. Same Var.
59	30½	Set chained post 4 ft long 3 in wide, 1 ft in ground in mound 4½ ft dia at base 2 ft high. 2 pits 48 x 20 x 12 in 2 pits 20 x 20 x 12 in for 1/16 Sec Corner
79	14	Corner to Sec's, 13, 14, 23 + 24
		Surface rolling prairie, but adapted to wheat. Soil 1st Grade

Township No 26 North, of Rang No

Chs.	Lks	
		North on a random line bet Secs 13 & 14 Va. 11° 30' East.
3	00	Wagon road N.E. & S.W.
16	90	Creek 8 lks wide N. to E. Fence North.
20	00	Set temp 1/16 Sec Cor
23	80	Ploughed Land N.E. & S.W.
27	50	Leave Ploughed Land S.E. & N.W.
39	66	1/4 Sec Cor. Set a granite Stone 15×12×7 in 10 in in ground for 1/4 Sec Cor, at fence Thence North with Same Var. Leave fence
60	00	Set temp 1/16 Sec Cor
79	22	To a point 23 lks West of Cor to Secs 11, 12, 13 & 14 at which Corner I Set post 4 ft long 3 in square 1 ft in ground in mound 4 1/2 ft dia at base 2 ft high 2 pits 48×20×12 2 pits 20×20×12 in and deposited marked (-) Sand Stone 5×5×5 in From which Corner I run.
		South on a true line Va. 11° 10' East
19	78	Set granite Stone 15×12×3 in 10 in in ground for 1/16 Sec Cor
39	56	1/4 Sec Corner.

8 East of the 6th Principal Meridian

Chs.	Lks	
		From which Cor I run
		South on a true line Va. 11° 30' East.
59	39	Set chained post 4 ft long 3 in wide, 1 ft in ground in mound 4 1/2 ft dia at base 2 ft high 2 pits 48×20×12, 2 pits 20×20×12 for 1/16 Sec Cor
79	22	The Corner to Secs 13, 14, 23 and 24.
		Surface fine rolling Prairie, Soil dark loam, best adapted for wheat. 1st rate

Township No 26 North of Range No

Chs.	Lks	
		East on a random line bet Secs 12 + 13. Va. 11° 30' East.
10	00	Creek Bottom bears N + S.
20	00	Set temp 1/16 Sec Cor
22	30	Omaha Creek 18 lks wide runs S + N.
23	50	Ploughed field S.E + N.W.
39	34	Fence and Plowed Land bears N + S
39	34	To a Point 24 lks N of 1/4 Sec Cor, Set a Granite Stone 14 x 12 x 8 in, 9 in in ground From which Cor I run
		East on a random line. Va 11° 30' East
	20	Wagon road bears N + S.
	30	Ploughed Land bears N + S
3	00	Leave " bears N + S.
4	50	Leave "Creek" Bottom bears N + S.
9	50	Wagon Road from Sioux City to Agency N + S.
20	00	Set temp 1/16 Sec Cor
26	45	Wagon Road N + S.
39	02	Intersect East Boundary of Township at Corner to Secs 12 + 13 from which I run

8 East of the 6th Principal Meridian.

Chs	Lks.	
		N 89° 47' West on a true line, Va, 11° 43' East.
19	51	Set Chained post 4 ft long 3 in wide, 1 ft in ground in mound 4 1/2 ft at base 2 ft high, dug 2 Pits 48 x 20 x 12, 2 pits 20 x 20 x 12 for 1/16 Sec Cor
39	02	The 1/4 Sec Cor, From which Cor I run
		N. 89° 47' W. on a true line Va, 11° 22' East.
58	69	Set Chained post 4 ft long 3 in wide, 1 ft in ground in mound 4 1/2 ft base 2 ft high dug 2 pits 48 x 20 x 12 2 pits 20 x 20 x 12 in for 1/16 Sec Cor.
78	36	The Cor to Secs, 11, 12, 13 and 14, Surface fine rolling Prairie and dry Bottom Soil dark Clay loam with Clay Subsoil, best adapted for wheat. Pr rate

Township No 26 North, of Range

Chs	Lks	
		North on a random line bet. Secs, 11 & 12
		Va, 11° 45' East
5	00	Fence and ploughed field bears N. E & S. W.
13	50	Frame house 2.00 Chs. West
15	00	Leave fence S. 20° E & N. 20° W.
16	20	Wagon Road S. E & N. W.
16	50	Fence N. 80° E & N. W.
18	00	Frame house
20	00	Set tempy 1/16 Sec Cor
20	40	Creek Creek 2 lks wide runs from W. to E.
34	84	Leave fence & ploughed land bears N & S.
39	84	To a point 5 lks East of 1/4 Sec Cor. At Cor. Set Granite Stone 12 x 10 x 6 in From which Cor Drawn
		North on a random line. Same Var
	05	Wagon Road N. W & S. E
	10	Fence bears N. W & S. E. thence along fence and 10 lks East of Wagon Road
20	00	Set tempy 1/16 Sec Corner and leave fence and road bears S & N. E.
21	50	Creek Bottom (Wet) bears E & W.

No 8 East of the 6th Principal Meridian

Chs	Lks	
26	45	Recross Road N. W & S. E, 50 lks E. of bridge
28	00	Creek 3 lks Wide bears W. to E.
29	20	Recross Road N. E & S. W & leave Creek bottom
39	35	to point 27 lks West of Cor to Secs, 1, 2, 11 & 12 At Corner Set Chained post 4 ft long 3 x 3 in, ft in ground in mound 4 1/2 ft at base 2 ft high 2 pits 48 x 20 x 12 2 Pits 20 x 20 x 12, From which Cor Drawn
		South on a true line
		Va 11° 22' East
19	67 1/2	Set chained post 4 ft long 3 in wide, ft in ground in mound 4 1/2 ft at base 2 ft high, dug 2 pits 48 x 20 x 12, 2 Pits 20 x 20 x 12 in for 1/16 Sec Cor
39	35	The 1/4 Sec Cor. From which Drawn
		South true line
		Va 11° 49' East
59	27	Set chained post, 4 ft long 3 in wide, ft in ground in mound 4 1/2 ft dia at base 2 ft high dug 2 pits 48 x 20 x 12 in, 2 pits 20 x 20 x 12 in for 1/16 Sec Corner
79	19	The Cor to Secs, 11, 12, 13 & 14
		Surface fine rolling Prairie, Best for wheat, 1st rate

Township No 26 North, of Range

Chs	lks	
		East on a random line bet Secs 1+12 Va. 11° 30' E.
9	00	Creek Bottom bears N+S.
10	70	Cross Omaha Creek 25 lks wide S. to N. with Scattering timber
17	00	Slough S.E+N.W.
20	00	No tempy Cor in Slough
21	72	Leave Slough bears N.W+S.E.
22	00	Set tempy Wit. Cor to 1/16 Sec Cor
25	00	Ploughed Land N+S.
34	20	Fence N.10° E+S.10° W. and leave ploughed land
39	45	1/4 Sec Cor Set Sand Stone 15×12×6 in 10 in ground from which Cor Draw East. Same Va
4	00	Wagon road N+S.
4	10	Creek 5 lks Wide N.E+S.W
19	40	Wagon road N+S.
20	00	Set tempy 1/16 Sec Cor fence + ploughed field N.
38	88	Intersect East Boundary at Cor to Secs 1+12 from which Corner Draw

No 8 East of the 6th Principal Meridian

Chs	lks	
		West on a true line bet. Sec's 1+12, Va 11° 30' East.
19	44	Set sand stone 16×6×6 in 11 in in ground for 1/16 sec cor.
38	88	The 1/4 Sec. cor.
56	60 1/2	Set sand stone 14×14×4 in 9 1/2 in in ground for Wit. Cor. to 1/16 Sec. Corner 2 chs East of true point for cor.
78	33	The Corner to Sec's 1, 2, 11+12,
		Surface level prairie and Creek bottom.
		Soil 1st rate good for wheat and corn.
		May 12th 1875

Township No 26 North of Range

chs	lks	
		North on a random line bet Secs 1 & 2
		Va 11° 45' East.
20	00	Set temp 1/16 sec. cor.
29	50	Creek Bottom bears S.E. and N.W.
39	48	To a point 72 lks East of 1/4 sec. cor. at corner deposited Liner Stone 8×4×2 in and set post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high dug 2 pits 48×20×12 in, 2 pits 20×20×12 from which Corner Irun.
		North on a random line
		Va 11° 45' East.
4	50	Omaha Creek 20 lks wide runs from S 10° E. to N 10° W.
20	00	Set temp 1/16 sec. cor.
31	00	Plowed land bears W and N.W.
32	00	Frame house 4, or chs East.
39	43	To a point 56 lks East of Cor bet Secs 1 & 2 on North Boundary of Township from which Cor. Irun.
		S. 1° 28' E on a true line
		Va 11° 05' East.

No 8 East of the 6th Principal Meridian

chs	lks	
19	43	Set charred post 4 ft long 3 in wide, 1 ft in ground in mound 4½ ft dia at base 2 ft high, dug 2 Pits 48×20×12 in, 2 Pits 20×20×12 in for 1/16 Sec Cor
39	43	The 1/4 Sec Cor, S 1° 28' E on a true line
		Va 11° 19 East
59	17	Set charred post 4 ft long 3 in wide, 1 ft in ground in mound 4½ ft at base 2 ft high, 2 pits 48×20×12 2 Pits 20×20×12 for 1/16 Sec Cor.
78	91	The Corner to Secs 1, 2, 11 and 12.
		Surface Creek bottom, subject to overflow during high Water, Soil dark loam, best adapted to Corn. 2nd rate
		May 12th 1875

Township No 26 North, of Range

Chs	lks	
		North on a true line bet Secs 22 + 23 from Cor on South Boundary Reservation* Va 12°20' East
5	46	The Corner to Secs 14, 15, 22 + 23. Set charred post 4 ft long 3 in square, 1 ft in ground in mound 4½ ft at base 2 ft high dug 2 pits 48 x 20 x 12 in 2 pits 20 x 20 x 12 in
		Surface rolling prairie. Soil pale clay loam, best adapted for wheat. 2d rate
		*Said Cor being 16.12 chs West of 7th Mile Cor To reestablish the Corner to Secs 22 + 23 on South Boundary Reservation Set charred post 4 ft long 3 in wide, 1 ft in ground in mound 4½ ft at base 2 ft high dug 3 pits 54 x 24 x 12 in. Post with the additional Marks I.B.W.R + O.R.

No 8 East of the 6th Principal Meridian

Chs	lks	
		East on a random line bet Secs 14 + 23 Va. 11°45' East
5	00	Old Wagon road S 80° E. N. 80° W.
20	00	Set temporary 1/16 Sec Cor
40	00	No old 1/4 Sec Cor, Set tempy. 1/4 Sec Cor
60	00	Set tempy 1/16 Sec Cor
67	00	Wagon road N. E + S. W.
79	57	Intersect N + S. line at Cor to Secs, 13, 14, 23 + 24 from which corner I run
		S. 89°43' W on a true line bet Secs 14 + 23 Va 11°28' East
19	89¼	Set a Granite Stone 20 x 12 x 5 in 15 in in ground for 1/16 Sec Cor
~~19~~	~~87~~	
39	7 8½	Set a Quartz Stone 12 x 12 x 12 in 8 in in ground for 1/4 Sec Cor
59	67¾	Set a Sand Stone 18 x 12 x 4 in 12 in in ground for 1/16 Sec Cor
~~59~~	~~65~~	
79	57	The Cor to Secs 14, 15, 22 + 23.
		Surface fine rolling Prairie. Soil pale Clay loam, best adapted to Wheat. 1st rate

Township No 26 North, of Range

Chs	lks	
		North on a random line bet Secs 14 + 15 Va 12° East
1	30	Cross road S 80° E. N. 30° W.
20	00	Set tempy 1/16 Sec Cor.
40	00	No old 1/4 Sec Cor. Set tempy 1/4 Sec Cor
60	00	Set tempy 1/16 Sec Corner
61	10	Creek 5 lks wide W. to E.
68	50	Wagon road S. 80° E. N. 80° W.
79	12	To a point 31 lks West of old Cor to Secs. 10, 11, 14 + 15. Set post 4 ft long 3 in square 1 ft in ground in mound 4½ ft at base 2 ft high deg 2 Pits 48 × 20 × 12 in, 2 Pits 20 × 20 × 12 in From which Corner Drum
		South on a true line bet Secs 14 + 15 Va. 11° 47' East
19	78	Set Sand Stone 16 × 12 × 5 in 11 in in ground for 1/16 Sec Cor
39	56	Set Sand Stone 16 × 12 × 4 in 11 in in ground for 1/4 Sec Cor
59	34	Set Sand Stone 16 × 12 × 5 in 4 in in ground for 1/16 Sec Cor
79	12	The Cor to Secs 14, 15, 22 + 23.
		Surface rolling prairie, Soil pale Clay loam, best adapted for wheat. 2d rate

No 8 East of the 6th Principal Meridian

Chs	lks	
		East on a random line bet Secs 11 + 14 Va. 11° 30' East
20	00	Set tempy 1/16 Sec Corner
40	00	No old 1/4 Sec Cor. Set tempy 1/4 Sec Corner
60	00	Set tempy 1/16 Sec Corner
80	12	Intersected N + S. line 46 lks South of Cor to Secs 11, 12, 13 + 14 from which Drum;
		N. 89° 34' W on a true line bet Secs 11 + 14 Va. 12° 16' East
20	03	Set Granite Stone 14 × 6 × 6 in, 9 in in ground for 1/16 Sec Corner.
40	06	Set Sandstone, 14 × 12 × 3 in, 9 in in ground for 1/4 Sec Corner
60	09	Set Granite Stone 14 × 10 × 5 in 9 in in ground for 1/16 Sec Corner
80	12	The Corner to Secs 10, 11, 14 + 15
		Surface very rolling Prairie, Soil best adapted to wheat. 1st rate May 13th 1875

Township No 26 North of Range

Chs	lks	
		North on a random line bet. Secs. 10 & 11 Va. 11° 45' East
20	00	Set temp. 1/16 Sec Corner
40	00	Pt. old 1/4 Sec Cor. Set temp. 1/4 Sec Cor.
60	00	Set temp. 1/16 Sec Corner
70	95	Creek 4 lks wide S. W. to N. E.
79	65	To a point 6 9 lks West of Corner to Secs 2, 3, 10 & 11, or Corner Set Charred post 4 ft long 3 in square, 1 ft in ground in mound 4 1/2 ft dia at base 2 ft high dug 2 pits 48 x 20 x 12 in 2 pits 20 x 20 x 12 in for Corner from which Drawn:
		South on a true line bet. Secs 10 & 11 Var. 11° 15' East
19	91 1/4	Set Granite Stone 14 x 10 x 10 in 9 in in ground for 1/16 Sec Cor.
39	82 1/2	Set Granite Stone 12 x 7 x 7 in 8 in in ground for 1/4 Sec Cor
59	73 3/4	Set Granite Stone 14 x 10 x 5 in, 9 in in ground for 1/16 Sec Corner
79	65	The Corner to Secs 10, 11, 14 & 15 Surface rolling Prairie, Soil adapted to Wheat, Pl. rate

No 8 East of the 6th Principal Meridian

		East on a random line bet. Secs. 2 & 11 Var. 11° East
8	00	Creek 3 links wide S. W. to N. E.
11	10	Ravine S. to N.
20	00	Set temp. 1/16 Sec Corner
21	00	Oak Grove N. W. & S. E.
21	75	Ravine North, with outcropping of red sandstone
28	25	Creek 5 lks wide N. 80° W. to S. 80° E.
33	50	Ploughed land N. E. & S. W. 2 acres
39	00	Leave Ploughed Land leave N. & S.
39	73	Old 1/4 Sec Corner Set charred Post 4 ft long 3 in wide, 1 ft in ground, in mound 4 1/2 ft base 2 ft high dug 2 pits 48 x 20 x 12 in 2 pits 20 x 20 x 12
60	00	Set temp. 1/16 Sec Corner
79	98	Intersect N. & S. line at Cor to Secs 1, 2, 11 & 12 from which Corner Drawn:
		N. 89° 52' W. on a true line bet. Secs 2 & 11 Va 11° 8' East
20	12 1/2	Set Granite Stone 12 x 10 x 10 in 8 in in ground for 1/16 Sec Corner
40	25	The Established 1/4 Sec Corner

Township No 26 North of Range

Chs	lks	
60	11½	Set Post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor from which
		An Oak 6 in dia Bears S 88° E. 198 links dist
		An Oak 6 in dia bears N. 79° E. 211 lks dist.;
79	98	The Corner to Secs 2, 3, 10 & 11
		Surface broken prairie & brush land
		Soil 2nd rate

No 8 East of the 6th Principal Meridian

Chs	lks	
		North on a random line bet. Secs. 2 & 3 Va 12° East.
20	00	Set temp 1/16 Sec Corner
26	40	Creek 5 lks wide with scattering Willows N. 70° W. to S. 70° E.
39	68	Old 1/4 Sec Corner, Set granite Stone 14×10×6 in 9 in in ground for 1/4 Sec Corner
60	00	Set temp 1/16 Sec Corner
71	18	Ravine drains from W to E.
79	54	Intersected North Boundary Township 41 lks East of Corner of Secs 2 & 3 from which I ran;
		S. 22' E on a true line bet Secs 2 & 3 Va 11° 56' East
19	86	Set granite Stone 14×10×8 in, 9 in in ground for 1/16 Sec Corner
39	86	The 1/4 Sec Corner, S. 22 E. on a true line Va 11° 38' E.
59	70	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor. from which
		Oak 10 in dia bears N. 74½° E. 246 lks No other trees convenient for marking.
		Deep Out Pit 2×2 ft 12 in deep 8 lks South of Post.
79	54	The Cor. to Secs, 2, 3, 10 & 11.
		Surface Very Rolling, Adapted to grazing, 2d rate

Township No 26 North, of Range

Chs	lks	
		North on a true line bet Secs 21 + 22 from Corner on South Boundary Reservation* Va 12°30' East
5	46	The Corner to Secs. 15, 16, 21 + 22. Deposited quartz Stone 6 x 4 x 4 in, Set post 4 ft long 3 in sq. 1 ft in ground in mound 4½ ft dia at base 2 ft high. dug 2 Pits 48 x 20 x 12 in, 2 Pits 20 x 20 x 12 in,
		Surface rolling Prairie. Soil 1st rate
		* Said Corner being 16.27 chs West of 8th Mile Cor. To reestablish the Corner to Secs 21 + 22 on South Boundary Reservation Set Charred post 4 ft long 3 in wide 1 ft in ground in Mound 4½ ft at base 2 ft high dug 3 pits 54 x 20 x 12 in. Post with the additional Marks, S.B. W.R + O.R. May 14th 1875

No 8 East of the 6th Principal Meridian

Chs	lks	
		East on a random line bet Secs 15 + 22 Va 12°10' East
2	00	Ravine trains from N.W. to S.E.
20	00	Set temp 1/16 Sec Corner
39	74	Point 20 lks North of ¼ Sec Corner at Corner Set Sand Stone 14 x 13 x 4 in 9 in in ground, from which I ran
		East on a random line bet Secs 15 + 22 Va 12°10' East.
1	20	Old Wagon Road bears N.E. and S.W.
20	00	Set temp 1/16 Sec Corner
39	87	Intersect N + S line at Corner to Secs 14, 15 22 + 23 from which I ran:
		S 89° 43' W. on a true line bet Secs 15 + 22 Va 11°53' E
19	93½	Set Sand-Stone 17 x 12 x 5 in 12 in in ground for 1/16 Sec Corner
39	87	The ¼ Sec Corner from which Corner I run
		S 89° 43' W. on a true line. Va 11°36' East

Township No 26 North, of Range

Chs.	lks.	
59	74	Set Sandstone 16x12x4in. 10 in in ground for 1/16 Sec Corner
49	61	The Corner to Secs 15, 16, 21 & 22
		Surface fine rolling Prairie Soil best adapted to wheat, 1st rate

No 8 East of the 6th Principal Meridian

Chs.	lks.	
		North between Sections 15 & 16 on a random line Va, 12° 30' East
1	00	Drain N. to S.
20	00	Set temp 1/16 Sec Corner
39	90	To a Point 50 lks West of 1/4 Sec Corner Set Granite Stone 18x12x12in, 12in in ground from which Cor. Drum North Va 12° 30' East
5	00	Head of small Valley 5 Chs wide, S. to N.
20	00	Set temp 1/16 Sec Corner
25	00	Leave Valley, Creek 5 lks wide, N. to S.
32	50	Wagon Road E & W.
39	95	To a Point 19 lks West of Corner to Secs 9, 10 15 and 16, Set post 4 ft long 3 in square 1 ft in ground, in mound 4½ ft dia at base 2 ft high 2 pits 8x20x12in 2 Pits 20x20x12in from which Corner Drum:
		South on a true line between Secs 15 & 16 Va, 12° 11' East
19	97½	Set Granite Stone 14x12x6in 12in in ground for 1/16 Section Corner

Township No 26 North, of Range

Chs	lks	
39	95	The 1/4 Sec Corner.
		South on a true line
		Va 11° 47 East.
59	90	Set Granite Stone 14×10×4 in 9 in in ground for 1/16 Sec Corner
79	85	The Corner to Secs 15, 16, 21 + 22,
		Surface rolling Prairie
		Soil pale clay loam, best adapted to wheat.
		Timber a few scattering trees

No 8 East of the 6th Principal Meridian

Chs	lks	
		East on a random line bet Secs 10 + 15
		Va. 11° 35 East.
17	75	Road N.E. + S.W.
20	00	Set temp 1/16 Sec Corner
20	00	Enter Creek bottom N.E. + S.W.
35	00	Creek 2 lks wide S.E. + leave Creek bottom, Creek unite with another creek 150 lks South and runs East.
33	00	Road S. 80° E. N. 80° W.
39	66	To a point 18 lks South of 1/4 Sec Corner, at Cor. Set granite Stone 18×12×5 in 12 in in ground From which Cor Iron East.
		Va. 11° 35 East
6	00	Enter Creek bottom (meadow) N.E. + S.W.
20	00	Set temp 1/16 Sec Corner
21	00	Leave Creek bottom S.E. + N.W.
39	78	Intersect N + S line at Corner to Secs 10, 11 14 + 15 from which I ran;
		N. 89° 52' W. on a true line bet Secs 10 + 15
		Va 11° 43' East.
19	89	Set Granite Stone 12×8×7 in 8 in in ground for 1/16 Sec Corner

Township No 26 North, of Range No 8 East of the 6th Principal Meridian

Chs	Lks	
39	78	The 1/4 Sec Corner, from which I run
		N 89° 52' W on a true line bet Secs 10 & 15 Va 11° 58' East
59	61	Set Granite Stone 16 x 12 x 12 in 10 in in ground for 1/16 Sec Corner
79	44	The Corner to Secs 9, 10, 15 & 16
		Surface rolling Prairie & Creek bottom Soil pale clay loam, best adapted for Meat & Crate
		Timber, a few Cottonwood & Burr Oak trees.

Chs	Lks	
		North on a random line bet Secs 9 & 10 Va 12° East
17	00	Moist meadow N. W. & S. E.
20	00	Set temp. 1/16 Sec Corner
24	00	Leave Meadow N. W. & S. E.
39	89	To a Point 10 lks West of 1/4 Sec Corner, To restablish old Corner, Set Granite Stone 17 x 10 x 8 in 11 in in ground
		from which I run North, on a random line bet Secs 9 & 10 Va. 12° East
18	50	A drain N. W. & S. E.
20	00	Set temp 1/16 Sec Corner
39	93	To a Point 4 lks East of Corner of Secs. 3, 4, 9 & 10 To restablish old Corner, Set Deposited Granite Stone marked IIIIIIII 10 x 10 x 5 in, Set post 4 ft long 3 in square 1 ft in ground in mound 4½ ft dia at base 2 ft high 2 Pits 48 x 20 x 12 in 2 Pits 20 x 20 x 12 in, From this Corner I run
		Run

Township No 26 North of Range

Chs	lks	
		South on a true line bet Secs 9+10 Va 12°03 East
19	96½	Set Granite 16×14×5 in 10 in in ground for 1/16 Sec Corner
39	93	The 1/4 Sec Corner, from which I run
		South true line bet Secs 9+10 Va 11°51' East
59	87½	Set Granite Stone 20×12×6 in 15 in in ground for 1/16 Sec Corner
79	82	The Corner to Secs 9, 10, 15 + 16
		Surface Very broken, Soil yellow clay loam, best adapted to wheat, Rt rate

No 8 East of the 6th Principal Meridian

Chs	lks	
		East on a random line bet Secs 3+10 Va, 11°30 East
20	00	Set temp 1/16 Sec Corner
40	01	To 1/4 Sec Corner, To re-establish this Corner Set post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high, dug 2 pits 48×20×12, 2 Pits 20×20×12, in, from which I run East on a random line Va 11°30' East
20	00	Set temporary 1/16 Sec Corner
40	20	Intersect N + S line 76 lks N of Corner to Secs, 2, 3, 10 + 11, From which I run
		N 89°44' W on a true line bet Secs 3+10 Va, 10°41 East
20	10	Set post (charred) 4 ft long 3 in wide 1 ft in ground in mound 4½ ft dia at base 2 ft high dug 2 Pits 48×20×12, 2 Pits 20×20×12 for 1/16 Sec Corner
40	20	1/4 Sec Corner, from which I run
		N 89°44' W, on a true line bet Secs 3+10 Va 11°36' East

Township No 26 North, of Range

Chs.	lks	
60	20½	Set chained post 4 ft long 3 in wide, 1 ft in ground in mound 4½ ft dia at base 2 ft high dug 2 Pits 48×20×12 2 Pits 20×20×12 for 1/16 Sec Corner.
80	21	The Corner to Secs, 3, 4, 9 & 10,
		Surface very rolling
		Soil clay loam adapted to wheat, 1st rate

No 8 East of the 6th Principal Meridian

Chs	lks	
		North on a random line bet Secs 3 & 4 Va 12° East,
20	00	Set temp 1/16 Sec Corner
39	95	To Point 18 lks West of 1/4 Sec Corner, to establish which, Set Granite Stone 14×10×5 in 9½ in in ground, and from which Corner Drum; North on a random line, Va 12° East,
12	00	Weedy Meadow E & W,
20	00	Set temp 1/16 Sec Corner
21	20	Leave Meadow N & S,
39	43	Intersect North Boundary Township at Corner to Secs 3 & 4 from which Corner Drum;
		S. 28' E on a true line bet Secs 3 & 4 Va 11° 32' East,
19	43	Set granite Stone 14×8×6 in 9½ in in ground for 1/16 Sec Corner
39	43	The 1/4 Sec Cor from which Drum;
		S 28' E. on a true line bet Secs. 3 & 4 Va, 11° 23' East,

Township No 26 North, of Range

Chs	Lks	
59	40½	Set granite Stone 15×10×8 in, 10 in in ground for 1/16 Sec Corner,
79	38	The Corner to Secs, 3, 4, 9 & 10
		Surface, Mostly very rolling Prairie
		Soil Clay loam, best adapted to wheat 1st rate

No 8 East of the 6th Principal Meridian

Chs	Lks	
		North on a true line bet Secs 20 & 21 from Corner on South Boundary Reservation *
		Va 12° East
4	73	The Corner to Secs 16, 17, 20 & 21, To reestablish which I set Chained post 4 ft long 3 in square 1 ft in ground, in mound 4½ ft dia at base 2 ft high, dug 2 pits 48×20×20 in 2 Pits 20×20×12 in,
		Surface, Prairie.
		Soil 1st rate
		* Said Corner being 17.25 chs west of the 9th Mile Corner, To reestablish the Corner to Secs 20 & 21 on South Boundary Reservation Deposited Marked Stone (4) Granite 8×8×8 in Set post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high dug 3 pits 54×24×12 in, Post with the additional Marks. N. B. W. R. & O. R.

Township No 26 North of Range

Chs	Lks	
		East on a random line bet Secs 16 & 21 Va 12° East
20	00	Set temp 1/16 Sec Corner
40	25	The 1/4 Sec Corner, to be established which set granite Stone 24 x 16 x 5 in 18 in in ground from which Corner drawn East on a random line Va 12° East
20	00	Set temp 1/16 Sec Corner
36	00	Nagaw Road N.E. & S.W.
40	40	Intersect g.t. & line 36 lks South of Corner to Secs 15, 16, 21 and 22 from which Draw
		S 89° 54' W on a true line bet Secs 16 & 21 Va 12° 25' East
20	20	Set granite Stone 14 x 12 x 4 in 9 in in ground for 1/16 Sec Cor
40	40	The 1/4 Sec Corner from which Draw
		S 89° 54' W on a true line bet Secs 16 & 21 Va 11° 54' East
60	52½	Set granite Stone 18 x 12 x 6 in 12 in in ground for 1/16 Sec Corner

No 8 East of the 6th Principal Meridian

Chs	Lks	
80	65	The Corner to Secs 16, 17, 20 & 21
		Surface very rolling prairie
		Soil best adapted for wheat. 1st rate

Township No 26 North of Range

Chs	Lks	
		West on a random line bet Secs 17 & 20. Va 12° East.
20	00	Set temp'y 1/16 Sec. Corner.
21	00	Drain Course N.E. & S.W.
40	00	Set temp'y 1/4 Sec. Corner
41	32	Intersect West Boundary of Township at Corner to Sec's 17 & 20, from which Corner Draw.
		N. 89° 37' East on a true line bet Secs 17 & 20. Va 11° 37' East.
1	32	Set chamf post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 3 ft high dig 2 pits 48 x 20 x 12 in 2 pits 20 x 20 x 12 in for 1/4 Sec. Cor.
21	32	Set a granite stone 18 x 12 x 6 in 12 in in ground for 1/16 Sec Corner.
41	32	The Corner to Sec's 16, 17, 20 & 21.
		Surface very rolling prairie. Soil grey clay loam best for wheat, 2nd rate.

No 8 East of the 6th Principal Meridian

Chs	Lks	
		North on a random line between Secs. 16 & 17. Va 1° 30' East.
20	00	Set temp'y 1/16 Sec Corner
40	05	To a point 10 Lks West of 1/4 Sec Corner, to restablish which, Deposited granite stone 6 x 6 x 6 in, Set Post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high, dug 2 pits 48 x 20 x 12 in 2 Pits 20 x 20 x 12 in, from which Corner Draw North on a random line Va 1° 30' East.
20	00	Set temp'y 1/16 Sec Corner
40	00	To a Point 52 Lks West of Corner to Secs. 8, 9, 16 & 17. To restablish old Corner, Deposited granite Stone 8 x 8 x 5 in. Set chamf post 4 ft long 3 in 2 ft 1 ft in ground in mound 4½ ft at base 2 ft high dug 2 pits 48 x 20 x 12 and 2 pits 20 x 20 x 12 in from which Corner Draw South on a true line bet Secs 16 & 17 Va 11° 45' East.
20	00	Set chamf post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high, dug 2 Pits 48 x 20 x 12 in 2 Pits 20 x 20 x 12 in for 1/16 Sec Corner

Township No 26 North, of Range No 8 East of the 6th Principal Meridian

Chs	Lks	
40	00	The ¼ Sec Corner from which Drawn
		South on a true line Va 12° 21' East
60	02½	Set granite Stone 14 x 12 x 7 in 9½ in in ground for ¼ Sec Corner
80	05	The Corner to Secs, 16, 17, 20 & 21
		Surface rolling Prairie
		Soil Clay loam, best adapted to wheat. 2nd rate

Chs	Lks	
		East on a random line bet Secs 9 & 16 Va 11° 30' East
20	00	Set temp ¼ Sec Corner
40	57	To a point 13 lks South of ¼ Sec Corner to reestablish which Set granite Stone 22 x 15 x 10 in 16½ in in ground, from this Corner Drawn East on a random line Va 11° 30' East
20	00	Set temp ¼ Sec Corner
40	60	The Corner to Secs 9, 10, 15 & 16 from which Corner Drawn
		N. 89° 50' W. on a true line bet Secs 9 & 16 Va 11° 40' East
20	30	Set granite Stone 12 x 12 x 8 in, 8 in in ground for ¼ Sec Corner
40	60	The ¼ Section Corner from which Drawn
		N 89° 50' W. on a true line bet Secs 9 and 16 Va 11° 51' East
60	8 8½	Set Granite Stone 14 x 10 x 6 in 9½ in in ground for ¼ Section Corner

Township No 26 North, of Range

Chs	Lks	
81	17	The Corner to Secs 8, 9, 16 & 17
		Surface Very Rolling,
		Soil Yellow Clay loam best adapted to wheat, 2nd rate,

No 8 East of the 6th Principal Meridian

Chs	Lks	
		West on a random line bet Secs 8 & 17 Va 11°30' East.
18	00	Ravine with small amount of Brush bears N & S.
20	00	Set temporary 1/16 Section Corner
40	00	Set temporary 1/4 Section Corner
40	38	Intersect West Boundary Township 17 Lks North of Corner to Sections 8 & 17 from which Corner Iran;
		S. 89°49" E. on a true line between Secs 8 & 17 Va 11°56' East.
	38	Set chained post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high dug 4 Pits 24 x 24 12 in for 1/4 Sec Corner
20	38	Set a granite Stone 16 12 x 6 in 10½ in in ground for 1/16 Section Corner
40	38	The Corner to Sections 8, 9, 16 and 17
		Surface rolling Prairie
		Soil best for wheat, 2nd rate

Township No 26 North of Range

Chs	Lks	
		North on a random line bet Secs 8 & 9 Va. 12° East.
20	00	Set temp 1/16 Sec Corner
40	06	To 1/4 Sec Corner, to reestablish the Cor. Deposited Granite Stone 10 x 5 x 4 in Marked x, Set post 4 ft long 3 in wide, 1 ft in ground in mound 4 1/2 ft at base 2 ft high 2 Pits 48 x 20 x 12 in 2 Pits 20 x 20 x 12 in from this Corner Draw North on a random line, Va 12° East.
20	00	Set temp 1/16 Sec Corner
29	00	Drain W to E
40	10	The Cor to Secs 4, 5, 8 & 9, To reestablish this Corner Set chained post 4 ft long 3 in Square, 1 ft in ground in mound 4 1/2 ft base 2 ft high 2 Pits 48 x 20 x 12 in & 2 Pits 20 x 20 x 12 in from which Corner Draw South on a true line bet Secs 8 & 9 Va 12° East.
20	05	Set chained post 4 ft long 3 in wide, 1 ft in

No 8 East of the 6th Principal Meridian

Chs	Lks	
		ground in mound 4 1/2 ft at base 2 ft high dug 2 Pits 48 x 20 x 12, 2 Pits 20 x 20 x 12 in for 1/16 Sec Corner
40	10	To 1/4 Sec Corner
60	13	Set a Granite Stone 15 x 15 x 15 in 10 in in ground for 1/16 Sec Corner
80	16	The Corner to Secs 8, 9, 16 and 17
		Surface rolling Prairie,
		Soil Yellow Clay loam, best adapted to wheat. 2nd rate

Township No 26 North, of Range

Chs	lks	
		East on a random line bet Secs 4 & 9
		Va. 11°15' East.
18	00	Meadow N.W. & S.E.
20	00	Set temp 1/16 Sec Corner
20	50	Leave Meadow N.W. & S.E.
33	00	Meadow N. to S.
37	00	Leave meadow N to S.
40	28	To a point 11 lks South of old 1/4 Sec Cor
		To reestablish this Corner, Deposited
		a granite Stone 9×8×3 in, Set post 4 ft long
		3 in wide 1 ft in ground in mound 4½ dia
		at base 2 ft high dug 2 Pits 48×20×12 in &
		2 Pits 20×20×12 in from this Corner Draw
		East on a random line
		Va 11°15' East.
20	00	Set temp 1/16 Sec Corner
40	41	Intersect N & S line at The Corner to Secs 3, 4, 9 & 10 from which Corner Draw
		S. 89°27' W on a true line bet Secs 4 & 9
		Va 10°42' East
20	20½	Set Sandstone 16×12×3 in, 11 in in ground for 1/16 Sec Corner

No 8 East of the 6th Principal Meridian

Chs	lks	
40	41	The 1/4 Sec Corner
60	55 ~~57~~	Set chained post 4 ft long 3 in wide, 1 ft in ground in mound 4½ ft at base 2 ft high dug 2 Pits 48×20×12, 2 Pits 20×20×12 in for 1/16 Sec Corner
80	69	The Corner to Secs 4, 5, 8 and 9
		Surface very rolling,
		Soil pale clay loam, best adapted to
		Wheat, Rt rate

Township No 26 North of Range

Chs	Lks	
		West on a random line bet Secs 5 + 8 Va 11° 15' East.
11	00	Grain Course N. W. to S. E.
20	00	Set temporary 1/16 Sec Corner
30	10	Grain Course from N. to S.
40	00	Set temp'y 1/4 Sec Corner
40	14	Intersect West Boundary Township 41 Lks North of Corner to Secs 5 + 8 from which Drawn,
		N. 89° 02' E on a true line bet Secs 5 + 8 Va 11° 12' East.
	14	Set chained Post 4 ft long 3 in wide, 1 ft in ground in mound 4½ ft at base 2 ft high dug 4 Pits 24 x 24 x 12 in, for 1/4 Sec Corner
20	14	Set chained post 4 ft long 3 in wide, 1 ft in ground in mound 4½ ft at base 2 ft high dug 2 Pits 48 x 20 x 12 in and 2 Pits 20 x 20 x 12 in for 1/16 Sec Corner
40	14	The Corner to Secs. 4, 5, 8 + 9
		Surface fair rolling Prairie Soil best adapted to wheat, Clay

No 8 East of the 6th Principal Meridian

Chs	Lks	
		North on a random line bet Secs 4 + 5 Va 12° East
20	00	Set temp'y 1/16 Sec Corner
39	81	To a Point 10 Lks East of old 1/4 Sec Cor, to reestablish which Deposited a granite Stone marked (+) 11 x 4 x 4 in, Set post 4 ft long 3 in wide, 1 ft in ground in mound 4½ ft dia at base 2 ft high, dug 2 Pits 48 x 20 x 12 in, + 2 Pits 20 x 20 x 12 in for 1/4 Sec Corner. From this Corner Drawn North on a random line Va 12° East
20	00	Set temp'y 1/16 Sec Corner.
39	02	Intersect North Boundary Township 28 Lks East of Corner to Secs 4 + 5 from which Drawn,
		S. 6' W. on a true line bet Secs 4 + 5 Va. 12° 30' East
19	02	Deposited granite Stone 4 x 4 x 3 in, Set Post 4 ft long 3 in wide, 1 ft in ground in mound 4½ ft at base 2 ft high dug 2 Pits 48 x 20 x 12 in + 2 Pits 20 x 20 x 12 in for 1/16 Sec Corner.

Township No 26 North of Range

Chs	Lks	
39	02	1/4 Sec Corner from which Iron
		S. 6' W. on a true line bet Secs 4 & 5
		Va 12° 15' East.
58	92½	Set Chained post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high deg 2 pits 48 x 20 x 12 in and 2 pits 20 x 23 x 12 in for 1/16 Sec Corner
78	83	The Corner to Secs 4, 5, 8 & 9
		Surface rolling Prairie
		Soil best adapted to wheat, 1st rate
		May 17th 1875

No 8 East of the 6th Principal Meridian

Township No 26 North, of Range No

8 East of the 6th Principal Meridian

Part. 2.

Township No 26 North, of Range

No 8 East of the 6th Principal Meridian

Chs	Lks	
		West on a random 1/16 Sec line through South 1/2 of Sec 13 Var 11° 45' East
5	65	Creek 5 lks wide running N W
20	00	Set Temp 1/16 Sec Cor
22	00	Top of Ridge bears N & S and leave scattering Scrub Oaks bears N S
34	80	a Road bears N W & S E.
38	00	a Fence bears N W & S E
40	00	Set Temp 1/16 Sec Cor
48	20	Omaha Creek 50 lks wide running N. W.
55	00	leave creek bottom bears N E & S W
60	00	Set Temp 1/16 Sec. Cor.
61	30	Creek 5 lks wide bears N E
66	75	a Wagon Road bears N & S
79	04	Intersect N & S line 32 lks South of S 1/16 Sec Corner from which I run
		S 89° 46' E on a true 1/16 Sec. line through South 1/2 of Sec 13 Var 11° 45' East

Township No. 26 North of Range No. 8 East of the 6th P.M.

Chs	lks	
19	76	Drove charred stake 4 ft long 3 in wide. 2 ft in ground for 1/16 Sec cor from which
		An Oak 3 in diam bears S 7° E. 78 lks dist.
		An Oak 4 in diam bears N 82° E 48 lks dist.
39	52	Set a Sandstone 15 X 12 X 8 in chs. 10 inches in ground for 1/16 Sec cor
59	28	Drove charred post 4 ft long 3 in wide. 2 ft in ground for 1/16 Sec Cor from which
		An Oak 3 in diam bears S 77° W 78 lks distant
		An Oak 4 in diam bears N 59° E 157 lks distant
79	04	The S 1/16 Sec Cor to Sec 13 + 18
		Surface. West half level and marshy East half broken prairie. Soil of west half 1st Rate best adapted to corn. East half clay loam 2nd Rate

Chs	lks	
		East on a random 1/4 Sec line through middle of Sec 13 Var 11° 30' East
	02	Fence bears E + S.
9	10	Fence bears E + N
9	10	Wagon Road N + E
20	00	Set temp. 1/16 Sec Cor.
20	00	Leave fence bearing W + N
24	00	Creek bottom
27	90	Omaha Creek 25 lks wide running N. with scattering trees
34	20	Leave Creek bottom bears N + S
38	50	a fence N W + S E. bearing crossed a plowed field
40	00	Set temp. 1/4 Sec cor
41	10	Leave plowed field bears N + S
41	10	a Road bearing N E + S W
56	80	Enter brush bears N + S
60	00	Set temp. 1/16 Sec cor
63	00	Leave brush bears N + S
63	10	Creek 2 lks wide running N.
63	80	Creek 5 lks wide running N W
67	10	recross Creek running S W

Township No. 26 North of Range No. 8 East of the 6th Principal Meridian

Chs	Lks	
73	74	Recross Creek running N W
79	10	Intersect N & S line 54 lks North of 1/4 Sec Cor from which Bear
		N 89° 37' W on true 1/4 Sec line through middle of Sec 13
		Var 11° 30' East
19	77½	Set Charred post 4 ft long 3 in wide 2 ft in the ground from which
		In Oak 6 in diam bears S 14° W 22 lks dist. No other tree being convenient I dug one pit 8 links from post on south side for 1/16 Sec Cor
39	54	Set Charred Stake 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high Dug 4 pits 24 X 24 X 12 inches for 1/4 Sec cor
59	32½	Set a Sandstone 16 X 10 X 5 in diam 11 inches in the ground for 1/16 Sec Co
79	10	to 1/4 Sec cor but Sec 18 + 18
		Surface Creek bottom level. East half very broken

Chs	Lks	
		Soil yellow clay loam best for Wheat 2nd Rate. Soil of creek bottom dark clay loam best for corn 1st Rate

Township 26 North of Range No 8

Chs	Lks	
		West on a random 1/16 Sec line through North 1/2 of Sec 13 Var 11°30' East
11	25	Road to Sioux City bears NW + SE
12	75	Fence bears S E + N 80° W
17	35	Fence bears S 10° W + N 10° E
17	85	To plowed land
		A point 2 chs North of a house
20	00	Set Temp'y 1/16 Sec Cor
38	00	To fence and leave plowed field N and S
38	20	Wet Creek bottom bears N + S
40	00	Set Temp'y 1/16 Sec. Cor
44	85	Omaha Creek 18 lks wide running North with scattering willows
52	50	Leave Creek bottom bearing N + S
60	00	Set Temp'y 1/16 Sec Cor
69	65	Wagon Road bears N + S
78	64	Intersect N + S line 9 lks S of N 1/16 Sec Cor. from which I run
		S 89° 56' E on a line 1/16 Sec line through North 1/2 Sec 18 Var 11°30' East

East of the 6th Principal Meridian

Chs	Lks	
19	66	Set Charred post 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high. dug 4 pits 24 x 24 x 12 in diam for 1/16 Sec Cor.
39	32	Set Charred post 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high. dug 4 pits 24 x 24 x 12 in diam for 1/16 Sec Cor
58	98	Set Charred post 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high. dug 4 pits 24 x 24 x 12 in diam for 1/16 Sec Cor
78	64	The N 1/16 Sec Cor bet Sects 13 + 18
		Surface Rolling. Soil dark clay loam 1st Rate
		Best for wheat on uplands and corn in the flats

Township 126 North of Range No 8 East of 6th Principal Meridian

Chs	lks	
		West on a random 1/16 Sec line through South 1/2 of Sec 12 Var 11°45' East
5	95	Wagon Road bears N & S.
9	75	a Wagon Road bears N30°W & S30°E
10	75	Ravine bears N W & S E - scattering tree
20	00	Set Tem 1/16 Sec cor
40	00	Set Tem 1/16 Sec. cor.
40	05	a Wagon Road bears N10°W & S10°E
60	00	Set Tem 1/16 Sec cor
62	20	Omaha Creek 20 lks wide running North
82	40	Creek bottom bears N & S
84	50	leave Creek bottom bears N & S
78	52	Intersect N & S line 28 lks North of S 1/16 Sec Cor between Sect 11 & 12 from which I run
		N 89°48' E on true 1/16 Sec line through South 1/2 of Sec 12 Var 11°45' East
19	63	Set Charred post 4 ft long 3 in wide 2 ft in ground from which

Chs	lks	
		an ash 7 in diam bears N 56°W 133 lks distant No other tree being convenient I dug 1 pit 8 lks South of post 24 X 24 X 12 inches for 1/16 Sec cor
39	26	Set Charred Stake 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high. Dug 4 pits 24 X 24 X 12 inches for 1/16 Sec cor
59	78	Set a sandstone 18 X 9 X 4 inches 13 1/2 inches in ground for 1/16 Sec cor
78	52	the South 1/16 Sec cor bet Sects 7 & 12
		Surface fine Rolling Prairie
		Soil Creek bottom
		Soil of bottom land. dark clay loam 1st Rate - best for corn
		Upland soil. gray loam. best for wheat 1st Rate

Township No 26 North of Range No 8 East of 4th Principal Meridian

Chs	lks	
		East on a random 1/4 Sec line through middle of Sec 12 Var 11° 30' East
0	03	a fence bears N & E
0	05	a Road bears SE & N
6	00	Creek bottom bears N & S
10	50	leave fence bears W
11	90	Omaha Creek 25 lks Rms North
20	00	Set Tem 1/16 Sec Cor
35	00	a Ravine bears S 80° E to SW
38	00	Wagon Road bears N & S
40	00	Set Tem 1/4 Sec Cor.
46	00	a Road bears S 80° E & NW
60	00	Set Tem 1/16 Sec Cor
62	90	a fence E & W plowed field N adjoining line
70	00	To a point 5 chs S. of a house
76	00	a Ravine SW & NE (bears) with scattering trees
78	69	End of fence
78	69	Intersects N & S line 20 lks South of 1/4 Sec Cor bet Sects 7 & 12 from which Pras

Chs	lks	
		S 89° 51' W on a true 1/4 Sec line through middle of Sec 12 Var 11° 30' East
19	67 1/2	Set a Sandstone 16 X 10 X 5 inches 10 inches in ground for 1/16 Sec Cor
39	34 1/2	Set Charred post 4 ft long 8 in wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high dug 4 pits 24 X 24 X 12 inches for 1/4 Sec Corner
59	02 3/4 ~~09 1/2~~	Set a Sandstone 20 X 9 X 5 inches 15 inches in the ground for 1/16 Sec Cor
78	69	To 1/4 Sec corner between sections 11 & 12
		Surface Rolling Prairie
		Soil dark loam best for corn or wheat 1st Rate

Township 26 North of Range No 8

Chs	Lks	
		West on a random 1/16 sec line through North 1/2 of Sec 12 Var 11°30' East
20	00	Set item 1/16 Sec Cor
21	60	Fence around plowed field bears N+S
34	25	Fence bears N+S. and leave field
38	05	Wagon Road bears N+S.
38	70	plowed land bears N+S
39	50	fence bears N+S.
40	00	Set Item 1/16 Sec Cor
43	50	leave plowed land bearing N+S
48	00	a Slough 40 lks wide bears NW+SE
53	25	Descend Bluff 50 ft bears N+S.
58	50	Creek bottom bears N+S
60	00	Set Item 1/16 Sec Cor —
60	00	Omaha Creek bend.
69	60	Omaha Creek 24 lks wide runs N
69	85	Plowed land Bears N+S
75	00	Leave Creek bottom bears N+S
78	80	Intersect N+S line 4 lks South of A 1/16 Sec Cor from which Pine
		S 89°58' E on a true 1/16 sec

East of the 6th Principal Meridian

Chs	Lks	
		line through N 1/2 of sec 12 Var 11° 30' East
19	70	Set Charred post 4 ft long 3 in wide 2 ft in ground from which a Willow 5 in diam bears N 49°30' W 30 lks distant an oak 12 in diam bears E 1°2 47 lks distant for 1/16 Sec Cor.
39	40	Set a sandstone 20 x 13 x 4 inches 15 inches in ground for 1/16 sec cor
59	10	Set Charred post 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base - 2 ft high. dug 4 pits 24 x 24 x 12 inches for 1/16 sec. Corner
78	80	The North 1/16 sec cor between sections 7 + 12 Surface Rolling Prairie and Creek bottom Soil of creek bottom, dark deep loam 1st Rate good for wheat or corn. Soil of upland grey clay loam 1st Rate best for wheat. May 14th 1875

Township No 26 North Range No 8 East of the 6th Principal Meridian

Chs	lks	
		East on a random 1/16 Sec. line through South 1/2 Sec 1 Var 11°30' East
8	92	Omaha Creek 16 lks wide runs N.
11	00	Enter a large tract of level plowed land bears North & South
20	00	Set Temp 1/16 Sec Cor
29	00	A house 20 lks N of line
40	00	Set Temp 1/16 Sec Cor.
43	48	Leave plowed land N & S.
44	25	Road to Sioux City bears N & S
60	00	Set Temp 1/16 Sec Corner
72	70	Road bears NE & SW.
78	35	Intersect N & S line 21 lks North of South 1/16 Sec Cor. From which I run
		N 89° 51' W on a true 1/16 Sec line through South 1/2 Sec 1 Var 11°30' East
19	58¾	Set Sandstone 20 X 15 X 3 inches 15 inches in ground for 1/16 Sec. Cor.
39	17½	Set Charred stake 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base two ft high, dug 4 pits 24 X 24 X 12 inches for 1/16 Sec. cor.
58	76¼	Set Charred stake 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high. dug 4 pits 24 X 24 X 12 inches for 1/16 Sec. cor.
78	35	The South 1/16 Sec Corner between Sections 1 & 2. Surface Rolling prairie & creek bottom Soil in creek bottom dark loam 1st Rate best for corn. Soil of prairie gray clay loam 1st Rate best adapted for wheat

Township No 26 North of Range No 8

Chs	Lks	
		West on a Random 1/4 Sec line through middle of Sec 1 Var 11° 17' East
16	40	Road bears N & S W
20	00	Set temp 1/16 Sec Corner
21	32	Creek 5 lks wide runs S 25° W
23	00	A point 4 chs South of a house
23	92	Road to Sioux City bears N 20° W + S 20° E
30	58	Fence around Breaking bears N 20° W + S 20° E
40	00	Set tem 1/4 Sec Cor
60	00	Set temp 1/16 Sec Cor
64	00	End of fence bears N 20° W + S 20° E
69	10	Omaha creek 20 lks wide runs N
76	00	A Branch of Omaha creek 20 lks wide runs North
78	87	Intersect N + S line at 1/4 Sec Corner from which I ran
		East on a true 1/4 Sec line through middle of Sec 1 Var 11° 17' East
19	71 3/4 / 12 3/4	Set charred post 4 ft long

East of the 6th Principal Meridian

Chs	Lks	
		3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high dug 4 pits 24 X 24 X 12 inches for 1/16 Sec corner
39	43 1/2	Set Charred stake 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high. dug 4 pits 24 X 24 X 12 inches for 1/4 Sec cor.
59	15 1/4	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high. dug 4 pits 24 X 24 X 12 inches for 1/16 Sec cor
78	87	the 1/4 Sec Cor on N + S line between Sec 1 + 6 Surface Rolling and creek bottom Soil of creek bottom dark loam with clay subsoil 1st rate best for cultivation of wheat Soil of upland grey clay loam 1st rate best adapted for corn

Township No 26 North of Range No 8 East of the 4th Principal Meridian

Chs	lks	
		East on a random 1/16 Sec line through N 1/2 Sec 1
		Var 11° 17' East
1	20	Enter plowed land bears N & S
20	00	Set Temp'y 1/16 Sec Cor
34	20	Leave plowed land bears N 20° W. S 20° E
35	80	Road to Sioux City bears N 20° W, S 20° E
40	00	Set Temp'y 1/16 Sec Cor.
60	00	Set Temp'y 1/16 Sec Cor
72	88	a Road bears N 25° E + S 25° W
79	45	Enter Sect East boundary at N 1/16 Sec Cor. between Sec 1 + 6 from which corner I ran
		West on a true 1/16 Sec line through N 1/2 Sec 1
		Var 11° 17' East
19	86 1/4	Set Charred Post 4 ft long 3 in side 1 ft in ground in mound 4 1/2 ft at base two feet high. dug 4 pits 24 X 24 X 12 inches for 1/16 Sec Cor
39	72 1/2	Set Charred Post 4 ft long, 3 in wide 1 ft in ground in mound

Chs	lks	
		4 1/2 ft at base two ft high. dug 4 pits 24 X 24 X 12 inches for 1/16 Sec Cor
59	58 3/4	Set Charred Stake 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base. 2 ft high. dug 4 pits 24 X 24 X 12 inches for 1/16 Sec Cor
79	45	The N 1/16 Sec Cor between Sec. 1 + 2
		Surface Creek bottom and Rolling Prairie. Soil of bottom land. very rich dark loam 1st rate best for corn.
		Soil of upland clay loam 2nd rate best adapted to Wheat

Township No. 26 North of Range No 8 East of the 6th Principal Meridian

Chs	Lks	
		West on a random 1/16 sec line through S ½ of sec 14 Var 12° East
13	48	Creek 5 lks wide. running S.E.
20	00	Set Temp 1/16 sec cor
40	00	Set Temp 1/16 sec cor
60	00	Set Temp 1/16 sec cor
69	10	A Road bears N + S.
80	10	Intersect N + S line 9 lks south of S 1/16 sec cor. from which I run
		S 89° 56' E on a true 1/16 sec line through south ½ sec 14 Var 12° East
20	02½	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high dug 4 pits 24 x 24 x 12 inches for 1/16 sec cor
40	05	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high dug 4 pits 24 x 24 x 12 inches for 1/16 sec cor
60	07½	Set Charred Post 4 ft long

Chs	Lks	
		3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high dug 4 pits 24 x 24 x 12 inches for 1/16 sec cor.
80	10	The S 1/16 sec cor on N + S line between sec 13 + 14 Surface very rolling. Soil clay loam 1st Rate best adapted for wheat

Township No 26 North of Range N 8

Chs	lks	
		West on a random 1/4 Sec line through middle of Sec 14 Var 12° East
20	00	Set Tempy 1/16 Sec Cor
32	70	Road bears N 30° E
40	00	Set Tempy 1/4 Sec Cor -
48	00	Creek 7 lks wide runs S.E. -
60	00	Set Tempy 1/16 Sec Cor
69	53	A Road bears N 30° W + S 30° E
80	12	Intersect N + S line 29 lks South of 1/4 Sec Cor. from which I run
		S 89° 48' E on a true 1/4 Sec line through middle of Sec 14 Var 12° East
20	03	Set a granite Stone 20 X 12 X 5 inches, 15 inches in ground for 1/16 Sec Cor
40	06	Set a granite Stone 24 X 12 X 5 inches 18 inches in ground for 1/4 Sec Cor
60	09	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high. dug

East of the 6th Principal Meridian

Chs	lks	
		4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor
80	12	Thee 1/4 Sec Cor on N + S line between Sec 13 + 14 Surface Rolling Prairie Soil pale clay 2nd Rate fair for wheat or oats

Township 26 North of Range No. 8

Chs	Lks	
		West on a random 1/16 Sec line through N 1/2 of Sec 14 Var 11°48' East
20	00	Set Temp'y 1/16 Sec Cor
39	00	a Road bears N. & S.
40	00	Set Temp'y 1/16 Sec Cor
60	00	Set Temp'y 1/16 Sec Cor
63	10	a Creek 5 lks wide runs S 25° E
80	60	Intersect N + S line 18 lks South of N 1/16 Sec cor. from which a gran
		S 89°52' E on a true 1/16 Sec line through N 1/2 Sec 14. Var 11°48' East
20	15	Set Charred post 4 ft long 3 in wide. 1 ft in ground in mound 4 1/2 ft at base 2 ft high dug 4 pits 24 X 24 X 12 inches for 1/16 Sec cor
40	30	Set Charred post 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base. 2 ft high dug 4 pits 24 X 24 X 12 inches for 1/16 Sec Cor

East of the 6th Principal Meridian

Chs	Lks	
60	45	Set Charred post 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high dug 4 pits 24 X 24 X 12 inches for 1/16 Sec Cor
80	60	1/4 Cor N 1/16 Cor on N + S line between sections 13 + 14 Surface Rolling ~~Timber~~ Soil Gray Clay loam 1st Rate best adapted to the Cultivation of Wheat

Township 26 North of Range No 8

Chs	lks	
		East on a random 1/16 Sec line through S 1/2 of Sec 11
		Var 11°40' East
20	00	Set Tempy 1/16 Sec cor
40	00	Set Tempy 1/16 Sec cor
52	10	A Road bears N W & S E.
58	00	Gully. Water in holes bears N W & S E.
60	00	Set Tempy 1/16 Sec Cor.
62	60	plowed land N W & S E. bearing
72	40	leave plowed land bears N W & S E.
79	30	Drain water in holes bears N W & S E
80	48	Intersect N & S line 16 lks South of S 1/16 Sec Cor. from which Pran
		S 89°53' W on true 1/16 Sec line throug S 1/2 Sec 11
		Var 11°40' East
20	~~11~~ 10 3/4	Set Charred post 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high dug 4 pits 24X24X12 in. for 1/16 Sec cor

East of the 6th Principal Meridian

Chs	lks	
40	21 1/2	Set Charred post 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base. 2 ft high. dug 4 pits 24X24X12 inches for 1/16 Sec cor
60	32 1/4	Set Charred post 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high dug 4 pits 24X24X12 in for 1/16 Sec cor
80	48	The S 1/16 Sec cor on N & S line between Sec 10 & 11
		Surface. Rolling Prairie Soil. grey Clay loam - 2nd Rate fair wheat land

Township 26th North of Range No 8 East of the 6th Principal Meridian

Chs	Lks	
		West on a random 1/4 Sec line through middle of Sec 11 Var 11° 47' East
20	00	Set temp 1/16 Sec Cor
40	00	Set temp 1/4 Sec Cor
43	36	A Road bears N ___ E 3
60	00	Set temp 1/16 Sec Cor
80	35	Intersect N & S line 8 8 lks N of 1/4 Sec Cor; from which Pran
		N 89° 44' E on a true 1/4 Sec line through middle of Sec 11 Var 11° 47' East
20	08 34 ~~04~~	Set Charred post 4 ft long 8 in wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high dig 4 pits 24 X 24 X 12 inches for 1/16 Sec Cor
40	17 1/2	Set a granite stone 12 X 12 X 5 inches. 8 inches in ground for 1/4 Sec Cor.

Chs	Lks	
60	26 1/4	Set granite stone 15 X 8 X 8 inches 10 inches in ground for 1/16 Sec Cor
80	85	The 1/4 Sec corner on N & S line between Sections 11 & 12 Surface Rolling prairie Soil pale clay loam 2nd Rate fair Wheat land.

Township No 6 North of Range No 8

Chs	Lks	
		West on a random 1/16 Sec line through N 1/2 of Sec 11 Var 12° 3' East
	23	Road bears N to S
15	00	a gulch bears N to S
20	00	Set temp 1/16 Sec Corner
23	50	a gulch with brush and young timber bears N + S
38	00	Timber gulch bears N + S
38	00	Creek running S. 4 lks wide
38	00	Oak Timber
40	00	Set temp 1/16 Sec Cor
43	35	a small creek 3 lks wide originating in a spring bearing N 2 -
46	00	a Road bears N + S.
48	00	leave Oak Timber bears N + S.
60	00	Set temp 1/16 Sec Cor
80	66	Intersect N + S line 46 lks S of N 1/16 Sec Cor from which I ran
		S 89° 40' E on a true 1/16 Sec line through N 1/2 of Sec 11 Var 12° 3' East

East of the 6th Principal Meridian

Chs	Lks	
20	16½	Set Charred post 2 ft in ground for 1/16 Sec Cor from which a box elder tree 4 in diam bears S 13° W 160 lks dist. No other tree being convenient I dug 1 pit 24 X 24 X 12 inches - 8 lks S of Post.
40	33	Set Charred post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor from which an Oak 18 in diam bears S 30° 15' W 30 lks dist. an Oak 14 in diam bears N 5° W 130 lks dist
60	49½	Set Charred post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor from which an Oak 8 in diam bears N 32° E 182 lks dist no other tree being convenient I dug 1 pit 24 X 24 X 12 inches 8 lks S of Post
80	66	the N 1/16 Sec Cor on N + S line bet Sec 11 & 12. Surface very rolling Soil - pale clay loam 2nd Rate fair Wheat land May 14th 1875

Township No 26 North of Range No 8 East of the 6th Principal Meridian

Chs	Lks	
		East on a random line through South ½ of Sec 2
		Var 11°30' East
5	80	A creek runs S 2. 10 lks wide
20	00	Set temp. ¼ sec Cor
40	00	Set temp. ¼ sec Cor
54	00	A Road bears N 2 ½ S.W.
59	10	A Road bears N 20° W ½ S
60	00	Set temp ¼ sec cor.
80	25	Intersect N ½ S line 33 lks South of S ¼ sec cor. from which I ran
		S 89° 46' W on true ¼ sec line through Section 2. S ½.
		Var 11°30' East
20	06¼	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high - dug 4 pits 24 X 24 X 12 inches for ¼ sec cor
40	12½	Set Charred post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high dug 4 pits 24 X 24 X 12 inches for ¼ sec cor
60	18¾	Set Charred post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high. dug 4 pits 24 X 24 X 12 inches for ¼ sec cor
80	25	The S ¼ cor on N ½ S line between Sec 2 ½ 3

Surface rolling somewhat broken soil clay loam 2nd class good for wheat.

Township No. 26 North of Range No. 8 East of the 6th Principal Meridian

Chs	Lks	
		Post on a random 1/4 Sec line through middle of Sec 2 Var 11°44' East
20	00	Set Temp 1/16 Sec Cor
32	40	A Road bears N 15° E + S 15° W
40	00	Set Temp 1/4 Sec Cor
40	00	A point 3.50 chs S of a house
60	00	Set Temp 1/16 Sec Cor
79	85	Intersect N + S line 21 lks S of 1/4 Sec Cor. from which a ran
		S 89°51' E on a true 1/4 Sec line through middle of Section 2. Var 11°44' East
19	26	Set Charred ~~post~~ 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high dug 4 pits 24 X 24 X 12 inches for 1/16 Sec Cor
39	92½	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high. dug 4 pits 24 X 24 X 12 in for 1/4 Sec Cor

Chs	Lks	
59	88¾	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high dug 4 pits 24 X 24 X 12 in for 1/16 Sec Cor.
79	85	The 1/4 Sec Cor on N + S line bet. Sec. 1 + 2
		Surface Rolling. Soil in valleys dark loam 1st Rate good Wheat land. Soil on hills lighter 2nd Rate but fair Wheat land

Township No 26 North of Range No 8 East of the 6th Principal Meridian

Chs	Lks	
		East on a random 1/16 sec line through N 1/2 of sec 2 Var 11°44' East
20	00	Set temporary 1/16 sec cor
40	00	Set temporary 1/16 sec cor
60	00	Set temporary 1/16 sec cor
64	33	A Road bears N15°W + S15°E
71	00	Bottom of Bluff bears N + S + enters Creek Bottom bears N + S
74	50	Omaha Creek 12 lks wide runs North
79	86	Intersect N + S line 17 lks S of N 1/16 sec cor. from which pran
		S 89°53' W on a true 1/16 sec line through N 1/2 of sec 2 Var 11°44' East
19	96½	Set a sandstone 22 x 10 x 3½ inches 16½ inches in ground for 1/16 sec cor
39	93	Set a sandstone 18 x 9 x 5 inches 13 inches in ground for 1/16 sec cor
59	89½	Set granite stone 14 x 14 x 14 inches 9 in in ground for 1/16 sec cor

Chs	Lks	
79	86	The N 1/16 sec cor on N + S line between sec 2 + 3 Surface Rolling Prairie and Creek bottom. Soil in bottom dark loam with clay subsoil 1st Rate good for corn + wheat Soil of upland of good quality but light 1st Rate best for wheat

Township No 26 North of Range No 8 East of the 4th Principal Meridian

Chs	Lks	
		East on a random 1/16 Sec line through South 1/2 of Sec 15 Var 11°50' East
20	00	Set temp 1/16 Sec Cor
40	00	Set temp 1/16 Sec Cor
60	00	Set temp 1/16 Sec. Cor
79	82	Intersect N+S line 20 lks South of S. 1/16 Sec Cor from which I ran
		S 89°54' W on a true 1/16 Sec line through S 1/2 of Sec 15 Var 11°50' East
19	95 1/2	Set a granite stone 13X10X6 in 9 inches in ground for 1/16 Sec Cor
39	91	Set granite stone 14X10X5 inches 9 inches in ground for 1/16 Sec Cor
59	86 1/2	Set a granite stone 16X12X7 inches 10 1/2 inches in the ground for 1/16 Sec Cor
79	82	the S 1/16 Sec Cor. on N+S line between Sec. 15+16
		Surface. Rolling Prairie
		Soil grey clay loam 1st Rate
		best adapted to wheat

Chs	Lks	
		West on a random 1/4 Sec line through middle of Sec 15 Var 11°58' East
20	00	Set temp 1/16 Sec Cor
40	00	Set temp 1/4 Sec Cor.
60	00	Set temp 1/16 Sec Cor
79	79	Intersect N+S line 20 lks S. of 1/4 Sec Cor from which I ran
		S 89°54' E on a true 1/4 Sec line through middle of Sec 15 Var 11°56' East
19	94 3/4	Set a granite stone 18X12X8 inches 13 inches in the ground for 1/16 Sec Cor
39	89 1/2	Set a granite stone 18X15X6 inches 13 inches in ground for 1/4 Sec Cor
59	74 1/4	Set a granite stone 18X8X8 inches 13 inches in ground for 1/16 Sec Cor
79	79	to 1/4 Sec Cor on N+S line bet. Sec. 14+15
		Surface Rolling Prairie
		Soil Rich clay loam - 1st rate.
		Best adapted for wheat

Chs	Lks	
		East on a random 1/16 Sec line through N 1/2 of Sec 15 Var 11° 56' East
1	70	Enter plowed land bears N & S
4	43	Leave breaking bears N & S
20	00	Set temp 1/16 Sec Cor
40	00	Set temp 1/16 Sec Cor
60	00	Set temp 1/16 Sec Cor.
79	68	Intersect N & S line 5 lks N of North 1/16 Sec Cor. from which I ran
		N 89° 58' W on a true 1/16 Sec line through N 1/2 of Sec 15 Var 11° 56' East
19	92	Set granite stone 14 X 12 X 8 inches 9 inches in ground for 1/16 Sec Cor
39	84	Set granite stone 14 X 10 X 8 inches 9 inches in ground for 1/16 Sec Cor
59	76	Set granite stone 16 X 8 X 6 inches, 10 in in ground for 1/16 Sec Cor
79	68	The N 1/16 Sec Cor on N & S line between Sections 15 & 16. Surface Rolling prairie soil clay loam 1st Rate. Good wheat land

Chs	Lks	
		West on a random 1/16 Sec line through S 1/2 of Sec 10 Var 11° 27' East
20	00	Set temp 1/16 Sec Cor.
40	00	Set temp 1/16 Sec Cor.
60	00	Set temp 1/16 Sec Cor
67	00	Enter wet meadow bottom bears N & S
79	80	Intersect N & S line 36 lks N of S 1/16 Sec Cor from which I ran
		N 89° 46' E on a true 1/16 Sec line through S 1/2 of Sec 10 Var 11° 27 East
19	95	Set granite stone 18 X 12 X 5 inches 13 inches in ground for 1/16 Sec Cor
39	90	Set granite stone 15 X 10 X 6 inches 10 inches in ground for 1/16 Sec Cor.
59	85	Set granite stone 18 X 10 X 4 inches 13 inches in ground for 1/16 Sec Cor
79	80	The S 1/16 Sec Cor on N & S line between Sec 10 & 11 Surface Rolling prairie soil clay loam 1st Rate best for wheat

Township No 26 North of Range No 8 East of the 6th Principal Meridian

Chs	Lks	
		East on a random 1/4 Sec line through middle of Sec 10 Var 11° 15' East
20	00	Set Temp'y 1/16 Sec Cor
40	00	Set Temp'y 1/4 Sec Cor
60	00	Set Temp'y 1/16 Sec Cor
80	05	Intersect N & S line 29 lks South of 1/4 Sec Cor from which I run
		S 89°48' W on a true 1/4 Sec line through middle of Sec 10. Var 11°15' East
20	0 1/2	Set Charred post 4 ft long 3 in wide 1 ft in ground in mound, 4 1/2 ft at base. 2 ft high. dug 4 pits 24 X 24 X 12 in for 1/16 Sec Cor.
40	02 1/2	Set granite Stone 18 X 10 X 5 inches 13 inches in ground for 1/4 Sec Cor
60	03 3/4	Set granite Stone 16 X 15 X 12 inches Set 10 1/2 inches in ground for 1/16 Sec Cor
80	05	The 1/4 Sec Cor on N & S line between Sec 9 & 10 Surface rolling Prairie. Soil Clay loam 1st Rate best adapted to Wheat
		May 18th 1875

Chs	Lks	
		West on a random 1/16 Sec line through N 1/2 of Sec 10 Var 11° 15' East
20	00	Set Temp'y 1/16 Sec Cor
40	00	Set Temp'y 1/16 Sec Cor
43	00	Enter grove of Elm timber in a gulch bears N & S.
43	75	Center of gulch bears N & S
46	00	Leave gulch bears N & S.
60	00	Set Temp'y 1/16 Sec Cor
80	20	Intersect N & S line 8 lks N of N 1/16 Sec Cor. from which I run
		N 89°54' E on a true 1/16 Sec line through N 1/2 of Sec 10 Var 11° 15' East
20	05	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base. 2 ft high, dug 4 pits 24 X 24 X 12 inches for 1/16 Sec Cor.
40	10	Set Charred post 4 ft long 3 in wide 1 ft in ground in mound

Township No. 26 North of Range No. 8

Chs	Lks	
		4½ ft at base. 2 ft high dug 4 pits 24 X 24 X 12 inches for 1/16 sec cor
60	15	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base. dug 4 pits 24 X 24 X 12 inches for 1/16 sec cor.
80	20	The N 1/16 sec cor on N + S line between sec 10 + 11 Surface Rolling. Barren. Soil clay loam 1st Rate. Except on top and sides of bluffs where there is much gravel and many stone Soil good for wheat.

East of the 6th Principal Meridian

Chs	Lks	
		West on a random 1/16 sec line through S ½ of sec 3 Var 11° 20' East
20	00	Set Tem 1/16 sec cor
26	56	Creek 5 lks wide runs N
40	00	Set Tem 1/16 sec cor
60	00	Set Tem 1/16 sec cor
80	20	Intersect N + S line 16 lks S of S 1/16 sec cor from which I can
		S 89° 54' E on a true 1/16 sec line through S ½ of sec 3 Var 11° 20' East
20	05	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high dug 4 pits 24 X 24 X 12 in. for 1/16 sec cor
40	10	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high also dug 4 pits 24 X 24 X 12 inches for 1/16 sec cor

Township No. 26 North of Range No. 8 East of the 6th Principal Meridian

Chs	Lks	
60	15	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4 ft at base 2 ft high. Dug 4 pits 24 X 24 X 12 inches for 1/16 Sec Cor.
80	20	The S 1/16 Sec Cor on N & S line between Sec 2 & 3
		Surface Rolling. Soil light clay loam 2nd Rate fair Wheat land-

Chs	Lks	
		East on a random 1/4 Sec line through middle of Sec 3 Var 11°20' East
20	00	Set Temp'y 1/16 Sec Cor
40	00	Set Temp'y 1/4 Sec Cor
60	00	Set Temp'y 1/16 Sec Cor
67	41	Creek 5 lks wide runs N E-
67	92	Creek 5 lks wide runs S W
88	60	Creek 20 lks wide runs S E
80	90	Intersect N & S line 26 lks N of 1/4 Sec Cor from which I ran
		N 89°49' W on a true 1/4 Sec line through middle of Sec 3 Var 11°20' East
20	22½	Set Charred Post 4 ft long 3 in wide in ground 1 ft, in mound 4½ ft at base 2 ft high Dug 4 pits 24 X 24 X 12 in for 1/16 Sec Cor
40	45	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base - 2 ft high. Dug 4 pits 24 X 24 X 12 inches for 1/4 Sec Cor

Township No 26 North of Range No 8

Chs	Lks	
60	67½	Set a lime stone 18 x 12 x 3½ in 18 inches in ground for 1/16 Sec Cor
80	00	The 1/4 Sec Cor on N & S line between Sec. 3 & 4
		Surface - Rolling Prairie
		Soil Clay loam of fair quality
		2nd Rate. fair wheat lands

East of the 6th Principal Meridian

Chs	Lks	
		West on a random 1/16 Sec line through N 1/2 of Sec 3
		Var 11° 9' East
20	00	Set Temp'y 1/16 Sec Cor
31	40	Creek 5 lks wide runs S E.
40	00	Set Temp'y 1/16 Sec Cor
60	00	Set Temp'y 1/16 Sec Cor.
77	00	Enter Meadow bears N & S
79	97	Intersect N & S line 21 lks S of N 1/16 Sec Cor from which I run.
		S 89° 51' E on a true 1/16 Sec line through N 1/2 of Sec 3
		Var 11° 9' East
19	99¼	Set Charred Post 4 ft long 3 in. wide 1 ft in ground in mound 4½ ft at base 2 ft high - dug 4 pits 24 X 24 X 12 inches. for 1/16 Sec Cor
39	88½	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high dug 4 pits 24 X 24 X 12 inches for 1/16 Sec Cor

Township No 26 North of Range No 8 East of the 6th Principal Meridian

Chs	Lks	
59	97¾	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high. dug 4 pits 24 X 24 X 12 inches for 1/16 Sec Cor
79	97	The N 1/16 Sec cor on N + S line between Sec 2 + 3 Surface Rolling Prairie Soil Clay loam 2nd Rate Fair Wheat land

Chs	Lks	
		East on a random 1/16 Sec line through S½ of Sec 16 Var 12° 22' East
20	00	Set Tem 1/16 Sec Cor
40	00	Set Tem 1/16 Sec Cor
60	00	Set Tem 1/16 Sec cor
80	16	Intersect N + S line 60 lks S of S 1/16 Sec Cor from which from
		S 89° 34' W on a true 1/16 Sec line through S½ of Sec 16 Var 12° 22' East
20	04	Set granite Stone 12 X 9 X 6 inches 8 inches in ground for 1/16 Sec Cor
40	08	Set granite Stone 16 X 7 X 6 inches 11 inches in ground for 1/16 Sec Cor
60	12	Set granite Stone 14 X 8 X 7 inches 9 inches in ground for 1/16 Sec Cor
80	16	The S 1/16 Sec cor on N + S line between Sec 16 + 17 Surface Rolling Prairie Soil on West ½ Good Clay loam 1st Rate on East ½ of Poorer quality 2nd Rate best adapted to Wheat

Township No 26 North of Range No 8

Chs	Lks	
		West on a random 1/4 sec line through middle of sec 16 Var 12° 6' East
20	00	Set temporary 1/16 sec cor
40	00	Set temporary 1/4 sec cor
60	00	Set temporary 1/16 sec cor
81	37	Intersect N & S line 34 lks S of 1/4 sec cor from which Q ran
		S 89° 45' E on a line 1/4 sec line through middle of sec 16 Var 12° 6' East
20	34	Set a granite stone 14 X 10 X 5 inches 9 inches in ground for 1/16 sec cor
40	68 1/2	Set granite stone 13 X 10 X 5 1/2 inches 9 inches in ground for 1/4 sec cor
61	02 3/4	Set a limestone 13 X 9 X 6 inches 9 inches in ground for 1/16 sec cor
81	37	The 1/4 sec cor on N & S line between sec 15 & 16
		Surface Rolling Prairie soil, clay loam 2nd Rate. Fair for cultivation of wheat

East of the 6th Principal Meridian

Chs	Lks	
		East on a random 1/16 sec line through N 1/2 of sec 16 Var 11° 56' East
20	00	Set temporary 1/16 sec cor
40	00	Set temporary 1/16 sec cor
60	00	Set temporary 1/16 sec cor
81	15	Intersect N & S line 21 lks S of N 1/16 sec cor from which Q ran
		S 89° 51' W on a line 1/16 sec line through N 1/2 of sec 16 Var 11° 56' East
20	28 3/4	Set Charred Post 4 ft long 9 inches wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high. Dug 4 pits 24 X 24 X 12 inches for 1/16 sec cor
40	57 1/2	Set Charred Post 4 ft long 9 in. wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high. Dug 4 pits 24 X 24 X 12 inches for 1/16 sec cor

Township No. 26 North of Range No. 8

Chs	Lks	
60	86¼	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high Dug 4 pits 24 x 24 x 12 inches for 1/16 sec cor
81	15	The N 1/16 sec cor on N & S line between Sec 16 & 17 Surface Rolling Prairie. Soil Clay loam 2nd Rate. fair for wheat.

East of the 6th Principal Meridian

Chs	Lks	
		West on a random 1/16 sec line through S ½ of Sec 9 Var 11° 45' East
7	00	Leave meadow bears N & S.
20	00	Set temp 1/16 sec cor
40	00	Set temp 1/16 sec cor
60	00	Set temp 1/16 sec cor
81	48	Intersect N & S line 18 lks N of S 1/16 sec cor. from which I ran
		N 89° 52' E on a true 1/16 sec line through S ½ of sec 9 Var 11° 45' East
20	37	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 pits 24 x 24 x 12 inches for 1/16 sec cor
40	74	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high Dug 4 pits 24 x 24 x 12 inches for 1/16 sec cor

Township No 26 North of Range No 8 East of 6th Principal Meridian

Chs	Lks	
60	11	Set granite stone 15 X 10 X 4 inches 10 inches in ground for 1/16 Sec Cor
81	48	The S 1/16 Sec Cor on N & S line between Sec 9 & 10. Surface Rolling Prairie Soil gray loam 2nd Rate fair for cultivation of wheat

Chs	Lks	
		East on a random 1/4 Sec line through middle of Sec 9 Var 11°15' East
20	00	Set Sem 1/16 Sec Cor
36	71	A Drain 4 lks wide runs S.E.
36	71	Enter Meadow bears N & S.
40	00	Set Sem 1/4 Sec Cor
45	00	Leave Meadow bears N & S
60	00	Set Sem 1/16 Sec Cor
81	40	Intersect N & S line 8 lks S of 1/4 Sec Cor from which bran S 89°59' W on a true 1/4 Sec line through middle of Sec 9 Var 11°15' East
20	35	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high. Dug 4 pits 24 X 24 X 12 inches for 1/16 Sec Cor
40	70	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground in mound 4 1/2 ft at base

Township No 26 North of Range No 8 East of the 6th Principal Meridian

Chs	Lks	
		2 ft high Dug 4 Pits 24 X 24 X 12 inches for 1/4 Sec Cor
61	05	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high. Dug 4 pits 24 X 24 X 12 inches for 1/16 Sec Cor
81	40	The 1/4 Sec Cor on N & S line between Sec 8 & 9
		Surface Rolling Prairie soil pale clay loam 2nd Rate best adapted to Wheat
		May 19th 1875

Chs	Lks	
		West on a random 1/16 Sec. line through N 1/2 of Sec 9. Var 11° 25' East
20	00	Set temp'y 1/16 Sec Cor
40	00	Set temp'y 1/16 Sec Cor
60	00	Set temp'y 1/16 Sec Cor
81	10	Intersect N & S line 25 lks South of N 1/16 Sec Cor from which Trees
		S 89° 49' E on a true 1/16 Sec line through N 1/2 of Sec 9 Var 11° 25' East
20	27 1/2	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high. Dug 4 pits 24 X 24 X 12 inches for 1/16 Sec Cor.
40	55	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high. Dug 4 pits 24 X 24 X 12 inches. for 1/16 Sec Cor

Township No. 26 North of Range No. 8 East of the 6th Principal Meridian

Chs	Lks	
60	82½	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 pits 24 x 24 x 12 inches for 1/16 sec cor
81	10	the N 1/16 sec cor on N + S line between sec 9 + 10 Surface very Rolling Soil Pale loam. 2nd Rate Best for grazing

Chs	Lks	
		East on a random 1/16 sec line through S ½ of Sec 4 Var 11°13' East
20	00	Set temporary 1/16 sec cor
40	00	Set temporary 1/16 sec cor
60	00	Set temporary 1/16 sec cor
81	00	Intersect N + S line 25 lks N of S 1/16 sec cor. from which I run
		N 89°49' W on a true 1/16 sec line through S ½ of Sec 4 Var 11°13' East
20	25	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high Dug 4 Pits 24 x 24 x 12 inches for 1/16 sec cor
40	50	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 pits 24 x 24 x 12 inches for 1/16 sec cor

Township No. 26 North of Range No. 8

Chs	Lks	
60	75	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base. 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor
81	00	The S 1/16 Sec Cor on N & S line between Sec 4 & 5
		Surface Very Rolling Soil Pale Clay 2nd Rate Fair Wheat land

East of the 6th Principal Meridian

Chs	Lks	
		West on a random 1/4 Sec line through the middle of Sec 4 Var 11° 2' East
20	00	Set Temporary 1/16 Sec Cor
40	00	Set Temporary 1/4 Sec Cor.
60	00	Set Temporary 1/16 Sec Cor
81	04	Intersect N & S line 7 lks South of 1/4 Sec Cor. from which Pt an
		S 89° 57' E on a true 1/4 Sec line through middle of Sec 4 Var 11° 2' East
20	26	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base. 2 ft high Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor
40	52	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/4 Sec Cor.
60	78	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high.

Township No 26 North of Range No 8

Chs	Lks	
		Dug 4 Pits 24X24X12 inches for 1/16 sec cor.
81	04	The 1/4 sec corner on N.+S. line between sec 3+4 Surface very Rolling. Soil Pale clay loam 2nd Rate best for grazing

East of the 6th Principal Meridian

Chs	Lks	
		East on a random 1/16 sec line through N 1/2 of sec 4 Var 11°12' East
20	00	Set Temp 1/16 sec Cor
40	00	Set Temp 1/16 sec Cor
60	00	Set Temp 1/16 sec Cor
75	70	Enter run a down tamel [illegible] N+S.
80	62	Intersect N+S line 56 lks South of N 1/16 sec Cor. from which Tram
		S 89°36' W on a true 1/16 sec. line through N 1/2 of sec 4 Var 11°12' E
20	15 1/2	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high. Dug 4 Pits 24X24X12 inches for 1/16 sec Cor
40	31	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high Dug 4 Pits 24X24X12 inches for 1/16 sec corner

Township No 26 North of Range No 8 East of the 6th Principal Meridian

Chs	Lks	
60	40½	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 Pits 24 X 24 X 12 inches. for 1/16 Sec Cor.
80	62	The N 1/16 Sec Cor on N + S line between Sec 4 + 5
		Surface very Rolling Soil Clay loam 1st Rate except on tops of ridges Good for wheat and hay

Chs	Lks	
		West on a random 1/16 Sec line through S½ of Sec 17 Var 11°40' East
20	00	Set Temp'y 1/16 Sec Cor.
40	00	Set Temp'y 1/16 Sec Cor.
41	33	Intersect West boundary of ~~township~~ 7 lks North of S 1/16 Sec Cor. from which Tran
		N 89°54' E on a true 1/16 Sec line through S½ of Sec 17 Var 11°40' East
1	33	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground, in Mound 4½ ft at base. 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor.
21	33	Set Granite Stone 14 X 12 X 10 inches 9 inches in ground for 1/16 Sec Cor
41	33	The S 1/16 Sec Cor on N + S line between Sec 16 + 17
		Surface very Rolling Soil Clay loam. 2nd Rate Best for grazing

Township 26 North of Range No 8

Chs	Lks	
		West on a random 1/4 Sec line through Middle of Sec 17 Var 11° 40' East
20	00	Set Temp'y 1/16 Sec Cor
40	00	Set Temp'y 1/4 Sec Cor
41	05	Intersect West boundary of Township 3 lks S of 1/4 Sec Cor From which I ran-
		S 89° 57' East on a true 1/4 Sec line through Middle of Sec 17 Var 11° 40' East
1	05	Set granite Stone 12 X 10 X 8 inches 8 inches in ground for 1/4 Sec Cor
21	05	Set granite Stone 14 X 9 X 5 inches 9 inches in ground for 1/16 Sec Cor
41	05	The 1/4 Sec. Cor. on N + S line between Sec 16 + 17 Surface Rolling Prairie Soil Clay loam 2nd Rate Fair for cultivation of Wheat

East of the 5th Principal Meridian

Chs	Lks	
		West on a random 1/16 Sec line through N 1/2 of Sec 17 Var 11° 50' East
20	00	Set Temp'y 1/16 Sec Cor
33	54	A Creek water in holes 10 lks wide runs NE + SW
34	64	A Creek water in holes 5 lks wide runs NW + SE
38	24	A Creek water in holes 5 lks wide runs N + S.
39	14	A Creek water in holes 5 lks wide runs NW + SE
40	00	Set Temp'y 1/16 Sec Cor.
41	24	Intersect West boundary of township 13 lks south of N 1/16 Sec Cor From which I ran-
		S 89° 49' E. on a true 1/16 Sec line through N 1/2 of Sec 17 Var 11° 50' East
1	24	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in Mound 4 1/2 ft at base. 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor
21	24	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in Mounds

Township No 26 North of Range No 8 East of the 6th Principal Meridian

Chs	Lks	
		4½ ft at base. 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor.
41	24	The N 1/16 Sec Cor between Sections 16 + 17
		Surface Rolling Prairie Soil gray Clay loam 2nd Rate fair for wheat

Chs	Lks	
		West on a random 1/16 Sec line through S ½ of Sec 8 Var 11°50' East
20	00	Set Temp'y 1/16 Sec Cor.
40	00	Set Temp'y 1/16 Sec Cor.
40	32	Intersect West boundary of Township 4 lks S of South 1/16 Sec Cor from which from
		S 89°57' E on a true 1/16 Sec line through S ½ of Sec 8 Var 11°50' East
	32	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground in mound 4½ ft at base. 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor.
20	32	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base. 2 ft high Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor.

Township No 26 North of Range No 8

Chs	Lks	
40	32	The South 1/16 Sec cor on N + S. line between Sec 8 + 9
		Surface Rolling Prairie Soil Clay loam 2nd Rate Fair for Wheat

East of the 6th Principal Meridian

Chs	Lks	
		West on a random 1/4 Sec line through Middle of Sec 8 Var 11° 50' East
20	00	Set Temp'y 1/16 Sec Cor
40	00	Set Temp'y 1/4 Sec Cor.
40	14	Intersect West boundary of Township. 4 lks South of 1/4 Sec Cor from which I ran
		S 89° 57' E on a true 1/4 Sec line through Middle of Sec 8 Var 11° 50' East
00	14	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in Mound 4½ ft at base. 2 ft high. Dug 4 Pits 24 x 24 x 12 inches for 1/4 Sec Cor
20	14	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in Mound 4½ ft at base 2 ft high. Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec Cor
40	14	The 1/4 Sec Cor on N + S line between Sec 8 + 9
		Surface Rolling Prairie Soil Clay loam 2nd Rate Fair for Wheat

Township No 26 North of Range No 8

Chs	Lks	
		West on a random 1/16 Sec. line through N 1/2 of Sec 8 Var 11°30' East
20	00	Set Temp'y 1/16 Sec Cor
40	00	Set Temp'y 1/16 Sec Cor.
40	27	Intersect West boundary of Township 25 Lks North of N 1/16 Sec Cor. From which Pran N 89°39' E on a true 1/16 Sec line through North 1/2 of Sec 8 Var 11°30' East
	27	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground. in mound 4 1/2 ft at base. 2 ft high - Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor
20	27	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4 1/2 ft at base. 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor.
40	29	The North 1/16 Sec Cor. on N + S line between Sec. 8 + 9.

Surface Rolling
Soil Clay loam 2nd Rate
Fair Wheat land.

East of the 6th Principal Meridian

Chs	Lks	
		West on a random 1/16 Sec line through S 1/2 of Sec 5 Var 12° East
20	00	Set Temp'y 1/16 Sec Cor
40	00	Set Temp'y 1/16 Sec Cor
40	27	Intersect West boundary of Township 10 Lks South of S 1/16 Sec Cor. From which Pran S 89°51' E. on a true 1/16 Sec line through S 1/2 of Sec 5 Var 12° East
	27	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground. in mound 4 1/2 ft at base. 2 ft high. Dug 4 Pits 24 X 24 X 12 inches. for 1/16 Sec Cor.
20	27	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground in mound. 4 1/2 ft at base Dug 4 Pits 24 X 24 X 12 inches for. 1/16 Sec Cor

Township No 26 North of Range No 8

40	27	The South 1/16 Sec Cor on N & S line between Sec 4 & 5
		Surface Very Rolling. Soil grey loam 2nd Rate Fair Wheat land

East of the 6th Principal Meridian

		West on a random 1/4 Sec line through Middle of Sec 5 Var 12° East
20	00	Set Temp'y 1/16 Sec Cor
40	00	Set Temp'y 1/4 Sec Cor
40	20	Intersect N & S line. West boundary of Township. 14 lks South of 1/4 Sec Cor. From which I run
		S 89° 48' E on a true 1/4 Sec line through Middle of Sec 5 Var 12° East
	20	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground in Mound 4 1/2 ft at base 2 ft high Dig 4 Pits 24 x 24 x 12 inches. for 1/4 Sec Cor.
20	20	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground in Mound 4 1/2 ft at base 2 ft high Dig 4 Pits 24 x 24 x 12 inches for 1/16 Sec Cor

Township No 26 North of Range No 8

Chs	Lks	
40	20	The 1/4 Sec Cor on N + S line between Sec 4 + 5
		Surface. Rolling Prairie Soil Clay loam 2nd Rate fair for the cultivation of Wheat-

East of the 6th Principal Meridian

Chs	Lks	
		West on a random 1/16 Sec line through North 1/2 of Sec 5 Var 12° East
20	00	Set Temp 1/16 Sec Cor
40	00.	Set Temp 1/16 Sec Cor-
40	22	Intersect West boundary of Township. 10 lks North of N 1/16 Sec Cor
		from which I run N 89°51' E on a true 1/16 Sec line through N 1/2 of Sec 5 Var 12° East
	22	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high. Dig 4 Pits 24 X 24 X 12 inches. For 1/16 Sec Cor
20	22	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground in mound 4 1/2 ft at base 2 ft high- Dig 4 Pits 24 X 24 X 12 inches For 1/16 Sec Cor

Township No 26 North of Range No 8

40	22	The N 1/16 Sec Cor on N & S line between Sec 4 & 5 Surface Rolling Prairie Soil. Clay loam 2nd Rate Fair for Cultivation of Wheat May 20th 1875

East of the 6th Principal Meridian

General Description

The surface of this Township is prairie, quite rolling with a few small groves of oak timber in East part. and considerable amount of Creek bottom land. General Elevation above Omaha creek 50 feet.

Soil. The upland prairie is Clay loam of a yellowish brown color. 1 to 2 ft deep with Clay subsoil 2nd rate. best for cultivation of Wheat

Soil in Creek bottoms is a black loam. 3 ft deep dry and arable. 1st rate. and best adapted to growth of Corn

Water. Omaha creek runs through the East half of this town and brooks and springs are found in all localities

Township No 26 North, of Range

No 8 East of the 6th Principal Meridian

List of Names.

A list of the names of the individuals employed to assist in running, measuring, or marking the lines and corners described in the foregoing field note of fractional Township No 26 North, of Range No 8 East of the 6th Principal Meridian included within the boundaries of the Winnebago Indian Reservation showing the respective capacities in which they acted;

A. H. Wilcox, Compassman,
C. W. Torres, Compassman,
W. P. Pike, Chainman,
James E. Roche, Chainman,
J. H. Stewart, Chainman,
Wm McDavit Chainman.
William Lindley Flagman
T. T. Bennett, Mounsdman & Axeman
Anthony Benson Mounsdman & Axeman
Frank Campbell Mounsdman & Axeman
Michael Fagne Mounsdman & Axeman

Township No 26 North, of Range No

8 East of the 6th Principal Meridian

Certificate of Assistants

We hereby certify that we assisted J. W. Beaman U. S. Deputy Surveyor in surveying the Section lines of Fractional Township No. 26 North of Range No 8 East of the 6th Principal Meridian, included within the boundaries of the Winnebago Indian Reservation, and that said lines have been in all respects to the best of our Knowledge and belief well and faithfully surveyed and the boundary monuments planted according to the instructions of the Surveyor General.

S. H. Wilcox	Compassman
W. P. Pike	Chainman
his James E Roche	Chainman
T. T. Bennett In presence of T. H. Marshall	Moundman & axeman
Anthony Benson	Moundman & axeman

Subscribed and sworn to, by the above named Persons, before me, a Justice of the Peace, for Dakota County, in the State of Nebraska, this 28th day of June, 1875.

A. G. Manchester
Justice of the Peace

Township No 26 North, of Range

No 8 East of the 6th Principal Meridian

Certificate of Assistants.

We hereby certify that we assisted J. W. Beaman U. S. Deputy Surveyor in surveying the Sectional Subdivisional line of Fractional Township No 26 North of Range No. 8 East of the 6th Principal Meridian included within the boundaries of the Winnebago Indian Reservation, and that said lines have been in all respects to the best of our knowledge and belief well and faithfully surveyed and the boundary monuments planted according to the instructions furnished by the Surveyor General.

C. W. Jones — Compassman
J. H. Stewart — Chainman
Wm. McDavitt in presence of C. W. Jones — Chainman
Frank Campbell — Moundman & axeman
William Lindley — Flagman

Subscribed and sworn to, by the above named persons, before me, a Justice

Township No 26 North, of Range

of the Peace for the County of Dakota in State of Nebraska, this 28th day of June 1875.

A. G. Manchester
Justice of the Peace

No 8 East of the 6th Principal Meridian

Affidavit

I John M. Beaman, Deputy Surveyor, Solemnly swear that in pursuance of a Contract with E. E. Cunningham, Surveyor of the public lands of the United States, in the State of Iowa and Nebraska, bearing date the 6th day of October, 1874, and in strict conformity to the laws of the United States, and the instructions furnished by the said Surveyor General, I have faithfully surveyed the section lines and the quarter subdividing sections of fractional Township No 26 North of the base line, of Range No 8 East of the 6th Principal Meridian, included within the boundaries of the Winnebago Indian Reservation in the State of Nebraska, and do, further solemnly swear that the foregoing are the true and original field notes of such survey.

I John W. Beaman Deputy Surveyor do solemnly swear that in pursuance of a contract with E. C. Cunningham Surveyor General for the District of Nebraska and Iowa bearing date the 6th day of October 1874. I have well faithfully and truly and in strict conformity with the instructions furnished by the Surveyor General, Surveying Manual, and the Laws of the United States surveyed all those parts, or portions of fractional Township 26 North of the Base Line of Range No 8 East of the 6th Principal Meridian as are represented in the foregoing field notes as having been surveyed under my direction. And I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, printed instructions and special instructions of the Surveyor General of dimensions, character, construction, and marking and in the manner specifically described in the foregoing field notes and that the foregoing are the true and original field notes of such survey.

J. W. Beaman

Subscribed in my presence and sworn to before me in the County of Cass State of Nebraska this the 29th day of July AD, 1875.

Thos Pollock
Notary Public.

Surveyor Generals Office
Plattsmouth Neb Feby 21st 1876

The foregoing field notes of the Survey and Subdivision into forty acre tracts of Fractional Township No 26 North of the Base Line of Range No 8 East of 6th Principal Meridian in the Winnebago Indian Reservation in the State of Nebraska Executed by John W. Beaman under his Contract No 87 dated Oct 6th 1874 in the month of May 1875 having been critically examined the necessary corrections and explanations made the said field notes and the surveys they describe are hereby approved

Jno C Blunt
Surveyor General

Vol II Part I.

VOL II PART I

Field notes of the section lines and the lines subdividing sections of fractional Township number 27 north of Range number 8 East of the 6th Principal Meridian included within the Winnebago Reservation Nebraska.

Surveyed by John W. Beaman U. S. Deputy Surveyor under his contract No 87 bearing date October 6th 1874.

Survey commenced May 14th 1875
Survey Completed May 24th 1875

Plot pg. 150

Index



Township No 27 North of Range No 8 East of the 6th Principal Meridian

Chs	Lks	
		From the Corner to Secs 35 & 36 on South Boundary of Township Drawn:
		North on a random line bet Secs 35 & 36 Va. 11° 45' East
		Dr Creek Bottom
2	50	Plowed Land & Wagon road N. N. & S. E.
20	00	Set temp 1/16 Sec Corner
40	00	No old 1/4 Sec Corner. Set temp 1/4 Sec
46	50	Creek 5 lks Wide E & W.
70	30	Leave Plowed land E & W.
76	60	Intersect North Boundary Reservation 17 lks West of the Cor to Secs 35 & 36, To re-establish which I set post 4 ft long 3 in wide, firm ground (with the additional Marks N.B. and W.R.) in mound 4½ ft square base 2 ft high, 3 Pits 54 x 20 x 12 in, From this Corner I run
		S 0° 5' W on a true line bet Secs 35 & 36 Va 11° 43' East
16	60	Set Chained post 4 ft long 3 in wide, firm

Chs	Lks	
		ground in mound 4½ ft square base 2 ft high dug 2 Pits 48 x 20 x 12 2 Pits 20 x 20 x 12 for 1/16 Sec Corner
36	60	Set Chained post 4 ft long 3 in wide, firm ground in mound 4½ ft square base 2 ft high dug 2 pits 48 x 20 x 12, & 2 Pits 20 x 20 x 12 in for 1/16 Sec Cor
56	60	Set Chained post 4 ft long 3 in wide, firm ground in mound 4½ ft square base 2 ft high dug 2 pits 48 x 20 x 12, 2 Pits 20 x 20 x 12 in for 1/16 Sec Cor
76	60	The Corner to Secs 35 & 36 on S. Boundary of Township
		Surface fine arable creek bottom, Mostly all under cultivation, but for corn, but will adapted to any tillage, 1st rate Soil
		May 14th 1875

Township No 27 North, of Range

Chs	Lks	
		From the Corner to Secs 34 + 35 on the South Boundary of the Township Iran:
		North on a random line bet Secs 34 + 35 Va 12° East
20	00	Set temp 1/16 Sec Corner
39	95	The old 1/4 Sec Corner, To reestablish this Corner Set Granite Stone 18 x 14 x 6 in 12 in in ground, from this Corner Iran North on a random line Va 12° East
14	55	a Ravine W. to East
20	00	Set temp 1/16 Sec Corner
25	50	Road N.W + S.E.
27	00	Drain N.W + S.E.
35	25	Intersect North Boundary of Winnebago Indian Reservation at a point 11.7 lks East of Corner to Secs 34 + 35, To reestablish this Corner I Set post 4 ft long 3 in wide 1 ft in ground in mound (post with additional Mark N.B. + W.R.) 4 1/2 ft at base 2 ft high 3 pits

8 East of the 6th Principal Meridian,

Chs	Lks	
		54 x 20 x 12 in, from this Corner Iran:
		S. 26' E on a true line bet Secs. 34 + 35 Va 13° 14' East
15	25	Set granite Stone 14 x 10 x 5 in 9 1/2 in in ground for 1/16 Sec Corner
35	25	The 1/4 Sec Corner Iran S. 26' E on a true line Va 11. 34 East
55	23	Set granite Stone 14 x 12 x 3 in 9 1/2 in in ground for 1/16 Sec Corner
75	20	The Corner to 34 + 35 on South Boundary of Township, Surface rolling Prairie, best adapted to grazing. 2nd rate May 19th 1875

✓ 6/5/08 . 5/155

Township No 27 North of Range No

chs	lks	
		From the Corner to Secs 33 & 34 on the South Boundary of the Township Iran:
		North on a random line bet. Secs 33 & 34 Va. 11° 55 East.
20	00	Set temp 1/16 Sec Corner
39	00	Ravine N. 60° W. S. 60° E.
39	90	To a point 26 lks West of old 1/4 Sec Corner to reestablish which, Set post 4 ft long 3 in wide 2 ft in ground, in mound 4 1/2 ft at base 2 ft high dug 2 pits 48 x 20 x 12 in & 2 pits 20 x 20 x 12 in from which A Cottonwood 4 in dia, bears S. 47 1/4° E. 48 1/4 lks dist. From this Corner Iran North on a random line Va 11° 55' East
20	00	Set temp 1/16 Sec Corner
34	69	Intersected North Boundary of Winnebago Indian Reservation at Corner to Secs 33 & 34. To reestablish the Corner Set chaned post with additional marks, N.B. & W.R. 4 ft long 3 in wide 1 ft in ground in mound 4 ft at base 2 ft high, with 3 Pits 54 x 20 x 12 in, From this Corner Iran;

6/156

8 East of the 6th Principal Meridian.

chs	lks	
		S. 23' East on a true line bet Secs 33 & 34 Va. 11° 22 East.
14	69	Set post chaned 1/4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high, dug 2 Pits 48 x 20 x 12 & 2 Pits 20 x 20 x 12 in for 1/16 Sec Corner
34	69	The 1/4 Sec Corner from which Iran
		S. 23' E on a true line bet Secs 33 & 34 Va 10° 40' East.
54	64	Set chaned post 4 ft long 3 in wide 1 ft in ground in mound 4 1/2 ft dia at base 2 ft high dug 2 Pits 48 x 20 x 12 & 2 Pits 20 x 20 x 12 for 1/16 Sec Cor
74	59	The Corner to Secs 33 & 34 on South Boundary of Township.
		Surface rolling Prairie
		Soil best adapted to wheat, 1st rate

Township No 27 North, of Range

Chs	Lks	
		From the Corner to Secs 32 & 33 on the South Boundary of Township Draw:
		North on a random line bet Secs. 33 & 32 Va 11° 30' East
20	00	Set temporary 1/16 Sec Corner
21	30	Drain S. 10° E. to N. 10° W.
39	90	To a point 4 lks East of 1/4 Sec Corner which Corner I re-established viz: Set post 4 ft long 3 in wide, 1 ft in ground, in mound 4 1/2 ft dia at base 2 ft high, with 2 Pits 48 x 20 x 12 & 2 Pits 20 x 20 x 12 in, From this Corner Draw, North on a random line, Va 11° 30' East
1	00	Cut 5 lks wide runs from S.E. to N.W.
6	50	Cut 30 lks wide from S. 10° W. to N. 10° E.
36	38	I intersect North Boundary Winnebago Indian Reservation 4 lks East of Corner to Secs. 32 & 33, To re-establish this old Corner, Set post (Chained) and marked with the additional marks N.B. & N.R. 4 ft long

No 8 East of the 6th Principal Meridian

		3 in wide, 1 ft in ground, in mound 4 1/2 ft dia at base 2 ft high, 3 Pits 54 x 20 x 12 in, From this Corner Draw:
		S. 7' E on a true line bet Secs 32 & 33 Va 11° 35' East
16	38	Set Chained post 4 ft long 3 in wide, 1 ft in ground in Mound 4 1/2 ft dia at base 2 ft high dug 2 Pits 48 x 20 x 12 & 2 Pits 20 x 20 x 12 in for 1/16 Sec Corner
36	38	The 1/4 Sec. Cor. from which Draw:
		S. 7' E. on a true line bet Secs 32 & 33 Va 11° 26' East
56	33	Set a Granite Stone 20 x 15 x 12 in 15 in in ground for 1/16 Sec Corner
76	28	The Corner to Secs 32 & 33 on South Boundary of Township
		Surface rolling Prairie Soil best adapted to wheat 2d rate " Pale clay loam May 18th 1875

9/159

Township No 24 North of Range

10/160

No 8 East of the 6th Principal Meridian

11/161

Township No 27 North, of Range

12/162

No 8 East of the 6th Principal Meridian

Part. 2.

13/163

Township No 24 North of Range No

8 East of the 6th Principal Meridian

14/164

Chs	Lks	
		West on a random 1/16 Sec line through S 1/2 of Sec 36 Var 11° 17' East
20	00	Set Temp 1/16 Sec Cor.
40	00	Set Temp 1/16 Sec Cor
60	00	Set Temp 1/16 Sec Cor.
61	37	Road to Sioux City bears N & S
62	40	Crossed fence and enter breaking bears N & S
80	17	Intersect N & S line 20 lks N. of South 1/16 Sec Cor. from which I ran
		N 89° 51' E on a true 1/16 Sec line through S 1/2 of Sec 36 Var 11° 17' East
20	04	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in Mound 4 1/2 ft at base 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor
40	08 1/2	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor

Township 27 North. Range No 8 East of 6th Principal Meridian

Chs	Lks	
60	12 3/4	Set Charred Post 4ft long 3 inches wide 1ft in ground in mound 4½ ft at base 2 ft high. Dig 4 Pits 24x24x12 for 1/16 Sec cor
80	17	The S 1/16 Sec cor on N + S line between Sec 31 + 36

Surface Rolling. East 3/4 level west 1/4. Soil of East 3/4 clay loam 2nd Rate best for wheat. Soil of west 1/4 dark clay soil 1st Rate excellent for Corn.

Chs	Lks	
		East on a random 1/4 Sec line through middle of Sec 36 Var 11°25' East
13	00	End of fence and breaking bears N + S
13	00	A Point 4½ chs N of a house
16	40	Road to Sioux City bears N + S + S.W.
20	00	Set Temp'y 1/16 Sec cor
20	00	A Point 4 chs S of a house
40	00	Set Temp'y 1/4 Sec cor
60	00	Set Temp'y 1/16 Sec cor.
79	80	A gulch (Marshy) bears NW + SE
80	64	Intersect E. Boundary of township 44 lks S of 1/4 Sec cor from which I run
		S 89°41' W on a true 1/4 Sec line through middle of Sec 36 - Var 11°25' East
20	16	Set a lime stone 18x9x5 inches 13 inches in ground for 1/16 Sec cor
40	32	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high Dig 4 Pits 24x24x12 inches for 1/4 Sec cor

Township 27 North, Range No 8 (17/165) East of 6th Principal Meridian (15/166)

Chs	Lks	
60	48	Set a limestone 18×10×4 inches, 13 inches in ground for 1/16 Sec Cor.
80	64	The 1/4 Sec Cor on N & S line between Sec 35 & 36
		Surface rolling. except 13 chs at west end of line which is level
		Soil rich dark loam best for corn
		Soil of east portion. gray clay loam 2nd Rate. best for wheat

East on a random 1/16 Sec line through N ½ of Sec 36
Var 11°40' East

Chs.	Lks	
2	48	leave fence and breaking bears N & S.
12	05	Road to Sioux City bears N20°W & S20°E
20	00	Set Temp'y 1/16 Sec Cor.
22	80	Road bears NE & SW
34	80	Creek 10 lks wide runs SW.
39	20	Creek 10 lks wide runs NW
40	00	Set Temp'y 1/16 Sec Cor
41	25	Creek 10 lks wide runs S25°W
48	00	a point 30 lks N of a house
60	00	Set Temp'y 1/16 Sec Cor
80	34	Intersect E. Bdy of Township 12 lks S of N 1/16 Sec Cor. from which I ran

S 89° 55' W on a true 1/16 Sec line through N ½ of Sec 36
Var 11°40' East

Chs.	Lks	
20	18½	Set limestone 20×10×8 inches 15 inches in ground for 1/16 Sec Cor
40	17	Set Sandstone. 15×15×6 inches 10 inches in ground for 1/16 Sec Cor

Township 27 North, Range No 8 East of 6th Principal Meridian

19/167 20/168

Chs	Lks	
60	25½	Set Sandstone 14X11X5 inches 9 inches in ground for 1/16 Sec. Cor.
80	34	The N 1/16 Sec Cor on N & S line between Sec 35 & 36
		Surface Rolling. Soil Clay loam 2nd Rate Best adapted to Wheat

Chs	Lks	
		West on a random 1/16 Sec line through S ½ of Sec 35 Var 11°30' East
16	00	Leave breaking bears N & S.
17	06	Omaha Creek 10 lks wide runs N
20	00	Set Temp 1/16 Sec Cor
27	80	Road bears N & S.
80	20	Set Temp 1/16 Sec Cor Set Temp 1/16 Sec Cor Intersect N & S line 13 lks N of S 1/16 Sec Cor from which I ran
		N 89°54' E on a true 1/16 Sec line through S ½ of Sec 35. Var 11°30' East
20	05	Set Charred Post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 Pits 24X24X12 inches for 1/16 Sec Cor
40	10	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 Pits 24X24X12 inches for 1/16 Sec Cor
60	15	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound

Township 27 North, Range No 8 (2/1/69) East of 6th Principal Meridian (2/2/70)

Chs	Lks	
		4½ ft at base. 2 ft high. Dug 4 pits 24 X 24 X 12 inches for 1/16 sec cor
80	20	The S 1/16 sec cor on N + S line between sec 35 + 36
		Surface Rolling. Soil of 1st 1/4 East dark loam 1st Rate best for corn 2nd + 3rd 1/4 Soil Clay loam 2nd Rate best for wheat. Soil West 1/4 dark clay loam 1st Rate good for Corn or wheat

Chs	Lks	
		East on a random 1/4 sec line through middle of sec 35 Var 11° 30' East
20	00	Set Temporary 1/16 sec cor
40	00	Set Temporary 1/4 sec cor.
49	60	Road bears N + S.
49	80	Fence & lands bears N 20° W + S 20° E
50	20	Creek 15 lks wide runs S E.
53	00	A point 3 chs S of a house
54	50	Creek 10 lks wide runs N E
55	20	End of fenced field bears N + S
60	00	Set Temporary 1/16 sec cor
60	89	Omaha Creek 10 lks wide runs N
63	60	Enter plowed land bears N + S.
79	98	Intersect N + S line 9 lks S of 1/4 sec cor from which I run
		S 89° 56' W on a true 1/4 sec line through middle of sec 35 Var 11° 30' East
19	99½	Set Charred Post 4 ft long 3 in. wide one ft in ground in mound 4½ ft at base 2 ft high

Township 27 North, Range No 8 East of 6th Principal Meridian

Chs	Lks	
		Dug 4 Pits 24X24X12 inches for 1/16 Sec Cor
39	99	Set Charred Post 4 ft long, 3 inches wide. 1 ft in ground in mound 4½ ft at base. Dug 4 Pits 24X24X12 inches for 1/4 Sec Cor.
59	98½	Set Charred Post 4 ft long, 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high Dug 4 Pits 24X24X12 inches for 1/16 Sec Cor
79	98	The 1/4 sec cor on N + S line bet. sec 34 + 35 Surface W 3/4 rolling E 1/4 level Soil Rich loam 1st Rate Good for Corn or Wheat

Chs	Lks	
		East on a random 1/16 Sec line through N ½ of Sec 35 Var 11°30' East
19	20	Enter breaking bears N + S.
20	00	Set Temporary 1/16 Sec Cor
40	00	Set Temporary 1/16 Sec Cor
40	00	Leave breaking + fence bears N + S
55	00	A Point 10 chs N of a house
60	00	Set Temporary 1/16 Sec Cor
60	00	Road bears N + S.
60	00	Enter Creek bottom bears N + S
67	75	Omaha Creek 15 lks wide runs North
75	90	To breaking bears N. + S.
80	08	Intersect N + S line 24 lks N of N 1/16 Sec Cor. bet Sec 34 + 35 from which I run
		N 89° 50' W on a true 1/16 Sec line through N ½ of Sec 35. Var 11° 30' East.
20	02	Set a granite stone 16 X 10 X 4 inches 11 inches in ground for 1/16 Sec Cor
40	04	Set granite stone 20 X 9 X 7 inches 15 inches in ground for 1/16 Sec Cor

Chs	Lks	
60	06	Set granite stone 18 x 9 x 4 inches 13½ inches in ground for 1/16 sec cor
80	08	The N 1/16 sec cor on N + S line between Sec 34 + 35
		Surface Rolling prairie and creek bottom Soil dark clay loam 1st Rate - good for Corn or Wheat

Chs	Lks	
		West on a random 1/16 sec line through S ½ of Sec 34 Var 11°30' East
20	00	Set temp 1/16 sec cor
27	80	Road bears N + S
40	00	Set temp 1/16 sec cor
49	50	A creek 5 lks wide runs S 20° E
60	00	Set temp 1/16 sec cor
80	60	Intersect N + S line 11 lks South of S 1/16 sec cor. from which I run
		S 89°55' E on a true 1/16 sec line through S ½ of Sec 34 Var 11°30' East
20	12½	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 Pits 24 x 24 x 12 inches for 1/16 sec cor
40	25	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 Pits 24 x 24 x 12 inches for 1/16 sec cor

Township 27 North. Range No 8

60	37½	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 Pits 24X24X12 inches for 1/16 Sec Cor
80	50	The S 1/16 Sec Cor on N & S line between Sec. 34 & 35. Surface Rolling Prairie Soil clay loam 1st Rate good wheat land.

East of 6th Principal Meridian

Chs	Lks	
		East on a random 1/4 Sec line through middle of Sec 34 Var 11°27' East
80	86	Creek water in holes 7 lks bears N & S.
20	00	Set Tempy 1/16 Sec Cor.
40	00	Set Tempy 1/4 Sec Cor
60	00	Set Tempy 1/16 Sec Cor
80	42	Intersect N & S line 11 lks S of 1/4 Sec cor from which I ran
		S 89°55' W on a true 1/4 Sec line through middle of Sec 34 Var 11°27' East
20	10½	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 Pits 24X24X12 inches for 1/16 Sec Cor
40	21	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high Dug 4 Pits 24X24X12 inches for 1/4 Sec. cor -

Township 27 North, Range No 8 East of 6th Principal Meridian

Chs	Lks	
60	31½	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 pits 24X24X12 inches - for 1/16 Sec cor
80	42	the 1/4 Sec cor on N + S line between Sections 33 + 34 Surface Rolling Prairie Soil Clay loam 1st Rate best for Wheat

East on a random 1/16 Sec line through N ½ of Sec 34
Var 11°30' East

Chs	Lks	
20	00	Set temporary 1/16 Sec cor
40	00	Set temporary 1/16 Sec cor
80	00	Set temporary 1/16 Sec cor
80	70	Intersect N + S line 2 lks S of N 1/16 Sec Cor. from which Pecan

S 89°39' W on a true 1/16 Sec line through N ½ of Sec 34.
Var 11°30 East

Chs	Lks	
20	17½	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 Pits 24X24X12 inches for 1/16 Sec cor
40	35	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high - Dug 4 pits 24X24X12 inches. for 1/16 Sec cor
60	52½	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound

Township 27 North, Range No 8

Chs	lks	
		4½ ft at base 2 ft high. Dug 4 Pits 24X24X12 inches. For 1/16 Sec Cor
80	70	The N 1/16 Sec cor. on N + S line between Sections 33 + 34 Surface Rolling Prarial. Soil clay loam 1st Rate best for wheat

East of 6th Principal Meridian

		West on a random 1/16 Sec line through S ½ of Sec 33 Var 11°10' East
20	00	Set Temp'y 1/16 Sec Cor.
40	00	Set Temp'y 1/16 Sec cor
60	00	Set Temp'y 1/16 Sec cor -
80	09	Intersect N + S line 20 lks S of S 1/16 Sec cor - From which I ran S 89 S 89°51'2 on a true 1/16 Sec Cor through S ½ of Sec 33 Var 11°10' East
20	02	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 Pits 24X24X12 inches for 1/16 Sec cor
40	03	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 Pits 24X24X12 inches for 1/16 Sec. cor.

Township 27 North, Range No 8 East of 6th Principal Meridian

33/181 34/182

Chs	Lks	
60	0 ~~X~~ 6 3/4	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground in mound 4½ ft at base. 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor
80	09	The S 1/16 Sec Cor. on N + S line between Sec. 33 + 34
		Surface Rolling Prairie Soil 1st Rate on west side. on East Side Soil Pale + thin 2nd Rate best for wheat and grazing
		May 22nd 1875

Chs	Lks	
		East on a random 1/4 Sec line through middle of Sec 33. Var. 11° 2' East
1	63	Creek runs N 35° W 12 lks wide
20	00	Set Temp'y 1/16 Sec Cor
40	00	Set Temp'y 1/4 Sec Cor
60	00	Set Temp'y 1/16 Sec Cor.
80	11	Intersect N + S line 24 lks S of 1/4 Sec Cor. from which I ran
		S 89° 50' W. on a true 1/4 Sec line through middle of Sec 33 Var 11° 2' East
20	0 ~~4~~ 2 3/4	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec. Cor.
40	06 1/2	Set Charred Post 4 ft long. 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high Dug 4 Pits 24 X 24 X 12 inches for 1/4 Sec. Cor.

Township 27 North, Range No 8 East of 6th Principal Meridian

Chs	Lks	
60	08 1/4	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor
80	11	The 1/4 Sec Cor on N & S line between Sec 32 & 33 Surface Very Rolling
		Soil Pale clay loam 2nd Rate Fair Wheat land

Chs	Lks	
		East on a random 1/16 Sec line through N 1/2 Sec 33 Var 11° 30' East
4	50	a Creek. water in holes 20 lks wide runs N.
20	00	Set Temporary 1/16 Sec Cor.
40	00	Set Temporary 1/16 Sec Cor.
60	00	Set Temporary 1/16 Sec Cor
79	79	Intersect N & S line 50 lks North of N 1/16 Sec Cor from which I run
		N 89° 39' W on a true 1/16 Sec line through N 1/2 of Sec 33 Var 11° 30' East
19	95	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor
39	89 1/2	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high. Dug 4 pits 24 X 24 X 12 inches for 1/16 Sec Cor

Chs	Lks	
59	84½	Set Charred Post 4 ft long 3 inches wide 1 ft in ground on mound 4½ ft at base 2 ft high + Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor -
79	79	The N 1/16 Sec Cor on N + S line between Sec 32 + 33 Surface Rolling Prairie Soil Clay loam 1st Rate good Wheat land

Chs	Lks	
		West on a random 1/16 sec line through S ½ of Sec 32 - Var 10°41' East
20	00	Set Temp'y 1/16 Sec Cor
40	00	Set Temp'y 1/16 Sec Cor
40	11	Intersect West boundary of Township 10 Lks South of S 1/16 Sec Cor: from which I ran
		S 89°51' E on a true 1/16 sec line through South ½ of sec 32 Var 10°41' East
0	11	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground. on mound 4½ ft at base. 2 ft high Dug 4 Pits 24 X 24 X 12 inches. for 1/16 sec Cor -
20	11	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground on mound 4½ ft at base, 2 ft high Dug 4 Pits 24 X 24 X 12 inches for 1/16 sec Cor -
40	11	The S 1/16 Sec cor on N + S line between Sec 32 + 33 Surface Rolling Prairie Soil. good clay loam 2nd Rate good for wheat -

Township 27 North. Range No 8 East of 6th Principal Meridian

Chs	Lks	
		West on a random 1/4 Sec line through Middle of Sec 32 Var. 10° 30' East
20	00	Set Temp'y 1/16 Sec Cor -
40	00	Intersect West boundary of Township at 1/4 Sec Cor - from which P ran
		East on a true 1/4 Sec line through Middle of Sec 32 Var 10° 30' East
20	00	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground, in mound 4 1/2 ft at base, 2 ft high Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec Cor -
40	00	The 1/4 Sec Cor. on N & S line between Sec 32 & 33 Surface Rolling Prairie Soil good clay loam 1st Rate well adapted to Wheat

Chs	Lks	
		West on a random 1/16 Sec line through N 1/2 of Sec 32 Var 10° 30' East
20	00	Set Temp'y 1/16 Sec Cor
40	00	Set Temp'y 1/16 Sec Cor
40	12	Intersect West boundary of Township 7 Lks North of N 1/16 Sec Cor - from which P ran
		N 89° 54' East on a true 1/16 Sec line through North 1/2 of Sec 32 Var 10° 30' East
0	12	Set Charred Post 4 ft long 3 inches wide 1 ft in ground. in mound 4 1/2 ft at base 2 ft high. Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec Cor
20	12	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground. in mound 4 1/2 ft at base, 2 ft high Dug 4 Pits 24 x 24 x 12 inches. for 1/16 Sec Cor -
40	12	The North 1/16 Sec Cor on N & S line between Sec 32 & 33. Surface Rolling Prairie Soil Clay loam 2nd Rate fair for cultivation of Wheat May 24th 1875

Township 27 North. Range No 8 41/189

East of 6th Principal Meridian 42/190

General Description

The surface of this township is prairie, quite rolling with patches of oak timber in east part and quite an amount of creek bottom land.

General elevation above Omaha Creek. 50 feet.

Soil. Of uplands is a yellowish clay loam. 1 to 2 feet deep with clay subsoil. 2nd rate and best for wheat while in the creek bottom it is a black loam. 3 feet deep, dry and arable. 1st rate and well adapted for cultivation of corn.

Water. Omaha Creek flows through east ½ of the town brooks and springs are found in all localities

Township No 2 43/191 North, of Range No 8 East of the 6th 44/192 Principal Meridian.

List of Name

A list of the names of the individual employed to assist in running, measuring, or marking the line and corners described in the foregoing field note, of fractional township No 2 North, of Range No 8 East of the 6th Principal Meridian included, within the boundaries of the Winnebago Indian Reservation, showing the respective capacities in which they acted,

Alvin H. Wilcox,	Compassman,
C. N. Jones,	Compassman,
N. P. Pike	Chainman,
James E. Roche	Chainman,
J. H. Stewart	Chainman,
Wm McDavit,	Chainman,
William Lindley	Flagman,
Frank Campbell,	Moundman & axeman,
T. T. Bennett,	Moundman & axeman,
Anthony Benson,	Moundman & axeman
Michael Fague	Moundman & axeman

45/193

Township No 27 North, of Range

46/194

No 8 East of the 6th Principal Meridian

Certificate of Assistant

We hereby certify that we assisted J. W. Beaman U. S. Deputy Surveyor in surveying the Section line of Fractional Township No 27 North of the base line, of Range No 8 East of the 6th Principal Meridian, included within the boundaries of the Winnebago Indian Reservation, and that said lines have been in all respects to the best of our knowledge and belief well and faithfully surveyed, and the boundary monuments planted, according to the instructions of the Surveyor General.

Alvin H. Wilcox	Compassman
W. P. Pike	Chainman
his James E. Roche	Chainman
T. H. Bennett In presence of T. H. Marshall	Mounderman & axeman
mark Anthony Benson	Mounderman & axeman

Subscribed and sworn to, by the above named persons before me, a Justice of the Peace for Dakota, County, in the State of Nebraska, this 28th day of June, 1875.

A. G. Manchester
Justice of the Peace

47/195

Township No 27 North, of Range

48/196

8 East of the 6th Principal Meridian

Certificate of Assistants

We hereby certify that we assisted J. W. Beaman U. S. Deputy Surveyor in surveying the Sectional Subdivisional lines of Fractional Township No 27 North, of the base line, of Range No 8 East of the 6th Principal Meridian, included within the boundaries of the Winnebago Indian Reservation and that said lines have been in all respects, to the best of our knowledge and belief, well and faithfully surveyed and the boundary monuments planted according to the instructions of the Surveyor General.

G. W. Jones.	Compassman
J. H. Stewart	Chainman
Wm his x mark McDowitt in presence of G. W. Jones	Chainman
Frank Campbell	Mounderman & axeman
William Lindley	Flagman

Subscribed and sworn to, by the above named persons, before me, a Justice of the Peace, for the County of Dakota, in the State, of Nebraska, this 28th day of June, 1875

A. G. Manchester
Justice of the Peace.

Township No 24 North, of Range No 8 East of the 6th Principal Meridian

49/197

50/198

2 58/80

Affidavit.

I, John H Beaman, Deputy Surveyor, do Solemnly Swear that in pursuance of a contract with E. E. Cunningham, Surveyor of the public lands of the United States in the State of Nebraska, bearing date the 6th day of October 1874 and in strict conformity to the laws of the United States, and the instructions furnished by the said Surveyor General I have faithfully surveyed the section lines and the sectional subdivisional lines of fractional Township No 24 North of the base line, of Range No 8 East of the 6th Principal Meridian, included within the boundaries of the Winnebago Indian Reservation, in the State of Nebraska, and I do further Solemnly Swear that the foregoing are true and original field notes of such survey.

I John M. Beaman Deputy Surveyor do solemnly swear that in pursuance of a contract with E. E. Cunningham Surveyor General for the District of Nebraska & Iowa bearing date the 6th day of October 1874. I have well, faithfully and truly, and in strict conformity with the instructions furnished by the Surveyor General, Surveying Manual and the Laws of the United States surveyed all those parts or portions of fractional Township 27 North of the Base Line of Range No. 8. East of the 6th Principal Meridian as are represented in the foregoing field notes as having been surveyed under my direction. And I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, printed instructions and special instructions of the Surveyor General of dimensions, character, construction, and marking and in the manner specifically described in the foregoing field notes and that the foregoing are the true and original field notes of such survey.

J M Beaman

Subscribed in my presence and sworn to before me in the County of Cass State of Nebraska this the 29th day of July A.D. 1875.

Thos Pollock
Notary Public.

Surveyor Generals Office
Plattsmouth Neb Feby 21st 1876

The foregoing field notes of the survey and subdivision into forty acre tracts of Fractional Township No 27 North of Base Line of Range No 8 East of the 6th Principal Meridian in the Winnebago Indian Reservation in the State of Nebraska Executed by John M. Beaman under his Contract No 87 dated Oct 6th 1874 in the month of May 1875 having been critically examined the necessary corrections and explanations made the said field notes and the surveys they describe are hereby approved

Jno R Clark
Surveyor General

General Land Office • Original Field Notes

Book Number

143

The images in this file are photographs of the notes of the original surveys of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The original surveys in Nebraska began in the mid 1850's and were completed in the mid 1880's. The Nebraska office of the Surveyor General was closed June 30, 1886.