General Land Office • Original Field Notes

Book Number

144

The images in this file are photographs of the notes of the original surveys of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The original surveys in Nebraska began in the mid 1850's and were completed in the mid 1880's. The Nebraska office of the Surveyor General was closed June 30, 1886.

(8)

Winn'o
Ind. Res.
T.26,27 N.
R. 9 E.
8.

Range No. 9.
Vol. I. Township Number 26.
Vol. II. Township Number 27.

Vol. I. Part. 1.

Field notes of the section lines & the lines subdividing sections and the meanders of the Wisconsin River, of fractional Township number 26 north of Range number 9 East of the 6th Principal Meridian included within the Winnebago Reservation Wisconsin

Surveyed by John N. Beaman U.S. Deputy Surveyor under his contract No 87 bearing date October 6th 1874.

Survey Commenced, April 26th 1875
Survey Completed. July 19th 1875

PLAT S.S.

Township 26 North of Range No 9 East of the 6th Principal Meridian

Index

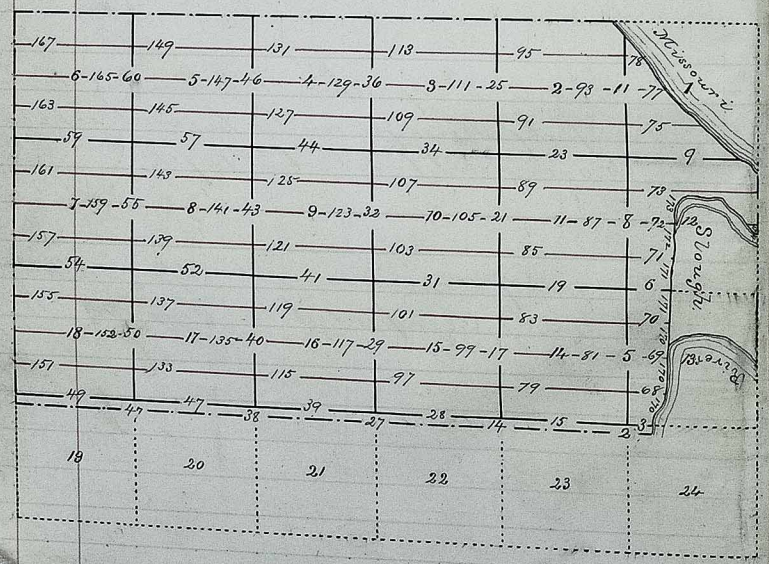

Chs	lks	
		From the Corner to Sec 14 + fractional Secs 13, 23 and 24 Iran.
		South on a true line bet. fractnl Secs 23 + 24 Up a Steep hill Va 12°15' East
4	20	To old Corner bet Secs 23 + 24, and 17.70 Chs West of River Bank, (old corner on bank, had washed away) To Establish the Corner bet 23 + 24 on South Boundary. Set new post 4 ft long 3 in wide 2 ft in ground and remarked old bearing trees, as follows. (Post marked S. B. W. R + O R. An Iron wood, 12 in dia bears, S 10° E 5 8 lks dist. a hackberry 15 in dia bears N. 49° W. 48 lks dist.
		Surface Hilly
		Soil Rr vale best for Corn + vegetables
		Timber good Elm and oak

Township No 26 North of Rang

Chs	lk	
		East on a true line bet Secs 13 & 24 Va. 12° 15' East.
13	00	Ravine bears N 80° W to S. 80° E
16	00	Cornfield N and South
19	22	Right Bank Missouri River finding no old Meander Corner. Set post 4 ft long 3 in wide 2 ft in ground from which An oak 7 in dia, bears N. 25½° W 58 lks dist A Cottonwood 3 in dia, bears S. 44½° E. 60 lks dist
		Surface rough, Soil 1st rate best for Corn, Timber good oak, Basswood & Elm

No 9 East of the 6th Principal Meridian

Chs	lks	
		South on a random line bet Secs, 13 & 14 Va 12° East
12	00	Summit of hill bears E & W.
14	00	Descent of Same
20	00	Ravine bears from W. to East
20	00	Tempy 1/16 Sec Cor
30	00	Top of hill bears N. W & S. E
40	00	No old 1/4 Sec Cor found Set tempy 1/4 Sec Cor
41	50	Descent of hill, East & West
60	00	Set tempy 1/16 Sec Corner
61	00	Steep Ravine Course N 10° W. to S 10° E,
75	00	Creek 3 lks wide bears S. E
78	90	To a point 1.79 lks East of old Corner to Secs 13, 14, 23 and 24, To reestablish this Corner Set post 4 ft long 3 in sq 2 ft in ground from which 2 old bearing trees A Red Elm, 8 in dia bears S. 41° E, 23 lks dist A Red Elm, 8 in dia bears, N. 4½° W, 46 lks dist New bearing trees Viz; A Basswood 8 in dia, bears N 88° E, 33 lks dist An Ironwood 5 in dia, bears S. 9° W. 10 lks dist from this Corner Trans:

Township No 26 North, of Range

Chs	lks	
		North on a true line bet Secs 13 & 14 Va 10°43' East
19	72½	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor from which
		A Rock Elm, 12 in dia, bears S 10° E, 19 lks dist
		A Rock Elm, 12 in dia bears S. 39° W. 18 dist
39	45	Set post 4 ft long 3 in wide 2 ft in ground for 1/4 Sec Corner, from which;
		A Basswood, 12 in dia bears S 47° E 23 lks dist
		A Oak 22 in dia bears N. 29° W. 110 lks dist
59	17½	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor from which.
		An Elm 12 in dia bears, S. 78½° W. 7 lks dist.
		An Elm 12 in dia, bears, N. 57° E. 27 lks dist
78	90	The Corner to Secs 11, 12, 13 and 14
		Surface very broken
		Soil, black loam R^r rate
		Timber, oak elm basswood.

No 9 East of the 6th Principal Meridian

Chs	lks	
		East on a true line bet Secs 12 and 13 Va 12° East
17	00	Cross Creek 3 lks wide, runs S. 80° E.
20	00	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor from which;
		Basswood, 10 in dia, bears S 46° W, 49 lks dist
26	00	A Mulberry 8 in dia bears N 75½° E, 32 lks dist
26	28	Cross Creek N W 3 lks wide To Impassable Slough, Set post 4 ft long 3 in wide 2 ft in ground from which;
		An Elm 8 in dia, bears S 43° E. 41 lks dist
		A White Willow 5 in dia bears N. 35° E. 58 lks dist
		Surface broken, too rough for cultivation.
		Timber good oak, Red Elm &c
		Soil black loam rich.

Township No 21 North of Range 2

Chs	Lks	
		South on a random line bet Secs 11 & 12 Va 12° E.
		Up steep hilly through timber and dense under brush
8	00	Summit of Ridge bears S. 20° E & N. 20° W.
9	00	Open Basswood timber bears E & W.
15	00	Cup Ravine course from S. E to N. W.
19	00	Summit of hill bears S. E to N. W.
20	00	Set temp, for qr 1/16 Sec Corner
		Down hill with dense brush & heavy timber
26	00	Ravine do for deep drains S. to E.
36	50	Ravine drains East
39	60	To a point 14 lks East of old 1/4 Sec Cor.
		Set post 4 ft long 3 in side of spring mound and look bearing to old bearing trees;
		a Burr Oak 24 in dia bears N. 20° W. 27 lks dist
		an Ironwood 10 in dia, bears S. 74° E. 51 lks dist.
		from this Corner draw: South Va 12° East.
14	00	Summit of hill
20	00	Set temp 1/4 Sec Corner
22	00	Descent of hill bears E & N.
38	00	Ravine bears E & N.

Ts 9 East of the 6th Principal Meridian

Chs	Lks	
39	56	To a point 26 lks E. of Cor to Secs 11, 12, 13 & 14
		To reestablish this Corner Set post 4 ft long 3 in of spring ground, from which.
		Old Trees,
		a Basswood, 14 in dia, bears S. 32° E. 8 lks dist
		an Ironwood 8 in dia bears S. 39 1/2° W. 33 lks dist.
		an Oak 12 in dia, bears N. 22 1/2° W. 42 lks dist
		New Tree, Rock elm 5 in dia bears N. 27° E. 42 lks dist
		From this Corner draw,
		North on a true line bet Secs 11 & 12 Va 11° 38' E.
19	78	Set post 4 ft long 3 in side of spring ground for 1/16 Sec. Cor. from which
		a Burr Oak, 9 in dia, bears S. 76° East, 6 lks dist,
		a Black Walnut 12 in dia, bears N. 58 1/2° W. 33 lks dist
39	56	The 1/4 Sec Corner North. Va 11° 48' East
59	36	Set post 4 ft long 3 in side of spring ground, for 1/16 Sec Cor from which,
		an Oak 24 in dia bears N. 39° E. 65 lks. dist.
		an Oak 24 in dia bears S. 50 1/2° W. 87 lks dist
79	16	The Corner to Secs 1, 2, 11 and 12,
		Surface rough and hilly, Timber, oak,
		Walnut Basswood, April 26th 1875

Township No 26 North, of Range

Chs.	lks	
		East on a random line bet Secs 1 & 12
		Va. 12° 23' East.
		In Cornfield bears N & S.
4	00	Leave Cornfield and enter dense brush N & S.
5	00	Dry ravine from S. to N.
14	00	Summit of hill bears N & S.
16	00	Descent of hill " " "
20	00	Set temp 1/16 Sec Corner
22	00	Top of bluff, red sand stone 100 ft high N & S
24	00	River Bottom, foot of bluff bears N & S
38	00	Wagon road from Agency to Saw Mill bears N W & S E.
39	30	To old 1/4 Sec Cor. To reestablish this Cor
		Set Sand Stone 20 x 10 x 5 in, 15 in in ground
		from which
		A Willow 4 in dia bears S. 30° W. 34 lks dist.
		An Ash 3 in dia bears N. 6 1/4° W. 60 lks dist
		from which, Iran East on a random line
		Va 12° 23' East
20	00	Set temp 1/16 Sec Corner
29	00	Right Bank Missouri River No old M. C.
		found, Set post 4 ft long 3 in wide 2 ft in
		ground for Meander Corner to Secs 1 & 12

No 9 East of the 6th Principal Meridian

Chs	lks	
		from which,
		old bearing tree
		Elm 12 in dia bears S 18° W. 31 lks dist
New		An Elm 24 in dia bears N 73 1/2° W. 58 lks dist
		bearing tree from this Meander Corner Iran
		West on a true line bet Secs 1 & 12
		V 12° 23' East
9	00	Set post 4 ft long 3 in wide 2 ft in ground for
		1/16 Sec Corner from which
		An Elm 13 in dia bears S 11 1/2° W. 56 lks dist
		An Elm 10 in dia bears N 60° E. 26 lks dist
29	00	1/4 Sec Corner
48	65	Set post 4 ft long 3 in wide, 2 ft in ground
		from which
		An Ironwood 6 in dia bears S. 51° E. 62 lks dist
		An Ironwood 6 in dia bears N. 72 1/2° E. 78 lks dist
68	30	The Corner to Secs 1, 2, 11 & 12
		East 3/4 level river bottom, with scattering
		Elm & Cotton Wood
		West 1/4 Mostly Bluffs of Sandstone
		Soil on uplands 1st rate, black loam
		first rate Best for Corn

Township No 26 North, of Range No

Chs	lks	
		North on a random line bet Secs 1 & 2 Va 10°15' East.
1	00	Cornfield bears N & S.
10	50	Ravine Drains N 10° E.
16	00	Descend Steep bank, to creek bottom E & W
17	50	Creek 8 lks wide runs from W. to East
24	50.	East Corner of log house Enter small wide in Village
26	50	Leave Cornfield & cross fence bears N 80° E & S 80° W.
27	50	Road from agency to Saw Mill, bears N 80° E & S 80° W.
31	00	Leave creek bottom, bears E & W. & Enter cornfield bears E & W.
35	00	Leave cornfield & cross fence E & W, and enter dense brush.
39	60	To a point 68 lks West of old 1/4 Sec Corner, To reestablish this corner Set post 4 ft. long 3 in wide 2 ft in ground from which the following old bearing trees. Burr Oak, 6 in bears N. 81° E 28 lks dist A Hickory, 6 in dia bears N 75½° W 100 lks dist From this Corner, with a corrected Va from North on a random line 9°17' East

9 East of the 6th Principal Meridian

Chs	lks	
2	00	Leave dense brush and enter brush prairie bears E & W.
15	00	Top of hill, leave brush & Enter mixed timber
20	00	Set temp 1/16 Sec Corner
27	00	Top of bluff 120 ft high bears N. W & S E.
36	86	Right Bank Missouri River at foot of bluff, find no old Meander Corner, Set post 4 ft long 3 in wide 2 ft in ground, for Meander Corner, bet Secs 1 and 2 from which: A Red Elm 10 in dia bears S. 47° E 14 lks distant A Basswood 10 in dia, bears S. 70° W. 42 lks dist From this corner Train
		South on a true line bet Secs 1 & 2 Va 9°17' East
16	86	Set post 4 ft long 3 in wide, 2 ft in ground for 1/16 Section Corner from which: A Black Walnut, 12 in dia, bears N. 73° E. 25 lks dist A Hickory 6 in dia bears N 26° W 25 lks dist
36	86	The 1/4 Sec Corner
56	66	Set post 4 ft long 3 in wide 2 ft in ground, for 1/16 Sec Cor, from which An Elm 24 in dia bears S 9½° W. 20 lks dist

Township No 26 North, of Range No.

Chs	Lks	
76	46	A Basswood 7 in dia, S 28½° E, 322 lks dist
		The Corner to Secs 1, 2, 11 & 12, To restablish this corner, set post 4 ft long 3 in sq, 2 ft in ground from which, remarked
		old bearing tree
		Hackberry, 9 in dia bears N. 14½° W. 34 lks dist
		A Coffee Bean 14 in dia bears S. 68° E. 15 lks dist
		New tree
		A Coffee Bean 6 in dia bears S. 4½° E 93 lks dist,
		Red Oak, 11 in dia bears S. 64½° W. 87 lks dist
		Land rough and hilly
		Timber, oak, Hickory, Basswood & CC
		Too Rough for Cultivation
		Bluffon Missouri River consists of soft red sandstone,
		Apr 27th 1875

9 East of the 6th Principal Meridian

Chs	Ks	
		South on a true line bet Secs 22 & 23
		Va 12° East
4	34	To old Cor bet Secs 22 & 23, and 170 8 chs West of 1st Mile Corner, To restablish the Cor to Secs 22 & 23 on South Boundary Reservation set post 4 ft long 3 in wide, 2 ft in ground from which (Post marked with the additional marks S.B. W.R. & O.R.
Odd,		A. Basswood, 12 in dia bears, S. 40° W 9 lks dist
New,		A Basswood, 12 in dia, bears N. 31½° E. 27 lks dist,
		Timber Oak, Walnut & hickory
		Surface broken
		Soil dark loam Rc rate best for Corn

Township No 26 North, of Range

Chs.	Lks	
		East on a random line bet Secs 14 & 23 Va 12° East
20	00	Set temp 1/16 Sec Corner in a deep ravine drains S & N
38	25	Deep ravine from S to N
38	86	To a point 40 lks S of 1/4 Sec Corner in deep ravine drains from S. to N. To reestablish this Corner Set post 4 ft long 3 in wide 2 ft in ground from which An Elm, 28 in dia, bears S 16° E 56 lks dist. An Elm, 5 in dia bears N 15½° E 27 lks. dist Thence East on a random line Va 12° East
8	64	Deep Ravine drains from S. to N.
19	95	" " " " " "
20	00	Set temp 1/16 Sec Cor
25	00	Deep Ravine drains from S to N
38	85	Intersect N & S line 4 lks North of Corner to Secs 13, 14, 23 and 24 from which Draw: S. 89° 40' W on a true line bet 14 & 23 Va 11° 36' East
19	42½	Set post 4 ft long 3 in wide, 2 ft in ground

No 9 East of the 6th Principal Meridian

Chs	Lks	
		for 1/16 Sec Corner from which An Oak, 30 in dia bears S 35° E, 4 lks dist A Basswood 12 in dia bears S. 16° W. 7 lks dist
38	85	To old 1/4 Sec Corner from which Draw S 89° 40' W. on a true line bet Secs 14 & 23 Va 12° 14' East
58	28	Set post 4 ft long 3 in wide 2 ft in ground, for 1/16 Sec Corner, from which A Black walnut 18 in dia bears S. 25° E, 1 lks dist. An Oak 12 in dia bears N 40° W. 48 lks dist
499	41	Corner of Secs 14, 15, 22 and 23 Surface broken, Soil Clay bet for Corn Timber good oak, black walnut & c.

Township No 26, North, of Range

Chs	lks	
		South on a random line bet Secs 14 & 15 Va 12° East.
		South through mixed timber
1	00	Deep Ravine, bears W to S 70° E.
3	00	" " bears from S. W to N. 70° E
9	00	Leave mixed timber and enter oak opening bears E & W & Cross road bears E & W.
15	00	Enter prairie bears E & W.
20	00	Set post for temp 1/6 Sec Corner
23	50	Leave prairie & Enter mixed timber bears E & W.
25	80	Creek, 5 lks wide, bears S. W. to N. E.
28	00	Creek bottom bears N 10° E. & S 10° W.
29	40	Creek 3 lks, wide runs N 10° E & S 10° W.
32	00	Leave Creek bottom bears N 10° E. S. 10° W.
40	00	No old 1/4 Sec Corner, Set tem 1/4 Sec Corner
41	00	Dry ravine drains from S. E to N. W. and enter Black walnut & Hickory timber
54	00	Top of Ridge, bears S 10° E & N 10° W.
78	00	Old Wagon road E & W.
79	10	To a point 60 lks E of Corner to Secs 14, 15, 22 and 23. To reestablish this Corner, Set post 4 ft long 3 in square 2 ft in ground from which took the following old bearing trees

No 9 East of the 6th Principal Meridian

Chs	lks	
		a Black walnut 14 in. dia bears N 8° E. 19 lks dist.
		An Oak 8 in dia bears N 69¼ W. 20 lks dist.
		New bearing trees
		a Basswood 8 in dia bears S. 27½ E. 82 lks dist.
		an Elm 10 in dia bears S. 4° W. 79 lks dist.
		North on a true line bet. Secs 14 and 15. Va 11° 34' East.
19	77½	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 sec cor from which
		An Elm 12 in dia bears N 36° W 29 lks dist
		a Basswood 24 in dia bears S 34½ E 97 lks dist
39	55	Set post 4 ft long 3 in wide 2 ft in ground for 1/4 sec cor, from which
		a Basswood 16 in dia bears S 61° E. 44 lks dist.
		An Elm 7 in. dia. bears N. 68° W. 42 lks dist.
59	32½	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 sec cor. from which
		an oak 6 in dia bears N. 81° E. 212 lks dist.
		There being no other tree convenient to mark beg 1 pit 24x24x12 in 8 lks south of post.
79	10	The cor. to Secs 10, 11, 14 and 15
		Soil 1st rate best adapted to corn.
		Timber oak, walnut Basswood &c
		Surface broken. Apr 28th 1875

Township No 26 North of Range No 9 East of the 6th Principal Meridian

Chs	lks	
		East on a random line bet Secs 11 and 14
		Va 11° 30' East.
		Through dense brush
6	00	Old wagon road bears N.E. and S.W.
7	50	Corn field 50 lks south ½ acre
10	50	Descend steep bank to a slough with running water drains from N.E. to S.W.
13	50	Leave slough and go up a steep bank on burnt brush land bears S.W. and N.
20	" "	Set temp 1/16 sec. corner
27	80	Deep ravine drains from S. 60° E. to N. 60° W
40	00	No old 1/4 sec. cor. Set temp 1/4 sec. cor.
41	" "	Summit of hill bears N 10° W. and S 10° E.
47	" "	Leave burnt brush and Enter mixed timber at head of deep ravine running Easterly
51	" "	Same ravine 80 ft. deep drains from S. 80° W. to N 80° W.
60	00	Set temp 1/16 sec. corner.
63	00	Recross same ravine drains from N 80° W. to S. 80° E.
72	00	Recross same ravine with water drains from S. 60° W. to N. 60° E.
78	51	Intersect N. & S. line 14 lks north of corner to Secs 11, 12, 13, and 14 from which I ran.

Chs	lks	
		N 89° 27' W on a true line bet Secs 11 & 14
		Va 11° 57' East
19	~~63~~ 62¾	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 sec Corner from which
		An Ironwood 6 in dia bears N 13° E 25 lks dist
V		A Bass wood 12 in dia bears S 49½° W. 10 lks dist
39	25½	Set post 4 ft long 3 in wide 2 ft in ground for ¼ sec Corner from which
		An oak 4 in dia bears S 40° W. 72 lk dist
		A Bass wood 5 in dia bears N 44° E, 89° lks dist
58	88¼	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 sec Corner from which
		An oak 3½ in dia bears S 18¾° W 27 lks dist
		An oak 3 in dia bears N 24° E 111 lks dist
78	51	The Corner to Secs 10, 11, 14 & 15
		Surface hilly & broken
		Soil 1st rate light black loam best for corn
		Timber Oak black walnut & basswood with thick brush.
		Apr 29th 1875

Township No 26 North, of Range

Chs	Lks	
		South on a random line bet Secs 10 & 11 Va 11° East
		Through oak opening
14	50	Dip ravine from N 10° E to S 10° W
20	00	Set temp 1/16 Sec Corner
22	50	Descend steep bank to creek bottom bears E & W
25	00	Creek 4 lks wide runs from W to E Ascend steep bank & enter dense hazel brush & scattering timber
28	00	Ascend steep bank, bare brush & cross slough 50 lks wide bears E & W
30	00	Enter cornfield bears S. W. & N. E.
38	96	Find 1/4 Sec Cor. Set iron post 4 links long 3 in wide & firm ground for 1/4 Sec Corner from which A black walnut 12 in dia bears N 32° E 36 lks dist from old ~~bed~~ new bearing tree, Run South on a random line with same Var.
	20	Magnetic road bears E & W.
10	00	Enter dense hazel brush with scattering timber E & W
13	00	Leave brush and enter prairie bears N E & S. W
14	50	Road from Azuguy to Sac Mill on ridge bears E & W
19	50	Enter brush bears E & W
20	00	Set temp 1/16 Sec Corner
39	21	Era point 58 lks West of old Corner to Secs

No 9 East of the 6th Principal Meridian

Chs	Lks	
		10, 11, 14 & 15 To be restablish this Corner set from 4 links long 3 in sq firm ground, from which An Oak 12 in bears N 45° W 4 lks dist An Oak 11 in dia bears N 77½° E 21 lks dist An Ironwood 7 in dia bears S 66° E 23 lks dist A Black walnut 10 in dia bears N 32° W 25 lks dist first ~~Wood~~ & last one new, from this Cor Run
		North on a true line bet Secs 10 & 11 Va 11° 50' East
19	60½	Set post 4 links long 3 in wide firm ground for 1/16 Sec Cor from which An oak 7 in dia, bears S. 58° W. 85 lks dist An oak 3½ in dia bears S 44° E. 26 lks dist
39	21	Old 1/4 Sec Cor. restablished from which Run
		North on a true line bet Secs 10 & 11 Va 11° East
58	69	Set post 4 links long 3 in wide firm ground for 1/16 Sec Corner from which An Oak 8 in dia bears S. 84½° W. 7 lks dist An Elm 14 in dia, bears N. 12° E. 151 lks dist
78	17	The Corner to Secs 3, 34, 10 & 15 black oak post from surface very hilly. Soil Grade black timber & scattering hum oak & mixt brush Apr 27th 1875

Township No 26 North, of Range No 9 East of the 6th Principal Meridian

Chs	Lks	
		East on a random line for Sec 2 & 11 Va 12° East
2	33	through mixed timber to dep Ranier N & S. brand E & W.
8	00	Top of hill in oak opening & cross wagon road
15	00	Leave oak openings and enter dense brush N & S
20	00	Set temp 1/16 Sec Corner
3	00	Foot of long slope leave brush & cross ravine N 70 S E
32	00	Enter Cornfield 1 acre brass N & S.
35	00	Cross fence leave cornfield & Enter Creek bottom N & S.
35	50	Wagon road from Oqy to Saw Mill N E & S W.
36	00	Creek, 7 lks wide runs from S W to N E
38	00	Leave Creek bottom N. E and S W.
39	92	Set post 22 lks North of old 1/4 Sec Corner, to wh which this Corner lies for 4 of long 3 in wide 2 in ground from which bore bearing to old Stump 70
		An Elm 10 in dia bears N. 30° W. 20 lks dist
		An Elm 8 in dia bears S 24° W. 18 lks dist also marked the following 2 yr trees
		A Rock Elm 15 in dia bears N 39 1/4° W. 107 lks dist
		A Rock Elm 12 in dia bears N 4 1/2 W 98 lks dist
		from this Corner ran East on a random line Va 12° East
5	28	Cross ravine bears S. E & N. W.

Chs	Lks	
20	00	Set temp 1/16 Sec Corner
29	78	Ranier 90 fr dep bears N & S.
39	91	Inclined Hand Stone 96 lks South of Corner to Sec 1, 2 & 11 and 12 from which bears
		N 89° 55' W on a true line for Sec 2 & 11 Va 13° 24' East.
19	95 1/2	Set a long 3 in wide 2 in ground for 1/16 Sec Cor from which a R of Oak 5 in dia bears N. 50° W. 32 lks distant a Red Oak 4 in dia bears N. 28° W. ~~0° 24'~~ 18 lks dist
39	91	The 1/4 Sec Corner from which bears
		N 89° 55' W on a true line for Sec 2 & 11 Va. 12° 24' East
59	77	Set post 4 of long 3 in wide 2 in ground for 1/16 Sec from which Elm, 18 in dia bears N. 50° E. 240 lks dist An Elm 8 in dia bears N. 50 1/4° W. 242 lks dist
79	63	The Corner to Secs 2, 3 10 and 11
		Surface hilly,
		Soil black loam best for Corn,
		Timber brush and scattering oak Elm &c,

Township No 26 North, of Range No 9 East of the 6th Principal Meridian

Chs	lks	
		North on a random line bet Secs 2 & 3 Thought timber. Va 10° East
13	00	Wagon Road bears S E and N. W.
20	00	Set temporary 1/16 Sec Corner
32	00	Ravine 30 ft deep, drains from S 80° W. to N 80° E
33	00	Leave timber and Enter brush bears N & E
39	33	To 1/4 Sec Cor, Set post 4 ft long 3 in wide, 1 ft in ground from which, old Stumps
		A hickory, 6 in dia, bears N. 70° W. 5 lks dist
		A hickory, 6 in dia, bears, S 70° E. 8 lks dist
	new	An Elm 14 in dia, bears S 33 3/4° E. 74 lks dist
	tree	An Oak 10 in dia bears S. 64 1/4 W. 253 lks dist
		first two old Stumps last two new bearing trees.
		North on a random line Va 10° East
17	00	Top of Sandstone bluff 80 ft high E & W.
19	00	Foot of bluffs bears W to East
20	00	Set tempy 1/16 Sec Corner
20	50	Creek 8 lks wide runs East
21	20	Up a steep bank and enter hazel brush E & W
24	50	Leave brush and enter oak opening bears E & W
36	50	Ravine 50 ft deep drains from W to East
40	62	Intersected North boundary of Tp. at Corner to Secs 2 & 3 from which corner I ran

Chs	lks	
		S 9° E on a true line bet Secs 2 & 3 Va 9° 51' East
20	62	Set post 4 ft long 3 in wide, 2 ft in ground for 1/16 Sec Cor from which
		A red Elm 5 in dia bears N 7 1/4° E. 211 lks dist
		A hickory 6 in dia dia bears N 84° W. 253 lks dist
40	62	The 1/4 Sec Corner
60	28 1/2	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Corner from which
		A basswood 12 in dia bears S 9 1/2° W. 70 lks dist
		An Oak 14 in dia bears N 8 1/2° E 62 lks dist
79	95	The Corner to Secs 2, 3, 10 and 11. Set Post 4 ft long 3 in Square 2 ft in ground from which
		An Oak, 24 in in dia, bears N 35° W, 40 lks dist
		An Oak, 13 in dia, bears S 57 1/2° W. 22 1/2 lks dist
		An Oak 9 in dia, bears, N. 8° E 88 lks dist
		An Oak 12 in dia bears S. 4 1/2° E 40 lks dist
		first two old and last two new bearing trees.
		Surface too rough for Cultivation
		Soil black loam good. Apr 29th 1875

Township No 26 North of Range No

Chs	Lks	
		South on a true line between Secs 21 & 22 Var 2° East
4	13	Fd Corner for Secs 21 & 22 on South Boundary Reservation and 16.73 Chs West of the 2d Mile Corner To preserve both the Corner for Secs 21 & 22, Set a granite Stone 20 x 12 x 9 in 15 in in ground.
		Surface rolling Prairie, Soil dark brown. 1st Rate soil adapted to cultivation

9 East of the 6th Principal Meridian

		East on a random line between Secs. 15 and 22. Variation 11°55' east.
10	10	Creek 2 lks wide runs N.W.
17	20	Wagon road bears N. and S.
20	00	Set temporary 1/16 Sec. cor.
30	50	Leave prairie and enter dense brush. bears N + S.
40	00	Finding no old 1/4 Sec. cor. Set temporary 1/4 Sec. cor.
49	30	Leave dense brush at top of ridge bears N. and S. and enter timber bearing N + S
59	00	Creek 3 lks wide in small ravine runs N 10° E.
60	00	Set temporary 1/16 Sec. cor.
78	75	Intersected North and South line 20 lks south of corner to Secs. 14. 15. 22. 23. Thence S. 89° 55' W. on a true line. Variation 11°59 east.
19	68 3/4 ~~68~~	Set post 4 ft long, 3 in, wide, 2 ft in ground for 1/16 Sec. cor, from which An elm 8 in, diam, bears S. 31° W. 42 lks. dist, An oak 18 in, diam, bears N. 65 1/2° E. 35 lks, dist.
39	37 1/2 ~~38~~	Set post 4 ft, long, 3 in, wide 2 ft in ground for 1/4 Sec, cor, from which An oak 4 in, diam, bears N. 60 1/4° E. 212 lks, dist, An elm 3 in, diam, bears S. 2° W. 213 lks, dist,
59	06 1/4	Set post 4 ft long, 3 in, wide, 1 ft in ground, in mound 4 1/2 ft in diam at base 2 ft high. described marked (+) stone 6 x 6 x 6. dug 2 pits 48 x 20 x 12

Township No 26 North, of Range No 9 East of the 6th Principal Meridian

		2 pits 20x20x12. for 1/16 sec. cor.
78	75	Corner to secs, 15. 16. 21 and 22.
		Surface west 20 chs. fine rolling prairie. remainder broken
		Soil 1 . adapted for cultivation
		Timber, oak. elm. basswood and hickory.
		South on a random line between secs, 15 and 16
		Variation 11° east.
		Corner in brush prairie.
3	50	Wagon road from Agency to saw mill. bears N. E and S. W.
20	00	Set temporary 1/16 sec, cor.
22	49	To a point 1 mile East of a house,
24	75	To center of school house, Measured through window
25	50	Leave brush prairie and enter dense brush bears E and W.
34	00	Leave dense brush and enter brush prairie. bears N. S.
40	00	Finding no 1/4 sec, cor. Set temporary 1/4 sec, cor,
41	00	Enter dense brush bears E and W.
44	00	Ravine drains from W. to E.
48	00	Leave brush and enter rolling prairie bears E and W.
48	50	Wagon road bears N. W. and S. E.
49	50	Cross corner of fence bears S 10° W. and N 10° E. to plowed field

56	00	Leave field bears E and W, and enter prairie
60	00	Set temporary 1/16 sec, cor,
79	15	To a point 6 lks. west of corner to secs, 15. 16. 21 and 22.
		Found the old mound and pits, Set charred post 4 ft long
		3 in, square, 1 ft in ground in mound, 4 1/2 ft in diam, at base,
		2 ft high, dug 2 pits 48x20x12, 2 pits 20x20x12 for corner
		to secs, 15 and 16, and fractional secs, 21 and 22.
		Thence North , on a true line
		Variation 11° 03' East,
19	78 3/4	Set charred post 4 ft long, 3 in, wide, 1 ft in ground in mound 4 1/2 ft diam, at base
		2 ft high, dug 2 pits 48x20x12, 2 pits 20x20x12 for 1/16 sec, cor,
39	57 1/2	Set charred post 4 ft long, 3 in, wide, 1 ft in ground in mound 4 1/2 ft diam,
		at base, 2 ft high, dug 2 pits 48x20x12. 2 pits 20x20x12 for 1/4 sec, cor,
59	36 1/4	Set post 4 ft long, 3 in, wide, 2 ft in ground for 1/16 sec, cor. from which
		An oak 14 in, diam, bears S 11 1/4° E. 93 lks, dist,
		An oak 14 in, diam, bears S 25 1/2° W. 115 lks, dist,
79	15	To corner to secs, 9. 10. 15 and 16. Set new post 4 ft long
		3 in, square, 2 ft in ground for corner to secs. 9. 10. 15 and 16 from which
		An oak 12 in, diam, bears S 43° E. 96 lks, dist
		An oak 10 in, diam, bears N 59 1/4° E. 54 lks, dist,
		An oak 13 in, diam, bears N 13 1/2° W. 153 lks, dist.
		An oak 11 in, diam, bears S 71° W. 241 lks, dist.

Township No 26 North of Range

		Surface irregular if cleared of brush it would be well adapted for wheat. Soil 1st rate.
		East on a random line between Sec's, 10 and 15.
		Variation 11° 30' east.
		Through dense brush and scattering timber.
1	00	Wagon road bears N. and S.
8	50	Ravine bears N. & S.
16	00	Wagon road from Agency to saw mill bears N.E. & S.W.
20	00	Set temporary 1/16 Sec. cor.
40	00	Finding no old 1/4 Sec. cor. Set temporary 1/4 Sec. cor.
45	00	Blond land bears N.W. and S.E.
47	50	Leave blond land bears N.W. and S.E. enter very rolling prairie
60	00	Set temporary 1/16 Sec. cor.
61	20	Leave prairie and enter dense brush and scattering timber, bears N.W. and S.E.
78	10	Deep ravine drains to S 80° E from N 80° W
78	86	Intersected north and south line 25 lks south of corner to Sec's. 10. 11. 14 and 15.
		Thence N 89° 26' W. on a true line
		Variation 12° 15' east.

No 9 East of the 6th Principal Meridian

19	71½	Set post 4 ft long, 3 in wide, 2 ft in ground for 1/16 Sec. cor. from which An oak 8 in. diam. bears N. 65½° E. 169 lks. dist. An oak 2½ in. diam. bears S. 82¾° E. 188 lks. dist.
39	42½	Set post 4 ft long, 3 in wide, 2 ft in ground for 1/4 Sec. cor. from which An oak 4 in. diam. bears N. 27½° E. 60 lks. dist. A basswood 14 in. diam. bears S. 15° W. 168 lks. dist.
59	12.40 ~~15~~	Set post 4 ft long, 3 in wide, 2 ft in ground for 1/16 Sec. cor. from which A hickory 9 in. diam. bears S. 80½° W. 65 lks. dist. An oak 5 in. diam. bears N. 6° E. 206 lks. dist.
78	86	Corner to Sec's. 9. 10. 15 and 16
		Surface broken, soil dark loam, 1st rate: best adapted for corn and vegetables
		Timber Oak hickory and basswood
		May 6th 1875
		South on a random line between Sec's. 9 and 10.
		Variation 11° east.
		Across prairie.
18	00	To land alternating with brush and cultivated land
18	50	Creek 5 lks wide runs east in a deep ravine N. to E.
20	00	Set temporary 1/16 Sec. cor.

Township No 26 North, of Range No

40	00	Finding no old 1/4 sec. Set temporary 1/4 sec. cor.
49	00	Leave semi cultivated land and enter dense brush and scant prairie bears E & W
59	00	Cruck 8 lks wide with rocky bed runs N. 10° E. in a deep ravine
60	00	Set temporary 1/16 sec. cor.
78	80	In a point 73 lks west of corner to secs. 9. 10. 15 and 16. took bearings of stumps of old blaming trees as follows An oak 10 in diam bears S. 11° E. 31 lks dist. An oak 12 in diam bears N 49½° W 89 lks dist. An oak 9 in diam bears N 20½° E. 27 lks dist. Thence North on a true line Variation 11¾° East.
19	70	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 sec cor. from which An elm 9 in diam bears N 41½ W. 66 lks dist. An elm 9 in diam bears N. 32° E. 25 lks dist.
39	40	Set post 4 ft long 3 in wide 2 ft in ground for 1/4 sec cor from which An elm 8 in diam bears S 15½° W. 141 lks dist. An elm 4 in diam bears N 67½° E. 164 lks dist.
59	10	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 sec cor. from which An elm 14 in diam. bears S. 58° E. 256 lks dist. A red Elm 12 in diam bears N 73½° W. 188 lks dist.

9 East of the 6th Principal Meridian

78	80	Corner to secs 3, 4, 9 and 10. Set post 4 ft long 3 in square 2 ft in ground for corner to secs 3, 4, 9 and 10 from which An oak 12 in diam bears S. 18¾ W 88 lks dist New B.T. An oak 4 in diam bears S. 35¾ E. 68 lks dist An oak 8 in diam bears N. 85° E. 133 lks dist. Old An oak 14 in diam bears N. 10½ W. 278 lks dist. Surface broken and hilly prairie, Soil 1st rate, black loam best adapted for corn. Timber red elm, hickory, oak of inferior quality May 5th 1875
		East on a random line between secs 3 and 10 Variation 11° East. Through brush prairie
1	00	Brush with scant timber bears N & S.
3	50	Leave brush and scant timber and enter prairie bears N & S
6	20	Cross ravine with growing timber bearing from N.W. to S.E.
10	00	Ravine bears from N.E. to S.W.
12	30	Ravine bears from S.E. to N.W.
20	00	Set temporary 1/16 sec. cor. top of ridge bears S.E. and N.W.
20	30	Wagon road bears S.E. and N.W.
21	00	Enter brush and timber bears N & S

Township No 26 North, of Range

28	00	Ravine trains from N.W. to S.E.
29	00	Leave brush and scant timber and enter prairie bears N. &
39	47	To a point 6 lks south of old 1/4 sec cor. Set new post 4 ft long 3 in wide 2 ft in ground for 1/4 sec cor from which
		An oak 20 in diam. bears S. 34° E. 131 lks dist.
		An oak 18 in diam bears N. 41 1/4° E. 140 lks dist.
		Thence East with same variation.
2	80	Drop ravine with timber trains from N. to S.
4	00	Fence and plowed ground, bears N. & S.
6	00	Leave plowed ground. bears N. & S.
6	60	Plowed ground one acre (round)
13	00	Top of ridge bears S.E. and N.W.
14	00	Enter timber with thick brush bears S.E. and N.W.
20	00	Set temporary 1/16 sec cor.
22	50	Drop ravine Drains from N. to S.
34	00	Leave timber and brush and enter prairie bears N. & S.
37	50	Top of ridge and enter timber bears N. and S.
39	04	Intersected north and south line 18 lks north of Corner to secs 2, 3, 10 and 11
		Thence N. 89 43' W. on a true line
		Variation 10° 52' East.
19	52	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 sec cor from which

No. 9 East of the 6th Principal Meridian

		A. red oak 26 in diam bears N. 71° W. 12 lks dist.
		A red oak 24 in diam bears S. 60° E. 72 lks dist.
39	04	1/4 sec cor.
		Thence N 89° 43' W variation, 11° 17' East
58	78	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 sec cor from which
		An oak 4 in diam bears S. 82 3/4° E. 146 lks dist.
		An oak 9 in diam bears N. 27° E. 149 lks dist.
78	51	Corner to sections 3, 4, 9 and 10.
		Surface broken prairie and timber land
		Soil, dark clay loam 1st rate.
		Timber principally burr oak of inferior quality.
		May 7th 1875
		South on a random line between secs 3 & 4
		Variation 11° East.
2	00	Enter timber and thick brush, bears N. & S.
5	00	Cross deep ravine trains from S.W. to N.E.
20	00	Set temporary 1/16 sec cor.
21	00	brush 8 lks wide runs east. & enter open timber
39	65	To a point 40 lks east of old 1/4 sec cor.
		Set a post 4 ft long 3 in wide 2 ft in ground for 1/4 sec cor from which
		an old and new bearing tree as follows,

Township No 26 North of Range No 9 East of the 6th Principal Meridian

A. basswood 12 in diam bears S. 87¼° W. 77 lks dist.
A. basswood 6 in diam bears S. 46½° E. 26 lks dist.
Thence South with same variation

10	" "	Wagon road bears N. E. and S. W.
20	01	Fence to plowed field bears E and W. Set temporary 1/16 sec cor.
26	25	Leave plowed field and enter prairie bears N & S.
26	50	Wagon road bears E and W.
35	00	Ravine drains from S. E. to N. W. and enter brush.
39	62	To a point 41 lks east of corner to secs. 3. 4. 9 and 10.
		Thence N 0° 9' E. on a true line.
		Variation 10°34' east.
19	31	Set post 4 ft long. 3 in. wide, 2 ft in ground for 1/16 sec. cor. from which
		An oak 16 in. diam. bears S 77½° E. 197 lks. dist.
		An oak 14 in. diam. bears S 77½° W. 211 lks. dist.
39	62	1/4 sec. cor.
		Thence N 0° 9' E. with same variation
59	62	Set post 4 ft long 3 in wide 2 ft in ground, for 1/16 Sec Corner from which
		A Red Oak, 6 in dia bears N 41½° E, 42 lks dist
		A Red Elm 5 in dia bears N 44° W. 18½ lks dist
79	27	The Corner to Secs 3, & 4 on North Boundary
		Surface broken timber cultivated land & brush
		Soil dark Clay loam 1st rate
		Timber Basswood, Oak & Walnut of inferior quality

To reestablish the Corner to Secs 16, 17 20 & 21 Set Chained post 4 ft long 3 in sq 1 ft in ground in mound 4½ feet base 2 ft high deg 2 pits 48 x 20 x 12 in & 2 Pits 20 x 20 x 12 in, From this Corner Drain South on a true line between Secs, 20 and 21.

Variation 11°45' east

1	80	A drain from N. E. to S. W.
4	30	Cross fence bears S. E and N. W. and leave a field.
4	64	To Corner to Secs 20 & 21 on South Boundary Reservation, and 17.62 Chs West of old the 3rd Mile Corner. To reestablish this Corner to to Secs 20 & 21 on South Boundary, Set Chained post 4 ft long 3 in wide 1 ft in ground in mound 4½ feet base 2 ft high deg 3 Pits 54 x 24 x 12 in, Post with the additional Marks, S. B. W. R & O R.
		Surface prairie, adapted to cultivation
		Soil 2d rate

May 5th 1875

Township No 26 North, of Range No

		East on a random line between Sec's. 16 & 21.
		Variation 12° east.
1	50	A drain from S.E. to N.W.
4	50	Enter Plowed field
18.	00	Wagon road bears N. and S.
20	00	Set temporary 1/16 Sec. cor,
39	75	To 1/4 Sec, cor, Set chained post 4 ft long, 3 in wide, 1 ft in ground in mound. 4 1/2 ft in diam, at base. 2 ft high, dug 2 pits 48 X 20 X 12. 2 pits 20 X 20 X 12. for 1/4 Sec, cor,
40	25	Cross a fence, bears N. and S. and leave field.
60	00	Set temp 1/16 Sec Cor
64	35	Creek 3 lks wide, runs N to W.
80	19	Intersected north and south line 36 lks north of corner to Sec's. 15. 16. 21 and 22.
		Thence N 89° 50' W. on a true line
		Variation 11°39' east.
20	22	Set a granite stone 20 X 12 X 5. 12 in, in ground for 1/16 Sec, cor,
40	44	1/4 Sec, cor, Thence ch 89° 50' W. on a true line
		Va 12° 10' East.
60	31 1/4	Set chained post 4 ft long, 3 in, wide, 1 ft in ground 1 in mound 4 1/2 ft in diam, at base, 2 ft high. dug 2 pits 48 X 20 X 12. 2 pits 20 X 20 X 12 for 1/16. Sec, cor,
80	19	Corner to Sec's, 16. 17. 20 & 21.

9 East of the 6th Principal Meridian

		Surface rolling prairie, soil 1st rate. well adapted to the cultivation of wheat.
		South on a random line between Sec's, 16 and 17.
		Variation 12° east.
15	00	Wagon road bears E and W.
20	00	Set temporary 1/16 Sec. cor,
21	00	Wagon road bears E and W.
21	50	A fence bears E and W. and plowed field.
40	00	Finding No 1/4 Sec, cor, Set temporary 1/4 Sec, cor,
60	00	Set temporary 1/16 Sec, cor,
78	00	Leave plowed field and enter prairie. bears N & S
79	69	To a point 212 lks east of cor, to Sec's, 16. 17. 20 and 21 P.M.
		Thence North on a true line
		Variation 10°30' east.
19	92 1/4	Set chained post 4 ft long, 3 in, wide, 1 ft in ground in mound 4 1/2 ft in diam at base, 2 ft high. dug 2 pits 48 X 20 X 12. 2 pits 20 X 20 X 12 for 1/16 Sec. cor,
39	85 1/2	Set granite stone 18 X 12 X 10. 12 in, in ground for 1/4 Sec, cor,
59	76 3/4	Set quartz stone 18 X 18 X 10. 12 in, in ground for 1/16 Sec, cor,
79	69	Corner to Sec's. 8. 9. 16 and 17.

Township No. 26 North, of Range No

		Set post 4 ft long, 3 in, square, 2 ft in ground for cor, to Sec's 8.9.16 & 17, from which
		A bassword 14 in, diam, bears N 44½° W. 175 lks, dist.
		A bassword 18 in, diam, bears S. 62½° W. 305 lks, dist
		An oak 4 in, diam, bears N. 34° E. 120 lks, dist. 220
		other tree convenient for marking dug one pit 2½ ft sq
		12 in deep 8 lks south of post
		Surface rolling prairie, soil 1st rate, dark clay loam, best adapted for wheat
		East on a random line between Sec's 9 and 16.
		Variation 11° east
8.	20	Ravine with fine springs runs N. W.
12.	60	Wagon road bears S. W. and N. E.
20	00	Set temporary 1/16 Sec, cor,
22	00	Indian trail bears S. E. and N. W.
29	00	Wagon road bears N. E. and S. W.
31	60	Wagon road bears N. W. and S. E.
32.	00	Wagon road bears N. and S.
39	77	To a point 10 lks north. old 1/4 Sec, cor, mound
		Thence east with same variation
6	50	A drain from N. W. to S. E.
6	70	Wagon road bears S. E and N. W.

9 East of the 6th Principal Meridian

20	00	Set temporary 1/16 Sec, cor.
22	00	Indian trail bears S. W. and N. E.
22	75	Deep ravine drains from S. W. to N. E and enters brush and scattering timber
30	50	A ravine drains from S. E. to N. W.
32	00	A cornfield, two acres. bearing N + S.
35	00	Lean cornfield. bearing N + S
38	00	Enter prairie. bearing N + S
39	38	Intersected north and south line at corner to Sec's 9.10.15 & 16.
		N 89° 48' West on a true line
		Variation 11° 0 2' East.
19	69	Set a granite stone 20 x 12 x 8. 15 in, in ground for 1/16 Sec, cor,
39	38	Old 1/4 Sec, cor, Set a granite stone 15 x 12 x 8. 10 in, in ground for 1/4 Sec, cor.
		Thence N 89 2½ W. with variation 10° 53' East.
59	26	Set a granite stone 14 x 14 x 10. 10 in, in ground for 1/16 Sec, cor.
79	38	Corner to Sec's, 8.9.16 and 17.
		Surface Brushland Prairie, Rolling
		Soil Clay loam, best for wheat

Township No 26 North of Range No 9 East of the 6th Principal Meridian

		South on a random line between sec's 8 and 9.
		Variation 11° east.
12	60	Wagon road bears S.W. and N.E.
20	00	Set temporary 1/16 sec, cor.
22	00	Wagon road bears S.E. and N.W.
25	00	Plowed field 4 acres. 1 ch. west of line.
39	37	To a point 77 lks. west of old 1/4 sec. mound.
		Thence south with same variation
3	00	Wagon road bears S.E. and N.W.
16	73	A creek 3 lks wide runs from E. to W. in a deep ravine with scattering timber
20	00	Set temporary 1/16 sec, cor.
21	83	A drain from N.W. to S.E.
39	35	To a point 15 lks west of corner to sec's, 8.9.16 and 17.
		Thence North on a true line
		Variation 11°13' East.
19	67 1/2	Set charred post 4 ft long 3 in, wide, 1 ft in ground in mound, 4 1/2 ft in diam, at base 2 ft high, dug 2 pits. 48X20X12. 2 pits 20X20X12 for 1/16 sec. cor.
39	35	Set charred post 4 ft long, 3 in. wide, 1 ft in ground in mound, 4 1/2 ft in diam at base, 2 ft high, dug 2 pits. 48X20X12. 2 pits 20X20X12 for 1/4 sec, cor.
		Thence North on a true line variation. 12° 06' East.
59	~~05~~ 03 1/2	Set a granite stone 18X18X12. 12 in, in ground for 1/16 sec, cor.
78	76	Corner to sec's, 4.5.8 and 9. Set charred post 4 ft long

		3 in square 1 ft in ground in mound 4 1/2 ft in diam at base 2 ft high dug 2 pits 48X20X12 2 pits 20X20X12 for corner to sec's 4, 5, 8 and 9.
		Surface fine rolling prairie, soil 1st rate, dark and rich best adapted for wheat.
		May 8th 1875
		West on a random line between sec's, 4 and 9.
		Variation 11° east.
2	00	Top of ridge bears S.E. and N.W.
7	90	N.E. corner of fenced field
10	60	N.W. corner of fenced field, about 2 acres
10	70	Indian trail bears N.W. and S.E.
11	00	Cross ravine. course S.E. timber below.
12	00	Circular grove. oak timber. about two acres.
18	00	Leave grove, enter prairie.
19	50	Top of ridge bears N. and S.
20	00	Set tempy 1/16 sec. cor.
24	30	Ravine course S.
29	50	Wagon road bears S.W. and N.E.
40	00	Finding no 1/4 sec. cor. Set temp 1/4 sec. cor.
44	00	Dry drain course North

Township No. 26 North of Range

51	20	Creek 8 lks, wide runs North.
60	00	Set tempy 1/16 sec. cor.
67	00	Enter brush bears N. W. and S. E.
68	10	Cross drain, course S. 80° E.
72	00	Leave brush bears N. and S.
76	00	Wagon road bears N. and S.
79	50	Intersected north and south line, 18 lks North of cor. to sec's 4.5.8 & 9
		Thence S 89° 2½' E. on a true line
		Variation 11° 26' East.
19	87½	Set post 4 ft long, 3 in. wide, 2 ft in ground for 1/16 sec. cor. from which
		An oak 18 in. diam. bears N. 89° E. 223 lks, dist.
		An oak 12 in. diam. bears S 29° E. 168 lks, dist.
39	75	Set post 4 ft long, 3 in. wide, 2 ft in ground for 1/4 sec. cor. from which
		An oak 4 in. diam. bears S. 34° W. 156. lks, dist.
		An oak 10 in. diam. bears N. 18½° W. 276 lks, dist.
59	62½	Set post 4 ft long, 3 in. wide, 2 ft in ground for 1/16 sec. cor. from which
		An oak 4 in. diam. bears S. 34° W. 156 lks, dist.
		An oak 10 in. diam. bears N. 18½° W. 276 lks, dist.
79	50	Corner to sec's 3 4. 9 and 10
	—	
		Surface rolling prairie, soil yellow clay loam, 2nd rate best adapted for wheat.
		Timber scattering oak trees and hazel brush, May 1st 18[illegible]

No. 9 East of the 6th Principal Meridian

		South on a random line between secs 4 and 5
		Variation 11° East.
12	15	Enter brush bears E. and W.
20	00	Set temporary 1/16 sec. cor.
25	50	Leave brush and enter prairie bears E. & W.
30	50	Wagon road bears S. E. and N. W.
38	45	To old 1/4 sec cor. mound
		Thence south with same variation. 39 50 41.50 38 45 30 75 77 95 39 50
58	45	Set temporary 1/16 sec. cor.
79	95	To a point 74 lks East of corner to secs 4.5.8 and 9
		Thence N 0° 2' W. on a true line
		18 45 Variation 9° 04' East.
20.	75	Set charred post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft in diam at base 2 ft high deg 2 pits 48 x 20 x 12, 2 pits 20 x 20 x 12 for 1/16 sec cor.
41.	50	Set lime stone 17 x 10 x 5, 11 in old mound for 1/4 sec. cor.
		Thence N 0° 2' W on a true line Va 10° 58' East.
61.	50	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor from which
		An Oak 10 in dia bears S 39½ W. 233 lks dist.
		An Oak 4 in dia bears S 78½ E. 130 lks dist
79	95	The Cor to secs 4 & 5 on North Boundary Township
		Surface rolling Prairie, Soil Clay loam with Clay Subsoil best adapted to wheat 1st rate

Township No 26 North, of Range No

		South on a true line between Secs 19 and 20
		Variation 11° East
4	35	+ Finding no corner set post 4 ft long 3 in wide 2 ft (with the additional 2 ft and 1 S. N.R. & D.R.) in ground for corner to fractional Secs 19 and 20 on south boundary of the Reservation from which
		An oak 8 in diam bears S 42½° E. 258 lks dist.
		An oak 14 in diam bears S. 23½° W. 213 lks dist.
		+ No Mile Corner found.
		Surface rolling.
		Soil dark loam best for Corn & Grass
		May 8th 1875

		East on a random line between Secs 17 and 20
		Variation 12° East.
		through brush
14	50	Ravine drains S. to N. enter scattering timber
14	60	Wagon road bears N. and S.
20	00	Set temporary 1/16 sec cor.
40	00	Found no 1/4 sec cor set temporary 1/4 sec. cor.
40	20	Creek 5 lks wide runs S.

East of the 6th Principal Meridian

Chs	Lk	
41	20	Wagon road bears S. 10° E & N. 10° N.
46	50	Leave brush and timber bears N. W & S. E.
46	70	Fence bears N. W and S. E
49	05	Cross wagon road bears N. W & S. E enter wheat field
59	00	Leave wheat field bears N. E and S. W.
60	00	Fence bears N. E and S. W. set temporary 1/16 Sec Cor
63	25	Creek 5 lks wide runs N. W in deep drain with scattering timber
75	50	Fence bears N and S
78	40	Intersect N & S line 3 chs South of Corner to Secs 16, 17 20 and 21 from which bears
		S 89° 55' W on a true line bet Secs 17 & 20
		Va 12° 10' East
19	10	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 sec Cor from which
		An Oak 6 in dia bears S 42½° E. 26 lks dist
		No other tree near to mark day 1 Pit 2 ft deep 1 ft deep 8 lks South of post
39	20	Set post 4 ft long 3 in wide 2 ft in ground for the sec Cor from which
		A basswood 18 in dia, bears S 74½° E 62 lks dist
		A basswood 13 in dia bears N 4° W. 79 lks dist

Township No 26 North, of Range

Chs	lks	
58	30	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor from [illegible]
		Ay Elm, 7 in dia bears N 27½° E 135 lks dist
		A Basswood 8 in dia bears S 4¼ W. 73 lks dist
78	40	The Corner to Secs 17, 18, 19 and 20
		Surface broken brush timber & prairie and cultivated land
		Soil black loam, best adapted to corn 1st rate
		May 10th 1875
		West on a random line bet Secs 18 and 19
		Va 12° East
		Through hazel brush
8	00	Leave brush and enter prairie with scattering timber bears N. W and S. E
19	75	Leave scattering timber & enter prairie bears S 80 E ch 80 W
20	00	Set temp 1/16 Sec Corner
39	50	To a point 10 lks South of old 1/4 Sec Corner mound
		Thence West with same Var
20	00	Set temp 1/16 Sec Corner
31	45	Creek 5 lks wide runs N. W.
39	08	Intersected West Bdry Tp. 17 lk South

No 9 East of the 6th Principal Meridian

Chs	lks	
		of Corner to Secs 18 and 19 from which Dran
		S 89° 53' E on a true line bet Secs 18 & 19
		Va 11° 52' East.
19	08	Set chained post 4 ft long 3 in wide 1 ft in ground in mound 4½ feet base 2 ft high dug 2 Pits 48 x 20 x 12 in & 2 Pits 20 x 20 x 12 in for 1/16 Sec Cor
39	08	The 1/4 Sec Corner set a granite 12 x 10 x 5 in, 8 in in ground for 1/4 Sec Cor
		Dran. S 89° 53 E on a true line
		Va 11° 58' East
58	83	Point for 1/16 Sec Corner, being in drain & place a Nil Cor 30 lks East, set chained post 4 ft long 3 in wide 1 ft in ground in mound 4½ feet base 2 ft high dug 2 Pits 48 x 20 x 12 in & 2 Pits 20 x 20 x 12 in for 1/16 Sec Cor
78	60	The Corner to Secs 17, 18, 19 and 20
		Surface rolling Prairie. Soil 2d rate dark clay loam, best for wheat.
		Timber, scattering burr oak of poor quality
		May 11th 1875
		South on a random line bet Secs 17 & 18
		Va 11° East.
		Through brush and scattering timber

Township No 26 North, of Range No 9 East of the 6th Principal Meridian

Chs	lks	
10	50	Leave brush and scattering timber, Enter Prairie, bears N W & N E
20	00	Set temp 1/16 Sec Corner
21	10	Cross fence bears E & W to plowed field
25	15	Leave fence and Enter brush E & W.
28	00	A drain from East to West,
35	00	Leave brush bears E & W.
38	50	Cross fence bears E & W
40	00	Finding No old 1/4 Sec Cor Set temp 1/4 Sec Cor
49	00	A fence bears N.W & S.E.
49	80	Farm House 186 lks west.
50	00	Wagon Road from Agency to Sioux City E & W
52	50	Wagon Road bears N 80° W & S 80° E.
59	30	A Creek 5 lks wide runs N.W. as and sluts bank and enter brush, bears N.W & S.E.
60	00	Set temp 1/16 Sec Corner
79	41	To a point 21 lks E. of Cor of Secs. 17, 18, 19 & 20
		Set charred post 4 ft long 3 in sq, 1 ft in ground in mound 4½ ft at base 2 ft. high deg 2 pits 48x20x12 in & 2 pits 20x20x12 in. for Cor to Secs 17, 18, 19 & 20
		From which I ran
		North on a true line between Secs 18 & 19
		Va 10° 51' East

Chs	lks	
19	85¼	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor from which.
		An Ironwood 8 in dia, bears N. 22° W 42 lk dist
		An Elm 7 in dia, bears S. 53° E. 35 lks dist
39	70½	Set Charred post 4 ft long 3 in wide 1 ft in ground for 1/4 Sec Cor from which
		An Oak 9 in dia bears N. 59° E 176 lks dist
		An Oak 9 in dia bears N 19° W. 186 lks dist
59	55¾	Set Charred post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high, deg 2 pits 48x20x12 in & 2 pits 20x20x12 in for 1/16 Sec Corner
79	41	The Corner to Secs 7, 8, 17 and 18
		Surface hilly Soil 2d rate, Clay loam best for wheat Timber scattering oak & brush.
		May 10th 1875
		East on a random line between Secs 8 & 17
		Va 12° 30' East.
		Through dense hazel brush
7	00	Leave hazel brush bears N & S
20	00	Set temp 1/16 Sec Corner
21	00	Cross a fence bears N. E & S W. to a plowed field
29	50	Leave plowed field bears N.W & S.E.
30	50	A Creek 5 lks wide with marshy bottom runs N 80° W
31	50	A road bears N W & S.E.

Township No 26 North, of Range No

Chs	lks	
39	45	To a point 5 lks South of 1/4 Sec Corner
		Thence East with Same Var
20	00	Set temp'y 1/16 Sec Corner
36	50	A deep ravine with Scattering timber drain
		from S. to N
39	71	Intersected N & S line at Corner to Secs
		8, 9, 16 and 17 from which Dran:
		N 89° 29' W on a true line bet Secs 8 & 17
		Va 13° 01' East
19	85½	Set a granite Stone 20x12x12 in 1 ft in ground for 1/16 section cor
39	71	To old 1/4 Sec Corner Set a granite Stone 18x18x10 in
		12 in in ground for 1/4 Sec cor from which Dran
		N 89° 29' W. on a true line bet Secs 8 & 17
		Va 13° 05' East
59	43½	Set Charred post 4 ft long 3 in wide 1 ft in ground in mound
		4½ ft at base 2 ft high dug 2 Pits 48x20x12 in for 1/16 Sec Cor, 2 Pits 20x20x12 in
79	16	The Corner to Secs 7, 8, 17 and 18
		Surface rolling Prairie Soil clay loam
		best adapted for wheat.
		Timber Scattering,

9 East of the 6th Principal Meridian

		West on a random line between 7 and 18.
		Variation ~~11° 30'~~ East.
		Through dense brush.
4	30	Cross ravine from North to South
7	90	Creek 10 lks. wide runs S. 80° W.
11	00	Leave brush bears N. E. and S. W.
12	50	Cross a fence bears N. E. and S. W. to plowed land thence along fence
19	50	Cross fence bears N. and S.
20	00	Set temporary 1/16 sec, cor.
39	49	To a point 50 lks, north of old 1/4 sec, cor.
		Thence west with the same variation.
4	00	Leave fence bears N. and S.
5	40	A Wagon road bears N. & S.
20	00	Set temporary 1/16 sec, cor.
25	00	Wagon road bears N. and S.
40	12	Intersected west boundary 30 lks, south of corner to secs. 7 and 18.
		Thence S 89° 54' E. on a true line
		Variation. 11° 10' East.
20	12	Set charred post 4 ft long, 3 in, wide, 1 ft in ground, in mound, 4½ ft
		diam, at base, 2 ft high, dug 2 pits 48x20x12, 2 pits 20x20x12 for
		1/16 sec, cor.

Township No 26 North, of Range No

40	12	To old 1/4 sec. cor. set a sandstone 18x12x5. 12 in. in ground
		Thence S. 89° 54' E. ~~with same variation~~. 12° 15' East
59	8 ft 1/2	Set chamd post 4 ft long 3 in. wide 1 ft in ground in mound 4 1/2 ft
		diam. at base, 2 ft high, dug 2 pits 48x20x12, 2 pits 20x20x12
		for 1/16 sec. cor.
79	61	Corner to secs. 7. 8. 17 and 18.
		Surface rolling prairie, soil 1st rate, dark clay loam.
		20 inches deep with clay subsoil. best for wheat.
		Timber, brush on east end.
		May 11th 1875

		South on a random line between secs. 7 and 8.
		Variation 12° East.
0	75	A creek 5 lks wide runs N. 10° W. at foot of hill.
20	00	Summit of hill.
20	00	Cross wagon road bears S. E. and N. W.
20	00	Set temporary 1/16 sec. cor. descend a slope bears E. and W.
32	00	Wagon road bears E. and W.
39	76	To a point 58 lks. west of old 1/4 sec. corner mound.
		Thence south with same variation
20	00	Set temporary 1/16 sec. cor.

9 East of the 6th Principal Meridian

31	78	A garden fence bears N. 89° 10' E. + S. 89° 10' W.
32	90	A frame house (John Butler's) at 31.50 chs, offset around garden and house by running west 1.00 ch. thence south 2.50 chs, thence east 1.00 ch to random line, thence north 56 lks. to garden fence and 80 lks to south side of frame house near the middle
36	50	Cross creek 5 lks wide runs W. and enter dense brush and scattering timber bears E. and W.
39	50	To a point 26 lks east of old post corner to secs. 7. 8. 17 and 18.
		Set new post 4 ft long 3 in. square, 2 ft in ground for cor to secs. 7. 8. 17 and 18. from which
		An oak 10 in. diam. bears S. 36° E. 62 lks. dist
		An oak 16 in. diam. bears S. 65 1/2° W. 90 lks. dist.
		An oak 18 in. diam. bears N. 48 1/2° W. 121 lks. dist.
		An oak 3 in. diam. bears N. 16 1/2° E. 21 lks. dist.
		first three old and last one a new bearing tree
		Thence North on a true line
		Variation 12° 00' East.
19	75	Set chamd post 4 ft long 3 in. wide 1 ft in ground in mound 4 1/2 ft in diam at base 2 ft high dug 2 pits 48x20x12, 2 pits 20x20x12 for 1/16 sec. cor.
39	50	Set chamd post 4 ft long 3 in. wide 1 ft in ground in mound 4 1/2 ft in diam at base 2 ft high dug 2 pits 48x20x12, 2 pits 20x20x12 for 1/4 sec. cor.
		Thence North on a true line Va 12° 00' East

Township No 26 North, of Range

chs	lks	
59	38	Set charred post 4 ft long 3 in side 1 ft in ground in mound 4½ ft in diam. at base 2 ft high dug 2 pits 48 x 20 x 12 2 pits 20 x 20 x 12, for 1/16 sec. cor.
79	26	Corner to Secs 5. 6. 7 and 8, Set charred post 4 ft long 3 in square 1 ft in ground in mound 4½ ft in diam. at base 2 ft high for Corner to Secs 5. 6. 7 and 8
		Surface rolling prairie, soil 2nd rate, black clay loam best for wheat + vegetables. ~~best for wheat, and vegetables~~
		West on a random line between Secs 5 and 8
		Variation 12° 00' East.
14	00	Wagon road bears N. and S.
14	50	Slough Marsh N. and S.
18	00	Bears Marsh N. and S.
20	00	Set temporary 1/16 sec. cor.
28	00	Wagon road bears N. and S.
32	70	Wagon road bears S and N 20° E.
35	50	Wagon road bears S and N.W.
36	00	Drain Course N.W.
39	74	To point 37 lks north of old 1/4 sec cor. Mound
		Thence West Va 12° East.

No 9 East of the 6th Principal Meridian

chs	lks	
8	50	Drain Course N.W.
20	00	Set temporary 1/16 sec cor.
25	00	Descent of hill bears N.W. and S.E.
38	50	Wagon road bears N. and S.
39	62	Intersected north and south line 32 lks north of Corner to Secs 5. 6. 7 and 8.
		Thence N 89° 33' E. on a true line
		Variation 12° 00' East.
19	81	Set charred post 4 ft long 3 in side 1 ft in ground in mound 4½ ft in diam. at base 2 ft high dug 2 pits 48 x 20 x 12 2 pits 20 x 20 x 12 for 1/16 sec cor.
39	62	Old 1/4 sec. cor. Set granite stone 24 x 18 x 10, 18 in in ground for 1/4 sec cor.
		Thence N 89° 33' E. with ran. 12° 00' E.
59	49	Set charred post 4 ft long 3 in side 1 ft in ground in mound 4½ ft in diam at base 2 ft high dug 2 pits 48 x 20 x 12 2 pits 20 x 20 x 12 for 1/16 sec. cor.
79	36	Corner to Sections 4. 5. 8 and 9.
		Surface rolling prairie soil 2nd rate, black clay loam 12 to 20 inches deep with clay subsoil best for wheat.
		May 10th 1875

Township No 26 North of Range

Chs	lks	
		West on a random line bet Secs 6 and 7 Va 12° East
	50	Creek 10 lks wide, runs N 10° W.
6	00	Small patch brush 1 acre
14	00	Top of Ridge N & S.
14	50	Wagon Road bears N & S
20	00	Set temp 1/16 Sec Corner
29	50	Wagon road bears S E & N W.
39	31	To point 10 lks S of old 1/4 Sec Corner from which Drawn West on a random line, Va 12° East.
19	90	Wagon Road bears N 80° W & S. E.
20	00	Set temp 1/16 Sec Corner
28	50	Wagon Road bears S 80° W. & N 80° E.
39	95	Intersect West Boundary Township 40 lks South of Corner to Secs 6 and 7 from which Drawn
		S 89° 49' E on a true line bet Secs 6 and 7 Va 11° 37' East.
19	95	Set lime Stone 15 x 12 x 3 in 10 in in ground for 1/16 Sec Corner
39	95	Set a Sand Stone 16 x 16 x 12 in, 11 in in ground for 1/4 Section Corner from which Drawn

No 9 East of the 6th Principal Meridian

Chs	lks	
		S 89° 49' E on a true line bet Secs 6 & 7 Va 12° 02' East.
59	60 1/2	Set lime Stone 14 x 12 x 3 1/2 in 9 1/2 in in ground for 1/16 Sec Corner
79	26	The Corner to Secs 5, 6, 7 and 8
		Surface rolling Prairie
		Soil black clay loam best for wheat
		South on a random line between Secs 5 and 6 Variation 11° East.
17	00	Ravine drains from N. 15° E to S 15° W.
20	00	Set temporary 1/16 sec cor.
23	00	Creek 6 lks wide runs west with scattering timber along deep ravine through which it flows.
39	68	Old 1/4 sec cor. mound
		Thence south with same variation.
8	70	Creek 3 lks wide runs N. W.
9	90	Cross fence bears S W and N E. enter plowed field.
16	30	Frame house 3 chs west
20	00	Set temp 1/16 Sec corner
21	00	Leave plowed field and cross fence bears E and W.

Township No 26 North, of Range No 9 East of the 6th Principal Meridian

35	85	Wagon road bears N 10° W. and S 10° E.
39	35	To corner to sections 5. 6. 7 and 8.
		Thence North 0.9 E on a true line
		Variation 11° 09' East.
19	67½	Set granite stone 19 x 12 x 9 13 in in ground for 1/16 sec. cor.
39	35	Old 1/4 sec. cor. Set charred post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft in diam at base 2 ft high dug 2 pits 48 x 20 x 12 2 pits 20 x 20 x 12 for 1/4 sec. cor.
59	35	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 sec cor from which
		A. willow 5 in diam bears N 38¾° W 150 lks dist.
		An Elm 2½ in diam bears S. 38½° E. 229 lks dist.
79	03	Corner to sections 5 and 6.
		Surface fine rolling prairie
		Soil 1st rate, black clay loam best for wheat.
		May 11th 1875.

Part. 2.

9 East of 6th Principal Meridian

Chs	lks	
		East on a true 1/16 Sec line through South 1/2 of Sec 13
		Var. 12° East
18	37	Top of Perpendicular Bluff over Missouri River bears N + S.
18	37	A Point 163 lks west of 1/16 Sec Cor. Set Post 4 ft long 3 inches wide 2 ft in ground. for witness to 1/16 Sec Cor. From which
		an Oak 12 in diam bears N 10° 30' E 32 lks dist
		an Oak 4 in diam bears S 28° 15' W 57 lks dist
21	13	Right bank of Missouri River Set Post 4 ft long 3 inches wide. 2 ft in ground for M.C. From which
		an Elm 5 in diam bears N 25° W 77 lks dist
		an Oak 8 in diam bears S 59° W 55 lks dist
		Surface Rolling
		Soil Rich dark loam 1st Rate
		good for corn and vegetables
		Timber. Thick and good. Oak, ash
		Black walnut. Elm, + Basswood.

Township 26 North, Range No 9 East of 6th Principal Meridian

Chs	Lks	
		East on true 1/4 Sec line through middle of Sec 13 Var 12° East
18	00	Top of Bluff 100 ft high, bears N & S W
20	00	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor - from which an Ironwood 6 in diam bears S 10° E 3 lks dist an Ironwood 5 in diam bears N 14° W 57 lks dist
20	50	bottom of High Bluff bears N & S W
23	40	To Right bank of Missouri River Set Post 4 ft long 3 inches wide 2 ft in ground, for M.C. from which a Red Oak 8 in diam bears N 46° 30' E 6 lks dist an Ironwood 8 in diam bears S 30° E 24 lks dist
		Surface Hilly Soil Rich dark loam Good for Corn Timber Good. Oak ash hickory Elm Black walnut thick underbrush

Chs	Lks	
		East on a true 1/16 Sec line through N 1/2 of Sec 13. Var. 12° East
10	00	Top of Hill bears N & S.
12	50	Bottom of Hill bears N & S.
15	00	To top of Hill bears N 70° E & S 70° W decend abruptly
20	00	Top of Bluff 100 ft high, bears N & S W
20	00	Set Post 4 ft long 3 inches wide. 2 ft in ground for 1/16 Sec Cor from which an Elm 8 in diam bears S 38½° W 43 lks dist an Elm 8 in diam bears N 59° E 21 lks dist
26	08	bottom of bluff bears N & S W
27	51	To Impassable Slough
		Set Post 4 ft long 3 inches wide 2 ft in ground for M.C. from which a willow 3 in diam bears S 29° 30' W. 18 lks dist a Cottonwood 3 in diam bears N 29° W 22 lks dist Surface Hilly. Soil Rich and well adapted to corn and vegetables, Timber. fair Oak Elm Hickory & Black walnut

Township 26 North, Range No 9

Chs	lks	
		East on a true 1/16 sec line through S 1/2 of sec 12
		Var 12° East
6	20	Top of round Hill
7	00	Descend Hill
20	00	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 sec Cor from which a Black Walnut 10 in diam bears N 83° 30' W 8 lks dist a Coffee bean 5 in diam bears S 2° 45' E 14 lks dist
27	33	Top of Perpendicular Bluff over impassable slough.
28	45	Bank of impassable slough. Set Post 4 ft long 3 inches wide 2 ft in ground for M.C. from which a Willow 10 in diam bears S 35° W. 42 lks dist a Willow 4 1/2 in diam bears N 38 1/2° E 18 lks dist
		Surface Hilly
		Soil 1st Rate
		well adapted to cultivation of Corn and vegetables
		Timber. good Black walnut Oak Iron wood Coffee Bean with dense forest brush

East of 6th Principal Meridian

Chs	lks	
		East on a true 1/4 sec line through Middle of sec 12
		Var 12° East
14	10	a Creek 10 lks wide runs S E.
20	00	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 sec Cor. from which an Oak 12 in diam bears S 44° W 80 lks dist a Black walnut 14 in diam bears N 23° 15' East 83 lks dist
27	20	Top of Hill bears N + S. descend abruptly
28	50	to impassible slough Set Post 4 ft long 3 inches wide, 2 ft in ground for M. C. from which a red Elm 4 in diam bears N 2° 45' E 12 lks dist a Cottonwood 4 in diam bears S 1° 30' E 9 lks dist

From 1/4 sec cor. on range line between sec. 7 + 12 & run west on a true 1/4 sec. line

Var 12° East

4	16	to East bank of impassable slough marked a Cottonwood tree 17 in diam for M. C. from which an ash 7 in diam bears N 7 1/2° E 43 lks dist an Elm 8 in diam bears S 88 1/2° E 36 lks dist
		Surface broken, soil dark rich loam 1st Rate
		good for corn and vegetables
		Timber. good. Hickory, oak, Black walnut &c.

Apr 27th and June 26th 1875

Township 26 North, Range No 9

chs	lks	
		East on a random 1/16 sec line through North 1/2 of Sec 12
		Var 12° East
1	00	Top of Hill bears NW + SE
5	00	Bottom of Same bears NW + SE
7	00	Top of Hill bears N + S
8	50	Descent of Same
20	00	Set Tempy 1/16 Sec Cor.
20	00	Top of Steep Bluff bears N + S.
26	64	Bottom of bluff and cross Indian trail bears N25°W + S25°E
26	75	Enter Brush and bottom land
40	00	Set Tempy 1/16 Sec Cor
53	61	A Road bears NE + SW
60	00	Set Tempy 1/16 Sec Cor.
66	15	Road from agency to Sawmill bears N50°W + S50°E
79	76	Intersect East boundary of Township 27 lks North of N 1/16 Sec Cor From which I ran
		N89°48'W on a true 1/16 Sec line through N 1/2 of Sec 12

East of 6th Principal Meridian

chs	lks	
		Var 12° East
19	94	Set Post 4 ft long 3 inches wide, 2 ft in ground, for 1/16 sec cor, from which an Elm 30 in diam bears S31°30'W 184 lks dist an Oak 10 in diam bears N43°15'W 169 lks dist
39	88	Set Post 4 ft long. 3 inches wide - 2 ft in ground for 1/16 sec cor from which an Ash 3 in diam bears S23°15'W 145 lks dist a Willow 4 in diam bears N15°15'E 200 lks dist
59	82	Set Post 4 ft long, 3 inches wide, 2 ft in ground, for 1/16 sec cor, from which an Oak 20 in diam bears South 177 lks dist an Oak 15 in diam bears N45°45'W 195 lks dist
79	76	The North 1/16 sec cor on N + S line between Sec 11 + 12
		Surface Rolling - at west end - level at East 2/3. Soil dark loam 1st Rate good for corn and vegetables
		Timber Oak Ash Elm Black walnut Hickory &c -

10/16/08

Township 26. North. Range No. 9 East of 6th Principal Meridian

Chs	Lks	
		East on a true 1/16 Sec line through South 1/2 of Sec 1
		Var 12° East
6	73	6 End of Corn field bears N E + S W.
6	73	Cross Creek 10 lks wide runs N E.
9	20	Bottom of Steep Bluff bears N 80° W + S 80° E
11	20	Top of Steep Bluff bears N 30° W + S 30° E
14	25	Bottom of Bluff and centre of Public Road bears N 40° W + S 40° E
20	00	Set Post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor. from which an Elm 24 in diam bears N 21° 45' W 49 lks dist an Elm 24 in diam bears S 53° 30' W 60 lks dist
26	50	To Fence + Corn field bears S W + N E
32	00	To Fence bears S 70° E
33	37	A Fence bears N + S.
34	00	Enter dense brush bears N + S.
40	00	Set Post 4 ft long 3 in wide. 2 ft in ground for 1/16 Sec Cor from which an Elm 24 in diam bears N 32° 15' W 43 lks dist an Elm 27 in diam bears S 25° 15' E 107 lks dist
45	82	To Right bank of Missouri River Set Post 4 ft long 3 in wide 2 ft in ground for M.C. from which a Willow 5 in diam bears N 64° 45' W 90 lks dist an Elm 18 in diam bears S 30° 15' W 100 lks dist

Surface. Mostly level
Soil Rich dark loam. 1st Rate
Good for corn and vegetable

Timber Scattering. Cottonwood + Elm. Thick brush in patches

Township 26 North, Range No. 9 East of 6th Principal Meridian

Chs	Lks	
		East on a line 1/4 Sec line through Middle of Sec 1 Var 12° East
3	50	To top of Hill bears N & S-
6	00	Bottom of Hill bears N & S-
10	50	Top of Hill bears NW & SE
13	60	Bottom of Hill & level bottom
16	25	To Centre of Public Road bears S 30°W
18	00	To Wet Meadow bears N & S-
20	00	Set Post 4 ft long 3 in wide, 2 ft in ground. for 1/16 Sec Cor from which an Ash 4 in diam. bears S 27°30' E 68 lks dist an Ash 3 in diam bears N 28°30' W 98 lks dist
24	75	Right Bank of Missouri River Set Post 4 ft long 3 in wide 2 ft. in ground for M.C. from which an ash 3 in diam bears N 42° W 9 lks dist a cottonwood 16 in diam bears S 6°15' E 67 lks dist
		Surface - Rolling, Bluffs and river bottom Soil dark loam 1st Rate Good for Corn or vegetables Timber Scattering Cottonwood & Young Ash

Chs	Lks	
		East on a line 1/16 Sec line through North 1/2 of Sec. 1 Var. 12° East
10	05	Right Bank of Missouri River Set Post 4 ft long 3 in wide 2 ft in ground for M. C. From which
		a red Elm 8 in diam bears S 54°30' East 20 lks dist an Ironwood 10 in diam bears N 86° W 91 lks dist
		Surface Rolling- Soil dark 1st Rate Good for Cultivation of wheat or vegetables Timber Small and scattering Scant Oak - Elm & willow Some Brush
		April 27th 1875

Township 26 North Range No 9

Chs	Lks	
		East on a random 1/16 sec line through S 1/2 of Sec 14 Var 12° East
20	00	Set temp'y 1/16 sec cor.
32	30	Top of ridge bears N & S.
34	10	Bottom of ridge with gulch bears N E & S W
35	30	Top of ridge bears N & S.
40	00	Set temp'y 1/16 sec cor.
60	00	Set temp'y 1/16 sec cor.
78	80	Intersect N & S line 17 lks North of South 1/16 sec cor. From which I ran
		N 89° 55' W on a true 1/16 sec line through South 1/2 of sec 14 Var 12° East
19	70	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 sec cor, from which a White Oak 14 in diam bears N 29° 30' E 116 lks dist a White Oak 16 in diam bears S 19° 30' E, 25 lks dist
39	40	Set Post 4 ft long 3 in wide 2 ft in ground for 1/16 sec cor. from which an Oak 14 in diam bears S 26° W 23 lks dist an oak 12 in diam bears N 61° E 19 lks dist

East of 6 Principal Meridian

Chs	Lks	
59	10	Set Post 4 ft long 3 in wide - 2 ft in ground for 1/16 sec cor from which a Hickory 6 in diam bears N 24° E, 10 lks dist a Basswood 10 in diam bears S 2° 30' E 15 lks dist
78	80	The South 1/16 sec cor on N & S line between sec 14 & 15. Surface very broken and hilly Soil dark rich loam - 1st Rate Suitable for corn and vegetable
		Timber good. Oak ash Hackberry Elm Hickory walnut Thick underbrush

Township 26 North, Range No 9

Chs	Lks	
		East on a random 1/4 Sec line through middle of Sec 14 Var 11°53' East
20	00	Set Temp'y 1/16 Sec Cor.
20	35	to Bottom of Steep Ridge bears N+S
20	35	Road bears N+S
29	85	Top of Round Hill
40	00	Set temp'y 1/4 Sec Cor.
40	00	set temp'y 1/16 Sec Cor
67	85	Top of Ridge bears N+S.
71	35	Gulch 100 ft deep bears N+S.
73	85	Top of Hill bears NW+SE
78	85	Intersect N+S line 80 lks North of 1/4 Sec Cor. from which I run
		N 89°48' W on true 1/4 Sec line through middle of Sec 14 Var 11°53' East
19	71 1/4	Set Post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor from which a Black walnut 36 in diam bears S 29°45' W 20 lks dist a Bass wood 16 in diam bears N 30°50' E 18 lks dist

East of 6th Principal Meridian

Chs	Lks	
39	47 1/2	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/4 Sec cor from which a Hickory 6 in diam bears N 11° W 27 lks dist a Red Elm 8 in diam bears S 13°45' E 72 lks dist
59	13 3/4 14	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor from which a Basswood 24 in diam bears S 22°45' E 44 lks dist a Basswood 15 in diam bears N 15°30' W 75 lks dist
78	85	The 1/4 Sec cor on N+S line between Sec 14+15
		Surface Rolling and Broken Soil dark rich loam 1st Rate Suitable for corn and vegetables
		Timber good - Oak ash Hickory walnut with brush
		Apr 28th 1875

Township 26 North, Range No 9

Chs	Lks	
		East on a random 1/16 Sec line through North 1/2 of Sec 14 Var 11° 53' East
2	50	Plowed field bears N+S.
3	60	End of Plowed field
5	85	Plowed land bears N+S.
7	50	A creek 10 lks wide runs N 20° E
20	00	Set Temp'y 1/16 Sec Cor.
22	50	Top of Hill bears N+S.
24	00	Bottom of deep gulch bears NW+SE
26	00	Enter thick brush bears N+S
40	00	Set Temp'y 1/16 Sec Cor
43	00	Leave brush and enter timber bears N+S
47	00	Top of Hill bears N+S.
50	00	Bottom of Hill bears N+S.
53	50	Top of round Hill
60	00	Set Temp'y 1/16 Sec Cor
79	20	Intersect N+S line 70 lks North of N 1/16 Sec Cor from which bears
		N 89° 30' W on a true 1/16 Sec line through N 1/2 of Sec 14 Var 11° 53' East

East of 6 Principal Meridian

Chs	Lks	
19	80	Set Post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor - from which Ironwood 8 in diam bears S 26° W. 70 lks dist Oak 18 in diam bears N 33° 30' E. 3 lks dist
39	60	Set Post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor - from which Black walnut 14 in diam bears S 51° 30' E, 200 lks dist Oak 18 in diam bear N 8° 30' W, 88 lks dist
59	40	Set Post 4 ft long, 3 in wide, 2 ft in ground, for 1/16 Sec Cor from which Basswood 16 in diam bears S 46° W, 15 lks dist Basswood 4 in diam bears N 22° 15' E 37 lks dist
79	20	The N 1/16 Sec Cor on N+S line between Sec. 14+15
		Surface - Rough + Hilly
		Soil good and rich 1st Rate for any Cultivation
		Timber good. Oak, Elm, walnut, Hickory +c.
		Brush Hazel and brier

Township 26 North, Range No 9

Chs	Lks	
		East on a random 1/16 Sec line through S 1/2 of Sec 11 Var. 11° 30' East
	73	Fenced Plowed land bears S E + N W
4	00	Leave Plowed land
4	50	Enter dense Brush bears N + S.
15	50	Road bears N 30° E + S 30° W.
16	35	Creek 7 lks wide runs N 30° W
20	00	Set temp'y 1/16 Sec. Cor.
40	00	Set temp'y 1/16 Sec. Cor.
41	50	Enter Scattering timber bears N + S
50	00	Leave timber + Enter brush bears N E + S W
60	00	Set temp'y 1/16 Sec. Cor.
66	50	Top of Hill bears N E + S W
79	00	Intersect N + S line 26 lks North of S 1/16 Sec Cor — from which I ran
		N 89° 49' W on a true 1/16 Sec line through S 1/2 of Sec 11 Var 11° 30' East
19	75	Set Post 4 ft long 3 in wide, 2 ft in ground for 1/16 Sec Cor, from which

East of 5th Principal Meridian

Chs	Lks	
		an Oak 12 in diam bears N 60° 30' E 135 lks dist an Elm 12 in diam bears S 36° E 155 lks dist
39	50	Set Post 4 ft long 3 in wide, 2 ft in ground for 1/16 Sec Cor - from which an Oak 6 in diam bears N 39° 30' W 112 lks dist an Oak 6 in diam bears S 70° W 119 lks dist
59	25	Set Post 4 ft long 3 in wide, 2 ft in ground, for 1/16 Sec Cor. from which an Elm 18 in diam bears N 46° 45' W 183 lks dist there being no other tree convenient I dug 1 pit 24 x 24 x 12 inches. 8 lks South of Post.
79	00	The S 1/16 Sec Cor. on N + S line between Sec 10 + 11.
		Surface Rolling Soil 1st Rate. Timber Scattering and small Oak Black walnut Hickory
		Brush Hazel and Plum

Township 26 North Range No 9

Chs	lks	
		East on a random 1/4 Sec line through middle of Sec 11
		Var: 11° 30' East
	20	Road bears N E + S W
11	10	Road bears S E + N W
12	00	Enter brush drain ~~bears~~ N E + S W
18 20	72 00	Road bears N + S Creek 7 lks wide N 10° E
20	00	Set Temp 1/16 Sec Cor -
40	00	Set Temp 1/4 Sec Cor -
45	00	Enter timber, leave brush bears N + S -
60	00	Set Temp 1/16 Sec. Cor -
70	00	Top of hill bears N E + S W - 100 ft
74	00	Creek 7 lks wide at foot of steep hill runs N E
79	90	Intersect N + S line 7 lks North of 1/4 Sec Cor -
		From which I ran
		N 89° 57' W on true 1/4 Sec line through middle of Sec 11
		Var 11° 30' East
19	97½	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor from which

East of 6th Principal Meridian

Chs	lks	
		a Basswood 7 in diam bears S 36° W 18 lks dist
		an Elm 8 in diam bears N 5° 15' W 25 lks dist
39	95	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/4 Sec Cor from which
		a Hickory 4 in diam bears S 25° E 66 lks dist
		an Oak 6 in diam bears N 38° W 103 lks dist
59	92½	Set Post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec. Cor - from which
		Elm 18 in diam bears S 48° 30' W 172 lks dist
		Elm 12 in diam bears N 11° 45' W 195 lks dist
79	90	the 1/4 Sec Cor on N + S line between Sec 10 + 11

Surface Rolling Prairie
Soil dark clay loam 1st Rate
good for corn and vegetables

Timber small and scattering

Apr 29th 1875

Township 26 North, Range No. 9 East of 6th Principal Meridian

Chs	Lks	
		East on a random 1/16 Sec line through N 1/2 of Sec 11 Var 11°30' East
17	00	Leave Dense Hazel Brush bears N
20	00	Set Temp'y 1/16 Sec Cor.
22	50	a Creek 20 lks wide runs N10°E
30	00	10 lks S.E of Indian Wigwam
36	50	Gulch bears NW & SE
37	00	Scattering timber bears N & S
40	00	Set Temp'y 1/16 Sec Cor
46	00	Top of Hills bears N & S.
48	90	a Gulch bears N & S.
60	00	Set Temp'y 1/16 Sec Cor.
70	00	Leave timber & Enter brush prairie bears N E & S W.
78	90	Intersect N & S line 11 links South of North 1/16 Sec Cor From which a ran S 89° 49' W. on true 1/16 Sec line through N 1/2 of Sec 11 Var 11°30' East

Chs	Lks	
19	97½	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor from which an Oak 10 in diam bears N 26°30' E 30 lks dist a Basswood 12 in diam bears S 41°30' W 45 lks dist
39	95	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor from which a Hickory 7 in diam bears N 54°45' E 29 lks dist a Basswood 8 in diam bears N 36° W 35 lks dist
59	92½	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor from which an Elm 8 in diam bears N 39° E 70 lks dist an Elm 6 in diam bears S 33° E 69 lks dist
79	90	The North 1/16 Sec Cor on N & S line between Sec 10 & 11
		Surface Rolling.
		Soil dark loam 1st Rate Well adapted to corn and vegetable
		Timber small and scattering Scrub Oak. Elm. Basswood
		Dense brush in Patches

Township 26 North, Range No. 9 East of the Principal Meridian

Chs	Lks	
		East on a random 1/16 sec line through S 1/2 of sec 2. Var 11°30' East
5	00	Top of Hill bears N + S up gulch
7	50	Bottom of Hill bears N + S
13	00	Top of Hill bears N + S
20	00	Set Temp'y 1/16 Sec Cor
36	00	Leave timber bears N + S
37	10	To plowed land bears N + S
37	10	A House bears S.E. 5 chs distant
38	30	A small patch of Hazel brush bears N 40° W
40	00	Set Temp'y 1/16 Sec Cor
41	00	Enter Corn field bears N + S.
48	00	Cross fence and leave field bears N 40° W
53	00	Creek 7 lks wide runs N 50° E
57	70	Road bears N + S.
59	00	Creek 5 lks runs S
60	00	Set Temp'y 1/16 Sec Cor
61	30	To bottom of Hill bears NE + SW
66	50	A Creek runs SW
67	00	Plowed land bears N 15° E + S 15° W
71	40	Creek 5 lks wide runs S 30° E
73	50	Plowed land bears N + S.

Chs	Lks	
77	50	A Creek runs S.E.
78	95	Intersect N + S line 94 lks South of South 1/16 Sec Cor. From which I ran
		S 89°46' W on a true 1/16 Sec line through S 1/2 of Sec 2 Var 11°30' East
19	96 3/4	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 sec Cor from which an Elm 30 in diam bears N 35° E 205 lks dist an Elm 12 in diam bears S 74° 30' E 137 lks dist
39	97 1/2	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor from which a Blackwalnut 12 in diam bears S 60° 30' E 65 lks dist a Blackwalnut 14 in diam bears N 5° 45' W 38 lks dist
59	96 1/4	Set Post 4 ft long 3 in wide. 2 ft in ground for 1/16 sec Cor - from which an Oak 20 in diam bears S 24° 30' E 48 lks dist an Oak 5 in diam bears N 13° 15' W 37 lks dist
79	95	The S 1/16 Sec Cor on N + S line between Sec 2 + 3 Surface Rolling Soil Rich 1st Rate. Good for corn Timber small and scattering

Township 26 North, Range No 9 East of 6th Principal Meridian

Chs	Lks	
		East on a random 1/4 Sec line through Middle of Sec 2 Var 11°46' East
8	00	Deep Timber Gulch bears N + S.
9	00	Top of Ridge bears N + S -
10	00	Bottom of Ridge bears N + S
16	50	Leave Timber bears N + S -
20	00	Set Temporary 1/16 Sec Cor
20	29	a Creek 7 lks wide runs S
22	00	Enter dense brush bears N + S:
23	00	Leave brush
40	00	Set Temporary 1/4 Sec Cor
60	00	Set Temporary 1/16 Sec Cor -
62	50	Leave brush to open prairie bears N + S
64	00	Road bears NW + SE
64	50	Enter 7 + hazel brush bears N + S
80	12	Intersect N + S line 28 lks South of 1/4 Sec Cor from which I ran
		S 89°48' W on a true 1/4 Sec line through Middle of Sec 2 Var 11°46' East

Chs	Lks	
20	03	Set Post 4 ft long 3 inches wide 2 ft in ground, for 1/16 Sec Cor from which an Oak 8 in diam bears S 4°30' E 147 lks dist an Oak 6 in diam bears N 0°15' E 168 lks dist
40	06	Set Post 4 ft long, 3 inches wide 2 ft in ground for 1/4 Sec Cor from which an Oak 8 in diam bears S 22° E 225 lks dist an Oak 5 in diam bears N 39°45' E 175 lks dist
60	09	Set Post 4 ft long 3 inches wide 2 ft in ground, for 1/16 Sec Cor from which an Elm 24 in diam bears S 3°30' E 143 lks dist a Willow 6 in diam bears N 6°45' W 165 lks dist
80	12	The 1/4 Sec Cor on N + S line between Sec 2 + 3.

Surface Rolling

Soil - Rich dark loam 1st Rate well adapted for corn & vegetables

Minerals: through middle 1/2 Red Sand Stone with 4 in. soil.

Timber, Scattering, Brush dense -

Apr 30th 1875

Township 26 North, Range No 9

Chs	Lks	
		East on a random 1/16 sec line through North ½ of Sec 2 Var 11°50' East
8	50	Top of Hill bears NW + SE
10	50	Bottom of Same bears NW + SE
20	00	Set Temp 1/16 Sec Cor
21	50	Top of Hill bears NE + SW
30	00	Timber Gulch bears SW + NE
40	00	Top of Hill bears N40°W
40	00	Set Temp 1/16 Sec Cor
45	85	Road on top of Hill bears N25°W
50	50	Timber Gulch bears SE + NW
59	70	Top of Hill bears N30°W + S30°E
60	00	Set Temp 1/16 Sec Cor
66	00	Timber Gulch bears SE + NW
78	50	Top of Hill bears SE + NW
81	20	Intersect N + S line 8 lks North of N 1/16 Sec Cor From which I run
		N 89°57' W on a true 1/16 Sec line through N ½ of Sec 2 Var 11°50' East

East of 6th Principal Meridian

Chs	Lks	
20	30	Set Post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor, from which an oak 30 in diam bears N 17°45' E 40 lks dist a oak 6 in diam bears S 35° E 68 lks dist
40	60	Set Post 4 ft long 3 in wide, 2 ft in ground for 1/16 Sec Cor, from which an oak 8 in diam bears S 20°45' E 150 lks dist an Oak 20 in diam bears N 18°30' E 164 lks dist
60	90	Set Post 4 ft long 3 in wide, 2 ft in ground for 1/16 Sec Cor from which an Oak 8 in diam bears S 11°45' E 60 lks dist an Oak 10 in diam bears N 85° E 63 lks dist
81	20	The N 1/16 Sec. on N + S line between Sec 2 + 3.

Surface Rolling
Soil dark loam 1st Rate
good for corn + vegetables

Timber Oak, Elm, ash
Hickory Walnut

May 1st 1875

Township 26 North, Range 10 East of the 4th Principal Meridian

Chs	Lks	
		East on a random 1/16 Sec line through S 1/2 of Sec 15 Var 11°55' East
11	50	a point N of a House. 60 lks dist,
13	50	a Road bears N W + S E.
17	20	Enter plowed land, 9 acres bars S
20	00	Set Temp'y 1/16 Sec Cor.
21	80	Leave Plowed land bars S
23	00	Plowed land 4 acres bars S.
26	00	Enter Brush bears N + S
40	00	Set Temp'y 1/16 Sec Cor.
47	00	a Road bears S 60° E at 60° N.
60	00	Set Temp'y 1/16 Sec Cor.
60	00	Enter Timber bars S.
66	15	Creek 10 lks wide in gulch runs North
78	80	Intersect N + S line 12 lks South of South 1/16 Sec cor
		From which I run
		S 89°55' W on a true 1/16 Sec line through South 1/2 of Sec 15 Var 11°55' East

Chs	Lks	
19	70	Set Post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor. From which an Oak 12 in diam bears N 66° E 40 lks dist an Oak 12 in diam bears S 48° W 60 lks dist
39	40	Set Post 4 ft long 3 in wide, 2 ft in ground for 1/16 Sec Cor From which an Elm 24 in diam bears N 17½° E 30 lks dist a Basswood 24 in diam bears S 12½° E 200 lks dist
59	10	Set Charred Post 4 ft long 3 inches wide - 1 ft in ground in mound 4½ ft at base, 2 ft high - Dug 4 Pits 24X24X12 in for 1/16 Sec Cor
78	80	The South 1/16 Sec Cor on N + S line between Sec 15 + 16

Surface Rolling
Soil - dark loam 1st Rate
Suitable for corn or vegetables

Timber Good - Oak Elm
Walnut Basswood Hickory

Brush abundant.

Township 26 North, Range No 9

Chs	Lks	
		East on a random 1/4 Sec line through middle of Sec 15 Var. 11°20' East
5	00	Plowed land. 5 acres bears N+S
7	50	Leave Plowed land bears E+S.
7	50	A Point 5 chs North of a House bears E+S
13	00	Enter Plowed land. 5 acres
17	50	Leave Plowed land bears E+S.
20	00	Set Temp'y 1/16 Sec Cor
30	00	Road bears N 60° E + S 60° W
31	10	Plowed land bears E+S.
33	17	Leave Plowed land. bears E+S.
36	50	A Point 8 chs N of a House
40	00	Set 1/4 Sec Cor - Temp'y
47	00	Enter good Scattering timber bears N+S
60	00	Set Temp'y 1/16 Sec Cor -
77	70	A Creek 5 lks wide runs N.E -
78	90	Intersect N+S line 32 lks South of 1/4 Sec Cor. from which

S 89°46' W on a true 1/4 Sec line through middle of Sec 15 Var 11°20' East

East of 6th Principal Meridian

Chs	Lks	
19	72½	Set Post 4 ft long 3 in wide 2 ft in ground - for 1/16 Sec Cor - from which an Oak 5 in diam bears N 45° 30' E. 100 lks dist an Oak 5 in diam bears S 3° E. 74 lks dist
39	~~44~~ 45	Set Post 4 ft long. 3 in wide. 2 ft in ground for 1/4 Sec Cor - from which a Basswood 8 in diam bears N 37° E 28 lks dist an Oak 10 in diam bears S 26° E 24 lks dist
59	17½	Set Post 4 ft long 3 in wide 2 ft in ground - for 1/16 Sec Cor. from which an Oak 3 in diam bears N 14° E 86 lks dist there being no other tree convenient Pdng 1 Pit 24 x 24 x 12 inches 8 lks S of Post
78	90	The 1/4 Sec Cor on N+S line between Sec 15 + 16

Surface Rolling.
Soil dark loam 1st Rate
good for corn or vegetables

Timber good but scattering
thick brush May 10th 1875

Township 26 North, Range No 9

Chs	lks	
		East on a random 1/16 Sec line through N 1/2 of Sec 15. Var 11°20' E
6	80	a Road. bears S 50° E + N
20	00	Set Temp'y 1/16 Sec cor -
21	60	Road. bears N 2 + S W 5 chs. 5 in Indian village
27	70	Road. bears N 50° E + S 50° W
29	00	Corn field. about 35 acres fras d + S
40	00	Set Temp'y 1/16 Sec cor
48	20	Leave Corn field fras d + S.
51	90	Corn field 1 acre - 1 ch wide fras d + S
58	52	Creek 10 lks wide in gulch runs S 60° E.
60	00	Set Temp'y 1/16 Sec cor
78	31	Intersect N + S line 11 lks North of N 1/16 Sec Cor. From which I ran
		N 89° 55' W on a true 1/16 Sec line through N 1/2 of Sec 15 Var 11° 20' E
19	5 3/4	Set Post 4 ft long 3 in wide. 2 ft. in ground. for 1/16 Sec Witness Corner 9 lks North of true corner, which is in bed of small creek - from which

East of 6th Principal Meridian

Chs	lks	
		an Elm 24 in diam bears N 54 1/2° E 102 lks dist
		An Elm 20 in diam bears S 51° E 93 lks dist
39	15 2/4	Set Post 4 ft long. 3 in wide - 2 ft in ground for 1/16 Sec Cor from which
		An Oak 18 in diam bears S 74° E 170 lks dist
		There being no other tree convenient I dug 1 Pit 24 X 24 X 12 inches, 8 lks South of Post
58	23 3/4 74	Set Post 4 ft long, 3 inches wide. 2 ft in ground - for 1/16 Sec Cor, from which
—		a Hickory 4 in diam bears S 77 3/4° W 190 lks dist
		An Oak 3 1/2 in diam bears N 5° 30' E 211 lks dist
78	31	the North 1/16 Sec Cor on N + S line between Sec 15 + 16.
		Surface Rolling
		Soil - Dark loam West 1/2 1st Rate East 1/2 2nd Rate
		Suitable for wheat and corn
		Timber Very Scattering Oak Hickory and Elm

Township 26 North, Range No 9 East of 6th Principal Meridian

Chs	Lks	
		East on a Random 1/16 Sec line through S 1/2 of Sec 10 Var 11°20' East
10	50	Leave brush and Enter Prairie bears N & S.
11	15	Indian Trail bears N30°W + S30°E
18	00	Road & Enter brush bears N5°W + S5°E
20	00	Set temp'y 1/16 Sec Cor
26	22	Road bears N + S
30	40	Top of Hill bears N20°E + S
40	00	Set temp'y 1/16 Sec Cor.
45	00	Road in gulch bears N + S
60	00	Set temp'y 1/16 Sec Cor
64	80	Road on top of Hill bears NE + SW.
78	73	Intersect N + S line 6 lks South of S. 1/16 Sec Cor.
		From which I run
		S. 89°57' W on a true 1/16 Sec line through S. 1/2 of Sec 10 Var 11°20' East
19	68½	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor, from which

Chs	Lks	
		an Ironwood 10 in diam bears S28°30' W 74 lks dist
		an Oak 12 in diam bears N30°30' W 81 lks dist
39	36½	Set Post 4 ft long 3 in lks wide, 2 ft in ground for 1/16 Sec Cor. from which
		an Oak 3 in diam bears S15° W 82 lks dist
		an Oak 3 in diam bears N12°30' E 50 lks dist
59	04¾	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor. from which
		an Oak 5 in diam bears N4° E 62 lks dist
		an Oak 5 in diam bears S36° W 13 lks dist
78	73	The S 1/16 Sec Cor. on N + S line between Sec 9 + 10
		Surface Rolling
		Soil. Rich dark loam 1st Rate. Good for corn and vegetables
		Timber Oak. Elm. Walnut Ironwood. Basswood
		Brush Hazel and Briar

Township 26 North Range No 9 East of 6th Principal Meridian

Chs	Lks	
		East on a random 1/4 Sec line through Middle of Sec 10 Var 10° 56' East
3	50	A Creek 10 lks wide - in gulch runs N 15° E
5	70	Enter Plowed land } About 15 acres
14	49	Leave Plowed land } Bears A and S.
20	00	Set Temp. 1/4 Sec Cor -
18		Stone, land S 1/2 mile bears A + S.
21	97	A Road. bears N 25° E + S 30° W
22	50	Enter Timber and brush bears A + S.
35	40	Gulch. bears N 30° W + S 30° E
40	00	Set Temp. 1/4 Sec Cor -
57	40	A Road on top of Hill bears N 20° W + S 20° E
60	00	Set Temp. 1/16 Sec Cor
63	50	A Creek. 5 lks runs N 25° E
77	45	A Road bears N E + S W
78	71	Intersect N + S line 58 lks South of 1/4 Sec Cor. from which I run
		S 89° 35' W. on a true 1/4 Sec line through Middle of Sec 10 Var 10° 56' East
19	6 3/4	Set Post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor from which

Chs	Lks	
		A Hickory 4 in diam bears S 10° W 46 lks dist
		A Hickory 5 in diam bears N 43° E 24 lks dist
39	35 1/2	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/4 Sec Cor - from which
		A Basswood 5 in diam bears S 8° 30' W 53 lks dist
		an Oak 18 in diam bears N 10° E 42 lks dist
59	04 1/2	Set Charred Post 4 ft long 3 inches wide - 1 ft in ground in Mound 4 1/2 ft at base, 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor -
78	71	The 1/4 Sec Cor on N + S line between Sec 9 + 10.
		Surface Rolling
		Soil - dark clay loam 1st Rate
		Good for Corn and vegetables
		Timber Scattering
		Brush. thick Hazel + Brier
		Patches of Open Prairie
		May 8th 1875

Township 26 North Range No 9

Chs	Lks	
		East on a random 1/16 Sec line through North 1/2 of Sec 10 Var 10°30' East
1	30	a Creek 20 lks wide runs S 60° E
2	00	Enter plowed field bears N & S.
12	50	Leave plowed field bears N & S. & Enter Brush
16	50	Leave Brush bears N & S.
17	50	a Gulch (Marshy) bears N 20° W & S 20° E
18	62	Plowed field bears N & S.
20	00	Set Temp 1/16 Sec Cor
20	00	a Point 2 1/2 chs S of a House
21	34	Leave plowed field 3 acres bears N & S. Trees on E & S.
33	00	Marshy Creek Bottom 2.75 lks wide
40	00	Set Temp 1/16 Sec Cor. Trees N W & S E
41	50	Re cross Marshy Creek bottom 2.50 lks wide Trees on S & W
50	00	Marshy Creek bottom 2.60 lks wide
58	50	Plowed land bears N & S
60	00	Set Temp 1/16 Sec Cor
60	25	Leave Plowed land bears N & S.
64	25	Creek 10 lks wide runs S 60° E.
78	60	Intersect N & S line 60 lks South of N 1/16 Sec Cor.

East of 6th Principal Meridian

Chs	Lks	
		From which I run
		S 89° 34' W on a true 1/16 Sec line through North 1/2 of Sec 10 Var 10°30' East
19	85	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor from which
		a Basswood 10 in diam bears S 18°30' W 75 lks dist
		an Oak 8 in diam bears N 65°30' W 99 lks dist
39	80	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor. from which
		an Oak 20 in diam bears S 62° W 190 lks dist
		a Basswood 10 in diam bears N 64°30' E 185 lks dist
58	95	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor, from which
		an oak 24 in diam bears S 10°30' E 194 lks dist
		an oak 20 in diam bears N 9°30' W 285 lks dist
78	60	The N 1/16 Sec Cor on N & S line between Sec 9 & 10
		Surface Rolling
		Soil Clay loam 1st Rate
		good for Wheat
		Timber small and scattering

Township 26 North, Range No 9

Chs	Lks	
		East on a random 1/16 sec line through South 1/2 of Sec 3 Var 10°20' East
6	50	a gulch bears N + S.
6	80	a Hog lot. bears N + S. (Fence) N 20° E + S 20° W
16	50	Plowed land 3 chs wide bears
20	00	Set Temporary 1/16 Sec Cor.
23	00	Top of Hill bears N + S.
23	00	a Point 2 chs N of a house
24	70	Road bears N 60° East + S 60° W
25	20	Plowed land about 4 acres 2 chs wide bears N + S.
30	10	a Road. bears N 20° E + S 20° W.
32	00	Grove of small trees bears N + S.
37	50	leave grove. trees N + S.
38	20	Road bears N 25° E + S 25° W
40	00	Set Temporary 1/16 sec Cor
60	00	Set Temporary 1/16 sec. Cor.
65	90	Road bears N 20° W + S 20° E
72	80	Gulch 50 ft deep bears NW + SE
78	00	Top of Hill bears N 30° W + S 30° E
78	77	Intersect N + S line 12 lks North of S 1/16 sec Cor. from which Pian

East of 6th Principal Meridian

Chs	Lks	
		N 89°55' W on a true 1/16 sec line through S 1/2 of Sec 3 Var 10°20' East
19	69 1/2 67	Set Post 4 ft long 3 inches wide, 2 ft in ground for 1/16 sec cor. from which an oak 18 in diam bears N 58°30' E 45 lks dist an Oak 24 in diam bears S 47° W 72 lks dist
39	38 1/2	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 sec Cor. from which an Oak 12 in diam bears N 13° W 230 lks dist an Oak 15 in diam bears S 25°30' E 222 lks dist
59	0 7 1/2	Set Post 4 ft long 3 inches wide. 2 ft in ground for 1/16 sec Cor. from which an Oak 10 in diam bears S 47°30' E 54 lks dist an Oak 12 in diam bears N 22° W 72 lks dist
78	77	The S 1/16 sec Cor. on N + S line between Sec 3 + 4.
		Surface Rolling + Broken Soil dark loam 1st Rate good for Wheat Timber Scattering but good Oak Black walnut Hickory &c

Township 26 North. Range No 9

Chs	Lks	
		East on a random 1/4 Sec line through middle of Sec 3
		Var 10°20' East
3	50	Road on top of Hill bears N & S.
12	50	Timber Gulch bears N & S
20	00	Set Temp'y 1/16 Sec Cor
24	00	Top of Ridge bears N & S and leave Scattering Timber & thick brush
24	61	Enter Plowed land bears N & S
27	40	Leave Plowed land and enter Timber brush &
30	70	Gulch bears N & S
40	00	Set Temp'y 1/4 Sec Cor.
45	00	Top of Hill bears N 20° E & S 20° W
54	80	Timber Gulch 75 ft deep bears N 50° W
60	00	Set Temp'y 1/16 Sec Cor.
63	00	Top of Hill bears N & S.
70	00	Gulch N & N W.
78	50	Top of Hill bears N & S.
79	27	Intersect N & S line 10 lks North of 1/4 Sec corner. from which I run
		N 89° 56' W. on a true 1/4 Sec line through middle of Sec 3

East of 6th Principal Meridian

Chs	Lks	
		Var 10°20' East
19	81 3/4	Set Post 4 ft long 3 in wide, 2 ft in ground for 1/16 Sec Cor from which an Oak 24 in diam bears S 71° W 35 lks dist an Oak 24 in diam bears N 3° 45' W 100 lks dist
39	63 1/2	Set Post 4 ft long 3 in wide, 2 ft in ground for 1/4 Sec Cor, from which a Black walnut 10 in diam bears S 15° 30' E 5 lks dist a Black walnut 6 in diam bears N 9° 30' E 35 lks dist
59	45 1/4	Set Post 4 ft long 3 in wide, 2 ft in ground for 1/16 Sec Cor from which an Oak 10 in diam bears N 66° E 26 lks dist an Oak 30 in diam bears S 47° 30' W 30 lks dist
79	27	The 1/4 Sec Cor - on N & S. line between Sec 3 & 4
		Surface Hilly Soil dark loam 1st Rate good for Corn and vegetables
		Timber Oak Black Walnut. Hickory Elm &c. Thick brush through whole line May 7th 1875

Township 26 North, Range No 9

Chs	lks	
		East on a random 1/16 Sec line through N 1/2 of Sec 3 Var 10°42' East
2	50	a Creek 20 lks wide runs N E
4	90	a Creek 10 lks wide runs S W.
8	80	a Road bears N 15° W + S 15° E
20	00	Set Temp 1/16 Sec Cor
20	40	a Road bears N + S.
27	00	Leave brush bears N + S.
35	00	Enter brush bears N E + S W
37	10	a gulch bears N W + S E
40	00	Set Temp 1/16 Sec Cor.
41	80	gulch bears N W + S E.
51	50	Deep marshy gulch bears N + S
52	50	Top of Hill + leave brush bears N + S
57	50	Enter scattering timber bears N + S
60	00	Set Temp 1/16 Sec Cor.
79	68	Intersect N + S line 50 lks North of N 1/16 Sec Cor From which I run
		N 89° 39' W on a true 1/16 Sec line through North 1/2 of Sec 3 Var 10°42' East

East of 6th Principal Meridian

Chs	lks	
19	92	Set Post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor, from which an Oak 24 in diam bears S 55° 30' W 69 lks dist an Oak 6 in diam bears N 84° 30' E 98 lks dist
39	84	Set Post 4 ft long 3 inches wide, 2 ft in ground for 1/16 Sec Cor, from which an Oak 6 in diam bears N 74° 30' E 19 lks dist a Box Elder 8 in diam bears S 60° 30' W 238 lks dist
59	76	Set Post 4 ft long 3 inches wide, 2 ft in ground for 1/16 Sec Cor. from which an Oak 5 in diam bears N 49° 30' W 130 lks dist a Basswood 10 in diam bears S 5° 30' W 155 lks dist
79	68	The North 1/16 Sec Cor on N + S line between Sec 3 + 4
		Surface E 1/2 Hilly W 1/2 level Soil Clay loam 1st Rate Good for Corn and Vegetables
		Timber, Scattering Oak of various kinds Elm Hickory &c. Brush. Hazel & Briar
		May 6th 1875

Township 26 North, Range No 9 East of 6th Principal Meridian

Chs	Lks	
		East on a Random 1/16 Sec line through S 1/2 of Sec 16 Var 11°30' East
18	50	A Road bears N+S.
20	00	Set Temporary 1/16 Sec. Cor.
28	50	A Point 8 Chs S of a house
40	00	Set Temporary 1/16 Sec. Cors
42	00	End of Breaking bears N+S.
42	20	A Road bears N+S.
53	20	A Creek water in holes 10 lks wide runs S 30° E
60	00	Set Temp. 1/16 Sec Cor
60	00	A point 11 chs W of a House
62	40	A Road bears N2+SW
80	04	Intersect N+S line 6 lks South of S 1/16 Sec Cor From which 2 Ram.
		S 89°57' W on a true 1/16 Sec line through S 1/2 of Sec 16 Var 11°30' East
20	01	Set Charred Post 4 ft long, 3 inches wide 1 ft in ground, in mound 4 1/2 ft at base, 2 ft high, Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec cor
40	02	Set Charred Post 4 ft long, 3 inches wide 1 ft in ground, in mound 4 1/2 ft at base, 2 ft high, Dug 4 Pits 24 X 24 X 12 inches, for 1/16 Sec cor
60	03	Set Charred Post 4 ft long, 3 inches wide, 1 ft in ground, in mound 4 1/2 ft at base, 2 ft high, Dug 4 Pits 24 X 24 X 12 inches, for 1/16 Sec cor
80	04	The South 1/16 Sec Cor on N+S line between Sec 16 + 17

Surface Rolling
Soil Clay loam 1st Rate
Good Wheat land.

Township 26 North, Range No 9

Chs	Lks	
		East on a random 1/4 sec line through middle of Sec 16 Var 11°25' East
15	00	A Point 8 chs N of a house
19	60	Road bears N+S.
20	00	Set Temp 1/16 sec Cor-
36	40	Creek water in holes runs S-
40	00	Set Temp 1/4 Sec Cor-
42	30	Leave breaking bears N+S
60	00	Set Temp 1/16 Sec Cor
60	00	A Point 12 chs N of a House
65	80	Enter Breaking } Bears
69	20	Leave Breaking } N+S
70	70	A Road bears NE+SW
79	67	Intersect N+S line 14 lks South of 1/4 Sec Cor- From which I ran
		S89°54'W on a true 1/4 sec line through middle of Sec 16 Var 11°25' East
19	91 3/4	Set Granitestone 16X14X10 inches, 9 inches in ground, for 1/16 sec Cor-

East of 6th Principal Meridian

Chs	Lks	
39	83 1/2	Set Charred Post 4 ft long. 3 inches wide. 1 ft in ground in mound 4 1/2 ft at base, 2 ft high, Dug 4 Pits 24X24X12 inches, for 1/4 Sec Cor-
59	75 1/4	Set Charred Post 4 ft long 3 inches wide 1 ft in ground, in mound 4 1/2 ft at base. 2 ft high. Dug 4 Pits 24X24X12 inches For 1/16 Sec Cor
79	67	The 1/4 Sec Cor on N+S line between Sec 16+17
		Surface Rolling
		Soil Clay loam
		1st Rate
		Good Wheat land

Township 26 North, Range No 9 East of 6th Principal Meridian

Chs	Lks	
		East on a random 1/16 Sec line through N 1/2 of Sec 16 Var 10° 55' East
12	70	a Road to Agency bears NE + SW
18	05	a Road to Agency bears N 65° E + S 63° W
20	00	Set Temp'y 1/16 Sec. Cor - and
40	00	Set Temp'y 1/16 Sec Cor - approx 3 chs S.E. of a house
43	70	a Road bears SE + NW
51	30	Plowed land bears N + S
51	30	a Point 250 lks S of a House
56	15	End of Plowed land bears N + S
60	00	Set Temp'y 1/16 Sec Cor -
62	60	a Road bears NW + SE
74	40	a Road bears N 20° E + S 20° W
74	90	Plowed land 10 acres bears N + S
79	53	End of Plowed land bears N + S
79	53	Intersect N and S line 6.8 lks S of N 1/16 Sec Cor from which I ran
		S 89° 31' W on a true 1/16 Sec line through N 1/2 of Sec 16 Var 10° 54' East

Chs	Lks	
19	88 1/4	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high - Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor
39	76 1/4	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4 1/2 ft at base. 2 ft high, Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor
59	64 3/4	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high, Dug 4 Pits 24 X 24 X 12 inches. for 1/16 Sec Cor
79	53	The N 1/16 Sec Cor on N + S line between Sec 16 + 17

Surface Rolling.

Soil Clay loam 1st Rate Good for Wheat

Township 26 North, Range No 9

Chs	lks	
		West on a Random 1/16 Sec line through South 1/2 of Sec 9
		Var. 10° 55' E
2	10	A Creek 5 lks wide runs N 75° E
8	35	A gulch. bears NW + SE
13	00	Leave brush and enter open prairie, bears N + S.
20	00	Set Tempy 1/16 Sec Cor
20	00	A Point 6 chs NW of a house
22	10	A Road bears NE + SW
23	20	Plowed land. 3 chs wide bears NW + SE.
30	00	Plowed land 250 lks wide bears N + S
37	50	Plowed land bears N + S.
40	00	Set Tempy 1/16 Sec Cor
40	00	A Point 8 chs N of a house
40	00	A Point 12 chs NW of a house
43	10	Leave plowed land bears N + S
44	45	A Road bears N + S
49	00	breaking } about 8 acres
56	60	Leave breaking } bears N + S.
57	10	A Road bears SE + NW
60	00	Set Tempy 1/16 Sec Cor
60	47	A Road bears NW + SE
62	72	Plowed land 4 chs wide bears N + S

East of 6th Principal Meridian

Chs	lks	
79	64	Intersect N + S line 5 lks South of S 1/16 Sec Cor.
		From which I ran
		N 89° 58' E on a true 1/16 Sec line through S 1/2 of Sec 9
		Var 10° 55 East
19	91	Set Charred Post 4 ft long 3 inches wide, 1 ft in ground, in mound 4 1/2 ft at base 2 ft high. Dug 4 pits 24 x 24 x 12 inches, for 1/16 Sec Cor
39	82	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground in mound 4 1/2 ft at base, 2 ft high Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec Cor
59	73	Set Charred Post 4 ft long 3 inches wide, 1 ft in ground, in mound 4 1/2 ft at base 2 ft high, Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec Cor.
79	64	The South 1/16 Sec Cor on N + S line between Sec 9 + 10
		Surface Rolling
		Soil clay loam 1st Rate, for Corn and wheat
		May 11th 1875

Township 26 North, Range No 9

Chs	lks	
		West on a random 1/4 sec line through middle of Sec 9
		Var 10°40' East
2	00	Plowed land. 3 acres brass N & S
7	80	Leave Plowed land. brass N & S.
10	80	A Road bears N & NE
12	34	Plowed land. 5.66 Chs wide, brass N & S.
20	00	Set Temp 1/16 sec cor.
22	00	Enter brush Patch
29	00	End of brush brass N. N & S
29	00	A Road. NW , & SE.
40	00	Set Temp 1/4 Sec Cor
40	60	A Road bears N & S.
51	00	A Deep gulch bears N & S
60	00	Set Temp 1/16 sec Cor
60	00	Enter breaking brass N & S
64	40	Leave breaking brass N & S.
77	10	A Road bears N 10° E & S
79	96	Intersect N & S line 36 lks North of 1/4 sec cor —
		From which I ran
		N 89°45' E on a true 1/4 sec line through middle of Sec 9

East of 6th Principal Meridian

Chs	lks	
		Var 10°40' East
19	99	Set Flint Stone too hard to mark 16 X 12 X 10 inches 11 inches in ground for 1/16 Sec cor
39	98	Set a Lime Stone 15 X 9 X 5 inches 10 inches in ground for 1/4 sec cor.
59	97	Set Post 4 ft long 3 inches wide 2 ft in ground. for 1/16 sec cor from which
		An Oak 8 in diam bears N 61° E 2.05 lks dist no other tree, commence to mark, dug one pit 2 ft sq 1 ft deep 8 lks S,
79	96	the 1/4 sec cor on N & S line between Sec 9 & 10.
		Surface Rolling
		Soil Clay loam 1st Rate good for wheat corn oats or vegetables
		Timber, A few scattering oaks

Township 26 North. Range No 9

Chs	lks	
		West on a Random 1/16 Sec line through North 1/2 of Sec 9
		Var 10°40' East
6	45	A creek 3 lks wide runs N 65° E bears N + S.
18	90	Leave brush and enter Prairie
20	00	Set Temp'y 1/16 Sec cor
35	00	A Point 2 chs South of a House
40	00	Set Temp'y 1/16 Sec Cor
40	45	A Road. bears N 10° East
50	00	Marshy Gulch bears N + S.
57	50	Top of Hill bears N + S.
60	00	Set Temp'y 1/16 Sec Cor
79	98	Intersect N + S line 18 lks North of N 1/16 Sec Cor From which Pran
		N 89° 52' East on a true 1/16 Sec line through N 1/2 of Sec 9
		Var 10°40' East
19	99½	Set Post 4 ft long 3 in wide 2 ft in ground. for 1/16 Sec Cor. from which An Oak 3 in diam bears N 65° 30' W 46 lks dist An Oak 3 in diam bears S 17° W 285 lks dist

East of 6th Principal Meridian

Chs	lks	
39	99	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec Cor
59	98½	Set Post 4 ft long 3 inches wide. 2 ft in ground. for 1/16 Sec Cor from which an Oak 8 in diam bears N 70° W 272 lks dist an Oak 4 in diam bears S 33½° E 111 lks dist
79	98	The North 1/16 Sec cor on N + S line between Sec 9 + 10
		Surface Rolling
		Soil Clay loam 1st Rate well adapted to cultivation of Wheat or Corn
		Timber very Scattering

Township 26th North, Range No 9.

Chs	lks	
		West on a random 1/16 Sec line through South 1/2 of Sec 4 Var 10°40' East
	80	Road bears N+S
1	50	Road bears N + S.
3	50	Enter Brush and scattering timber
12	80	a gulch, with trail bears S+N.
15	00	Leave brush and timber bears N+S.
17	90	a Road. bears N + SW
20	00	Set Temp 1/16 Sec Cor.
22	75	a Road. bears NE+NW
39	50	a Wigwam on line
40	00	Set Temp 1/16 Sec Cor
40	97	a Creek 5 lks wide runs N.
40	97	a Point 10 chs S of a House
60	00	Set Temp 1/16 Sec Cor.
63	50	a Road bears NE.
65	00	a Road. N + NW
79	98	Intersect N+S. line at South 1/16 Sec Cor From which I run
		East on a true 1/16 Sec line

East of 6th Principal Meridian

Chs	lks	
		through South 1/2 of Sec 4 Var 10°40' East
19	99½	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 Pits 24X24X12 inches for 1/16 Sec Cor.
39	99	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground in mound. 4½ ft at base, 2 ft high, Dug 4 Pits 24X24X12 inches for 1/16 Sec Cor.
59	98½	Set Post 4 ft long, 3 inches wide 1 ft in ground for 1/16 Sec Cor. from Stick Oak 12 in diam bears N 2°30' East 72 lks dist Oak 10 in diam bears S 45°E 229 lks dist
79	98	The South 1/16 Sec Cor on N+S line between Sec 3+4

Surface, Rolling
Soil. Clay loam 1st Rate
Good for wheat and oats
Timber on East ½ good
Oak Elm +c.

Township 26 North, Range No. 9

Chs	lks	
		West on a Random 1/4 Sec line through Middle of Sec 4 Var 10°48' East
1	00	a gulch bears N15°W + S15°E
11	00	Top of Hill bears NW + SE
20	00	Set Tempy 1/16 Sec Cor.
20	00	a gulch bears N20°W + S20°E
20	11	a Road bears NW + SE.
26	40	Top of Hill bears NE + SW an Indian trail on top of Hill
29	10	a Road bears N + SW
30	15	To Plowed land } 20 acres
36	00	Leave Plowed land } bears N + S.
39	95	Creek 10 lks wide in gulch runs N
40	00	Set Tempy 1/4 Sec Cor.
45	40	Plowed land.
49	00	Leave Plowed land
51	50	Top of Ridge bears N + S.
56	55	Gulch bears NE + SW with Scattering Timber
60	00	Set Tempy 1/16 Sec Cor
70	00	a Road bears N + S
71	90	a Road bears NW + SE

East of 6th Principal Meridian

Chs	lks	
80	28	Intersect N + S line 21 lks South of 1/4 Sec Cor From which I ran
		S 89°51'E on a true 1/4 Sec line through Middle of Sec 4 Var. 10°48' East
20	07	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor from which an Ironwood 6 in diam bears N41°E 69 lks dist a Basswood 30 in diam bears S6°W 57 lks dist
40	14	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/4 Sec Cor from which an Oak 8 in diam bears N18°Ea 29 lks dist an Oak 3 in diam bears S29°W 97 lks dist
60	21	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor. from which a Basswood 10 in diam bears N9°E 37 lks dist a Basswood 10 in diam bears S17°30'W 105 lks dist
80	28	To 1/4 Sec Cor on N + S line between Sec 3 + 4.
		Surface Hilly
		Soil. Clay loam 1st Rate. for corn + wheat Timber good but scattering

Township 26 North, Range No 4

Chs	Lks	
		West on a random 1/16 Sec. line through N 1/2 of Sec 4 Var 10° 20' East
7	20	a creek 10 lks wide runs S E
16	70	leave Brush Nears N + S
17	21	a creek 10 lks wide runs S
20	00	Set Temp'y 1/16 Sec Cor.
21	12	a creek 5 lks wide runs S 60° E
21	12	a Point 2 chs S of a House
26	50	a Road bears N 25° W. + S 60° W
40	00	Set Temp'y 1/16 Sec Cor.
42	14	a creek 120 lks across runs S 60° E
43	84	Enter Hazel brush
60	00	Set Temp'y 1/16 Sec Cor
60	50	Leave Hazel brush
65	70	Top of Ridge bears N + S.
79	90	a Ravine bears N E + S W
80	00	Intersect N + S line 66 lks North of N 1/16 Sec Cor. from which Fro
		N 89° 32' E on a true 1/16 Sec line through North 1/2 of Sec 4 Var 10° 20' East

East of 6th Principal Meridian

Chs	Lks	
20	00	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor from which an Oak 3 1/2 in diam bears S 6° W 93 lks dist an Oak 3 1/2 in diam bears N 21° 30' E 133 lks dist
40	00	Set Post 4 ft long 3 in wide 2 ft in ground 40 lks North of true line. for Witness to 1/16 Sec Cor. from which an Oak 7 in diam bears S 23° W 130 lks dist an Oak 10 in diam bears N 50° 30' E 100 lks dist
60	00	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor. from which a Black walnut 6 in diam bears N 71° W 114 lks dist an Oak 14 in diam bears S 71° E 10 lks dist
80	00	The North 1/16 Sec Cor on N + S line between Sec 3 + 4
		Surface Rolling Soil. Clay loam - rich. 1st Rate well adapted to raising corn and vegtables Timber Scattering, Oak + Elm Thick brush May 10th 1875

Township 26 North Range No. 9

		West on a random 1/16 Sec line through South ½ of Sec 17 Var 12°20' East
9	25	Leave plowed land and enter fence field bearing N & S
17	00	Leave breaking in field bearing N & S
20	00	Set Temp'y 1/16 Sec Cor
20	57	Enter brush and timber bearing N & S
29	23	a creek 10 lks wide runs South
32	00	Leave brush and scattering timber
40	00	Set Temp'y 1/16 Sec Cor
44	45	a Road bears N 30° E + S 30° W
46	00	a Point 4 chs North of a House
51	25	a Road bears N E + S W
52	00	a Point 3 chs North of Carpenter Shop
57	20	a Road bears N E + S W
58	00	a Point 8 chs N of a barn
60	00	Set Temp'y 1/16 Sec Cor
61	50	a Point 80 lks North of a House
63	90	Road bears N 30° W + S 30° E
64	50	a Point 6 chs N of Mill
66	00	a Point 750 lks North of Blacksmith Shop

East of 6th Principal Meridian

71	50	a Point 2 chs South of a House
75	40	a creek 3 lks wide runs N + N W
78	20	a creek 3 lks wide runs S W
78	60	a creek 5 lks wide runs N W
79	35	Intersect N + S line 9 lks South of S 1/16 Sec Cor from which I can
		S 89° 56' E on a true 1/16 Sec line through South ½ of Sec 17 Var 12°20' East
19	83 3/4 ~~84~~	Set a Post 4 ft long, 3 inches wide, 2 ft in ground for 1/16 Sec Cor, from which an oak 14 in diam bears N 32° E 79 lks dist, an oak 14 in diam bears S 65° 30' W 422 lks dist
39	67½ ~~68~~	Set Post 4 ft long, 3 inches wide 2 ft in ground for 1/16 Sec Cor from which an oak 6 in diam bears S 66° W 359 lks dist an oak 4 in diam bears N 50° W 131 lks dist
59	51 1/4 ~~52~~	Set Post 4 ft long, 3 inches wide 2 ft in ground for 1/16 Sec cor, from which an oak 12 in diam bears N 38° W 131 lks dist an oak 10 in diam bears S 12° W 129 lks dist
79	35	The South 1/16 Sec Cor on N + S line between Sec. 16 + 17

Surface Rolling, Soil Rich loam 1st Rat. West 40 chs through agency village timber. a few oak and black walnut on East ½

Township 26. North, Range No. 9

Chs	Lks	
		East on a Random 1/4 Sec line through middle of Sec 17 Var. 12°20' East.
20	00	Set Temp'y 1/16 Sec Cor.
40	00	Set Temp'y 1/4 Sec Cor.
44	80	A Road bears bears N 50° E + S 50° W
46	00	Fenced land bears N 20° W + S 20° E
46	00	A Point 6 chs North of Agents House
60	00	Set Temp'y 1/16 Sec Cor.
70	65	End of Fenced land bears N + S.
79	49	Intersect N + S line 3 lks North of 1/4 Sec cor From which I ran
		N 89° 59' W on a true 1/4 Sec line through middle of Sec 17 Var 12°20' East
19	87½	Set Granite Stone (too hard to mark) 20 X 12 X 10 inches 15 inches in ground for 1/16 Sec Cor
39	74½	Set granite Stone 14 X 10 X 8 inches 9½ inches in ground for 1/4 Sec Cor

East of 6th Principal Meridian

Chs	Lks	
59	61½	Set Post 4 ft long 3 inches wide, 2 ft in ground for 1/16 Sec Cor. From which an Oak 10 in diam bears N 13½° W 200 lks dist an Oak 8 in diam bears S 5° E 42.9 lks dist
79	49	The 1/4 Sec Cor on N + S line between Sec 17 + 18

Surface Rolling
Soil Clay loam 1st Rate
Suitable for Wheat or Corn

No Timber

Township 26 North, Range No. 9

Chs	lks	
		East on a random 1/16 Sec line through North 1/2 of Sec 17 Var. 12° 20' East
9	50	Enter Brush, Plum & Hazel brush
20	00	Set temp'y 1/16 Sec Cor.
21	00	Leave Brush, Plum & Hazel brush
30	15	A Road bears N 30° W & S 30° E
38	80	To Breaking bears N & S.
40	00	Set temp'y 1/16 Sec Cor.
41	40	End of breaking bears N & S.
43	67	A Creek 33 lks wide runs N 20° W
45	70	A Road bears N 30° W to S 30° E
60	00	Set temp'y 1/16 Sec. Cor.
68	00	A Road bears. N E & S W
79	90	A Road bears N E & S W
80	00	Intersect N & S line 13 lks South of N 1/16 Sec Cor. From which Pran S 89° 54' W. on a true 1/16 Sec line through North 1/2 of Sec 17 Var 12° 20' East.

East of 6th Principal Meridian

Chs	lks	
20	00	Set Charred Post 4 1/2 ft long 3 inches wide, 1 ft in ground. in Mound 4 1/2 ft at base, 2 ft high Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor.
40	00	Set Charred Post 4 ft long 3 inches wide, 1 ft in ground in Mound 4 1/2 ft at base, 2 ft high, Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor
60	00	Set Post 4 ft long, 3 inches wide, 2 ft in ground for 1/16 Sec Cor, from which An Oak 14 in diam bears N 2° W 293 lks dist An Oak 12 in diam bears S 2° W 156 lks dist
80	00	The North 1/16 Sec Cor on N & S line between Sec. 17 & 18

Surface Rolling
Soil Clay loam 1st Rate
Good for Corn or Wheat

Township 26 North, Range No 9

Chs	Lks	
		West on a Random 1/16 Sec line through South 1/2 of Sec 8 Var. 12°26' E
18	30	To Breaking trees N+S.
20	00	Set Temp'y 1/16 Sec Cor.
26	76	A Creek 3 lks wide runs South trees N+S.
38	40	Leave breaking, about 35 acres
40	00	Set Temp'y 1/16 Sec Cor
57	15	A Creek. 55 lks wide runs South
59	10	A Road bears N + S W
60	00	Set Temp'y 1/16 Sec Cor.
75	90	Creek in gulch. 5 lks wide runs South
79	80	Intersect N + S line 10 lks North of South 1/16 Sec Cor
		From which Iran
		N 89° 56' East on a true 1/16 Sec line through South 1/2 of Sec 8 Var 12° 26' East
19	95	Set Charred Post 4 1/2 ft long, 3 inches wide, 1 ft in ground, in mound 4 1/2 ft at base, 2 ft high, Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor

East of 6th Principal Meridian

Chs	Lks	
39	90	Set Charred Post 4 ft long 3 inches wide, 1 ft in ground in mound 4 1/2 ft at base 2 ft high, Dug 4 Pits 24 X 24 X 12 inches. For 1/16 Sec Cor
59	85	Set Post 4 ft long, 3 inches wide, 2 ft in ground for 1/16 Sec Cor
		From which
		A Basswood 5 in diam bears S 45° E 255 lks dist there being no other tree convenient P Dug 1 Pit 24 X 24 X 12 inches, 8 lks South of Post
79	80	The South 1/16 Sec Cor on N + S line between Sec. 8 + 9
		Surface Hilly Soil Clay loam 1st Rate good for Corn or Wheat

Township 26 North, Range No 9

Chs	Lks	
		West on a random 1/4 Sec line through Middle of Sec 8 Var. 12°26' East
20	00	Set Temp'y 1/16 Sec Cor
40	00	Set Temp'y 1/4 Sec Cor.
60	00	Set Temp'y 1/16 Sec Cor
61	10	A Road. bears NW + SE
79	46	Intersect N + S line 15 lks North of 1/4 Sec Cor from which I ran.
		N 89°54' E on a true 1/4 Sec line through Middle of Sec 8 Var. 12°26' East
19	86½	Set lime Stone 20 X 7 X 4 inches. 15 inches in ground for. 1/16 Sec Cor.
39	73	Set granite Stone: (too hard to mark) 18 X 12 X 12 inches 12 inches in ground. for. 1/4 Sec Cor.
59	59½	Set Lime Stone 18 X 14 X 3 inches. 12 inches in ground

East of 6th Principal Meridian

Chs	Lks	
		for 1/16 Sec Cor
79	46	The. 1/4 Sec Cor. on line between Sec. 8 + 9.
		Surface. Rolling Soil Clay loam 1st Rate Well adapted to cultivation of Wheat
		May 13th 1875

Township 26 North, Range No 9

Chs	lks	
		West on a random 1/16 Sec line through North 1/2 of Sec 8 Var 12° 15' East by sight
4	30	A Road bears NW + SE.
10	20	A Road bears NE + SW.
20	00	Set Tempy 1/16 Sec Cor.
32	04	Plowed land. brass A + S.
32	04	A Point 4 chs. N of a House
36	48	End of Plowed land, about 9 acres brass A + S
40	00	Set Tempy 1/16 Sec Cor.
46	10	Plowed land - brass A + S.
50	00	A Point 10 chs N of a House
55	21	End of Plowed land - brass A + S 10° 0' W 10° 0'
60	00	Set Tempy 1/16 Sec Cor.
61	52	Creek 5 lks wide runs North from Spring
79	36	Intersect N + S line at N 1/16 Sec Cor.
		From which I ran
		East on a true 1/16 Sec line through North 1/2 of Sec 8 Var 12° 15' East

East of 6th Principal Meridian

Chs	lks	
19	84	Set Charred Post 4 ft long 3 inches wide, 1 ft in ground, in mound 4 1/2 ft at base, 2 ft high Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor.
39	68	Set Charred Post 4 ft long, 3 inches wide, 1 ft in ground, in mound 4 1/2 ft at base, 2 ft high Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor.
59	52	Set Charred Post 4 ft long, 3 inches wide, 1 ft in ground. in mound 4 1/2 ft at base - 2 ft high Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor
79	36	The North 1/16 Sec Cor - on N + S line between Sec 8 + 9.
		Surface Rolling
		Soil Clay loam.
		East 1/2 1st Rate. W 1/2 2nd Rate

Township 26 North, Range No 9

Chs	Lks	
		West on a random 1/16 Sec line through South 1/2 of Sec 5 Var. 12°15' East
17	00	A Point 3 chs South of a house
19	20	A Road. bears N+S.
20	00	Set Tem Pry 1/16 Sec Cor
22	41	A creek. 5 lks wide runs N 20° W.
25	00	A Point 8 chs South of a House
40	00	Set Temp Pry 1/16 Sec Cor.
53	00	A Point 8 chs North of a House
55	45	Breaking 2½ acre bears N+S.
59	12	leave breaking. bears N+S
60	00	Set Temp Pry 1/16 Sec Cor
62	40	A creek 6 lks wide runs NW
78	23	Breaking, bears N+S.
79	91	Intersect N+S line 32 lks North of South 1/16 Sec Cor From which I run
		N 89°46' E on a true 1/16 Sec line through S 1/2 of Sec 5 Var. 12°15' East

East of 6th Principal Meridian

Chs	Lks	
19	97¾	Set Post 4 ft long, 3 inches wide 2 ft in ground for 1/16 Sec Cor From which
		A cottonwood 8 in diam bears N 86° W. 197 lks dist
		an oak 5 inches diam bears S 58° W 162 lks dist
39	97½	Set Charred Post 4 ft long 3 inches wide, 1 ft in ground, in mound 4½ ft at base, 2 ft high. Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec Cor.
59	97¾	Set Charred Post 4 ft long 3 inches wide, 1 ft in ground, in mound 4½ ft at base, 2 ft high. Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec Cor.
79	91	The South 1/16 Sec Cor on N+S line between Sec 4 + 5
		Surface Rolling Soil Clay loam 1st Rate good for wheat.

Township 26 North, Range No 9

Chs	lks	
		West on a random 1/4 Sec line through middle of Sec 5 Var. 12°29' East
17	00	a Point 2 chs South of a House
20	00	Set Temp'y 1/16 Sec Cor
20	40	a Road bearg N + S.
31	32	a Breaking trans N + S.
40	00	Set Temp'y 1/4 Sec Cor.
40	00	a Point 15 lks South of a House
40	50	End of breaking trans N + S
41	00	a Road. bears N W. + S E.
44	60	a Creek 25 lks wide runs N 30° W.
60	00	Set Temp'y 1/16 Sec Cor.
80	40	Intersect N + S line 14 lks South of 1/4 Sec Cor from which I ran
		S 89°54' E on a true 1/4 Sec line through middle of Sec 5 Var 12°29' East
20	10	Set Red Sand Stone 14 X 10 X 8 inches 9½ inches in ground. 7 lks South of true line. for Witness to 1/16 Sec cor. a House being in the way

East of 6th Principal Meridian

Chs	lks	
40	20	Set Flint Stone 14 X 10 X 8 inches 9½ inches in ground for 1/4 Sec Cor.
60	30	Set premits Stone (too Hard to mark 14 X 9 X 6 inches. 9½ inches in ground for 1/16 Sec Cor.
80	40	The 1/4 Sec Cor on N + S line between Sec. 4 + 5.

Surface Rolling
Soil Clay loam 1st Rate
Well adapted to corn or wheat

Township 26 North, Range No 9

Chs	Lks	
		West on a random 1/16 Sec line through North 1/2 of Sec 5 Var. 12°23' East
5	33	a Road bears N E + S W.
20	00	Set temp 1/16 Sec Cor
40	00	Set temp 1/16 Sec cor-
46	25	a Road. bears N + S-
47	25	a Creek 12 lks wide runs S 20° W
56	00	a Point 8 chs N of a House
60	00	Set temp 1/16 Sec cor
62	00	a Point 6 chs N of a House
65	70	a Road. bears S E + N W
66	23	Breaking. 8 acres fence N + S
76	03	End of Breaking fence N + S.
80	59	Intersect N + S line 12 lks South of North 1/16 Sec Cor from which I run
		S 89° 55' E on a true 1/16 Sec line through N 1/2 of Sec 5 Var. 12°23' East
20	III 3/4 ~~15~~	Set Charred Post 4 ft long. 3 inches wide 1 ft in ground. in mound 4 1/2 ft at base. 2 ft high. Dug 4 Pits

East of 6th Principal Meridian

Chs	Lks	
		24 X 24 X 12 inches for 1/16 Sec Cor-
40	29 1/2 ~~30~~	Set Charred Post 4 ft long. 3 inches wide. 1 ft in ground. in mound 4 1/2 ft at base. two ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor-
60	III 3/4 ~~74~~	Set charred Post 4 ft long 3 inches wide. 1 ft in ground. in mound 4 1/2 ft at base. 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor-
80	59	The North 1/16 Sec Cor on N + S line between Sec 4 + 5
		—
		Surface 50 chs East very Rolling - 30 chs West level- Soil of East Part light Clay loam 2nd Rate. suitable for wheat Soil of West Part dark and rich 1st Rate good for Corn
		May 12th 1875

Township 26 North, Range No 9

Chs	Lks	
		West on a Random 1/16 sec line through South 1/2 of Sec 18 Var. 11°44' East
6	50	To a Point 3 chs South of a House
7	00	To a Point 40 lks North of Wigwam
11	95	To a Point 8 chs South of a barn.
20	00	Set Tempy 1/16 sec Cor
20	00	Top of Steep Hill bears N50°W & S50°E
26	90	Fence around Plowed land bears N & S.
36	00	End of Fence bears N & S.
39	40	A Creek 3 lks wide runs N
60	00	Set Tempy 1/16 sec Cor
79	83	Intersect N & S line on west boundary of township 15 lks South of South 1/16 sec Cor. from which I ran
		S89°54'E on a true 1/16 sec line through S 1/2 of Sec 18 Var. 11°44' East
19	83	Set Post 4 ft long 3 inches wide 2 ft in ground. for 1/16 sec cor. from which an Oak 8 in diam bears N34°45'E 467 lks dist an Oak 5 in diam bears S55°15'W 404 lks dist

East of 6th Principal Meridian

39	83	Set Charred Post 4 ft long 3 inches wide, 1 ft in ground. in mound. 4 1/2 ft at base 2 ft high - Dug 4 Pits 24X24X12 inches. for 1/16 sec Cor
59	83	Set Post 4 ft long - 3 inches wide 2 ft in ground for 1/16 sec Cor from which an Oak 10 in diam bears S63°30'E 55 lks dist an Oak 6 in diam bears N42°W 120 lks dist
79	83	The South 1/16 sec cor on N & S line between Sec 17 & 18
		Surface Rolling Soil Clay loam 1st Rate
		Good for Wheat
		West on a random 1/4 sec line through Middle of Sec 18. Var 11°44' East
6	00	Barn 128 lks South attached to office & House

Township 26 North, Range No 9

Chs	Lks	
8	00	School house 222 lks South
12	00	Trading post 84 lks South
15	00	Indian graves South of line.
17	90	A Road bears N 60° W + S 60° E
20	00	Set Temp'y 1/16 Sec Cor-
22	84	A point 60 lks S of a house-
26	40	A Road bears NW + SE-
29	64	A Creek 10 lks wide runs NW
40	00	Set Temp'y 1/4 Sec Cor-
41	00	Cross Creek 10 lks wide runs S 25° W
44	80	Cross creek 10 lks wide runs S W-
47	00	Cross Creek 10 lks wide runs NW
49	10	Cross Creek 10 lks wide runs S W
60	00	Set Temp'y 1/16 Sec Cor
65	25	To Plowed land. Trans N + S
79	67	Intersect West boundary of township at 1/4 Sec Cor.

From which I run

East on a true 1/4 Sec line through Middle of Sec 18

Var 11° 44' East

East of 6th Principal Meridian

Chs	Lks	
19	87	Set Charred Post 4 ft long, 3 inches wide, 1 ft in ground. in mound 4½ ft at base. 2 ft high. Dug 4 Pits 24 X 24 X 12 inches. for 1/16 Sec Cor-
39	67	Set granite Stone 15 X 8 X 7 inches 10 inches in ground- for 1/4 Sec Cor
59	67	Set Charred Post 4 ft long. 3 inches wide, 1 ft in ground in mound 4½ ft at base. 2 ft high. Dug 4 Pits 24 X 24 X 12 inches. for 1/16 Sec Cor-
79	67	To 1/4 Sec Cor on N + S line between Sec. 17 + 18.

Surface Rolling

Soil Clay loam. 1st Rate

Good for Wheat or corn.

May 13, 1875

Township 26 North, Range No 9

Chs	Lks	
		West on a Random 1/16 Sec line through North ½ of Sec 18 Var 11° 44' East
4	65	a Road. bears N & S.
20	00	Set Temp'y 1/16 Sec Cor -
20	00	Enter brush bears N & S -
28	50	Leave. brush bears N & S -
31	10	Creek 5 lks wide runs S -
39	00	a road bears N & S.
39	12	a Point 4 Chs North of Brick School House
39	18	to Fence around Yard bears N & S -
40	00	Set Temp'y 1/16 Sec. Cor -
40	77	Leave Yard. bears N & S -
56	40	Breaking bears N 20° E. & S 20° W
60	00	set temp'y 1/16 Sec Cor
60	80	Leave Breaking trust, 20° E & W 20° W
71	60	a Road. bears N & S -
79	90	intersect. West boundary of Township at North 1/16 Sec Corner.

From which point East on a true 1/16 Sec line through North ½ of Sec 18 Var. 11° 44' East

East of 6th Principal Meridian

Chs	Lks	
19	90	Set Charred Post 4 ft long 3 inches wide, 1 ft in ground, in mound 4½ ft at base. 2 ft high. Dug 4 Pits 24 X 24 X 12 inches, for 1/16 Sec Cor -
39	90	Set Charred Post 4 ft long. 3 inches wide 1 ft in ground in mound. 4½ ft at base. 2 ft High. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor -
59	90	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base, 2 ft high. Dug 4 Pits 24 X 24 X 12 inches, for 1/16 Sec Cor
79	90	The North 1/16 Sec Cor - on N & S line between Sec. 17 & 18

Surface Rolling
Soil Clay loam 1st Rate
Well adapted to Wheat

Township 26 North Range No 9

Chs	Lks	
		West on a Random 1/16 Sec line through South 1/2 of Sec 7 Var. 11°32' East
9	87	Cross Creek 5 lks wide runs South
20	00	Set Temporary 1/16 Sec Cor
40	00	Set Temporary 1/16 Sec Cor.
52	87	A Road bears N & S.
60	00	Set Temporary 1/16 Sec Cor.
79	87	Intersect West boundary of Township 17 lks South of South 1/16 Sec Cor From which Iran
		S. 89°53' E on a true 1/16 sec line through South 1/2 of Sec 7 Var 11°32' East
19	87	Set Charred Post 4 ft long 5 inches wide. 1 ft in ground. in mound 4½ ft at base, 2 ft high - Dug 4 Pits 24 X 24 X 12 inches. For 1/16 Sec Cor.
39	87	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound

East of 6th Principal Meridian

Chs	Lks	
		4½ ft at base. 2 ft high. Dug 4 Pits 24 X 24 X 12 inches. For 1/16 Sec Cor
59	87	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground - in mound 4½ ft at base. 2 ft high - Dug 4 Pits 24 X 24 X 12 inches For 1/16 Sec Cor.
79	87	The South 1/16 Sec Cor on N & S line between Sec. 7 & 8
		Surface. Rolling Soil Clay loam 1st Rate good for wheat

Township 26 North, Range No 9

Chs	Lks	
		West on a random 1/4 Sec line through Middle of Sec 7 Var. 11°40' East
6	60	A Creek 5 lks wide runs S.
8	20	A Road bears N20°E + S20°W
14	40	A Road bears N + S.
20	00	Set Temp'y 1/16 Sec. Cor
32	00	A Road bears N20°E + S20°W.
40	00	Set Temp'y 1/4 Sec Cor.
51	40	A Road. bears N15°E + S15°W
60	00	Set Temp'y 1/16 Sec cor -
69	55	A Road bears NW + SE
79	97	Intersect West boundary of Township 10 lks S of 1/4 sec cor from which I ran.
		S 89°56' E on a true 1/4 sec line through Middle of Sec 7 Var 11°40' East
19	97	Set Lime Stone 15 X 13 X 4 inches. 10 inches in ground for 1/16 Sec Cor

East of 6th Principal Meridian

Chs	Lks	
39	97	Set Lime Stone 20 X 12 X 5 inches 15 inches in ground - for 1/4 Sec Cor.
59	97	A Red sandstone 16 X 13 X 6 inches 11 inches in ground. for 1/16 Sec Cor.
79	97	The 1/4 Sec. Cor. on N + S line between Sec. 7 + 8
		Surface Rolling Soil Clay loam 1st Rate
		Adapted to Corn or Wheat

Township 26 North, Range No 9

Chs	Lks	
		West on a random 1/16 Sec line through North 1/2 of Sec 7 Var. 11°15' East
	50	A Road bears N 70° W + S 70° E
4	30	A Road bears N E + S W
20	00	Set Tempy 1/16 Sec Cor
40	00	Set Tempy 1/16 Sec Cor
47	52	A Road bears N + S.
55	90	A Road bears N W + S E
60	00	Set Tempy 1/16 Sec Cor.
79	88	Intersect West boundary of Township 40 Lks North of North 1/16 Sec Cor. From Which Drawn
		N 89°43' E on a true 1/16 Sec line through N 1/2 of Sec 7 Var. 11°15' East
19	88	Set Charred Post 4 ft long. 3 inches wide, 1 ft in ground in mound 4 1/2 ft at base. 2 ft high, Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec Cor

East of 6th Principal Meridian

Chs	Lks	
39	88	Set Charred Post. 4 ft long. 3 inches wide, 1 ft in ground, in mound 4 1/2 ft at base. 2 ft high. Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec Cor.
59	88	Set Charred Post 4 ft long 3 inches wide, 1 ft in ground. in mound 4 1/2 ft at base 2 ft high Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec Cor
79	88	The North 1/16 Sec Cor on N + S line between Sec. 7 + 8
		Surface Rolling
		Soil Clay loam - 1st Rate
		Suitable for Wheat or corn

Township 26 North, Range No 9

Chs	Lks	
		West on a random 1/16 Sec line through S 1/2 of Sec 6 Var. 11°15' East
2	00	Leave Plowed Land. bears N & S.
3	95	a Creek. 15 lks wide runs N.
20	00	Set Temp'y 1/16 Sec Cor.
28	00	a Road. bears N 30°W & S 30°E
38	00	a Point 4 chs North of a House
40	00	Set Temp'y 1/16 Sec Cor.
60	00	Set Temp'y 1/16 Sec Cor.
65	70	a Road. bears NW & SE
65	90	To Plowed Land. bears N & S.
~~69~~	90	Leave Plowed Land.
75	00	To a Point 250 lks S. of a House
80	12	Intersect West Boundary of Township 7 lks North of S 1/4 Sec Cor. from which gran.
		N 89°57' E on a true 1/16 Sec line through S 1/2 of Sec 6 Var. 11°15' East
20	12	Set Charred Post 4 ft long 3 inches wide, 1 ft in ground. in Mound

East of 6 Principal Meridian

Chs	Lks	
		4 1/2 ft at base. 2 ft high Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec Cor.
40	12	Set Charred Post 4 ft long, 3 inches wide, 1 ft in ground. in Mound 4 1/2 ft at base. 2 ft high. Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec. Cor.
60	12	Set Charred Post 4 ft long 3 inches wide, 1 ft in ground. in Mound 4 1/2 ft at base. 2 ft high Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec Cor.
80	12	The S 1/16 Sec Cor on N & S line between Sec. 5 & 6.
		Surface Rolling Soil Clay loam 1st Rate
		Good for Wheat or Corn

Township 26 North, Range No 9

Chs	Lks	
		West on a Random 1/4 Sec line through Middle of Sec 6 Var. 11° 25' East
8	70	a Creek 3 lks wide in gulch. runs N.
20	00	Set Temp'y 1/16 Sec Cor
40	00	Set Temp'y 1/4 Sec Cor
60	00	Set Temp'y 1/16 Sec Cor-
80	37	Intersect West boundary of Township 26 lks South of 1/4 Sec Cor- From which I can
		S 89° 49' East on a true 1/4 Sec line through Middle of Sec 6 Var 11° 25' East
20	37	Set Charred Post 4 ft long. 3 inches wide. 1 ft in ground. in mound 4 1/2 ft at base 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec cor-
40	37	Set Red Sand Stone 14 X 12 X 4 inches 9 1/2 inches in ground. for 1/4 Sec cor-

East of 6th Principal Meridian

Chs	Lks	
60	37	Set Charred Post 4 ft long 3 inches wide - 1 ft in ground in mound - 4 1/2 ft at base Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec cor -
80	37	The 1/4 Sec cor on N + S line between Sec ~~4 + 5~~ 5 & 6
		Surface Rolling Soil Clay loam 2nd Rate
		Especially well adapted to the Cultivation of wheat owing to a mixture of lime with the soil

Township 26 North, Range No 9

Chs	Lks	
		West on a random 1/16 Sec line through North ½ of Sec 6 Var. 11°25' East
20	00	Set Temp'y 1/16 Sec Cor-
27	40	a creek. 10 lks wide, in gulch. runs NW.
40	00	Set Temp'y 1/16 Sec Cor-
41	35	a Creek 10 lks wide in gulch. runs SW
60	00	Set Temp'y 1/16 Sec Cor-
80	46	Intersect West boundary of Township 5 lks South of North 1/16 Sec Cor- from which I can
		S 89° 58' E on a true 1/16 Sec line through N ½ of Sec 6 Var 11°25' East
20	46	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor

East of 6th Principal Meridian

Chs	Lks	
40	46	Set Post 4 ft long 3 inches wide 2 ft in ground- for 1/16 Sec Cor from which
		an Elm 6 in diam bears S 25° 45' E 87 lks dist
		a Willow 4 in diam bears N 69° 30' W 168 lks dist
60	46	Set Post 4 ft long 3 inches wide 2 ft in ground - for 1/16 Sec Cor - from which an Elm 8 in diam bears S 71° 30' W 170 lks dist There being no other tree convenient Dug 1 Pit 24 X 24 X 12 inches 8 lks South of Post
80	46	The North 1/16 Sec Cor on N + S line between Sec 5 + 6
		Surface Rolling Soil Clay loam 2nd Rate
		Fair for cultivation of Wheat
		May 14th 1875

Township 26 North. Range No. 9

East of 6th Principal Meridian

Meanders
of the Right Bank of the Missouri, and
of Impassable Slough, in Sections 24,
13, 12 and,
Commencing at the Meander Corner on the
Right Bank of Missouri River, on the South
Boundary of the Minnebago Indian Reservation,
and 19.70 Chs East of the Corner to Secs 23 & 24
I run in fractional Section 24

Va. 12° East,

Courses	Distances	
N. 20°	E. 4.50	To M. C. bet Secs 13 & 24 & 19.22 Chs East of the Corner to Secs, 13, 14, 23 and 24
		Thence in fractnl Sec. 13
N. 13°	E. 2.50	
N. 5°	E. 17.70	To M. C. on 5 1/16 Sec line thro Sec 13 & 21.13 Ch. E of Sec line June 26th 1875
		Thence in fractional Section 13
N. 5°	E. 24	To Edge of bluff over which it is impossible to measure at which joint bt flag and from which take course N 19 3/4° E. at an unknown point on said course offset S 70 3/4° E. 1 Ch to a point, from which flag bears S 44 1/2° W. which gives 65 1/4° for angle opposite line, Nat. tan. 65 1/4° = 2.17 Chs
N. 19 3/4°	E 2.17 Chs.	
N. 25 3/4°	E 5.00	
N. 5 1/4°	E 11.00	
N. 37°	W 2.00	To Meander Cor on 1/4 Sec line thro Sec 13 & 23.40 Chs East of Section line July 19th 1875

Township 26. North, Range No 9

Courses		Distances	
	4		Thence in fractional Section 13.
N. 2°15'	W.	1.20	
N. 1°	W	.65	
N. 23°45'	E	1.05	
N. 20°30'	E	1.35	
N. 26°30'	E	.85	
N. 33°	E	1.75	
N. 15°30'	E	1.50	
N. 21°30'	E	5.45	
N. 24°	E	2.40	To Impassable Slough Thence, along West Side of Same.
N. 6°	W.	2.20	
N. 10°45'	E	1.20	
N. 4°	E	1.20	
N. 8°30'	E	1.25	To M. C. on N 1/16 Sec line thro Sec 13 & 27.51 Ch E of Sec line
	5		
			Thence in Section 13
N. 14°45'	E	.65	
N. 25°30'	E	1.10	
N. 38°	E	.95	
N. 34°	E	1.00	
N. 25°30'	E	.80	
N. 45°	E	1.30	
N. 56°15'	E	1.00	

East of 6th Principal Meridian

Courses		Distances	
N. 61°30'	E.	.95	
N. 60°	E.	1.40	
N. 73°30'	E.	.95	
N. 75°30'	E.	1.20	
N. 5°30'	W.	.80	
N. 41°15'	W.	3.70	
N. 30°30'	W.	2.55	
N. 38°30'	W.	2.85	
N. 53°	W.	2.00	
N. 38°	W.	1.95	
N. 27°30'	E	.40	
N. 2°	W.	1.40	
N. 54°30'	W.	.90	To Meander Corner on line bet Secs 12 & 13 & 26.28 Chs East of Corner to Sections 11, 12, 13 and 14, said M. C. being on W. side of S.
	6		
			Thence in fractional 12
N. 36°	E	1.05	
N. 18°45'	E	1.00	
N. 3°45'	W.	2.00	
N. 14°30'	E	1.80	
N. 5°15'	E	2.75	

Township 26 North, Range No 9

Courses		Distances	
N. 15°	E.	1.60	
N. 8°45'	E.	1.65	
N. 23°	E.	3.30	
N. 1°30'	E.	1.45	
N. 8°45'	E.	1.90	
N. 7°45'	W.	1.50	
N. 4°15'	W.	.90	To M. Cor 3/4 Sec line thro Sec 12 & 28.45 chs E of Sec
	7		
			Thence in fractional Sec. 12.
N. 19°30'	E.	1.00	
N. 7°45'	E.	2.20	
N. 30'	E.	2.25	
N. 5°	W.	2.60	
N. 44°45'	E.	.70	
N. 1°15'	W.	3.25	
N. 19°30'	W.	1.00	
N. 26½°	E.	2.50	Mouth of Creek 4 lks wide bears S E
N. 12°	E.	2.10	
N. 5°	W.	4.50	To M.C. on 1/4 Sec line thro Sec 12 & 28.50 chs East of Section line & on West Side of Slough
	8		
			Thence in fractional Sec 12 around

East of 6th Principal Meridian

Courses		Distances	
			North End of Slough
N. 2°45'	E	3.90	
N. 8°	W.	3.00	Bears foot of bluff. N & S. To River Bottom
N. 24°30'	E.	3.00	
N. 66°	E.	10.00	
East.		15.00	Thick willow Brush
S. 81°30'	E.	8.60	
S. 49°	E.	12.00	At 1 ch. Saw Mill 1 ch East
S. 44°30'	E.	3.00	
S. 53°30'	E.	3.50	To M. C. on 1/4 Section line thro. Sec 12 and 4.16 chs West of 1/4 Sec Cor on Range line also on East side of Slough
	9		
			Thence in fractional Section 12
S. 44°	E.	5.77	To M. Cor on Range line, 4.27 chs. South of the 1/4 Sec Corner, bet. Sec. 13 & 18
	10		
			Until these Meander lines reach the River bottom they are along foot of steep Bluffs and through thick willows & Young Cottonwood
			June 26th 1875

Township 26 North, Range No 9

Meanders on Section 13
of Part of East Side of Impassable
Slough around point of land ex-
luding into Slough.

Commencing at the Meander Corner on
Range line for Secs 13 and 18, on
South Side of Slough, and 22.33 chs S.
of Point for Corner to Secs. 7, 12, 13 & 18
Bran

Va 12° East

	Courses.	Dist-ances.
11		
S	50° W	2.00
S	29°30' W	2.80
S	48°30' E	3.60
12		

To Meander Corner on Range Line
Bet Ranges 9 & 10 & Secs 13 & 18 and 7 & 22.
chs South of Point for Corner to Sec
7, 12, 13 and 18 in Impassable Slough
June 26th 1875

East of 6th Principal Meridian

Meanders
of Right Bank Missouri River Upstream
Bu Sections 12, 1 and 2 T. 26 N. R. 9 E.

Commencing at the Meander Corner on Range
Line for Range 9 & 10 and Bet Secs 7 & 12
on Right Bank Missouri River, being
27.70 chs North of the 1/4 Sec Cor. bet. Secs
7 and 12, and run in Section 12

Va. 12° East

	Courses	Dist-ances.
13		
N	44½° W	~~16.70~~

To Meander Corner for Secs 1 & 12,
29.00 chs East of the 1/4 Sec Cor bet Secs 1 & 12

14		

Thence in fractional Section 1

N	49¾° W	30.50

To Meander Corner on 5 1/16 Sec line thru
Section 1 and 5.82 chs East of the
Middle 1/16 Sec Corner

15		

Thence in Section 1

N	48°30' W	7.70
N	0°40' W	5.00
N	47½° W	4.00
N	42° W	9.00

To Meander Corner on 1/4 Sec line through

Township 26 North, Range No 9

Courses		Distances	
	16		Section 1 and 24.75 Chs. East of Section line
N.	33°15'	W. 11.20	At 6 Chs cross mouth of creek, 6 lks wide, & at 9.00 Chs leave river bottom and meander along foot of bluff 150 ft high
N	39°	W 9.50	
N	40°	W 4.00	To Meander Corner on 1/16 Sec line through N ½ Section 1 and 10.05 Chs. East of Sec line
	17		
N.	31°	W. 19.60	To Meander Corner bet Secs 1 & 2 and 16.86 Chs North of the N 1/16 Sec Corner bet Secs 1 & 2
	18		
			Thence in Section 2
N.	49	W. 5.30	To Meander Corner on Township line bet Secs 2 & 35 and 35.34 Chs. East of the ¼ Sec Corner bet Secs, 2 & 35.
	19		

May 1st 1875

East of 6th Principal Meridian

Township 26 North, Range No 9

General Description

The Surface of this Township is very broken and hilly through the East half - with bluffs along the Missouri River from 150 to 200 feet in height. The West ½ is rolling and hilly. The hills are well rounded at their summits with moderately sloping sides.

The East ½ is covered with a fair growth of timber, Burr Oak Red Oak. Hickory. Red Elm White Elm. Black Walnut Ironwood Coffee Bean. Mulberry Hackberry Ash Cottonwood and willow

The timber is in some localities open and clear of undergrowth but it has generally a dense growth of undergrowth consisting of Haze brush. grape vine green brier. plumb and thorn bushes

The west ½ is diversified with

East of 6th Principal Meridian

Oak Openings patches of Haze brush and prairie. The latter predominating

Water. The Missouri on the East and innumerable creeks and springs throughout. afford an abundant supply of pure water

Minerals — Light brown sand stone of inferior quality is found in place in most of the bluffs and ravines in the vicinity of the Missouri River

Soil. Black loam from 1 to 2 feet deep with clay subsoil well adapted for general agricultural purposes. especially for wheat corn and vegetables

Township No 26 North of Range No

9 East of the 6th Principal Meridian

List of Names.

A list of the names of the individuals employed to assist in running, measuring, or marking the lines and corners described in the foregoing field notes of fractional Township No 26 North, of Range No 9 East of the 6th Principal Meridian, included within the boundaries of the Munsiebags Indian Reservation, showing the respective capacities in which they acted.

A. H. Wilcox, Compassman,
E. H. Innes, Compassman,
W. P. Pike Chainman
James E. Roche Chainman,
J. H. Stewart Chainman,
Wm McDavit Chainman,
T. T. Bennett Moundman,
Anthony Benson Moundman
Calvin Fague Moundman & axeman
Frank Campbell, Moundman & axeman.
Michael Fague, Moundman & axeman
J. H. Marshall Compassman & Chainman

Certificate of Assistants.

We hereby certify that we assisted J. W. Beaman U. S. Deputy Surveyor, in surveying the Section lines, and the Meanders of the Missouri River in Sections, 2, 1 and 12, of Fraction, Township No. 26 North, of the base line of Range No 9 East of the 6th Principal Meridian included within the boundaries of the Winnebago Indian Reservation, and that said lines have been in all respects to the best of our knowledge and belief well and faithfully surveyed, and the boundary monuments planted according to the instructions of the Surveyor General,

H. H. Wilcox	Compassman.
W. P. Pike	Chainman
James E. Roche	Chainman
his T. T. Bennett In Presence of T. F. Marshall	Mounderman & Axeman
mark. Anthony Benson	Mounderman & Axeman

Subscribed and sworn to, by the above named persons, before me, a Justice

Township No 26 North, of Range

of the Place for the County of Dakota, in the State of Nebraska, this 28th day of June, 1875.

A G Manchester
Justice of the Place,

No 9 East of the 6th Principal Meridian

Certificate of Assistants

We hereby certify that we assisted J. H. Beaman U. S. Deputy Surveyor in surveying the Sectional Subdivisional lines, and the Meanders of Section 13, and Meanders of Impassible Slough in Section 12, all in Fractional Township No. 26 North of the base line of Range No 9 East of the 6th Principal Meridian included within the boundaries of the Winnebago Indian Reservation, and that said lines have been in all respects to the best of our knowledge and belief well and faithfully surveyed, and the boundary monuments planted according to the instructions of the Surveyor General.

C. W. Tomer — Compassman
J. H. Stewart — Chainman
Wm McDavitt his X mark in presence of C W Tomer — Chainman,
Calvin X Fayne his mark in presence of C W Tomer — Mormdman & axeman
Frank Campbell — Mormdman & axeman

Subscribed and sworn to by

Township No 26 North, of Range No 9 East of the 6th Principal Meridian

the above named persons, before me a Justice of the Peace for the County of Dakota, in the State of Nebraska, this 28th day of June 1875

A. G. Manchester
Justice of the Peace

I hereby certify that I assisted J. M. Brennan U.S. Deputy Surveyor in surveying the line between Sec 15 & 16 and the Meander of the Missouri River from M. Cor 5/6 Sec line thro Sec 15 to M. Cor 1/4 Sec line thro Sec 13, all in Township No 26 N, of Range No 9 East of the 6th Principal Meridian included within the boundaries of the Winnebago Indian Reservation and that said line has been run in all respects to the best of my knowledge and belief well and faithfully surveyed and the boundary monuments planted according to the instructions of the Surveyor General.

T. F. Marshall Compassman & Ch. man

State of Iowa } ss
Woodbury County } Subscribed in my presence and sworn to by the said T. F. Marshall at my office in Sioux City this 27nd day of July 1875

John Brennan J.P.
In & for said County

Affidavit

I, John M. Brennan, Deputy Surveyor, do solemnly swear that in pursuance of a contract with E. E. Cunningham, Surveyor of the public lands of the United States in the State of Iowa and Nebraska, bearing date the 6th day of October, 1874, and in strict conformity to the laws of the United States, and the instructions furnished by the said Surveyor General, I have faithfully surveyed, the Sectional and Sectional Subdivisional and Meander lines of Fractional Township No 26 North of the base line of Range No 9 East of the 6th Principal Meridian included within the boundaries of the Winnebago Indian Reservation in the State of Nebraska, and do further solemnly swear that the foregoing are the true and original field notes of such survey.

I John M. Beaman Deputy Surveyor do solemnly swear that in pursuance of a contract with E. E. Cunningham Surveyor General for the District of Nebraska and dated bearing date the 6th day of October 1874. I have well, faithfully and truly and in strict conformity with the instructions furnished by the Surveyor General Surveying Manual and the Laws of the United States. surveyed all those parts or portions and the meanders of the Missouri River of fractional Township 26 North of the Base Line of Range No. 9. East of the 6th Principal Meridian as are represented in the foregoing field notes as having been surveyed under my direction. And I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, printed instructions and special instructions of the Surveyor General of dimensions, character, construction and marking and in the manner specifically described in the foregoing field notes and that the foregoing are the true and original field notes of such survey.

J. M. Beaman

Subscribed in my presence and sworn to before me in the County of Pass State of Nebraska this the 29th day of July A.D. 1875

Thos. Pollock
Notary Public

Surveyor Generals Office
Plattsmouth Neb Feby 21st 1876.

The foregoing field notes of the Survey and subdivision into forty Acre tracts and the Meanders of the Missouri River in Fractional Township No 26 North of the Base Line of Range No 9 East of the 6th Principal Meridian in the Winnebago Indian Reservation in the State of Nebraska Executed by J. M. Beaman Deputy Surveyor under his Contract No 87 dated Oct 6th 1874 in the months of April May June and July 1875 having been critically examined the necessary corrections and explanations made the said field notes and the surveys they describe are hereby approved

J. M. Clark
Surveyor General

190

Field notes of the section lines the lines subdividing sections and the Meanders of the Missouri River of fractional Township number 27 north of Range number 9 East of the 6th Principal Meridian included within the Winnebago Reservation Nebraska.

Index.

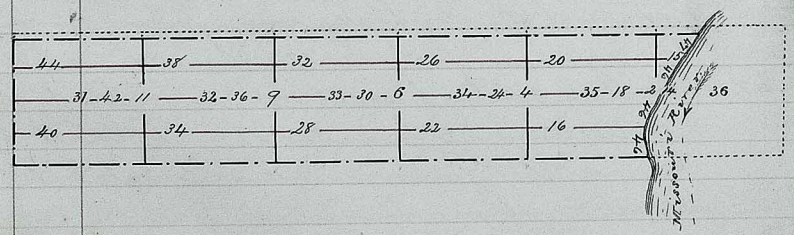

Surveyed by John W Beaman Ile. S.
Deputy Surveyor under his Contract No
87 bearing date October 6th 1874

Survey Commenced April 30th 1875
Survey Completed May 5th 1875

PLAT S.S.

Township No 27 North, of Range

Chs	lks	
		From the Corner to Secs 35 & 36 on the North Boundary Reservation Iran
		South on a random line bet Secs 35 & 36 Va 11° East
15	10	Set temp 1/16 Sec Cor
31	00	Bay on 30 lks wide from W. to E
34	98	A point 60 lks West of old 1/4 Sec Corner To re-establish this Corner Set post 4 ft long 3 in wide 2 ft in ground for 1/4 Section Corner from which An Oak 3 in dia, bears S 61½° East. 15 lks dist An Oak 4 in dia bears S 7½° W. 15 lks dist From this 1/4 Sec Cor with a Corrected Va Iran South on a true line Va 12° 51' East
10	62	Right Bank Missouri River, Set post 4 ft long 3 in wide 2 ft in ground for Meander Cor from which An Elm 3 in dia, bears N 37° E 70 lks dist. An Elm 3 in dia, bears N 66½° E 78 lks dist.
		From the 1/4 Section Iran North on a true line bet Secs 35 & 36

No 9 East of the 6th Principal Meridian

Chs	lks	
		Va 12° 51' East
30	00	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 Section Corner from which An Elm 24 in dia, bears S 17° W. 57 lks dist, An Oak 4 in dia, bears N 70° E 5 lks dist,
34	98	The Corner to Secs 35 & 36 on North Boundary Reservation, To re-establish this Corner Set post 4 ft long 3 in wide 2 ft in ground, from which An Oak 4 in dia N 42° East 113 lks distant A Cottonwood 30 in dia bears S 43¾° W. 418 lks dist No other tree Convenient for Marking. Dug one Pit 2 ft square 1 ft deep 8 lks South of Post. Post with the additional Marks N. B. W. R. Surface, Soil timber & brush the same as Missouri flat generally.

Township No 27 North of Range

Chs	lks	
		North on a random line bet Secs 34 & 35
		Va 10°30' East.
		Mixed timber
10	00	Enter oak opening bears N & S
12	00	Wagon Road bears N & S.E.
12	75	Wagon Road on ridge N & N.E.
14	00	Enter mixed timber bears E & W.
20	00	Set temp 1/16 Sec Corner
40	69	A point 10 lks West of 1/4 Sec. Corner, Took bearings to old Stumps
		An Oak, 8 in bears, N 75½° W. 23 lks.
		An Oak, 8 in bears, S 70½° E. 19 lks.
		To reestablish the old Corner by setting a new post 4 ft long 3 in wide 2 ft in ground from which:
		A Red oak 10 in dia, bears S 12½° E. 69 lks dist.
		A Basswood 8 in dia, bears S 89° W. 30 lks dist.
		North on a random line
		Va 10°30' East.
9	00	Cornfield East & West.
17	40	Creek 8 lks wide runs from W. to East
20	00	Set temp 1/16 Sec Corner
22	00	Leave Cornfield and Enter Prairie with scant timber

No 9 East of the 6th Principal Meridian

Chs	lks	
34	43	to Corner between Secs 34 and 35 on North Boundary Reservation, Reestablished Corner by Setting Post 4 ft long 3 in wide 2 ft in ground from which (Post with additional marks N.B.W.R.
		An Oak 10 in dia, bears S. 54½° E. 103 lks dist
		An Oak 10 in dia, bears S. 44° W. 212 lks dist
		from which Corner Drawn:
		S. 33' E on a true line between Secs 34 & 35
		Va 9°57' East.
14	43	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor from which:
		A. Cottonwood, 3 in dia bears S. 67° W. 31 lks dist
		A Black Walnut, 5 in dia bears S. 53½° E. 202 lks dist
34	43	The 1/4 Section Corner from which Drawn:
		S. 33' E. on a true line bet. Secs 34 & 35
		Va 9°48' East.
54	78	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 Section Corner from which.
		An Oak, 15 in dia bears N 57° W. 29 lks distant
		An Oak, 12 in dia bears N 37° E. 76 lks dist

Township No 27 North of Range

Chs	lks	
14	22	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 Section from which
		A Black walnut, 18 in, bears, S 75½° E, 17 lks dist
		A Basswood, 7 in dia, bears S 73½° W. 13½ lks dist
34	22	The 1/4 Section Corner
54	18	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 Section Corner from which
		An Oak, 11 in dia, bears S. 16½° W, 71 lks. dist
		An Oak, 10 in dia, bears S. 33° E, 91 lks distant
74	15	The corner to Sec 33 and 34 on South Boundary Township.
		Surface, rough and broken
		Soil, dark clay loam, two feet deep with clay subsoil, best adapted for wheat and other small grain. 1st rate
		Timber scattering. Burr Oak of inferior quality.
		May 3rd 1875

No 9 East of the 6th Principal Meridian

Chs	lks	
		North on a random line between Sec 32 & 33 Va 11°15' East
		Prairie with scattering oak timber
5	30	Deep Ravine drains from W to E.
16	50	Top of hill bears E and W.
20	00	Set temp 1/16 Sec. Corner
24	50	Wagon road bears N E & S W.
25	00	Wire fence bears N E and S W. enter plowed land.
34	10	Cross wire fence bears N W & S E & enter brush & timber
40	00	Set temp 1/4 Sec Corner, No old Corner found
55	00	Cross Ravine S 25° W. to N 25° E.
61	00	Set temp 1/16 Sec Corner
63	00	Descend steep bank
65	00	Creek 3 lk wide runs from W to E ascend high steep bank
66	80.	Ravine drains from N. W to S. E
74	04	Intersect North Boundary Reservation 53 lks West of Corner to Secs 32 and 33. To Re-establish this Corner Set New post 4 ft long 3 in wide 2 ft in ground with the additional marks N.B. N.R. from which
		An Oak 12 in dia, bears, N 63¼° W, 43 lks dist
		An Oak, 16 in dia, bears S. 59½° E, 116 lks dist
		First one old and last one new bearing tree from this Corner Iran;

Township No 27 North, of Range No 9

Chs	lks	
		So 0°17' E on a true line bet Secs 32 & 33 Va 10°34' East.
14	04	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Corner from which An Oak 10 in bears N 32½° W 37 lks dist. An Oak 5 in dia bears S 51½° E 63 lks dist.
34	04	Set post 4 ft long 3 in wide 2 ft in ground for 1/4 Sec Corner from which: An Oak 17 in bears N 44½° W, 165 lks An Oak 4 in dia bears S 1° E 337 lks
54	04	Set post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Corner from which: An Oak 13 in dia, bears S 74¾° E 107 lks dist No other trees convenient to mark, dug one pit 2 ft square & 1 ft deep 8 lks South of Corner
74	04	The Corner to Secs 33 & 32 on South Boundary Township.

Surface broken,
Soil, dark loam best for Corn
2nd rate.

East of the 6th Principal Meridian

Chs	lks	
		North on a random line between Secs 31 & 32 V 11°15' East
15	70	Wagon Road bears N E and S W.
20	00	Set temp 1/16 Section ~~Sec~~, Corner
28	00	Ravine bears from N E to S W.
39	20	A Point 28 lks West of 1/4 Sec Corner, To re-establish this Corner. Set chained post 4 ft long 3 in wide 1 ft in ground in mound 4½ at base 2 ft high dug 2 pits 48 x 20 x 12 in & 2 Pits 20 x 20 x 12 in for ~~1/16~~ 1/4 Sec Corner. From this Corner Draw: North on a random line. Va 11°15' East.
1	00	Old Road bears E and W.
14	60	Creek 5 lks wide bears E and W.
15	50	Fence bears E and W to plowed field
20	00	Set temp 1/16 Sec Corner
21	10	Fence bears E & W and leave plowed field
34	58	Intersect North Boundary 21 lks West of Corner to Secs 31 & 32. To re-establish this Corner Set chained post 4 ft long 3 in wide 1 ft in ground with additional marks N.B.W.D. in mound 4½ ft at base 2 ft high dug 2 pits 48 x 20 x 12 in & 2 Pits 20 x 20 x 12 in from this Corner Draw

Township No 27 North of Range No

Chs	Lk	
		S. 25' E. on a true line bet Secs 31 & 32 Va 10°28' East.
14	58	Sect Chained port 4 ft long 3 in wide, 1 ft in ground in mound 4½ ft at base 2 ft high dug 2 pits 48×20×12 in & 2 Pits 20×20×12 in for 1/16 Sec Cor
34	58	1/4 Sec Corner From which I ran
		S. 25' E on a true line bet. Secs 31 & 32 Va 10°28' East
54	18	Sec. Chained port 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base 2 ft high dug 2 pits 48×20×12 in & 2 pits 20×12×12 in for 1/16 Sec Cor.
73	78	The Corner to Secs 31 and 32 on South Boundary of Township.
		Surface. Very Rolling Prairie Soil 2d rate best adapted to wheat May 4th 1875

Part. 2.

Township 27 North, Range No 9 East of 6th Principal Meridian

Chs	Lks	
		East on a true 14 sec line through Middle of Sec 36 Var 11° 50' East
5	56	Right bank of Missouri River Set Post 4 ft long 3 inches wide 2 ft in ground for M. C. from which an Oak 4 in diam bears S 52° 45' W 6 lks dist an Ash 3 in diam bears N 40° 30' E 28 lks dist
		Surface level Soil dark loam 1st Rate well adapted to raising corn and vegetables Timber scattering, oak Ash Cottonwood Brush same

Chs	Lks	
		East on a true 116 sec line through N ½ sec 36 Var 11° 50' East
4	50	Wagon Road bears N 50° E + S 50° W
14	20	Right bank of Missouri River Set Post 4 ft long 3 in wide 2 ft in ground for M. C. from which a Willow 10 in diam bears N 10° 45' E 182 lks dist a Willow 8 " diam bears S 72° 45' W 117 lks dist
		Surface level Soil dark loam 1st Rate well adapted to raising corn and vegetables Timber. scattering. oak, ash, willow and cottonwood

Township 27 North, Range No 9 East of 6th Principal Meridian

Chs	Lks	
		East on a true 1/16 Sec line through S 1/2 of Sec 35 - Var 10-59' East
	08	Centre of Public Road bears N + S.
20	00	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec cor from which an Oak 8 in diam bears S10°W 24 lks dist an Oak 8 in diam bears N8½°E 73 lks dist
30	50	Gulch bears NW + SE Road in gulch
40	00	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec cor from which an Elm 12 in diam bears N63½°W 52 lks dist an Oak 10 in diam bears S85½°E 88 lks dist
53	50	Summit of Steep hill bears NW + SE
60	00	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec cor from which an Oak 6 in diam bears N79°W 52 lks dist " Oak 12 in diam bears S38½°W 90 lks dist
61	50	Bottom of steep bluff 150 ft high and outer level bottom land bears N + S

Chs	Lks	
65	60	Public Road bears N + S
78	85	the Right bank of Missouri River Set Post 4 ft long 3 in wide 1 ft in ground in mound 4½ ft at base. 2 ft high. dug 1 pit 4 X 3 X 3 ft - 8 lks dist from post west for M. C.
		Surface: West 3/4 Rough and hilly East 1/4 River bottom
		Soil of West 3/4 Clay loam 1st Rate. but too rough for successful cultivation Soil of East 1/4 dark ~~sack~~ loam. 1st Rate well adapted to raising corn and all kinds of vegetables
		Timber Scattering Oak. Cottonwood with brush
		This line was previously run and established with a variation of 11°15' East the corners were afterward destroyed, and re-run as above

Township 27 North, Range No 9

Chs	Lks	
		East on a random 1/4 Sec line through Middle of Sec 35
		Var 11° East
6	65	a Road bears N 50° E & S 50° W
6	65	a Point 7 chs N of a house
20	00	Set Temp 1/16 Sec Cor
20	00	Top of hill bears N & S
20	00	a Point 5 chs N W of a house
23	00	bottom of gulch & Creek runs N 10° E
24	00	Top of hill bears N & S. plowed land
29	70	a Road bears N 20° E & S 20° W
40	00	Set Temp 1/4 Sec Cor
42	50	Summit of hill bears N 30° W & S 30° E
44	50	Bottom of deep gulch bears N & S
48	75	Top of hill bears S 25° E & N 25° W
55	00	Bottom of hill & Outer River Bottom
57	50	Road bears N 40° W & S 40° E
60	00	Set Temp 1/16 Sec Cor
80	70	Intersect N & S line 90 lks North of 1/4 Sec Cor from which I run
		N 89° 22' W on a true 1/4 Sec line through Middle of Sec 35

East of 6th Principal Meridian

Chs	Lks	
		Var 11° East
20	17½	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor from which
		an oak 20 in diam bears N 35° W 247 lks dist
		a Basswood 10 in diam bears S 8° 30' E 134 lks dist
40	35	Set Post 4 ft long 3 in wide 2 ft in ground for 1/4 Sec Cor. from which
		an oak 6 in diam bears S 6° 30' W 75 lks dist
		an oak 6 in diam bears N 47° 30' E 93 lks dist
60	52½	Set Post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor. from which
		a Basswood 8 in diam bears N 32° W 100 lks dist
		an Elm 18 in diam bears S 22° 45' E 167 lks dist
80	70	The 1/4 Sec Cor bet Sec 34 & 35.
		Surface West 3/4 hilly East 1/4 level
		Soil 1st Rate well adapted for raising Corn and vegetables
		Timber small and scattering Oak Ash Willow & Cottonwood with brush

Township 27 North, Range No 9

Chs	lks	
		East on a random 1/16 sec line through N 1/2 of sec 35
		Var 10° 22' East
5	50	Leave plowed land bears N + S.
5	90	Creek running NW 5 lks wide
6	80	Creek 10 lks wide runs S.E.
8	50	Corn field about 6 acres bears N+S.
14	80	A point 10 chs S of a house
19	30	Road bears N 60° E + S 60° W
20	00	Set Tempy 1/16 sec Cor.
21	52	Creek 5 lks wide runs N E
25	00	Road bears N 15 E + S 15 W
30	30	Plowed land bears N + S.
31	20	Road bears N 40° W + S 40 E
36	50	Enter thick brush bears N + S.
40	00	Set Tempy 1/16 sec Cor.
43	50	Plowed land bears N + S
46	65	Creek 5 lks wide runs S E. leave plowed land
48	50	Enter thick brush bears N + S
60	00	Set Tempy 1/16 sec Cor.
60	00	to a point 10 chs N of a house
69	00	Road bears N + S.
79	50	Intersect N + S line 72 lks North

East of 6th Principal Meridian

Chs	lks	
		of N 1/16 sec Cor from which I ran
		N 89° 29' W on a true 1/16 sec line through North 1/2 of sec 35
		Var 10° 22' East
19	87 1/2	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 sec cor from which
		A Basswood 24 inches diam bears S 76 1/4° E 9 lks dist
		A Cottonwood 24 in diam bears N 82° 30' W 163 lks dist
39	75	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 sec cor from which
		A Willow 5 in diam bears N 28° E 90 lks dist
		A Willow 3 in diam bears S 15 1/2° W 67 lks dist
59	62 1/2	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 sec cor. from which
		An Ash 4 in diam bears N 44 1/2 W 177 lks dist
		An Elm 8 in diam bears S 30° E 14 lks dist
79	50	The N 1/16 sec Cor on N + S line between sec 34 + 35
		Surface Rolling and River bottom
		Soil dark loam 1st Rate
		Well adapted for corn.
May	3rd 1875	Timber small and scattering

West on a Random 1/16 Sec line
through South 1/2 of Sec 34
Var 11°30' East

6	70	Road on top of ridge bears S20°E & N20°W
6	70	scattering timber
17	00	Top of hill bears N30°W
17	25	Gulch bears N30°W to S30°E
20	00	Set Temp 1/16 Sec Cor.
31	00	Road bears NW on top of ridge
36	00	a gulch bears N & S.
40	00	Set Temp 1/16 Sec Cor.
42	00	Top of Ridge bears N & S.
46	50	Gulch bears N & S. Enter brush
50	40	leave brush bears N & S.
52	00	Top of Round hill
58	00	Enter grove of small timber
59	50	Gulch bears N & S.
60	00	Set Temp 1/16 Sec Cor.
66	24	a point from which a school house bears S11¼°E
67	75	Road bears N83°W & S60°E
79	09	a point from which a school house bears S30°E
80	14	Intersect N & S line 3 lks S of S 1/16 Sec Cor

From which I ran
N 89°59' E on a true 1/16 Sec line
through S 1/2 of Sec 34
Var 11°30' East

20	03½	Set Post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor from which an Oak 24 in diam bears S42°15' W 29 lks dist an Oak 20 in diam bears N32°30' E 56 lks dist
40	07	Set Post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec cor from which a Basswood 6 in diam N16°E 70 lks dist an Elm 12 in diam bears S2°15' E 30 lks dist
60	10½	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor. from which a Black walnut 8 in diam bears N81½° W 60 lks dist a Hickory 4 in diam bears S 26° W 5 lks dist
80	14	the South 1/16 Sec Cor. on N & S line between Sec 34 & 35

Surface Broken
Soil dark Clay loam 1st Rate
Good for Corn or Wheat
Timber good but scattering
Oak ash Hickory Elm and
Blackwalnut

Township 27 North, Range No 9

Chs	lks	
		West on a random 1/4 Sec line through middle of Sec 34 Var 11°15' East
1	00	Summit of hill bears N 30° W
5	00	bottom of hill bears N E & S W
10	00	Plowed land 2 chs across, 1 acre
20	00	Set tempy 1/16 Sec Cor.
24	50	A gulch bears N 10° W & S 10° E
33	00	Top of hill bears N 20° W & S 20° E.
36	50	Gulch bears N 20° W & S 20° E
39	00	Top of hill bears N 75° E & S 75° W
40	00	Set tempy 1/4 Sec Cor.
41	75	Wet gulch runs S 70° W.
46	50	Bottom of steep hill 130 ft deep
49	00	Top of same bears N E & S W
60	00	Set tempy 1/16 Sec Cor
70	10	A Road bears N E & S W
72	00	Enter Hazel brush bears N & S.
80	98	Intersect N & S line 31 lks N of 1/4 Sec Cor. from which 9 ran
		N 89°47' East on a true 1/4 Sec line through middle of Sec 34 Var 11°15' East

Past of 6th Principal Meridian

20	24 1/2	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor from which An Oak 24 in diam bears N 31° W 9 lks dist An Oak 12 in diam bears S 20°30' W 69 lks dist
4.0	49	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/4 Sec Cor from which An Oak 4 in diam bears N 8°30' W 50 lks dist An Oak 4 in diam bears S 84° W 41 lks dist
6.0	73 1/2	Set Post 4 ft long 3 in wide 2 ft in ground for 1/16 Sec Cor from which An Oak 8 in diam bears S 14°30' E 73 lks dist An Oak 10 in diam bears N 78° W 80 lks dist
80	98	The 1/4 Sec Cor on N & S line between Sec 34 & 35.
		Surface Hilly Soil dark and rich 1st Rate good for corn and vegetable Timber Small and Scattering Oak Ash hickory Basswood. Cottonwood & Blackwalnut May 4th 1875

		West on a Random 1/16 Sec line through N½ of Sec 34.
		Var 11°30' East
17	00	Creek. runs S 50° E
17	50	Enter thick timber, leave breadth bears N & S
20	00	Set temporary 1/16 Sec. Cor.
37	00	Top of Hill bears N & S.
40	00	Set temporary 1/16 Sec. cor.
42	00	the Bottom of Hill bears N & S.
48	00	Top of Hill bears N 25° E & S 25° W
55	50	Gulch, bears N 50° W & S 50° E
58	50	Top of Hill bears N & S
60	00	Set temporary 1/16 Sec cor.
62	00	Timber Gulch bears N 15° W
64	50	Top of Ridge bears N 15° W
73	00	Timber Gulch bears N & S.
76	00	Top of Hill bears N & S.
80	66	Intersect N & S line 37 lks South of North 1/16 Sec Cor. from which I ran
		S 89° 44' E on a true 1/16 Sec line through ~~middle of~~ on N½ of Sec 34

		Var 11°30' East
20	16½	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor. from which an Oak 6 in diam bears S 53¾° E 29 lks dist an Oak 4 in diam bears N 61½° W 10 lks dist
40	33	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec cor from which a Blackwalnut 6 in diam bears S 33° W 29 lks dist an Elm 9 in diam bears N 14¾° W 53 lks dist
60	49½	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec cor from which a Hickory 6 in diam bears S 65¾° W 17 lks dist an Oak 5 in diam bears N 19½ W 25 lks dist
80	66	the North 1/16 Sec Cor on N & S line between Sec 34 & 35

Surface Hilly
Soil dark loam 1st Rate
Good for corn and vegetables

Timber Good over thick
Oak of various species. Hickory
Elm. Mulberry. ash Blackwalnut &c

May 3rd 1875

Township 27 North, Range No 9

Chs	Lks	
		West on a random 1/16 Sec line through South 1/2 of Sec 33 Var 11° 30' East
6	50	Enter plowed land bears N + S.
11	00	End of plowed land. Fence bears S 40° E N 40° W
"	35	Centre of Road bears S 40° E + N 40° W
20	00	Set Temp 1/16 Sec cor.
38	50	Gulch bears N + S
40	00	Set Temp 1/16 Sec Cor
47	15	Plowed land bears N + S.
50	00	A Point 8 chs South of a house
54	58	End of plowed field bears N + S
59	00	Road bears N + S
60	00	Set Temp 1/16 Sec cor.
62	30	Road bears N + S
80	19	Intersect N + S line 3 lks South of S 1/16 Sec Cor. from which 9 x 9 am
		S 89° 59' E on a true 1/16 Sec line through South 1/2 of Sec 33. Var 11° 30' East
20	0 ~~45~~ 43 1/4	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4 1/2 ft at base. 2 ft

East of 6th Principal Meridian

Chs	Lks	
		high. Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec cor.
40	09 1/2	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec cor from which an oak 24 in diam bears S 3° E 109 lks dist an Elm 18 in diam bears N 86° E 112 lks dist
60	14 1/2	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec cor from which an Oak 5 in diam bears S 1° 45' E 120 lks dist an Oak 4 in diam bears N 24° 30' E 270 lks dist
80	19	The South 1/16 Sec Cor on N + S line between Sec. 33 + 34

Surface Rolling.
Soil 1st Rate
Best adapted to growth of Corn and Vegetables

Timber - A few scattering Oak + Elm
Brush and Hazel

May 4th 1875

30/221

Township 27 North, Range No 9

Chs	lks	
		West on random 1/4 sec line through middle of sec 33.
		Var 11° 30' East
1	60	Leave plowed land bears N + S.
5	50	Enter Hazel Brush + Scattering Timber bears N + S.
20	00	Set Tempy 1/16 Sec Cor.
20	00	Gulch bears N20W + S20E leave brush
21	50	Top of Ridge bears N + S
23	25	Gulch bears N + S.
25	00	Enter brush bears N + S
34	00	Timber grove bears N + S
38	00	Gulch bears N10°W + S10°E.
40	00	Set Tempy 1/4 Sec Cor.
46	50	Road on top of hill bears SW + N
60	00	Set Tempy 1/16 Sec Cor
62	00	A gulch bears N + S.
68	00	Leave brush bears N + S.
80	19	Intersect N + S line 36 links North of 1/4 Sec Cor. from which I ran
		N89°45'E on a true 1/4 sec line through middle of sec 33

Noon - 7/13 - 31/222

East of 6th Principal Meridian

Chs	lks	
		Var 11°30' East
20	05	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor from which
		An Oak 24 in diam bears N63°E 85 lks dist
		A Basswood 10 in diam bears S84°30'W 53 lks dist
40	09½	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/4 Sec Cor. from which
		An Ironwood 5 in diam bears N57°45'W 25 lks dist
		An Ironwood 5 in diam bears S69½°E 20 lks dist
60	14	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec cor from which
		A Basswood 30 in diam bears N71¾°W 62 lks dist
		An Elm 24 in diam bears S54¾°E 60 lks dist
80	19	the 1/4 Sec Cor on N + S line between Sec. 33 + 34
		Surface Hilly
		Soil Rich dark loam
		Well adapted to corn and vegatables
		Timber Scattering
		Oak Basswood, Ironwood
		Blackwalnut
		Brush Hazel Briar and Plumb

Township 27 North, Range No 9

Chs	lks	
		West on a random 1/16 Sec line through North 1/2 of Sec 33 Var 11°30' East
12	00	Gulch and Indian trail bears N + S
17	00	Top of Hill bears N 20° E + S 20° W
20	00	Set Temp'y 1/16 Sec Cor.
22	50	Gulch bears N 30° E + S 30° W
33	20	Top of Ridge bears N 25° E + S 25° W
33	20	Road bears N 30° E + S 30° W
40	00	Set Temp'y 1/16 Sec Cor.
43	00	Timber Gulch bears N + S
50	00	Top of Hill bears N + S
54	00	Gulch and dense Brush bears N + S.
60	00	Set temp'y 1/16 Sec Cor.
66	60	Gulch bears NE + SW
72	00	Top of Ridge bears NE + SW
77	00	Gulch bears N + S.
80	20	Intersect N + S line 11 lks North of N 1/16 Sec Cor from which I run
		N 89° 55' E on a true 1/16 Sec line through North 1/2 of Sec 33. Var 11° 30' East.

East of 6th Principal Meridian

Chs	lks	
20	05	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor. from which a Basswood 10 in diam N 45° 30' E 20 lks dist a Red Elm 7 in diam bears S 32° 45' E 17 lks dist
40	10	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor. from which a Hickory 5 in diam bears S 31½° E 8 lks dist a Basswood 7 in diam bears N 34° 45' E 55 lks dist
60	15	Set Post 4 ft long 3 inches wide 2 ft in ground for 1/16 Sec Cor from which a Black Walnut 6 in diam bears N 60° 15' E 26 lks dist a Oak 5 in diam bears S 36° E 12 lks dist
80	20	The North 1/16 Sec Cor on N + S line between Sec 33 + 34
		Surface Hilly Soil dark loam 1st Rate well adapted to corn Timber Scattering. good Oak ash Black walnut Brush Hazel + Brier

Township 27 North. Range No 9

Chs	Lks	
		West on a random 1/16 Sec line through S½ of Sec 32 Var 11°30' East
4	50	a Road bears N40°W + S40°E
14	80	a Road bears N10°E + S10°W
20	00	Set Temp'y 1/16 Sec Cor
34	25	a Road bears N15°W & S10°E
40	00	Set Temp'y 1/16 Sec Cor.
54	50	To a point 7 chs S of a house
60	00	Set Temp'y 1/16 Sec Cor
80	20	Intersect N + S lines. 12 lks S of South 1/16 Sec. Cor. from which I ran
		S 89°55'E on a true 1/16 Sec line through South ½ of Sec 32 Var 11°30' East
20	05	Set Charred Post 4 ft long 3 inches wide 1 ft in ground. in mound 4½ ft at base 2 ft high. Dug 4 Pits 24X 24X 12 inches for 1/16 Sec Cor
40	10	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground

East of 6th Principal Meridian

Chs	Lks	
		in mound 4½ ft at base. Dug 4 pits 24X24X12 inches for 1/16 Sec Cor.
60	15	Set Charred Post 4 ft long 3 inches wide 1 ft in ground. in mound 4½ ft at base 2 ft high. Dug 4 Pits 24X24X12 inches. for 1/16 Sec Cor
80	20	The S 1/16 Sec Cor. on N + S line between Sec 32 + 33
		Surface Rolling. Soil Rich dark loam 1st Rate well adapted to cultivation of Corn and Vegetables

Township 27 North. Range No 9

Chs	Lks	
		West on a random 1/4 Sec line through Middle of Sec 32 Var 11° 30' East
5	00	Timber Gulch bears N 20° W
20	00	Set Tempy 1/16 Sec Cor.
21	00	Enter Timber and gulch bears N+S
21	50	Gulch bears bears N+S.
28	25	Leave Timber bears N+S
35	40	Road bears N+S
36	10	Road bears N 60° W + S 60° E
40	00	Set Tempy 1/4 Sec Cor
60	00	Set Tempy 1/16 Sec Cor
60	50	Road bears N + S.
80	50	Intersect N+S line 46 lks North of 1/4 Sec cor. from which Pran
	—	
		N 89° 40' E on a true 1/4 Sec line through middle of Sec 32 Var 11° 30' East
20	12½	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high Dug 4 Pits 24 X 24 X 12 inches. for 1/16 Sec Cor

East of 6th Principal Meridian

40	25	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground in mound 4½ ft at base 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/4 Sec Cor.
60	37½	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4½ ft at base 2 ft high Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor
80	50	the 1/4 Sec Cor on N+S line between Sec 32 + 33
		Surface Rolling Prairie Soil Clay loam 1st Rate good for wheat + corn
		Timber - oak Black walnut box elder - in gulches

Township 27 North, Range No 9 East of 6th Principal Meridian

		East on a random 1/16 Sec line through North 1/2 of Sec 32 Var. 11°30' East
4	45	Leave Fenced Plowed field - 6 acres bears N 40° W. + S 40° E
13	50	Enter plowed land bears N + S.
20	00	Set Temp'y 1/16 Sec Cor.
22	35	Leave plowed field bears N 2 + S W
40	00	Set Temp'y 1/16 Sec. Cor.
42	00	Road. bears N 15° E
50	00	To Timber Gulch bears N + S. Ends 1,50 lks North
59	50	Enter brush and timber bears N + S.
60	00	Set Temp'y 1/16 Sec. Cor.
72	00	Wet Gulch. bears S 61° W to N 66° E
80	44	Intersect N + S line on top of hill. 9 lks South of N. 1/16 Sec Cor. From which I run
		S 89°56' W on a true 1/16 Sec line through N 1/2 of Sec 32 Var 11°30' East
20	11	Set Post 4 ft long 3 inches

		wide 2 ft in ground for 1/16 Sec Cor from which
		a Black Walnut 10 in diam bears N 19° E 98 lks dist
		a Oak 4 in diam bears S 24 1/2° W 85 lks dist
40	22	Set Charred Post 4 ft long 3 inches wide 1 ft in ground. in mound 4 1/2 ft at base. 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor.
60	33	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground in mound 4 1/2 ft at base. 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor.
80	44	The North 1/16 Sec Cor on N + S. line between Sec 31 + 32
		Surface Rolling Soil 1st Rate for corn and vegetables. Timber in Gulches Oak Iron wood Basswood Elm + Hickory

Township 27 North, Range No 9

Chs	Lks	
		West on a random 1/16 Sec line through S 1/2 of Sec 31 Var 11°30' E
7	90	Creek. Water in holes bears N + S.
9	50	Plowed land bears N + S
12	00	Leave Plowed land bears N + S.
20	00	Set Temp'y 1/16 Sec Cor
40	00	Set Temp'y 1/16 Sec Cor-
54	20	Road bears N 2 + SW.
60	00	Set Temp'y 1/16 Sec Cor-
79	81	Intersect W. Bdry. of Township 74 Lks South of S 1/16 Sec Cor from which Fran
		S 89°28' E. on a true 1/16 Sec line through S 1/2 of Sec 31- Var 11°30' E
19	81	Set Post (Charred). 4 ft long 3 inches wide. 1 ft in ground in Mound 4 1/2 ft at base 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor-
39	81	Set Charred Post 4 ft long 3 inches wide 1 ft in ground

East of 6th Principal Meridian

Chs	Lks	
		in Mound 4 1/2 ft at base 2 ft high. Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec Cor-
59	81	Set Charred Post 4 ft long 3 inches wide. 1 ft in ground in Mound 4 1/2 ft at base Dug 4 Pits 24 X 24 X 12 inches for 1/16 Sec. Cor-
79	81	The S 1/16 Sec Cor on N + S line between Sec 31 + 32
		Surface Rolling Soil Dark loam 1st Rate well adapted to Corn + Wheat

Township 27 North, Range No 9 East of 6th Principal Meridian

Lks	Chs	
		West on a random 1/4 Sec line through middle of Sec 31 Var 11° East
	80	Road bears NE + SW
20	00	Set Temp 1/16 Sec Cor
40	00	Set Temp 1/4 Sec Cor
40	75	Road bears SE + NW
60	00	Set Temp 1/16 Sec Cor
67	00	Timber Gulch Runs N30°E
71	25	Steep Gulch bears SW + NE
79	00	Marshy Gulch bears SW + NE
80	24	Intersect N Bdry of Township 31 Lks South of 1/4 Sec Cor on west boundary of Township between Sec 31 + 36 from which I run
		S 89°47' E on a true 1/4 Sec line through middle of Sec 31 Var 11° East
10	24	Set a Red Sandstone 14 X 12 X 4 inches 9½ inches in ground for 1/16 Sec Cor
40	24	Set a Red Sandstone 15 X 10 X 5 inches 10 inches in ground for 1/4 Sec Cor
60	24	Set a Limestone 15 X 12 X 3 inches 10 inches in ground for 1/16 Sec Cor
80	24	the 1/4 Sec Cor on N + S line between Sec 31 + 32.

Surface Hilly.
Soil Clay loam 1st Rate
Well adapted to the
cultivation of Corn and Vegetables

May 5th 1875

Township 27 North, Range No 9

Chs	Lks	
		West on a Random 1/16 Sec line through N 1/2 of Sec 31 Var 10° 44' East
19	75	Leave plowed field bears N + S.
20	00	Set Temporary 1/16 Sec Cor.
40	00	Set Temporary 1/16 Sec Cor
41	10	Creek in gulch. Water in holes bears N W + S E.
60	00	Set Temporary 1/16 Sec Cor
64	50	Summit of high bluff bears N + S.
79	91	Intersect W. Bdry of Township 16 lks South of North 1/16 Sec Cor. from which I ran
		S 89° 57' E. on a true 1/16 Sec line through N 1/2 of Sec 31 Var 10° 44' East
19	91	Set Charred Post 4 1/2 ft long 3 inches wide. 1 ft in ground in mound 4 1/2 ft at base 2 ft high. Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec Cor

East of 6th Principal Meridian

Chs	Lks	
39	91	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4 1/2 ft at base. 2 ft high Dug 4 Pits 24 x 24 x 12 inches for 1/16 Sec Cor
59	91	Set Charred Post 4 ft long 3 inches wide 1 ft in ground in mound 4 1/2 ft at base 2 ft high dug 4 pits 24 x 24 x 12 inches for 1/16 Sec Cor
79	91	The North 1/16 Sec Cor on N + S line between Sec 31 + 32
		Surface rolling Soil Clay loam 1st class Suitable for cultivation of corn and vegetables

Township No 27 North of Range No 9 East of the 6th Principal Meridian

Meanders of the Missouri River in fractional Secs 35 and 36, along the Right Bank, Commencing at the Meander Corner on Right Bank Missouri River and on Township line, bet Secs 2 & 35 an 15.34 Chs East of the 1/16 Sec Corner. Drawn Infractional Section 35.

Va 11° 30' East.

Courses		Chs.	
N. 19°	W	5.50	
N. 12°	E	9.00	
N. 30°	E	6.50	To M.C. on 1/16 Sec line the S 1/2 Sec 35, and 18.85 chs E of 1/16 Sec Corner.
2			Thence in fractional Sec 35
N. 8.85	E	2.60	To Meander Corner bet Secs 35 & 36 and 10.62 chs South of 1/4 Sec. Cor. bet Secs 35 and 36
3			Thence in fractional Section 36
N. 27°45'	E	12.00	To Meander Corner on 1/4 Sec line thro Section 36 and 5.56 Chs East of the 1/4 Sec Corner bet Secs 35 and 36
4			Thence in Section 36

Courses		Chs.	
N. 54°	E.	1.50	
N. 4 1/2°	E.	5.00	At 2.00 chs to mouth of creek 10 lks wide
N. 19 1/2°	E.	6.00	
N. 31°30'	E.	9.80	To Meander Corner on 1/16 Sec line through N 1/2 Sec 36 & 14.20 Chs East of Section line
5			Thence in fractional Sec 36
N. 31°30'	E.	4.00	
N. 42°30'	E.	10.50	
N. 52°	E	3.73	To M.C. on North Boundary Reservation and 27.00 Chs East of the Corner to Secs 35 & 36 on North Boundary.
6			

May 1st 1875

General Description

Surface. East ½ is very broken and hilly. with bluffs along the Missouri River from 150 to 250 feet high.

The West ½ is rolling and hilly. The hills are well rounded at their summits with moderately sloping sides. The East ½ is covered with a fair growth of timber. Burr Oak. Red oak Hickory. Red and White Elm Black Walnut. Ironwood. Coffee-Bean. Mulberry Hackberry Ash Cottonwood and willow

The timber in some localities is open and clear of undergrowth but it has generally a dense growth of undergrowth consisting of Hazle Brush. Grape vines Green Brier and Thornapple

The West ½ is diversified with oak openings patches

of Hazle Brush and prairie, the latter predominating

Water. The Missouri river on the East and innumerable springs and creeks. afford an abundant supply of water of Best quality

Minerals. Soft brown sand stone of inferior quality is found in place. in most of the Bluffs and ravines in the vicinity of the river and bottom

Soil. Black loam. from one to two feet deep with clay subsoil. 1st rate and well adapted for general agricultural pursuits. especially for cultivation of Wheat Corn and vegetables

Township 27 North, Range No 9 East of 6th Principal Meridian

51/242

List of Names

A list of the names of the individuals employed to assist in running measuring or marking the lines and corners described in the foregoing field notes of Township 27 North of the base line of Range No 9 East of the 6th Principal Meridian included within the boundaries of the Winnebago Indian Reservation, showing the respective capacities in which they acted

Albert H Wilcox	Compassman
C W Jones	Compassman.
W. P. Pike	Chainman
John E Roche	Chainman
J H Stewart	Chainman
Wm M Davitt	Chainman
T. T. Bennett	Moundman and axman
Anthony Benson	Moundman and axman
Calvin Tague	Moundman and axman
Frank Campbell	Moundman and axman
T. Marshall	Compassman and Chainman

Certificate of Assistants

We hereby certify that we assisted J. W. Beaman U. S. Deputy Surveyor, in surveying the section lines and meanders of Fractional Township No. 27 North, of the base line of Range No 9 East of the 6th Principal Meridian, included within the boundaries of the Winnebago Indian Reservation, and that said lines have been in all respects to the best of our knowledge and belief well and faithfully surveyed, and the boundary monuments planted according to the instructions furnished by the Surveyor General

Alvin H. Wilcox — Compassman
W. P. Pike — Chainman
his James E. Roche — Chainman
T. X Bennett Mark In Presence of T. H. Marshall — Mound man & axeman
Anthony Benson — Moundman & axeman

Subscribed and sworn to by the above named persons, before me a Justice

Township No 27 North, of Range

of the Place for Dakota County, in the State of Nebraska, this 28th day of June 1875

A G Manchester
Justice of the Place

No 9 East of the 6th Principal Meridian

Certificate of Assistant.

We hereby certify that we assisted J. W. Beaman, U. S. Deputy Surveyor in surveying the Sectional Subdivisional lines of Fractional Township No 27 North of Range No 9 East of the 6th Principal Meridian, included within the boundaries of the Winnebago Indian Reservation, and that said lines have been in all respects, to the best of our knowledge and belief well and faithfully surveyed and the boundary monuments planted according to the instructions of the Surveyor General.

C W Tomes	Compassman
Wm M G Davitt his mark in presence of C W Tomes	Chainman
J H Stenach	Chainman
Calvin Jaques his mark in presence of C W Tomes	Moundman & axeman
Frank Campbell	Moundman & axeman

Subscribed and sworn to, by the above named persons, before me a Justice of the Place, for the County of Dakota, in the State of Nebraska this 28th day of June 1875.

A G. Manchester
Justice of the Place

Township No 27 North of Range

I hereby certify that I assisted J. W. Beaman U.S. Deputy Surveyor in surveying the 7/16 Section lines through the S 1/2 of Section 33 and thro the S 1/2 of Section 34 of Township No 27, North of the base line of Range No 9 East of the 6th Principal Meridian included within the boundaries of the Winnebago Indian Reservation and that said lines have been in all respects to the best of my knowledge and belief well and faithfully surveyed and the boundary monuments planted according to the instructions of the Surveyor General.

T. F. Marshall Compassman & Chairman.

State of Iowa }
Woodbury County } SS Subscribed in my presence and sworn to before me by the said T. F. Marshall at my office in Sioux City this 22nd day of July 1875

John Brennan J.P.
In & for Said County

No 9 East of the 6th Principal Meridian

Affidavit

I John W. Beaman, Deputy Surveyor, do solemnly swear that in pursuance of a contract with E. E. Cunningham, Surveyor of the public lands of the United States, in the states of Iowa and Nebraska, bearing date the 6th day of October, 1874, and in strict conformity to the laws of the United States, and the instructions furnished by the said Surveyor General; I have faithfully surveyed the Section, and Sectional subdivisional and Meander lines of fractional Township No 27 North of the base line, of Range No 9 East of the 6th Principal Meridian, included within the boundaries of the Winnebago Indian Reservation, in the State of Nebraska, and do further solemnly swear that the foregoing are the true and original field note of such survey.

I John W. Beaman Deputy Surveyor do solemnly swear that in pursuance of a contract with E. E. Cunningham Surveyor General for the District of Nebraska and Iowa bearing date the 6th day of October 1874. I have well, faithfully and truly and in strict conformity with the instructions furnished by the Surveyor General, Surveying Manual and the Laws of the United States surveyed all those parts & portions and the meanders of the Missouri River of fractional Township 27 North of Base Line of Range No. 9 East of the 6th Principal Meridian as are represented in the foregoing field notes as having been surveyed under my direction. And I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, printed instructions and special instructions of the Surveyor General of dimensions, character, construction and marking and in the manner specifically described in the foregoing field notes and that the foregoing are the true and original field notes of such survey.

J W Beaman

Subscribed in my presence and sworn to before me in the County of Pacific State of Nebraska this the 29th day of July A.D. 1875

Thos Pollock
Atty Public

Surveyor Generals Office
Plattsmouth Neb Feb 21st 1876

The foregoing field notes of the survey and subdivision into forty acre tracts and the Meanders of the Missouri River in Fractional Township No 27 North of the Base Line of Range No 9 East of the 6th Principal Meridian in the Winnebago Indian Reservation in the State of Nebraska Executed by J. W. Beaman Deputy Surveyor under his Contract No 87 dated Oct 6th 1874 in the Months of April and May 1875 having been critically examined the necessary corrections and explanations made the said field notes and the surveys they describe are hereby approved

J M Clerk
Surveyor General

General Land Office • Original Field Notes

Book Number

144

The images in this file are photographs of the notes of the original surveys of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The original surveys in Nebraska began in the mid 1850's and were completed in the mid 1880's. The Nebraska office of the Surveyor General was closed June 30, 1886.