General Land Office • Original Field Notes

Book Number

612

The images in this file are photographs of the notes of the original surveys of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The original surveys in Nebraska began in the mid 1850's and were completed in the mid 1880's. The Nebraska office of the Surveyor General was closed June 30, 1886.

Index Diagram of Town 5 N. Range 39 W

6	60	5	44	4	33	3	22	2	11	1
59		58		43		32		21		10
7	57	8	42	9	31	10	20	11	9	12
56		55		41		30		19		8
18	54	17	40	16	29	15	18	14	7	13
53		52		39		28		17		6
19	51	20	38	21	27	22	16	23	5	24
50		49		37		26		15		4
30	48	29	36	28	25	27	14	26	3	25
47		46		35		24		13		2
31	45	32	34	33	23	34	12	35	1	36

Field Notes of

The Survey and Subdivision of Township No 5 N R 39 W. 6th P.M. in the State of Nebraska

Executed

By David V Stephenson Deputy Surveyor under joint Contract No 63 dated June 29th 1872

Survey

Commenced Sept 21st 1872
Completed Sept 26th 1872

List of Names

Of persons employed to assist in Surveying this Township showing the respective capacities in which they acted.

J C McElroy	Chainman
A C Teers	Chainman
D Stephenson	Axeman and Moundman
Levi Martin	Flagman

To determine the proper adjustment of my Compass for the Subdivision of this Township I commence at the Corner to Townships 4 and 5 North ranges 38 and 39 west of the 6th P.M. And run on a Blank line North along the East Boundary of Sec 36.

Var 13° 50' E

40.15	To a point 12 links East of the qr sec cor
80.25	To a point 23 links East of the Cor to Secs 25 and 36

To retrace this line or run Parallel thereto my Compass must be adjusted to a Variation of 14° E

	Found the Corner to Secs 35 & 36 on the South Boundary of the Township I run North on a true Line between Secs 35 and 36
	Var 14° E
40.00	Set Post Deposit Charred Stake round Mound of Earth with Pits as per Instructions for a 1/4 Sec Corner
80.00	Set Post Deposit Charred Stake round Mound of Earth with Pits as per Instructions for a Corner to Secs 25 26 35 and 36

Level rolling

Soil Good

Sand Hills

Township 5 N R 3 W 6th Pm

Chains	
	East on a random line Between Secs 25 and 36
	Var 14° E
4000	Set Post for temporary 1/4 sec Cor
8011	Intersect the East Boundary of the Township 16 Links South of the Corner Secs 25 ~~26~~ 35 and 36 from which Cor I Pass
	S 89 53 West on a true Line Between Secs 25 and 36
	Var 14° E
40 5½	Set Post Deposit Charred Stake raised mound of Earth with Pits as per Instructions for a 1/4 Sec Corner
8011	The Corner to Secs 25 26 35 and 36
	Land rolling 3rd rate sand Hills

Township 5 N R 3 West 6th Pm

Chains	
	North Between Secs 25 & 26
	Var 14° E
4000	Set Post Deposit Charred Stake raised Mound of Earth with Pits as per Instructions for a 1/4 Sec Corner
8000	Set Post Deposit Charred Stake raised Mound of Earth With Pits as per Instructions for a Corner To Secs 23 24 25 & 26
	Land Gently rolling
	Soil 2d rate

Township 5 N R 39 West 6th PM

Chains	
	East on a random line Between Secs 24 and 25 Var 14° E
4000	Set Post for temporary 1/4 Sec Corner
8030	Intersect the East Boundary of the Township 19 links South of the Corner to Secs 24 and 25 from which Corner I run S 89° 52' West on a true Line Between Secs 24 & 25 Var 14° E
4015	Set post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
8030	The Corner to Secs 23 24 25 and 26

Land Gently rolling
Soil 2d Rate

Township 5 N R 39 W 6th PM

Chains	
	North Between Secs 23 & 24 Var 14° E
4000	Set Post Deposit Charred Stake raised mound of Earth with pits as per Instructions for a 1/4 Sec Corner
8000	Set Post Deposit Charred Stake raised Mound of Earth with Pits as per Instructions for a Cor To Secs 13 14 23 and 24

Land Gently rolling

Soil Secd rate

Township 5 N R 39 W 6th Bed

Chains	
	East over a random line Between Secs 13 & 24 Var 14° E
4000	Set Post for temporary 1/4 Sec Corner
4800	Enter Sand Bears S.E.
8038	Intersect the East Boundary of the Township 33 links North of the Corner to Secs 13 and 24 from which Corner Bears N 89° 46' West on a true Line Between Secs 13 and 24 Var 14° E
4019	Set Post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
8038	The Cor to Secs 13 14 23 & 24

Land Gently rolling

Soil Sec^d Rate

Township 5 N R 39 West of 6th

Chains	
	North Between Secs 13 & 14 Var 14° E
4000	Set Post deposit Charred Stake raised Mound of Earth with Pits as per Instructions for a 1/4 Sec Corner
7100	Enter sand Hills
8000	Set post Deposit Charred stake raised Mound of Earth with Pits as per Instructions for a Corner to Secs 11 12 13 & 14

Land Gently Rolling

Soil 3^d rate

Sand Hills

Township 5 N R 39 W 6th PM

Chains	
	East on a random line between Secs 12 and 13 Var 14° E
40.00	Set Post for tenporary 1/4 Sec Corner
80.51	Intersect East Boundary of the Township 26 links South of the Corner to Secs 12 and 13 from which Corner a Pine S 89° 49' West on a true line between Secs 12 and 13 Var 14° E
40.25½	Set Post about Charred Stake raised Mound of Earth with Pits as per Instructions for a 1/4 Sec Corner
80.51	The Corner to Secs 11 12 13 & 14
	Land rolling Sandy Soil 3d rate Sandy

Township 5 N R 39 West 6th PM

Chains	
	North between Sec 11 and 12 Var 14° E
40.00	Set Post about Charred stake raised Mound of Earth with Pits as per instructions for a 1/4 Sec Corner
80.00	Set Post Detroit Charred stake Raised mound of Earth with pits as per Instructions for a Corner to Sec 1, 2, 11 & 12
	Land rolling 3d Rate Sand Hills

Township 5 N R 39 W 6 PM

Chains	
	East on a random line Between Secs 1 and 12 Var 14° E
4000	Set post for temporary 1/4 Sec Corner
8061	Intersect the East Boundary of the Township 39 Links south of the Corner To Secs 1 and 12 From which Corner I Run South 89° 43' West on a true Line Between Secs 1 & 12 Var 14° E
4030½	Set post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
8061	The corner to Secs 1 2 11 & 12

Land Gently rolling
Soil sandy 3d Rate

Township 5 N R 39 W 6th PM

Chains	
	North on a random line Between Secs 1 and 2 Var 13° 55 E
4000	Set Post for temporary 1/4 Sec Cor
8048	Intersect the North Boundary of The Township 73 links west of the Corner to Secs 1 and 2 from which Corner I run S 31' W on a true line Between Secs 1 and 2. Var 13 55 E
4048	Set Post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Cor
8048	The corner to Secs 1 2 11 & 12

Land Gently rolling
Soil sandy 3d rate

Sept 21st '72

Township 5 N R 39 W 6th Pm

Chains	
	North Between Secs 34 & 35 Var 14° 15' E
4000	Set Post deposit charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec corner
8000	Set post deposit charred stake raised Mound of Earth with pits as per Instructions for a 1 Corner to secs 26 27 34 and 35

Land Gently rolling

Sandy 3d rate

Township 5 N R 39 W 6th Pm

Chains	
	East on a random line Between Secs 26 & 35 Var 14° 15' E
40.00	Set Post for temporary 1/4 Sec corner
48.00	Leave sand Hills Bears S E
79.90	Intersect the N and S line 15 links North of the Corner To Secs 25 26 35 & 36 from which Corner Train North 89° 54' West on a true Line Between Secs 26 and 35 Var 14° 15' E
39.95	Set post deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec corner
79.90	The Corner to Sections 26, 27, 34 and 35

Land rolling 3d rate sandy soil

Township 5 N, R. 39 W 6th PM

Chains	North Between Secs 26 & 27. Var 14° 10' E
11.00	Leave Sand Hills Bear S E
40.00	Set Post deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.00	Set Post deposit charred stake raised Mound of Earth with pits as per Instructions for a corner to Secs 22 23 26 and 27.

Land Sand Hills

Soil 3d Rate

~~Sand H.~~

Township 5 N R 39 W 6th PM.

Chains	East on a random line Between Sec 23 and 26. Var 14° 10' E
40.00	Set post for temporary 1/4 Sec Corner
79.81	Intersect the N. and S. line 29 links north of the Corner to Secs 23 24 25 and 26. from which Corner from North 89 48 West on a true line Between Sec 23 and 26 var 14° 10' E
39.90½	Set post deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec corner
79.81	The corner to Secs 22 23 26 and 27.

Land rolling 3d rate

Sand Hills

Township 5 N. R. 39 W. 6th P.M.

Chains	
	North Between Secs 22 and 23 Var 14° E.
4000	Set post deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec corner
8000	Set post deposit Charred stake raised Mound of Earth with pits as per Instructions for a corner to Secs 14 15 22 and 23.

Land Rolling

Soil Sandy 3d rate

Sand Hills

Township 5 N. R. 39 W. 6th P.M.

Chains	
	East on a random line Between Secs 14 and 23 Var 14° E.
4000	Set Post for temporary 1/4 Sec Corner
7982	Intersect the N and S line 47 Links North of the Corner to Secs 13 14 23 and 24 from which Corner I run
	North 89° 40' West on a true line Between Secs 14 and 23. Var 14° E.
3991	Set Post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Cor
7982	The corner to Secs 14 15 22 and 23.

Land rolling

Sandy 3d rate soil

Township 5 N R 39 W 6th P.M.

Chains	North Between Sec 14 & 15 Var 14° 10' E
4000	Set Post deposit charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner.
8000	Set post deposit charred Stake raised Mound of Earth with pits as per Instructions for a corner To Secs 10 11 14 & 15

Land rolling

Soil sandy 3d rate

Township 5 N R 39 W 6th P.M.

Chains	East on a random line Between Secs 11 and 14 Var 14° 10' E
4000	Set post for temporary 1/4 sec Corner
7970	Intersect the N and S line 70 Links North of the Corner to Secs 11, 12, 13 and 14 from which Corner I run. North 89° 30' West on a true line Between Secs 11 & 14 Var 14° 10' E
3985	Set post deposit charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec corner.
7970	The corner to Secs 10 11 14 and 15

Land rolling

Soil Sandy 3d rate

Township 5 N R 39 W 6th P M

Chains	North Between Secs 10 & 11 Var 14° 15' E
40,00	Set post deposit charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
40,00	Leave Pond Hills
80,00	Set post deposit charred stake raised Mound of Earth with pits as per Instructions for a Corner to Sections 2, 3, 10 & 11
	Land rolling 3d rate

Township 5 N R 39 W 6th P M

Chains	East on a random line Between Secs 2 and 11 Var 14° 15' E
40,00	Set post for temporary 1/4 Sec Corner
79,63	Intersect the N and S line, 66 Links North of the Cor to Secs 1, 2, 11 & 12 from which Corner Trees; North 89° 32' West on a true line Between Secs 2 and 11 Var 14° 15' E
39,81	Set Post deposit charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
79,63	The Corner to Secs 2, 3, 10 & 11
	Land rolling
	Soil sandy 3d rate.

Township 5 N. R. 39 W. 6th P.M.

Chains	
	North on a random line Between Secs 2 and 3 Var 14° 18' E
40.00	Set post for temporary 1/4 Sec Corner
1981	Intersect the North Boundary of the Township 30 links West of the Corner to Secs 2 and 3 from which cor. I Run:
	S. 13' West on a true line Between Secs 2 and 3. Var 14° 18' E
1981	Set post deposit charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec corner
1981	The Corner to Secs 2, 3, 10 & 11
	Land rolling
	Soil 3d rate sandy

Township 5 N. R. 39 W. 6th P.M.

Chains	
	North Between Secs 33 & 34 Var 14° E
40.00	Set Post Deposit charred stake raised mound of Earth with pits as per Instructions for a 1/4 Sec corner
80.00	Set post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a corner to Sections 27 28 33 & 34.
	Land rolling Earthy
	Soil sandy 3d rate

Township 5 N R 39 W 6th P.M.

Chains	
	East on a random line Between Secs. 27 and 34
	Var 14° E
40.00	Set Post for temporary 1/4 Sec Corner
80.16	Intersect the N. and S. line B. Links North of the Corner To Secs. 26 27 34 and 35 from which Corner I Run North 89° 54' West on a Line Line Between Secs 27 and 34
	Var 14° E
40.08	Set post deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.16	The Corner to Secs 27 28 33 and 34.

Land rolling
Soil Sandy 3d rate.

Sept 23rd 1872

Township 5 N R 39 W 6th P.M.

Chains	
	North Between Secs 27 and 28
	Var 14° 05' E
40.00	Set post deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec corner.
80.00	Set Post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a corner To Secs 21 22 27 & 28.

Land rolling
Soil 3d rate sandy

Township 5 N R 39 W 6th P.M.

Chains	
	East on a random line Between Sect 22 and 27. Var 14° 05' E
4000	Set Post for temporary 1/4 Sec Corner
8017.	Intersect the N and S line 17. Links South of the corner To Sec 22 23 26 and 27. from which corner from S 89° 53'. West on a line line Between Secs 22 and 27. Var 14° 05' E
4008½	Set post deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
8017.	The corner to Secs 21 22 27 and 28.

Land rolling

Soil Sandy 3d Rate

Township 5 N R 39 W 6th P.M.

Chains	
	North Between Secs 21 and 22 Var 14° E
4000	Set post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
8000	Set post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a Corner to Secs 15 16 21 and 22

Land rolling

Soil Sandy 3d rate

Township 5 N R 39 W 6th P.M.

Chains	
	East on a random line Between Secs 15 & 22. Var 14° E.
40.00	Set Post for temporary 1/4 Sec Corner
80.33.	Intersect the N and S line 23 links South of the Cor To Secs 14 15 22 and 23 from which Corner I run South 89°50' West on a true Line Between Secs 15 & 22 Var 14° E.
40.16½	Set post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.33.	The Corner to Secs 15, 16, 21 & 22.

Land rolling

Soil 3d rate

Sandy.

Township 5 N R 39 W 6th P.M.

Chains	
	North Between Secs 15 and 16, Var 14° E.
40.00	Set post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.00	Set Post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a Corner to Secs 10 11 14 and 15.

Land rolling

Soil Sandy 2d rate

Township 5 N. R 39 W 6th PM

Chains	East on a round one line Between Secs 10 and 15 Var 14° E
40,00	Set post for temporary 1/4 Sec Corner
8030	Intersect the N and S. line 47 lks South of the Corner to Secs 10 11 14 and 15 from which Corner I run South 89°40' West on a true Line Between secs 10 and 15 Var 14° E
40,15	Set post deposit charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
8030.	The Corner to Secs 9.10.15 & 16

Land rolling

Soil Sandy 3d rate

Township 5 N R 39 W 6th PM

Chains	North Between Secs 9 & 10 Var 14° 05' E
40,00	Set Post deposit charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80,00	Set post deposit charred stake raised Mound of Earth with pits as per Instructions for a Corner to secs 3,4,9 & 10

Land rolling

Soil Sandy 3d rate

Township 5 N R 39 to 6th Rlle.

Chains	East on a random line Between Secs. 3 and 10 Var 14° 05' E
40.00	Set post for temporary 1/4 Sec Cor.
80.41	Intersect the N and S. line 39 Links South of the Corner to Secs 2, 3, 10 & 11 from which Corner I run South 89° 43' West on a line Between Secs 3 and 10 Var 14° 05' E.
40.26	Set Post deposit charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.41	The Corner to Secs 3, 4, 9 & 10.

Land rolling soil 2d Rate

Township 5 N R 37 to 6th Rlle.

Chains	North on a random line Between Secs 3 and 4 Var 14° 05' E
40.00	Set Post for temporary 1/4 Sec Corner
80.26	Intersect the North Boundary of the Township 50 links West of the Corner to Secs 3 and 4 from which Corner I run S. 21' West on a true line Between secs 3 and 4 Var 14° 05' E
40.26	Set post deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.26	The corner to Secs 3, 4, 9 & 10

Land rolling soil Sandy 3d rate

Township 5 N R 39 W 6th PM

Chains	North Between Secs 32 and 33. Var 14° E
4000	Set post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
8000	Set Post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a Corner to Secs 28 29 32 and 33.

Land rolling

Soil Sandy 3d rate

Township 5 N R 39 W 6th PM.

Chains	East on a random line Between Secs 28 and 33. Var 14° E
4000	Set Post for temporary 1/4 Sec Cor.
7973.	Intersect the N and S. line 11 Links South of the Corner To Secs 27 28 33 and 34 from which Corner I Run S. 8955 West on a true line Between Secs 28 and 33. Var 14° E
8996	Set post deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
7993.	The corner to Secs 28 29 33 and 32.

Land rolling

Soil sand Hills 3d rate

Township 5 N R 39 W 6th PM

Chains	North Between Sec. 28 and 29. Var 14° E
4000	Set post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
8000	Set post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a Corner to Sec. 20 21 28 and 29.

Land rolling

Soil Sandy

3d rate

Sept 24th

Township 5 N R 37 W 6th PM

Chains	East on a random line Between Sec. 21 & 28 Var 14° E
4000	Set post for temporary 1/4 Sec Corner
7989	Intersect The N and S line 38 Links South of the Corner To Sec. 21 22 27 and 28 from which Corner I run South 89° 44' West on a true Line Between Sec. 21 and 28 Var 14° E
3994	Set post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
7989	The Corner to Sec. 20 21 28 and 29

Land Rolling

Sand Hills 3d rate

Township 5 N R 39 W 6 PM

Chains	North Between Secs 20 & 21 Var 14° E
40.00	Set Post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.00	Set post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a Corner to Secs 16. 17. 20 and 21.
	Land Sand Hills 3rd rate

Township 5 N R 39 W 6th PM.

Chains	East on a random line Between Secs 16 and 21 Var 14° E
40.00	Set post for temporary 1/4 Sec Corner
79.87	Intersect the N and S line 30 links South of the Corner To Secs 15. 16. 21 and 22 from which Corner I Run South 89° 47' West on a true line Between Secs 16 and 21 Var 14° E
39.93½	Set post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
79.87	The Corner to Secs 16 17 20 and 21.
	Land 3d rate sand hills

Township 5 N R 39 W 6th P.M.

Chains	
	North Between Secs 16 and 17
	Var 14° E
40.00	Set post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.00	Set post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a Corner to Secs, 8, 9, 16 and 17
	Land rolling Soil
	Sandy 3d rate

Township 5 N R 39 W 6 P.M.

Chains	
	East on a random line Between Secs 9 and 16
	Var 14° E
40.00	Set post for temporary 1/4 Sec Corner
79.83	Intersect the N and S line 17 Links South of the Corner To Secs 9, 10, 15 and 16 from which Corner I run S 89° 53' West on a true line Between Secs 9 and 16
	Var 14° E
399.13	Set Post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
79.83	The Corner to Secs. 8, 9, 16 & 17
	Broken Sand hills

Township 5 N R 39 W 6 PM

Chains	North Between Secs 8 and 9. Var 14° E
20.00	Leave Sand hills
40.00	Set post Deposit chained Stake raised mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.00	Set post Deposit chained Stake raised Mound of Earth with pits as per Instructions for a Corner to Secs 4, 5, 8 and 9.
	Land Sandy 3d rate

Township 5 N R 39 W 6 PM

Chains	East on a random line Between Secs 4 and 9 Var 14° E
40.00	Set post for temporary 1/4 Sec Corner
79.92	Intersect the N and S line 18 links South of the Corner to Secs 3 & 4 & 8 & 9 from which Corner I run S 89° 52' West on a true line Between Secs 4 and 9. Var 14° E
39.96	Set post, Deposit chained Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
79.92	The corner to Secs 4, 5, 8 and 9.
	Land Sandy 3d rate.

Township 5 N R 39 W 6th Pm.

Chains	North on a random line
	Been een Sect 4 and 5
	Var 14° E
40.00	Set post for temporary 1/4 Sec corner
80.34	Intersect the North Boundary of the Township 27 lks West of the Corner to Secs 4 and 5 from which Corner I Run
	S 12' West on a true line
	Been een Sect 4 and 5.
	Var 14° E
40.34	Set Post deposit Chained Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.34	The Corner to Sect 4, 5, 8, and 9.

Land rolling

Soil 3d rate

Township 5 N R 39 W 6th Pm.

Chains	North Between Sec 31 and 32
	Var 14° E
40.00	Set post Deposit Chained Stake raised Mound of Earth with Pits as per Instructions for a 1/4 Sec corner
80.00	Set post Deposit Chained Stake raised Mound of Earth with pits as per Instructions for a Corner To Secs 29 30 31 and 32.

Land rolling

Soil Sand Hills

Township 5 N R 39 W 6th PM

Chains	East on a random line Between Secs 29 and 32 Var 14° East
4000	Set Post for temporary 1/4 Sec Corner
8013	Intersect the N and S line at the Corner to Secs 28 29 32 and 33. from which Corner I Run
	West on a true Line Between Secs 29 and 32 Var 14° E
4006½	Set post Deposit Charged Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Cor
8013	The Corner To Secs 29 30 31 and 32

Land 3d rate

Sand Hills

Township 5 N R 39 W 6th PM.

Chains	West on a random line Between Secs 30 and 31 Var 14° E
4000	Set Post for temporary 1/4 Sec Corner
7991.	Intersect the West Boundary of the Township 12 links North of the Corner to Secs 30 and 31 from which Corner I Run
	North 89 55 East on a true Line Between Secs 30 & 31 Var 14° E
3991.	Set post Deposit Charged Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Cor
7991.	The Corner to Secs 29, 30, 31 & 32

Sand Hills

Township 5 N R 39 W 6 PM

Chains	
	North & Between Sections 29 and 30 var 14° E
40.00	Set Post Deposit Chained Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec corner
80.00	Set post deposit Chained Stake raised Mound of Earth with pits as per Instructions for a Corner To Secs 19 20 29 & 30

Land Rolling
Sand Hills 3a rate

Sept 25th 1872

Township 5 N R 39 W 6 PM

Chains	
	East on a random line Between Secs 20 and 29 var 14° E
40.00	Set post for temporary Sec corner
80.13	Intersect the N and S line 10 links South of the corner To Secs 20 21 28 and 29 from which Corner I Run S 89°56' West on a true line Between Secs 20 and 29 var 14° E
40.06½	Set Post Deposit Chained Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.13	The corner to Secs 19 20 29 and 30

Land Rolling
Sand Hills 3a rate

Township 5 N R 39 W 6 PM.

Chains	
	West on a run down line Between Secs 19 and 30 Var 14° E
40.00	Set Post for temporary 1/4 Sec Corner
80.30	Intersect the West Boundary of the Township 17 Links North of the Corner to Secs 19 and 30 From which Corner I run N 89° 53' East on a true Line Between Secs 19 & 30 Var 14° E
40.30	Set post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec corner
80.30	The Corner to Secs 19 20 29 & 30

Land rolling

Soil 3d Rate

Township 5 N R 39 W 6th PM

Chains	
	North Between Secs 19 & 20 Var 14° E
40.00	Set Post Deposit Charred Stake raised Mound of Earth with Pits as per Instructions for a 1/4 Sec Corner
80.00	Set post deposit Charred Stake raised Mound of Earth with pits as per Instructions for a corner to Secs 17, 18, 19 and 20

Land 3d rate Sandy

Township 5 N R 39 W 6th PM

Chains	
	East on a random line Between Sec 17 and 20 Var 14° E
40.00	Set post for temporary 1/4 Sec corner
79.90	Intersect the N and S. line 20 links South of the Corner to Sec 16 17 20 & 21 from which Corner Drawn: S 89° 47' West on a true line Between Sec 17 & 20 Var 14° E
39.95	Set post Detroit Channel Lake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
79.90	The corner to Secs 17 18 19 and 20.

Send Rolling
Sort 3d rate
Sunday

Township 5 N R 39 W 6th PM

Chains	
	West on a random line Between Secs 18 and 19 Var 14° E
40.00	Set post for temporary 1/4 Sec corner
80.50	Intersect the West Boundary of the Township 15 links North of the Corner to Secs 18 and 19 from which Corner Drawn: North 89° 54' East on a true line Between Secs 18 and 19 Var 14° E
40.50	Set post detroit Channel Lake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.50	The corner to Secs 17 18 19 & 20

Sunday 3d rate

Township 5 N R 39 W 6 P.M.

Chains	North Between Secs 17 & 18 Var 14° E
40,00	Set Post Deposit Charred stake raised Mound of Earth with Pits as per Instructions for a 1/4 sec corner
80,00	Set post Deposit Charred Stake raised Mound of Earth with Pits as per Instructions for a Corner To Secs 7 8 17 and 18.

Land rolling 3d rate

Sandy

Township 5 N R 39 W 6 P.M.

Chains	East on a random Line Between Secs 8 and 17 Var 14° E
40,00	Set post for temporary 1/4 Sec Corner
7981	Intersect the N and S line 19 Links South of the Corner to Secs 8 9 16 and 17 From which Corner I Run S 89° 5½ West on a True line Between Secs 8 and 17 Var 14° E
3990½	Set post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
7981	The Corner to Secs 7 8 17 & 18

Land 3d rate Sandy

Township 5 N R 39 W 6th PM

Chains	
	West on a random line Between Secs 7 & 18 Var 14° E.
40,00	Set Post for temporary 1/4 Sec corner
80,60	Intersect the West Boundary of the Township 37 links North of the Corner to Secs 7 and 18 from which Corner I saw: North 89°44' East on a True line Between Secs 7 & 18 Var 14° E.
40,60	Set Post Deposit Charred stake raised Mound of Earth with Pits as per Instructions for a 1/4 Sec Corner
80,60	The Corner to Secs. 7, 8, 17, 18

Jno Hills

Township 5 N R 39 W 6th PM

Chains	
	North between Secs 7 & 8 Var 14° E
40,00	Set Post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec corner
80,00	Set post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a corner to Secs 5 6 7 & 8.

James Sandy 5th rate

Township 5 N R 39 W 6 PM

Chains	
	East on a random line Between Secs 5 and 8 Var 14° E
40.00	Set post for temporary 1/4 Sec Corner
79.70	Intersect the N and S line 2.3 links South of the Corner to Secs 4 5 8 and 9. from which Corner I saw South 89° 50' W. on a true Line Between secs 5 8 Var 14° E
39.85	Set Post Deposit Charred Stake raised Mound of Earth with pits as per instructions for 1/4 Sec corner
79.70	The corner to Secs 5 6 7 and 8
	Land 3d rate
	Sunny

Township 5 N, R, 39 W 6 PM

Chains	
	West on a random Line Between Sec 6 and 7. Var 14° E
40.00	Set post for temporary 1/4 Sec corner
80.75	Intersect the West Boundary of the township 4.3 links North of the Corner to Secs 6 and 7. from which Corner I saw North 89° 42' East on a true Line Between sec 6 and 7. Var 14° E
40.75	Set post deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec corner
80.75	The Corner to Sections 5, 6, 7, 8.
	Land Hills 3d rate Land

Township 5 N R 39 W 6 P.M.

Chains	
	North on a random line Between Secs 5 and 6 Var 14° E
40.00	Set Post for temporary 1/4 Sec corner
79.61	Intersect the North B'ndry of the Township 30 links East of the corner to Secs 5 and 6 from which Corner I run S 13' East on true Line Between Secs 5 & 6 Var 14° E.
39.61.	Set post deposit charcoal Stake raised mound of Earth with pits as per Instructions for a 1/4 Sec Corner
79.61	The corner to Secs 5 6 7 & 8
	Land Broken Sand Hills 3rd rate
	Sept 26th 1872

General Description

This Township is destitute of Water and timber is generally gently rolling 3rd rate land, is fit for Nothing but grazing It is covered with short Buffalo Grass

A List

Of the Names of the individuals who assisted in running, measuring and marking the Subdivision Lines and Corners of Township No 5 North Range No 39 West of the 6th Principal Meridian

S. C. McElroy	Chainman
A C Tuers	Chainman
Z Stephenson	Axeman and Moundman
Levi Martin	Flagman
D. V. Stephenson	Compassman

We hereby certify that we assisted David V. Stephenson Deputy Surveyor in Subdividing Township No 5 North Range No 39 West of the 6th Principal Meridian, and that said Township has been in all respects to the best of our Knowledge and belief well and faithfully Surveyed and the boundary monuments planted according to the Instructions of the Surveyor General

S C McElroy	Chainman
A C Tuers	Chainman
Z Stephenson	Axeman and Moundman
L Martin	Flagman

Subscribed and sworn to by the above named persons before me a Notary Public in and for the County of Webster in the State of Nebraska this 1st day of Novr 1872

O. W. Brown
Notary Public

I David V Stephenson do solemnly swear that in pursuance of a joint Contract No 63 wherein James L Slocum, David V Stephenson and George L Slocum are joint Contractors with E E Cunningham United States Surveyor General for the District of Nebraska and Iowa bearing date the 29th day of June AD 1872. I have will faithfully and truly in my own proper person and in strict conformity with the Instruc=ions of the Surveyor General the Surveying Manual and the Laws of the United States, Surveyed all those parts or portions of Township No 5 North of the Base line of Range No 39 West of the 6th Principal Meridian in the State of Nebraska as are represented in the foregoing Field Notes as having been sur=veyed under my direction and I do further solemnly swear that all the Corners of said Surveys have been established and perpetuated in strict accor=dance with the Surveying Manual and Printed Instructions and that the foregoing are the true and original Field Notes of such Surveys

David V Stephenson
Deputy Surveyor

Subscribed by the said David V. Stephenson Deputy Surveyor and sworn to before me ~~this~~ a Notary Public in and for the County of Webster in the State of Nebraska this 1st day of November AD 1872

O. W. Brown
Notary Public

Survey Commenced Sept 21st and Completed Sept 26th 1872

Surveyor General's Office
Plattsmouth Jany 10th 1873

The foregoing Field Notes of the Survey and Subdivison of Township No 5 North of Base Line, of Range No 39 West of 6th P. M. Executed by David V. Stephenson Deputy Surveyor under joint Contract No 63 dated June 29th 1872, wherein James L. Slocum David V Stephenson and George L Slocum are joint Contractors in the Month of September 1872 having been Critically Examined the necessary Corrections and Explanations made, the said Field Notes and Surveys they describe are hereby approved

E. E. Cunningham
Surveyor General

Index Diagram of Town 6 N Range 39 W

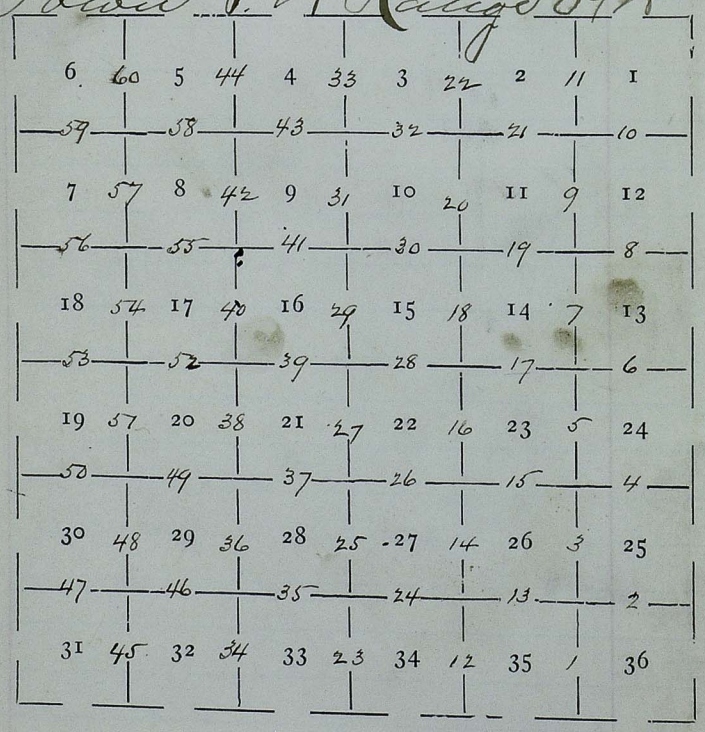

Field Notes of The Survey and Subdivision of Township No 6 N R 39 W. 6th P.M. in the State of Nebraska

Executed

By James L. Slocum Deputy Surveyor under joint Contract No 63 dated June 29th 1872

Survey

Commenced Sept 27th 1872
Completed Oct 3rd 1872

List of Names

Of persons employed to assist in Surveying this Township showing the respective capacities in which they acted -

W. P. Smith	Chainman
C. W. Tuers	Chainman
J. M. Clark	Axeman & Mounduman
C. F. Logue	Flagman

To determine the proper
Adjustment of My Compass
for the subdivision of this
Township I Commence at
the Corner to Townships 5 and 6
North ranges 38 and 39 E
run on a Blank line North
along the East boundary of
Sec 36
Var 14° 06'
3987 To the ¼ sec Cor
79.96. To the Cor to Secs 25 and 26
To retrace this line or
run Parallel thereto my
Compass is in proper
Adjustment at a
variation of 14° 06' E

Subdivision Commenced
Sept 27.

Township 6 N R 39 W 6 P.M.

From the Corner to Secs 35 and 36
on the South Boundary of the
Township I Run
North ~~on a true line~~ Between
Secs 35 and 36
Var 14° 06' E
4000 Set Post Deposit Charred stake
raised Mound of Earth with
pits as per Instructions for a
¼ Sec Corner
8000 Set Post Deposit Charred stake
raised mound of Earth with
pits as per Instructions for
a Corner to Secs 25 26 35
and 36

Land level sandy poor
2d rate

Township 6 N R 39 W 6th PM

Chains	
	East on a random line Between Secs 25 and 36 Var 14° 06' E
40.00	Set Post for temporary 1/4 Sec Corner
80.26	Intersect the East Boundary of the Township 11 links South of the Corner to Secs 25 and 36 from which Corner I run South 89° 55' West on a true Line Between Secs 25 and 36 Var 14° 06' E
40.13	Set post deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.26	The corner to Secs 25 26 35 & 36
	Land level Soil sandy 2d rate

Township 6 N R 39 West 6 PM

Chains	
	North Between Secs 25 and 26 Var 14° 06' E
40.00	Set Post deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.00	Set Post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a Cor to Secs 23 24 25 and 26.
	Land level sandy poor 2d rate

Township 6 N R 39 W 6 P.M.

Chains	
	East on a random line
	Between Secs 24 and 25
	Var 14° 06' E
5.30	White mans fork 36 lks wide bears S.E.
7.10	Some stream bears North East
9.00	Some stream bears South East
10.00	Set post for temporary 1/4 sec cor
43.40	Enters Sand hills bears South East
80.12	Intersect the E. Boundary of the Township at the Corner to secs 24 and 25
	From which Corner I run
	West on a true line Between
	Secs 24 and 25
	Var 14° 06' E
40.06.	Set post deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.12	The Corner to Secs 23 24 25 and 26
	Land rolling Poor 2d rate

Township 6 N R 39 W 6 P.M.

Chains	
	North Between Secs 23 & 24
	Var 14° E
2.00	Enter Bottom bears East
13.35	White Mans fork 68 lks wide
	Bears East
28.00	Leave Bottom & Enter Rocky Bluffs
40.00	Set Lime Stone 18 x 15 x 4 for 1/4 Sec Corner
44.00	Enter Sand hills
80.00	Set Lime Stone 13 x 12 x 5 for Cor to Secs 13 14 23 & 24.
	Land Broken soil poor 2d rate

Township 6 N R 39 W 6 PM

Chains	
	East on a random line between Secs 13 and 24 Var 14° E
4000	Set Post for temporary 1/4 Sec Corner
8013.	Intersect the East Boundary of the Township 19 links North of the Corner to Secs 13 and 24 from which Corner Brass North 89° 52' West on a true Line between Secs 13 and 24 Var 14° E
4006½	Set Post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
8013.	The Cor to Secs 13 14 23 and 24

Send bills 3 vote

Township 6 N R 39 W 6 PM

Chains	
	North 1 between Secs 13 & 14 Var 14° E
4000	Set Post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
8000	Set Post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a Corner to Secs 11, 12, 13 & 14

Land

Send bills 3 vote

Township 6 N R 39 W 6th PM

Chains	
	East on a random line Between Secs 12 and 13. Var 14° E
4000	Set Post for temporary 1/4 Sec Corner
8024	Intersect the East boundary of the Township 15 links South of the Corner to Secs 12 and 13 from which Cor I Run;
	S. 89 54 West on a true line Between Secs 12 and 13 Var. 14° E
4012	Set post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
8024	The Cor. to Secs 11 12 13 & 14

Sand hills Zorate

Township 6 N R 39 W 6th PM

Chains	
	North Between Secs 11 & 12 Var 14° E
4000	Set Post Deposit Charred stake Raised Mound of Earth with pits as per Instructions for a 1/4 Sec corner
8000	Set post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a Corner to Secs 1 2 11 & 12

Land rolling

Sand hills Zorate

Township 6 N R 39 W 6 P.M.

Chains	East on a random line Between Secs 1 and 12 Var 14° E.
4000	Set post for temporary 1/4 Sec corner [illegible]
7998	Intersect the East boundary of The Township 13 links North of The corner to Secs 1 and 12 from which Corner I run North 89° 54' West on a true line between Secs 1 and 12 Var 14° E.
3999	Set post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
7998	The corner to Secs 1 2 11 & 12

Land Sand hills

[illegible]

Township 6 N R 39.

Chains	North on a random line Between Secs 1 and 2, Var 14° 03' E
4000	Set post for temporary 1/4 sec cor
1983.	Intersect the North Boundary of The Township 20 links East of the corner to secs 1 and 2 from which Corner I run S 9' East on a true line between secs 1 and 2 Var 14° 3' E.
3983.	Set post Deposit Charred stake raised mound of Earth with Pits as per Instructions for a 1/4 Sec Corner
7983.	The Corner to Secs. 1, 2, 11 and 12

Land 3d rate rate

Sand hills

September 27th 1872

Township 6 N R 39 W 6th

Chains	
	North Between Secs 34 and 35 Var 14° E
4000	Set Post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
8000	Set Post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a Corner to Secs 26 27 34 and 35

Land Gently rolling
Soil Sandy 3d rate

Township 6 N R 39 W 6th

Chains	
	East on a random line Between Secs 26 and 35 Var 14° E
4000	Set Stone for temporary 1/4 Sec Cor
7000	Foot of Sand ridge bears N W & S E.
8020	Intersect the N and S line at the Corner to Secs 25 26 35 and 36. from which Cor Drain
	West on a true line between Secs 26 and 35 Var 14° E
4010	Set Stone 12 x 6 x 4 and raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
8020	The Cor to Secs 25 26 35 & 36

Land 3d rate Sandy

Township 6 N R 39 W 6th P.M.

Chains	North Between Secs 24 & 27 Var 14° 15' E
40.00	Set Post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.00	Set Sand Stone 12×11×5 for Corner to Secs 22 23 26 and 27.
	Land Flat sandy poor 2d rate

Township 6 N R 39 W 6th P.M.

Chains	East on a random line between Secs 23 and 26 Var 14° E
15.00	White Mains fork 60 lks wide bears S E
35.00	Same stream 55 lks wide bears North
40.00	Set Stone for temporary 1/4 Sec Corner
80.00	Intersect the N and S. line at the corner to Secs 23 24 25 and 26 from which Cor I run
	West on a true line Between Sections 23 and 26. Var 14° E
40.00	Set Sand Stone 12×6×6 for a 1/4 Sec Corner
80.00	The corner to Secs 22 23 26 and 27.
	Land rolling Sandy 3d rate

Township 6 N R 39 W 6 P.M.

Chains	North Between Secs 22 & 23 Var 14° E
15.00	Enter Cottom
22.00	White Mans fork 35 links Wide Bears South East
25.00	Spring Branch 18 lks wide bears S E
40.00	Set Sand Stone 15 x 8 x 4 for 1/4 Sec Corner
46.00	Foot of Bluffs bears E & W
80.00	Set Sand Stone 18 x 14 x 5 for a Corner to Secs 14 15 22 & 23.
	Land Broken Sundy 3d rate

Township 6 N R 39 W 6 P.M.

Chains	East on a random line Between Secs 14 and 23. Var 14° E
40.00	Set Stone for temporary 1/4 Sec Corner
80.13	Intersect the N and S line 15 links South of the Corner To Secs 13 14 23 and 24 from which Corner I Run South 89.54 West on a True line Between Secs 14 and 23. Var 14° E
40 lks	Set Sand Stone 10 x 10 x 4 for 1/4 Sec Corner
80.13.	The Corner to Secs 14 15 22 and 23
	Land Broken Sundy 3d rate

Township 6 N R 39 W 6th P.M.

Chains	
	North Between Secs 14 and 15
	Var 14° 05' E
40.00	Set Sand Stone 12x10x4 for
	1/4 Sec Corner
50.00	Enter Sand Hills bears S E
80.00	Set Post deposit Charred stake
	raised Mound of Earth with
	pits as per Instructions for a
	Corner to Sections 10, 11, 14
	and 15
	Land 3d rate Sandy

Township 6 N R 39 W 6 Ma

Chains	
	East on a Random line
	Between Secs 11 and 14
	Var 14.5° E
40.00	Set Post for temporary 1/4
	Sec Corner
80.31	Intersect the N and S line 10
	links South of the Corner
	To Secs 11 12 13 and 14
	from which Corner I run
	South 89.5 6 West on a true
	Line Between Secs 11 & 14
	Var 14° E
40.00	Set Post Deposit Charred stake
	raised Mound of Earth with
	Pits as per Instructions for a
	1/4 Sec Corner
80.31	The Corner To Secs 10, 11, 14
	and 15
	Land Sand hills
	Tail 3 rate

Township 6 N R 29 W 6 P.M.

Chains	
	Run Between Secs 10 & 11 Var 14° E
4.00	Set Post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
8.00	Set Post Deposit Charred Stake raised Mound of Earth With pits as per Instructions for a Corner To Secs 2, 3, 10 and 11

Land 3rd rate

Sandy

Township N R 29 W 6 P.M.

Chains	
	Run on a random line Between Secs 2 and 11 Var 14° E
4.00	Set post for Quarter 1/4 Sec Cor
8.19	Intersect the N. and S. Line 20 Links South of the Corner to Secs 1, 2, 11 and 12 from which Corner Bears South 89° 49' West on a true Line Between Secs 2 and 11 Var 14° E
4.09½	Set post deposit Charred stake raised Mound of Earth with Pits as per Instructions for a 1/4 Sec Corner
8.19	The Corner to Secs 2, 3, 10 & 11

Land Sandy Soil 3rd rate

Township 6 N R 39 W 6 P M

Chains	
	North on a random line Between Secs 2 and 3 Var 14° E
40.00	Set Post for tenth or any 1/4 Sec Corner
80.31	Intersect the North Boundary of The Township 40 links East ~~West~~ of the Corner to Secs 2 & 3 from which Corner I run S 17' E on a true line Between Secs 2 and 3 Var 14° E
40.31	Set Post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Cor
80.31	The Corner to Secs 2 3 10 and 11

Land

Sand Hills

September 28th 1872

Township 6 N R 39 W 6 P M

Chains	
	North Between Secs 33 and 34 Var 14° E
40.00	Set Post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Cor
80.01	Set ~~Post~~ Sand Stone 12 x 8 x 4 & ~~raised Mound of Earth with pits as~~ per Instructions for a Corner to Secs 28 27 33 and 34

Land Gently rolling

Poor 2d rate

Township 6 N R 39 W 6 P.M.

Chains	
	East on a random line Between Secs 27 and 34 Var 14° E
40.00	Set post for temporary 1/4 Sec Corner
80.00	Intersect the N and S line 15 links South of the Corner to Secs 26 27 34 & 35 from which Corner I run South 89° 54' West on a true line Between Secs 27 and 34 Var 14° E
40.00	Set post deposit charred stake raised mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.00	The Corner to Secs 27 28 33 and 34.

Land Gently rolling poor 2d rate

Township 6 N R 39 West 6 P.M.

Chains	
	North Between Secs 27 & 28 Var 14° E
40.00	Set post Deposit charred stake Raised mound of Earth with Pits as per instructions for a 1/4 Sec Corner
80.00	Set Post Deposit charred stake raised Mound of Earth with Pits as per Instructions for a Corner to Secs 21 22 27 and 28

Land 3d rate

Sandy

Township 6 N R 39 West 6 P.M.

Chains	
	East on a random line Between Secs 22 & 27 Var 14° E
20.00	Enter Sand Bears E & W
40.00	Set post for temporary 1/4 Sec Corner
60.00	Leave Sand bears E & W
80.00	Intersect the N and S line 15 links South of the Corner To Secs 22 23 26 and 27 from which Corner I run. South 89°54' West on a true line Between Secs 22 and 27, Var 14° E
40.00	Set post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.00	The Corner To Secs 21 22 27 and 28

Land rolling 3d rate Sandy.

Township 6 N R 39 W 6 P.M.

Chains	
	North Between Secs 21 and 22 Var 14° E
28.56	White Mains Fork 40 links wide Bears South East
40.00	Set post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec corner
77.06	Spring branch 10 links wide bears South East
80.00	Set Sand Stone 14 x 14 x 4 for Corner To Secs 15 16 21 and 22

Land Gently rolling

Soil 2d rate

Township 6 N R 39 W 6th P M

Chains	
	East on a random line Between Secs 15 and 22. Var 14° E
23.00	Foot of bluff (rocky) bears South
40.00	Set Stone for temporary 1/4 Sec Corner
79.90	Intersect the N and S. line 25 Links North of the Corner To Secs 14 15 22 and 23 from which Corner I run North 89° 49' West on a true Line Between Secs 15 and 22 Var 14° E
39.95	Set Sand Stone 15 x 11 x 5 for a 1/4 Sec Corner
79.90	The Corner To Secs 15 16 21 and 22

Land Broken 3d rate

Township 6 N R 39 W 6th P M.

Chains	
	North Between Secs 15 & 16 Var 14° E
3.60	Spring Branch 11 link wide Bears South West
8.25	Same Stream bears S E
40.00	Set Post Deposit Charred stake raised Mound of Earth with Pits as per Instructions for a 1/4 Sec Corner
80.00	Set Flint rock so hard I Could not Mark It 16 x 13 x 7 for corner to secs 9, 10, 15 and 16.

Land Broken
Soil hvr 2d rate

Township 6 N R 39 W 6th PM.

Chains	
	East on a random line
	Between Secs 10 & 15
	Var 14° E
10.00	Foot of Bluffs bears S E
20.00	Set Post for temporary 1/4
	Sec Corner
24.20	Intersect the W and S line
	27 links North of the
	Corner to Secs 10, 11, 14
	and 15 from which Ord.
	Bear
	North 89° 48' West on a true
	Line Between Secs 10
	and 15
	Var 14° E
40.10	Set Post deposit Claimed
	Stake raised Mound
	of Earth with pits on
	per Instructions for a
	1/4 Sec Corner
80.20	The Corner to Secs 9, 10,
	15 and 16
	Land rolling Soil 3d rate

Township 6 N R 39 W 6th PM.

Chains	
	North Between Secs 9 & 10
	Var 14° E
20.00	Foot of Bluffs
40.00	Set Sand Stone 18 x 17 x 15 for
	1/4 Sec Corner
80.00	Set Sand Stone 18 x 12 x 5 for
	Corner to sections 3, 4, 9 & 10
	Land Broken & Sandy
	Poor 2d rate

Township 6 N R 3 West 6 PM

Chains	
	East on a random line Between Secs 3 and 10 Var 14° E
7.50	Enter Sand hills
40.00	Set Post for temporary 1/4 Sec Corner
80.15	Intersect the N and S line 33 links North of the Cor to Secs 2 3 10 & 11 from which Corner I run North 89° 46' West on a true line Between Secs 3 and 10 Var 14° E
40.07½	Set Post deposit Stone state raised Mound of Earth with pits as per Instructions from 1/4 Sec Corner
80.15	The Corner to Secs 3 4 9 & 10

Sand Hills

Zone

Township 6 N R 3 West 6 PM

Chains	
	North on a random line Between Secs 3 and 4 Var 14° E
40.00	Set post for temporary 1/4 Sec Corner
79.81	Intersect the North Boundary of the Township 33 links west of the Corner to Secs 3 and 4 from which Corner I range
	North 14' West on a true line Between Secs 3 and 4 Var 14° E
39.81	Set post deposit Stone state raised Mound of Earth with pits as per Instructions from 1/4 Sec Corner
79.81	The Corner to Secs 3 4 9 & 10

Sand 3d rate

Sand Hills

September 30th 1872

Township No 6 N R 39 W 6 P M

Chains	North Between Secs 32 & 33
	Var 14° E
40.00	Set post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.00	Set post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a Corner To Secs 28 29 32 and 33.

Second 3d rate

Second hills

Township 6 N R 39 W 6th P M

Chains	Cast on a random line Between Secs 28 and 33.
	Var 14° E
40.00	Set Post for Temporary 1/4 Sec Corner
80.00	Intersect the N and S line at the Corner to Secs 27 28 33 and 34 from which Corner I run West on a True line Between Secs 28 and 33
	Var 14° E
40.00	Set post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.00	The Corner To Secs 28 29 32 and 33.

Land Gently rolling

Soil poor 2d rate

Township 6 N R 39 W 6 P.M.

Chains	North Between Secs 28 & 29, Var 14° E
4000	Set Post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
8000	Set Post Deposit Charred stake raised Mound of Earth with pits as per Instructions for a Corner To Secs 20 21 28 and 29.

Land Gently rolling

Soil 2d rate

Township 6 N R 39 West 6 P.M.

Chains	East on a random line Between Secs 21 and 28 Var 14° E
4000	Set Post for temporary 1/4 Sec Cor
8000	Intersect The N and S line 12 Links South of the Corner To Secs 21 22 27 and 28 from which Corner I run South 89.55 West on a True Line Between Secs 21 and 28 Var 14° E
4000	Set Post Deposit Charred stake raised Mound of Earth with Pits as per Instructions for a 1/4 Sec Corner
8000	The Corner To Secs 20 21 28 and 29.

Land Gently rolling

Soil 2d rate

Township 6 N R 39 west 6 PM

Chains	North Between Secs 20 & 21
	Var 14° E
40.00	Set Post Deposit Charred Stake raised Mound of Earth with Pits as per Instructions for a 1/4 Sec Corner
59.95	Chain mounts 35 lks wide bears East
80.00	Set Post Deposit Charred Stake raised Mound of Earth with Pits as per instructions for a Corner To Secs 16 17 20 & 21

Land 3d rate

Land hills

Township 6 N R 39 W 6 PM

Chains	East on a random line Between Secs 16 and 21
	Var 14° E
40.00	Set Post for temporary 1/4 Sec Cor
77.30	Spring Branch 7 lks wide bears South
79.87	Intersect the N. and S. line 31 lks South of the Corner To Secs 15 16 21 and 22 from which Corner Spring
	South 89.47 West on a True Line Between Secs 16 and 21
	Var 14° E
399.3½	Set Post Deposit Charred Stake raised Mound of Earth with Pits as per instructions for a 1/4 Sec Corner
79.57	The Corner To Secs 15 16 21 and 22

Land rolling

Land 3d rate

Township 6 N R 9 W 6 M

Chains	North Between Secs 16 & 17
	Var 14° E
40.00	Set Sand Stone 13 x 10 x 3 for ¼ Sec Corner
80.00	Set a Sand Stone 15 x 11 x 4 for Corner to Secs. 8. 9. 16 and 17.
	[illegible]
	[illegible]
	[illegible]
	First [illegible] 5 [illegible]
	[illegible]

Township 6 N R 9 W 6 M

Chains	East on a random line between Secs 9 and 16
	Var 14° E
40.00	Set Stone for Temporary ¼ Sec Corner.
70.00	Ravine bears South
79.90	Intersect the N and S. line 9 links North of the Cor. to Secs 9. 10. 15 and 16 from which Corner I run
	North 89°56 West on a true line between Secs. 9 and 16.
	Var 14° E
39.95	Set post [illegible] [illegible] raise Mound of Earth and [illegible] [illegible] for ¼ Sec Corner
79.91	To Corner to Secs 8, 9, 16 & 17.

Land Survey [illegible]

Township 6 N R 39 W 6th PM

Chains	
	North 1 Between Secs 8 and 9. Var 14° E
4000	Set Sand Stone 13x9x3 for 1/4 Sec Corner
8000	Set Sand Stone 13x11x4 for Corner To Secs 4 5 8 and 9.

Land 3d rate

Sand & Rolling

Township 6 N R 39 W 6 PM

Chains	
	East on a random line Between Secs 4 and 9. Var 14° E
4000	Set Stone for temporary 1/4 Sec Corner
5700	Barrine bean South
7970	Intersect the N and S. line 18 links North of the Corner To Secs 3. 4. 9 & 10 from which Cor Forms
	North 89° 52' West on a true line between Secs 4 and 9. Var 14° E
3985	Set Sand Stone 11x11x4 ~~[illegible]~~ for 1/4 Sec Corner
7970	To Corner To Secs 4 5 8 and 9.

Land Sandy rolling

3d Rate.

Township 6 N R 39 W 6 P M

Chains	
	North on a random line Between Secs 4 and 5 Var 14° E
40.00	Set Stone for temporary 1/4 Sec Cor
79.85	Intersect the North Boundary of the Township 13 links West of the Corner to Secs 4 and 5 from which Cor I Run.
	South 6' W on a true line Between Secs 4 and 5 Var 14° E
39.85	Set Sand Stone 14x8x4 for 1/4 Sec Corner
79.85	The Corner to Secs 4 5 8 and 9.

Land Sandy 3d rate

October 1st 1872

Township 6 N R 39 W 6th P M

Chains	
	North Between Secs 31 & 32 Var 14° E
40.00	Set Post Deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Cor
80.00	Set Post deposit Charred Stake raised Mound of Earth with pits as per instructions for a Corner to Secs 29 30 31 and 32.

Land 3d rate

Rolling & Sandy

Township 6 N R 39 W 6 P M

Chains	East on a Random line Between Secs 29 and 32 Var 14° E
40.00	Set Post for temporary 1/4 Sec Corner
80.18	Intersect the N and S. line 17 links South of the Cor. To Secs 28 29 32 and 33 from Which Corner I run South 89° 53' West on a True line Between Secs 29 & 32 Var 14° E
40.09	Set post Deposit Charred Stake raised Mound of Earth With pits as per Instructions for a 1/4 Sec Corner
80.18	The Corner To Secs 29 30 31 and 32

Land Sandy Poor 2d Rate

Township 6 N R 39 W 6th P M

Chains	West on a random line Between Secs 30 and 31 Var 14° E
40.00	Set Post for temporary 1/4 Sec Corner
80.65	Intersect the West Boundary of the Township at the Cor To Secs 30 and 31 from which Corner I Run East on a True line Between Secs 30 and 31 Var 14° E
40.65	Set Post deposit Charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.65	The Corner To Secs 29 30 31 and 32

Land Sandy Poor 2d rate

Township 6 N R 39 W 6 PM

Chains	North Between Secs 29 & 30 Var 14° E
4000	Set post deposit charred stake Raised Mound of earth with pits as per instructions for a 1/4 Sec Corner
8000	Set Post deposit charred stake raised Mound of Earth with pits as per instructions for a Corner To Secs 19 20 29 and 30
	Loved Sandy for 2d Rate

Township 6 N R 39 W 6 PM

Chains	Corner on a Random line Between Secs 20 and 29 Var 14° E
4000	Set Post for temporary to Sec
8030	Intersect the N and S line 18 Links South of the Cor To Secs 20 21 28 and 29 from which Corner Forms South 89° 52' West on a line Line Between Secs 20 & 29 Var 14° E
4015	Set Post deposit charred stake raised Mound of Earth with Pits as per Instructions for a 1/4 Sec Corner
8030	The Corner To Secs 19 20 29 and 30
	Loved Gently Rolling
	Soil poor 2d rate

Township 6 N R 39 W 6th P.M.

Chains	
	West on a random line between Secs 19 and 30 Var 14° E
40,00	Set Stone for Tenthwang 1/4 Sec Corner
80,85	Intersect the West boundary of The Township 15 links South of the Corner to Secs 19 & 30 from which Corner I run South 89°54' East on a true line between Secs 19 & 30 Var 14° E
40,85	Set Sand Stone 12 x 8 x 4 for 1/4 Sec Corner
80,85	The Corner to Secs 19 20 29 and 30

Land rolling

Sandy Poor 2d rate

Township 6 N R 39 W 6th P.M.

Chains	
	North Between Secs 19 & 20 Var 14° E
40,00	Set Post Deposit Charred Stake rubbed Mound of Earth with Pits as per in Fractions for 1/4 Sec corner
60,00	Wide Mouse fork 40 lks wide Bears East
80,00	Set Sand Stone 13 x 9 x 3½ for a corner to Secs 17 18 19 and 20

Land Broken Sandy 3d rate

Township 6 N R 3 W 6th P.M.

Chains	East on a Random line Between Secs 17 and 20 Var 14° E
19 00	Raise bears South East
40 00	Set Stone for Temporary 1/4 Sec Corner
79 91	Intersect the N and S line 14 Links South of the Corner to Secs 16 17 20 and 21 from which Corner I run. South 89° 54' West on a True line Between Secs 17 & 20 Var 14° E
39 95½	Set Sand Stone 12x10x5 for a 1/4 Sec Cor.
79 91	The corner to Secs 17 18 19 & 20

Land Broken

Soil Sandy 3d Rate

Township 6 N R 3 W 6th P.M.

Chains	West on a random line Between Secs 18 and 19. Var 14° E
40 00	Set Stone for Temporary 1/4 Sec Corner
80 91	Intersect the West Boundary of the Township 22 links South of the Corner to Sections 18 and 19 from which Cor I Run. South 89° 51' East on a True line Between Secs 18 and 19 Var 14° E
40 91	Set Sand Stone 12x10x5 for 1/4 Sec Corner
80 91	The corner to Secs 17 18 19 and 20.

Land Sandy 3d Rate

October 2nd 1872

Township 6 N R 39 W 6 PM.

Chains	North Between Secs 17 and 18 Var 14° E
24.00	Reverse bears South East
40.00	Set Line Stone 13×11×4 for 1/4 Sec Cor.
80.00	Set Line Stone 15×10×3 for Corner to Secs 7, 8, 17 & 18

Land Sandy rate 3.

Township 6 N R 39 W 6 PM.

Chains	East on a random line between Secs 8 and 17 Var 14° E
40.00	Set stone for temporary 1/4 Sec Corner
79.83	Intersect the N and S, line 13 links South of the Corner To Secs 8, 9, 16 & 17 from which Corner I Reverse South 89° 54' West on a line line Between Secs 8 and 17 Var 14° E
39.91½	Set Line Stone 14×8×3 for 1/4 Sec Corner
79.83	The corner To Secs 7, 8, 17, & 18.

Land rolling

Soil Sandy 3d rate

Township 6 N R 39 W 6 PM

Chains	
	West on a random line Between Secs 7 and 18 Var 14° E
40.00	Set post for temporary 1/4 Sec Corner
81.15	Intersect the West Boundary of the Township 33 links South of the Cor to Secs 7 and 18 from Which Corner I run South 89 46 East on a true Line Between Secs 7 & 18 Var 14° E
41.15	Set Post deposit Charred State raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
81.15	The Corner To Secs 7 & 17 & 18
	Land Sandy poor 3d rate

Township 6 N R 39 W 6 PM

Chains	
	North Between Secs 7 and 8 Var 14° E
40.00	Set Post deposit Charred stake raised Mound of Earth with Pits as per instructions for a 1/4 Sec Corner
80.00	Set post deposit Charred State raised Mound of Earth with Pits as per Instructions for a Corner To Secs 5, 6, and 8
	Land Gently rolling Sandy 3d rate

Township 6 N R 39 W 6th PM

Chains	East on a random line Between Secs 5 and 8 Var 14° E
40.00	Set Post for temporary Sec Corner
7995	Intersect the N and S line 21 Links South of the Cor To Secs 4 5 8 and 9 from which Corner I Run South 89.51 (one) West on a true Line Between Secs 5 and 8 Var 14° E
3997½	Set post deposit Charred Stake raised Mound of Earth with Pits as per Instructions for a 1/4 Sec Corner
7995	The Cor to Secs 5, 6, 7, 8, 8

Land Sandy 3d rate

Township 6 N R 39 W 6th PM

Chains	West on a Random line Between Secs 6 and 7, Var 14° E
40.00	Set Post for temporary 1/4 Sec Corner
8169	Intersect the West Boundary of the Township 25 links South of the Corner to Secs 6 and 7. from which Corner I run S 89 49 East on a true line Between Secs 6 and 7, Var 14° E
4169	Set Post deposit Charred Stake raised Mound of Earth with Pits as per Instructions for a 1/2 Sec Corner
8169	The Corner To Secs 5 6 7 and 8

Land Gently rolling Soil 2d rate

Township [illegible]

Chains	
	North on a random line Between Secs 5 and 6 Var 14° E
40.00	Set Post for temporary 1/4 Sec Corner
80.51	Intersect the North boundary of the Township 23 links East of the Corner to Secs 5 and 6 from which Corner I Raise.
	S 10' East on a true line Between Secs 5 and 6 Var 14° E
40.51	Set Post deposit charred Stake raised Mound of Earth with pits as per Instructions for a 1/4 Sec Corner
80.51	The Corner to Secs 5, 6, 7 & 8,

Land rolling

Soil sandy 3d rate

October 3rd 1872

General Description

The Land in this Township is 2d rate poor 2d rate and 3d class White Mansfork runs in Easterly Direction through the Southern Portion of the Township and there is also a Strong Branch Coming from the North East and running a South Easterly direction and Empties into White Mansfork in Sec 23 White mansfork is a very beautiful Mountain rapid Current rocky bottom No timber In the Township Strong Branch is formed by beautiful Springs of Water A portion of this Township could be Cultivated Provided there was Moisture sufficient or Irrigation could be made and used successfully

A List

of the names of the individuals who assisted in running measuring and marking the Subdivision Lines and Corners of Township No 6 North Range No 39 West of the 6th Principal Meridian

W. P. Smith	Chainman
C. W. Sivers	Chainman
J. M. Clark	Axeman & Moundman
C. F. Logue	Flagman
J. H. Slocum	Compassman

We hereby certify that we assisted James L. Slocum Deputy Surveyor in Subdividing Township No 6. North Range No 39 West of the 6th Principal Meridian, and that said Township has been in all respects to the best of our knowledge and belief well and faithfully surveyed and the boundary monuments planted according to the instructions of the Surveyor General

W. P. Smith	Chainman
C. W. Sivers	Chainman
J. M. Clark	Axeman and Moundman
C. F. Logue	Flagman

Subscribed and sworn to by the above named persons before me a Notary Public in and for the County of Webster in the State of Nebraska this 1st day of November AD 1872

Seal omitted

O. W. Brown
Notary Public

I James L. Slocum do solemnly swear that in pursuance of a joint Contract No 63 wherein James L. Slocum, David V. Stephenson and Geo. L. Slocum are joint Contractors with E. E. Cunningham, United States Surveyor General for the District of Nebraska and Iowa bearing date the 29th day of June AD 1872.

I have well faithfully and truly in my own proper person and in strict conformity with the Instructions of the Surveyor General the Surveying Manual and the Laws of the United States, Surveyed all those part or portions of Township No 6 North of the Base Line of Range No 39 West of the 6th Principal Meridian in the State of Nebraska as are represented in the foregoing Field-Notes as having been surveyed under my direction, and I do further solemnly swear that all the Corners of said Surveys have been established & perpetuated in strict accordance with the Surveying Manual and Printed Instructions, and that the foregoing are the true and original Field-Notes of such survey

Jas L Slocum
Deputy Surveyor

Subscribed by the said James L. Slocum Deputy Surveyor and Sworn to before me a Notary Public in and for the County of Webster in the State of Nebraska this 1st day of November AD 1872

Seal

O. W. Brown
Notary Public

Survey commenced Sept 27th 1872 and completed Oct 3rd 72

Surveyor Genl's Office
Plattsmouth Jany 10th 1873

The foregoing field Notes of the Survey and Subdivision of Township No 6. North of Base Line of Range 34. West of 6th P.M. in the State of Nebraska Executed by James L. Slocum under Joint Contract 63. Wherein James L. Slocum D. V. Stephenson and George L. Slocum are Joint Contractors in the Months of September and October 1872 having been critically examined the Necessary Corrections and Explanations Made the said field Notes and Surveys they describe are hereby approved

E. E. Cunningham
Surveyor General

Index Diagram of Town 7 N. Range 39 W

6	60	5	44	4	33	3	22	2	11	1
59		58		43		32		21		10
7	57	8	42	9	31	10	20	11	9	12
56		55		41		30		19		8
18	54	17	40	16	29	15	18	14	7	13
53		52		39		28		17		6
19	51	20	38	21	27	22	16	23	5	24
50		49		37		26		15		4
30	48	29	36	28	25	27	14	26	3	25
47		46		35		24		13		2
31	45	32	34	33	23	34	12	35	1	36

Field Notes of The Survey and Subdivision of Township 7 N. R 39 W. 6th P.M. in the State of Nebraska

Executed

By David V Stephenson Deputy Surveyor under joint Contract No 63 dated June 29th 1872

Survey

Commenced Sept 27th 1872
Completed October 3rd 1872

List of Names

Of the persons employed to assist in Surveying this Township showing the respective capacities in which they acted

S. C. McElroy	Chainman
A C Tuers	Chainman
Z Stephenson	Axeman & Moundman
Levi Martin	Flagman

To Determine the proper adjustment of my compass for the subdivisions of this Township I commence at the corner to Townships 6 & 7 N Ranges 38 and 39 West and run North on a blank line along the East boundary of SEC 36

Variation 14°15' E

39.96 The 1/4 SEC cor

79.92 To Corner to SEC 25 & 36 I find ~~that my~~ that my compass is in proper adjustment at

Var 14°15' E

Township 7 N Range 39 W 6th P.M.

Chains	
	From the corner to section 35 & 36 on south boundary of Township 8 run North between SEC 35 & 36 Va 14° 15' E
40,00	Set post deposit charred stake raised mound of earth with pits as per instruction for 1/4 SEC cor
80,00	Set post deposit charred stake raised mound of earth with pits as per instruction for cor to SEC 25 26, 35 & 36.
	Land Sand Hills

Township 8 N Range 39 W 6th P.M.

Chains	
	East on a random line bet Secs. 25 & 36 Va 14° 10' E
40.00	Set post for temporary 1/4 Sec cor
79.88	Intersect east boundary of Township at corner to Secs. 25 & 36. From which I run West on a true line Va 14° 10' E
39.94	Set post deposit charred stake raised mound of earth with pits as per instructions for 1/4 Sec cor
79.88	Corner to sections 25, 26, 35 and 36 Land Sandy 2nd Rate

Township 8 N Range 38 W 6th P.M.

Chains	
	North bet Secs. 25 & 26 Va 14° 10' E
40.00	Set post deposit charred stake raised mound of earth with pits as per instruction for 1/4 Sec cor
80.00	Set post deposit charred stake raised mound of earth with pits as per instruction for cor to Secs. 23, 24, 25 & 26.

Land Land Hills

Township 7 N Range 39 W 6th PM

Chains	
	East on a random line bet Secs. 24 & 25 Va 14° 10' E
4000	Set post for temporary 1/4 Sec cor.
79.55	Intersect east boundary of Township 26 links North of cor to Secs 24 & 25 from which cor bears
N 89°49'	West on true line bet Secs. 24 & 25 Va 14° 10' E
39.77½	Set post deposit charcoal Stake raised mound of earth with pits as per instruction for 1/4 Sec cor
79.55	Corner to Secs. 23 24 25 and 26
	Land Sandy Rolling

Township 7 N Range 39 W 6th PM

Chains	
	North bet Secs. 23 & 24 Va 14° 10' E
4000	Set post deposit charcoal Stake raised mound of Earth with pits as per instruction for 1/4 Sec cor
8000	Set post deposit charcoal Stake raised mound of Earth with pits as per instruction for Cor to Sec 13, 14, 23 & 24
	Land Sand Hills

Township 7 N Range 39 W 6th P M

Chains	
	East on a random line bet SEC 13 & 24
	Va 14°15' E
40.00	Set post for temporary 1/4 SEC cor
79.22	Intersect East boundary of Township 65 links North of cor to SEC 13 & 24 from which I run
	North 89°32' West on a true line bet SEC 13 & 24
	Va 14°15' E
39.61	Set post deposit charred stake raised mound of earth with pits as per Instruction for 1/4 SEC cor
79.22	Cor to SECs 13, 14, 23 & 24
	Land Sandy 3rd rate

Township 7 N Range 39 W 6th P M

Chains	
	North bet SEC 13 & 14
	Va 14°15' E
40.00	Set post deposit charred stake raised mound of earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charred stake raised mound of earth with pits as per instruction for cor to SEC 11, 12, 13 & 14
	Land Sandy 3rd Rate

Township 7 N Range 39 W 6th PM

Chains	
	East on a random line bet Sec 12 & 13 Va 14°10' East
40.00	Set post for temporary 1/4 Sec Cor
79.48	Intersect East boundary of Township 52 links north of Cor to Secs 12 & 13 from which Cor I run North 89°38' West on true line bet Secs 12 & 13 Va 14°10' E
39.74	Set post deposit charcoal Stake raised mound of Earth with pits as per instruction for 1/4 Sec Cor
79.48	Cor to Secs 11, 12, 13 & 14
	Land Sandy 3rd Rate

Township 7 N Range 39 W 6th PM

Chains	
	North bet Secs 11 & 12 Va 14°05' E
40.00	Set post deposit charcoal Stake raised mound of Earth with pits as per instruction for 1/4 Sec Cor
80.00	Set post deposit charcoal Stake raised mound of Earth with pits as per Instruction for Cor to Secs 1, 2, 11, & 12
	Land Sandy 3rd Rate

Township 7 N R 39 W 6th Pm

Chains	East on a random line bet sec 1 & 12 Va 14° 5' E
40.00	Set post for temporary 1/4 sec cor
79.63	Intersect East boundary of Township 71 links North of cor to secs 1 & 12 from which cor I run North 89° 30' West on a true line bet secs 1 & 12 Va 14° 5' E
39.81½	Set post deposit charred stake raised mound of earth pits as per instruction for 1/4 sec cor
79.63	Corner to sec 1, 2, 11, 12
	Land Sand Hills

Township 7 N R 39 W 6th Pm

Chains	North on a random bet secs 1 & 2 Va 14° 5' E
40.00	Set post for Temporary 1/4 sec cor
79.72	Intersect North boundary of Township 27 links East of cor to sec 1 & 2 from which cor I run South 12' East on true line bet sec 1 & 2 Va 14° 5' E
39.72	Set post deport charred stake raised mound of Earth with pits as per Instruction for 1/4 sec cor
79.72	Corner to sec 12, 11, & 12
	Sand Hills 3d Rate

Township 7 N R 39 W 6th P M

Chains	
	North bet SEC 34 & 35
	Va 14°7' E
40.00	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charred Stake raised mound of earth with pits as per instruction for Cor to SEC 26 27 34 & 35

Land Sand Hills
Soil 3rd Rate

Township 7 N R 39 W 6th P M

Chains	
	East on a random line bet SEC 26 & 35
	Va 14°5' E
40.00	Set post for temporary 1/4 SEC cor
80.00	Intersect N and S line 14 links N. of cor to SEC 25.26 35 & 36 from which cor I run N 89°54' West on true line bet SEC 26 & 35
	Va 14°5' E
40.00	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 SEC cor
80.00	Cor to SEC 26, 27, 34, & 35

Sand Hills

September 27th 1872

Township 7 N Range 39 W 6th PM

Chains	
	North bet SEC 26 & 27
	Va 14°5' E
40.00	Set post deposit charred Stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charred Stake raised mound of earth as per instruction for SEC cor to SEC 22.23,26. & 27
	Land Sand Hills
	Soil 3rd rate

Township 7 N Range 39 W 6th PM

Chains	
	East on a random line bet SEC 23 & 26
	Va 14°5' East
40.00	Set post for temporary 1/4 SEC cor
80.34	Intersect N and S line 21 links North of cor to SEC 23.24 25 & 26 from which cor ℄ run
	N 89°51' West on a true line bet SEC 23 & 26
	Va 14°5' E
40.17	Set post deposit charred Stake raised mound of earth with pits as per instructions for 1/4 cor
80.34	Corner to SEC 22.23 26. & 27
	Land Sand Hills

Township 7 N R 39 W 6th PM

Chains	
	North bet SEC 22 & 23
	Var 14° E
40.00	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charred Stake raised mound of earth with pits as per instruction for cor to SEC. 14, 15, 22 & 23

Sand Sandy
3rd Rate

Township 7 N R 39 W 6 PM

	East on a random line bet SEC 14 & 23
	Var 14° E
40.00	Set post for temporary 1/4 SEC cor
80.41	Intersect N and S line 14 links North of cor to SEC 13, 14 23 & 24 from which cor I run N 89° 54' West on a true line bet sec 14 & 23
	Var 14° E
4820½	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 SEC cor
80.41	Corner to SEC 14, 15, 22, & 23

Sand Sand Hills

Township 7 N Range 37 W 6th P M

Chains	North bet SEC 14 & 15 Va 14°5 E
40.00	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charred Stake raised mound of earth with pits as per instruction for cor to SEC 10.11.14 & 15

Land Sand Hills

Township 7 N Range 39 W 6th P M

Chains	East on a random line bet SEC 11 & 14 Va 14°5 E
40.00	Set post for temporary 1/4 SEC cor
80.24	Intersect N and S line 31 links North of cor to SEC 11 12 13 & 14 from which cor I run N 89°47 West on a true line bet SEC 11 & 14 Va 14°5 E
40.12	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 SEC Corner
80.24	Corner to SEC 10.11.14 & 15.

Land Sand Hills

Township 7 N R 39 W 6th P M

Chains	
	North bet sec 10 & 11
	Va 14°3' E
40.00	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 sec cor
80.00	Set Post deposit charred Stake raised mound of earth with pits as per instruction for cor to sec 2, 3, 10, & 11
	Land Sand Hills

Township 7 N Range 39 W 6th P M

Chains	
	East on a random line bet sec 2 & 11
	Va 14°3' E
40.00	Set post for temporary 1/4 sec cor
80.12	Intersect N. and S. line 36 links North of cor to sec 1, & 2, 11, & 12, from which cor L run
	North 89°45' West on a true line bet sec 2 & 11
	Va 14°3' E
40.06	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 sec cor
80.12	Cor to sec 2 3 10 & 11
	Land Sandy 3rd Rate

Township 7 N R 39 W 6th P.M.

Chains	
	North on a random line bet SEC 2 & 3 N. 14.3 E
40.00	Set post for temporary 1/4 SEC cor
79.83	Intersect North boundary of Township 29 links West of cor to SEC 2 & 3 from which cor I run South 12 W. on line between SEC 2 & 3 N. 14.3 E
39.83	Set post deposit chained stake raised mound of earth with pits as per instruction for 1/4 SEC cor
79.83	Corner to sec 2 3 10 & 11

Land Sand Hills

Township 7 N Range 39 W 6th P.M.

Chains	
	North bet SEC 33 & 34 N. 14°10' E
40.00	Set post deposit chained stake raised mound of earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit chained stake raised mound of earth with pits as per instruction for cor to SEC 27, 28, 33 and 34

Land Rolling
Sand Hills

Township 7 N Range 39 W 6th Pm

Chains	
	East on a random line bet SEC 27 & 34 Va 14° 10' E
40.00	Set post for temporary 1/4 SEC cor.
79.79	Intersect N and S line 11 links North of cor to SEC 26 27 34 & 35 from which cor S run North 89°55 West on a true line bet SEC 27 & 34 Va 14° 10' E
39.89½	Set post deposit charred stake raised mound of earth with pits as per instruction for 1/4 SEC cor
79.79	Cor to SEC 27 28 33 & 34

Land Sand Hills

Township 7 North R 39 W 6th PM

Chains	
	North bet SEC 27 & 28 Va 14° 10' E
40.00	Set post deposit charred stake raised mound of earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charred stake raised mound of earth with pits as per instruction for cor to SEC 22, 23, 27, & 28

Land Rolling Sand Hills

September 28th 1872

Township 7 N Range 39 W 6th PM

Chains	
	East on a random line bet SEC 22 & 27
	Va 14°10' E
40.00	Set post for temporary 1/4 SEC cor
80.00	Intersect N and S line 38 links North of cor to SEC 22, 23, 26 & 27 from which cor S run North 84°45' West on a true line bet SEC 22 & 27
	Va 14°10' E
40.00	Set post deposit charred stake raised mound of earth with pits as per instruction for 1/4 SEC cor
80.00	Corner to SEC 21, 22, 27, & 28
	Land Sandy Rolling Soil 3rd rate

Township 7 N R 39 W 6th PM

Chains	
	North bet SEC 21 & 22
	Va 14°10' E
40.00	Set post deposit charred stake raised mound of earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charred stake raised mound of earth with pits as per instructions for cor to SEC 15, 16, 21 & 22
	Land Sand Hills

Township 7 N R 39 W 6th Pm

Chains	
	East on a random line bet SEC 15 & 22 Va 14°15' E
40.00	Set post for temporary 1/4 SEC cor
80.11	Intersect N and S line 14 links North of cor to SEC 14, 15, 22 & 23 from which cor S run North 89°54' West on a true line bet SEC 15 & 22 Va 14°15' E
40.056	Set post deposit charred Stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
80.11	Corner to SEC 15, 16, 21, & 22
	Land 3d rate

Township 7 N R 39 W 6th Pm

Chains	
	North bet SEC 16 & 15 Va 14°5' E
40.06	Set post deposit charred Stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charred Stake raised mound of Earth with pits as per instruction for Cor to SEC 9 10 15 & 16
	Land Rolling Soil 3rd Rate

Township 7 N R 39 W 6th P.M.

Chains	
	East on a random line bet sec 10 & 15
	Va 14°5' E
40.00	Set post for temporary 1/4 sec cor
80.00	Intersect N. and S. line 17 links North of cor to sec 10, 11, 14 and 15 from which cor I run North 89°53' West on a true line bet sec 10 & 15
	Va 14°15' E
40.00	Set post deposit charcoal stake raised mound of earth with pits as per instruction for 1/4 sec cor
80.00	Corner to sec 9 10 15 & 16
	Land Sandy Rolling Soil 3rd rate

Township 7 N R 39 W 6th P.M.

Chains	
	North bet sec 9 & 10
	Va 14°5' E
40.00	Set post deposit charcoal stake raised mound of earth with pits as per instruction for 1/4 sec cor
80.00	Set post deposit charcoal stake raised mound of earth with pits as per instruction for cor to sec to sec 3, 4, 9 & 10
	Land Sand Hills

Township 7 N R 29 W 6th P.M.

Chains	
	East on a random line bet Sec 3 & 10 Va 14.5° E
40.00	Set post for temporary 1/4 Sec cor
80.21	Intersect N and S line 23 links N. of cor to Sec 2, 3, 10 & 11 from which cor S run N 84.50° West on a true line bet Sec 3 & 10 Va 14.5° E
40.04	Set post deposit charcoal stake raised mound of earth with pits as per instructions for 1/4 Sec cor
80.21	Corner to Sec 3, 4, 9 & 10
	Land Sand Hills

Township 7 N R 29 W 6th P.M.

Chains	
	North on a random bet Sec 3 & 4 Va 14.5° E
40.00	Set post for temporary 1/4 Sec cor
79.73	Intersect North boundary of Township 28 links W. of cor to Sec 3 & 4 from which cor S run S 12° W on a true line bet Sec 3 & 4 Va 14.5° E
39.73	Set post deposit charcoal stake raised mound of earth with pits as per instruction for 1/4 Sec cor
79.73	Cor to Sec 3, 4, 9 & 10
	Land Sand Hills Soil 3rd Rate

September 30th 1872

Township 7 N Range 39 W 6th P.M.

Chains	
	North bet SEC 32 & 33
	Va 14° 7' E
40.00	Set post deposit chained Stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
50.00	Ravine Bears S. E.
80.00	Set post-deposit chained Stake raised mound of Earth with pits as per instruction for cor SEC 28, 29, 32 & 33
	Land Sandy 3rd Rate

Township 7 N Range 39 W 6th P.M.

Chains	
	East on a random line bet SEC 28 & 33
	Va 14° 7' E
40.00	Set post for Temporary 1/4 SEC cor
80.09	Intersect N and S line at cor to SEC 27 28 33 & 34 from which cor I run West on true line
	Va 14° 7' E
40.04½	Set post deposit chained Stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
80.09	Corner to SEC 28 29 32 & 33
	Land Sandy 3rd Rate

Township 7 N R 39 W 6th P M

Chains	
	North bet SEC 28 & 29
	Va 14° 7' E
40.00	Set post deposit charred Stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charred Stake raised mound of Earth with pits as per instruction for cor to SEC 20 21 28 & 29
	Land Sandy 3rd Rate

Township 7 N Range 39 W 6th P M

Chains	
	East on a random line bet SEC 21 & 28
	Va 14° 7' E
40.00	Set post for temporary 1/4 SEC cor
80.16	Intersect N and S line 25 links North of cor to SEC 21, 22, 27 & 28 from which cor L run
	N 89° 49' West on true line bet SEC 21 & 28
	Va 14° 7' E
40.08	Set post deposit charred Stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
80.16	Corner to SEC 21, 22, 27 & 28
	Land Sandy 3rd Rate

Township 7 N R 39 W 6th P M

Chains	
	North bet SEC 20 & 21
	Va 14° 7' E.
40.00	Set post deposit charcd Stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charcd Stake raised mound of Earth with pits as per instruction for cor to SEC 16. 17. 20 & 21
	Land Sandy 3rd Rate

Township 7 N R 39 W 6th P M

Chains	
	East on a random line bet SEC 16 & 21
	Va 14° 7' E
40.00	Set post ~~for~~ temporary 1/4 SEC cor
80.20	Intersect N and S line 33 lks North of cor to SEC 15. 16. 21 & 22 from which cor S run
	N 89° 46' West on true line bet SEC 16 & 21
	Va 14° 7' E
40.10	Set post deposit charcd stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
80.20	Corner to SEC 16 17 20 & 21
	Land Sandy 3rd Rate

Township 7 N R 39 W 6th P M

Chains	North bet SEC 16 & 17 Va 14°10' E
40.00	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charred Stake raised mound of earth with pits as per instruction for SEC cor to SEC 8.9.16. & 17

Land Land Hills

Township 7 N R 39 W 6th P M

Chains	East on a random line bet SEC 9 & 16 Va 14°10' E
40.00	Set post for temporary 1/4 SEC cor
80.25	Intersect N and S line 40 links North of cor to SEC 9.10.15 & 16 from which cor I run North 89°43' W. on a true line bet SEC 9 & 16 Va 14°7' E
40.12½	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 SEC cor
80.25	Corner to SEC 8.9.16.&17.

Land Sandy 3rd Rate

Township 7 N R 39 W 6th P.M.

Chains	North bet SEC 8 & 9 N 14° 7' E
40.00	Set post deposit charred Stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charred Stake raised mound of Earth with pits as per instruction for cor to SEC 4. 5. 8 & 9
	Land Sandy 3rd Rate

Township 7 N R 39 W 6th P.M.

Chains	East on a random line bet SEC 4 & 9 N 14° 7' E
40.00	Set post for temporary 1/4 SEC cor
80.19	Intersect N and S line 30 links N of cor to SEC 3. 4. 9. & 10. from which cor S run N 89° 47' West on true line N 14° 7' E
40.092	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 SEC cor
80.19	Corner to SEC 4. 5 & 9
	Land Sandy 3rd Rate

Township 7 N Range 39 W 6th PM

Chains	
	North on a random line bet SEC 4 & 5 Va 14° 7' E
40.00	Set post for temporary 1/4 SEC cor
79.56	Intersect North boundary of township 20 links west of cor to SEC 4 & 5 from which corner I am S 9° W on true line bet SEC 4 & 5 Va 14° 7' E
39.56	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 SEC cor
79.56	Corner to SEC 4, 5, 8 & 9
	Land Sand Hills Soil 3rd Rate
	October 1st 1872

Township 7 N Range 39 W 6th PM

Chains	
	North bet SEC 31 & 32 Va 14° 5' E
40.00	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charred Stake raised mound of earth with pits as per instruction for cor to SEC 29, 30 31 and 32
	Land Gent Rolling Poor 2nd Rate

Township 7 N R 39 W 6th P M

Chains	
	East on a random line bet SEC 29 & 32
	Va 14° 5' E
40.00	Set post for temporary 1/4 SEC Cor
68.75	Ravine Bears S.E.
79.84	Intersect N. and S. line 21 links South of cor to SEC 28, 29, 32 & 33 from which cor I run
	S 89° 57' West on true line bet SEC 29 & 32
	Va 14° 7' E
39.92	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 SEC cor
79.84	Corner to SEC. 29, 30, 31 & 32
	Land Sandy 3rd Rate

Township 7 N R 39 W 6th P M

Chains	
	West on a random line bet SEC 30 & 31
	Va 14° 5' E
40.00	Set post for temporary 1/4 SEC corner
81.92	Intersect West boundary of Township 11 links South of cor to SEC 30 & 31 from which cor I run
	S 89° 5' East on a true line bet SEC 30 & 31
	Va 14° 5' E
41.92	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 SEC cor
81.92	Corner to SEC 29 30 31 & 32
	Land Sandy 3rd rate

Township 7 N Range 29 W 6th P.M.

Chains	
	North bet SEC 30 & 29 Va 14° 5' E
40.00	Set post deposit charred Stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
75.00	Ravine Bears S.E.
80.00	Set post deposit charred Stake raised mound of Earth with pits as per instruction for cor to SEC 19, 20, 29 & 30
	Land Sandy 3rd Rate

Township 7 N Range 29 W 6th P.M.

Chains	
	East on a random line bet SEC 28 & 29 Va 14° 5' E
40.00	Set post for Temporary 1/4 SEC cor
79.96	Intersect N. and S. line 15 links South of cor to SEC 20, 21, 28 & 29 from which cor S. and S 89° 54' West on a true line bet SEC 28 & 29 Va 14° 5' E
39.98	Set post deposit charred Stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
79.96	Corner to SEC 19, 20, 29, & 30
	Land Sandy 3rd Rate

Township 7 N R. 39 W 6th P.M.

Chains	
	West on a random line bet Sec 19 & 30
	Va 14° 5' E
40.00	Ravine Bears S E
40.00	Set post for temporary 1/4 Sec cor
81.36	Intersect west boundary of township 21 links South of cor to Sec 19 & 30 from which cor bears South 88° 51' East on a true line bet Sec 19 & 30
	Va 14° 5' E
41.36	Set post deposit charred stake raised mound of earth with pits as per instruction for 1/4 Sec cor
81.36	Corner to Sec 19, 20, 29 & 30
	Land Sandy 3rd rate

Township 7 N Range 39 W 6th P.M.

Chains	
	North bet Sec 19 & 20
	Va 14° 5' E
40.00	Set post deposit charred stake raised mound of earth with pits as per instruction for 1/4 Sec cor
80.00	Set post deposit charred stake raised mound of earth with pits as per instruction for cor to Sec 17, 18, 19 & 20
	Land Gent Rolling Soil Poor 2nd Rate

Township 7 N R 39 W 6th P.M.

Chains	
	East on a random line bet sec 17 & 20 Va 14° 5' E
40.00	Set post for temporary 1/4 sec cor
80.20	Intersect N. and S. line 19 links South of cor to sec 16 17 20 & 21 from which cor 8 sun South 89° 52' W. on true line bet sec 17 & 20 Va 14° 5' E
40.16	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 sec cor
80.20	Corner to sec 17, 18, 19, and 20. Land Sandy 3rd Rate

Township 7 N R 39 W 6th P.M.

Chains	
	West on a random line bet sec 18, 19 Va 14° 5' E
40.00	Set post for temporary 1/4 sec cor
81.05	Intersect West boundary of township 15 links North of cor to sec 18 & 19 from which S. sun North 89° 54' East on a true line bet sec 18 & 19 Va 14° 5' East
41.05	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 sec cor
81.05	Corner to sec 17, 18, 19 & 20. Land Cent Rolling Soil Poor 2nd Rate

October 2nd 1872

Township 7 N Range 39 W 6th Pm

Chains	
	North bet SEC 17 & 18 Var 14° E
40.00	Set post deposit charred Stake raised Mound of Earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charcoal Stake raised Mound of Earth with pits as per instruction for cor to SEC 7. 8. 17 & 18

Land Gently Rolling Soil 3rd Rate

Township 7. N. R. 39. W. 6th P. M.

Chains	
	East on a random line bet SEC 8 & 17 Var 14° E
40.00	Set post for temporary 1/4 SEC cor
80.15	Intersects N. and S line 13 links South of cor to SEC 8. 9. 16. & 17 from which cor I run South 89°54' West on a true line bet SEC 8 & 17 Var 14° E
40.07½	Set post deposit charred Stake raised Mound of Earth with pits as per instruction for 1/4 SEC cor
80.15	Corner to SEC 7. 8. 17 & 18.

Land Rolling Soil 3rd Rate

Township 7 N R 39 W 6th PM

Chains	
	West on a random line bet sec 7 & 18 Va 14° 5 E
40.00	Set post for temporary 1/4 Sec cor
80.91	Intersect West boundary of Township 25 links South of cor to sec 7 & 18 from which cor S cm South 89° 48' East on true line bet sec 7 & 18 Va 14° 5 E
40.91	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 sec cor
80.91	Corner to sec 7, 8, 17 & 18
	Land Gent Rolling Soil 2nd Rate

Township 7 N Range 39 W 6th PM

Chains	
	North bet sec 7 & 8 Va 14° 5 E
28.00	Enter sand Hills
40.00	Set post deposit charred Stake raised mound of earth with pits as per instruction for 1/4 sec cor
80.00	Set post deposit charred Stake raised mound of earth with pits as per instruction for cor to sec 5, 6, 7 & 8.
	Land Sand Hills 3rd Rate

Township 7 N Range 39 W 6th Pm

Chains	
	East on a random line bet sec 5 & 8
	Va 14°5 E
40.00	Set post for temporary 1/4 sec cor
80.26	Intersect N. and S. line 18 links South of cor to sec 4.5 8 & 9 from which cor I run South 89°52' West on a true line bet sec 5 & 8
	Va 14°5 E
40.13	Set post deposit charred stake raised mound of earth with pits as per instruction for 1/4 sec cor
80.26	Corner to sec 5.6.7.& 8.

Land Sandy 3rd Rate

Township 7 N Range 39 W 6th Pm

Chains	
	West on a random line bet sec ~~5~~ & 6 & 7
	Va 14°5 E
40.00	Set post for temporary 1/4 sec cor
80.43	Intersect West boundary of township 17 links North of cor to sec ~~5~~ & 6 & 7 from which cor I run North 89°53' East on a true line bet sec ~~5~~ & 6 & 7
	Va 14°5 E
40.43	Set post deposit charred stake raised mound of earth with pits as per instruction for 1/4 sec cor
80.43	Corner to sec 5.6.7.& 8.

Land Sandy 3rd Rate

October 3rd 1892

Township 8 N R 39 W 6th PM

Chains	
	North on a random line bet SEC 5 & 6 Var 14° 5' E
40.00	Set post for temporary 1/4 SEC cor
80.14	Intersect North boundary of Township 20 links West of cor to SEC 5 & 6 from which cor I run S 9° West on true line Va 14° 5' E
40.14	Set post deposit charred stake raised mound of earth ~~for~~ as per instruction for 1/4 SEC cor
80.14	Corner to SEC 5, 6, 7, & 8.

Land Sandy 3rd Rate

Oct. 30 1872

General Description

This Township is Gently Rolling Soil 3rd Rate Sandy unfit for cultivation destitute of water and timber

A List
of the names of the individuals who assisted in running, measuring and marking the Subdivision Lines and Corners of Township No 7 North Range No 39 West of the 6th Principal Meridian

S. C. McElroy	Chainman
A. C. Tuers	Chainman
J. Stephenson	Axeman and Moundman
Levi Martin	Flagman
D. V. Stephenson	Compassman

We hereby certify that we assisted David V. Stephenson Deputy Surveyor in Subdividing Township No 7 North Range No 39 West of the 6th Principal Meridian, and that said Township has been in all respects to the best of our knowledge and belief well and faithfully surveyed and the boundary monuments planted according to the instructions of the Surveyor General

S C McElroy	Chainman
A C Tuers	Chainman
J Stephenson	Axeman and Moundman
L Martin	Flagman

Subscribed and sworn to by the above named persons before me a Notary Public in and for the County of Webster in the State of Nebraska this 1st day of November AD 1872

Seal

O. W. Brown
Notary Public

I David V. Stephenson do solemnly swear that in pursuance of a joint Contract No 63 wherein James L. Slocum, David V. Stephenson and George L Slocum are joint Contractors with E. E. Cunningham United States Surveyor General for the District of Nebraska & Iowa bearing date the 29th day of June AD 1872. I have well faithfully & truly in my own proper person and in strict conformity with the instructions of the Surveyor General the Surveying Manual and the Laws of the United States, surveyed all those parts or portions of Township No 7 North of the Base Line of Range No 39 West of the 6th Principal Meridian in the State of Nebraska, as are represented in the foregoing Field Notes as having been surveyed under my direction, and I do further solemnly swear that all the corners of said Surveys have been established and perpetuated in strict accordance with the Surveying Manual & Printed Instructions, and that the foregoing are the true and original Field Notes of such Surveys

David V. Stephenson
Deputy Surveyor

Subscribed by the said David V. Stephenson Deputy Surveyor and sworn to before me a Notary Public in and for the County of Webster in the State of Nebraska this 1st day of November A.D. 1872

Seal

O. W. Brown
Notary Public

Survey Commenced September 24th 1872 and Completed Oct 3rd 1872

Surveyor Generals Office
Plattsmouth Nebraska
January 10th 1873

The foregoing field Notes of the Survey of the Subdivision Lines of Township No 7, North of the Base Line of Range No 39, West of the 6th Principal Meridian in the State of Nebraska Executed by David V. Stephenson under Joint Contract No 63, Wherein James L. Slocum David V. Stephenson and George L. Slocum are Joint Contractors in the Months of Sept and Oct 1872, having been critically examined the necessary corrections and explanations made the said field notes and the surveys thereby disclosed are hereby approved.

E. E. Cunningham
Surveyor General.

Index Diagram

Town 8 N. Range 39 W

6	60	5	44	4	33	3	22	2	11	1
59		58		43		32		21		10
7	57	8	42	9	31	10	20	11	9	12
56		55		41		30		19		8
18	54	17	40	16	29	15	18	14	7	13
53		52		39		28		17		6
19	51	20	38	21	27	22	16	23	5	24
50		49		37		26		15		4
30	48	29	36	28	25	27	14	26	3	25
47		46		35		24		13		2
31	45	32	34	33	23	34	12	35	1	36

Field Notes

of

The Survey and Subdivision of Township No 8 N. R 39 W. 6th P.M. in the State of Nebraska

Executed

By James L. Slocum Deputy Surveyor under joint Contract No 63 dated June 29th 1872

Survey

Commenced October 4th 1872
Completed October 9th 1872

List of Names

Of persons employed to assist in Surveying this Township showing the respective capacities in which they acted

W. P. Smith	Chainman
C. W. Tuers	Chainman
J. M. Clark	Axeman and Markman
C. F. Logue	Flagman

To determine the proper adjustment of my compass for the subdivisions of this Township I commence at the comp to Townships 7 & 8 Ranges 38 & 39 West and run north on a Blank line along the East boundary of sec 36 Variation 14° 12E

40.05 To a Point 5 links west of ~~co~~ the 4 cor

80.09 To a ~~Post~~ Point 12 links west of the corner to sec 25 & 36

To retrace this line or run Parallel thereto my compass must be adjusted to a Variation of 14° 7

Township 8 N Range 39 W 6th P.M.

Chains	
	From the corner to sections 35 & 36 on South boundary of Township I run North between sec 35 & 36 Var 14°.7' E
40.00	Set Post deposit charred stake raised mound of earth with Pits as per instructions for a ¼ sec cor
80.00	Set Post Deposit charred stake raised mound of earth with Pits as per instruction for corner to sec 25, 26, 35 and 36
	Land Sand Hills

Township 8 N R 39 W 6th P.M.

Chains	
	East on a random line between sec 25 & 36 Var 14°.7' E
40.00	Set Post for temporary ¼ sec cor
79.98	Intersect East boundary of Township at corner to sec 25 and 36 from which corner I run West on a true line between sec 25 & 36 Var 14°.7'
39.99	Set Post deposit charred stake raised mound of Earth with Pits as per instructions for ¼ sec cor
79.98	Corner to Secs 25 & 26 35 & 36
	Land Sand Hills

Township 8 N Range 39 W 6th P.M.

Chains	
	North bet Sec 25 & 26
	Va 14° 7' E
40.00	Set Post deposit chained
	Stake raised mound of
	Earth with Pits as per
	instruction for 1/4 Sec cor
80.00	Set Post deposit chained
	Stake raised mound of Earth
	with Pits as per
	instruction for cor No
	Sec 23.24 25 & 26
	Land Sand Hills

Township 8 N R 39 W 6th P M

Chains	
	East on a randomline bet
	Sec 24 & 25
	Va 14° 7' E
40.00	Set Post for Temporary
	1/4 Sec cor
79.90	Intersect East boundary of
	Township at cor No
	Sec 24 & 25 from which cor
	I run West on true line
	bet Sec 24 and 25
	Va 14° 7'
39.95	Set Post deposit chained & stake
	raised mound of Earth
	with Pits as per instructions
	for 1/4 sec cor
79.90	Cor No Sec 23.24.25 and 26
	Soil 3rd rate Sand Hills

Township 8 N Range 39 W 6th Pm

Chains	
	North bet Sec 23 & 24
	Va 14°.7 E
40.00	Set Post deposit charred stake raised mound of Earth with Pits as per instruction for 1/4 sec cor
80.00	Set Post deposit charred stake raised mound of Earth with Pits as per Instruction for cor to Sec 13 14 23 & 24
	Land Sand Hills 3rd rate

Township 8 N Range 39 W 6th Pm

Chains	
	East on a random line bet Sec 13 & 24
	Va 14°.7 E
40.00	Set Post for temporary 1/4 Sec cor
79.81	Intersect East boundary of Township 13 links North of cor to Sec 13 & 24 from which cor 8 mm North 89°.54 W on true line bet Sec 13 & 24
	Va 14°.7 E
39.902	Set Post deposit charred stake raised mound of earth with pits as per instructions for 1/4 sec cor
79.81	Corner to Secs 13.14.23 and 24 Sand Hills

Township 8 N R 39 W. 6th P.M.

Chains	
	North bet sec 13 & 14
	Va 14° 5' E
40.00	Set Post deposit charred
	Stake raised mound of
	East with Pits as per
	Instruction for 1/4 sec cor
160	Ravine Bears S E
80.00	Set Post deposit charred
	Stake raised mound of
	Earth with Pits as per
	Instruction for cor to
	Sec 11, 12, 13 and 14
	Land Sandy 3rd rate

Town Ship 8 N R 39 W 6th P.M.

Chains	
	East on a random line bet
	Sec 12 & 13
	Va 14°.5' E
40.00	Set Post for Temporary 1/4 sec
	cor
79.78	Intersect East boundary
	of Township 9 link South
	of cor to sec 12 and 13
	from which cor I run
	South 89°.56' W on true
	line bet sec 12 and 13
	Va 14°.5'
39.89	Set Post deposit charred
	Stake raised mound of
	Earth with Pits as per
	Instruction for 1/4 sec cor
79.78	Corner to sec 11 12 13 and 14
	Soil Sandy 3rd rate

Township 8 N R. 39 W 6th Pm

Chains	
	North bet sec 11 & 12 Va 14°.10' E
40.00	Set Post deposit charred Stake raised mound of Earth with Pits as per Instruction for 1/4 sec cor
80.00	Set Post deposit charred Stake raised mound of Earth with Pits as Per Instruction for cor to 1, 2, 11 and 12 Land Rolling Sand Hills

Township 8 N Range 39 W 6th Pm

Chains	
	East on random line bet sec 1 and 12 Va 14°.10' E
40.00	Set Post for Temporary 1/4 sec cor
79.74	Intersect east boundary of Township 16 links South of cor to sec 1 and 12 ~~Va 1~~ From which cor I run South 89°.53' W on true line bet secs 1 and 12 Va 14°10' E
39.87	Set Post deposit charred Stake raised mound of Earth with Pits as per instruction for 1/4 sec cor
79.74	Corner to sections 1, 2, 11, 12 Land Sandy 3rd rate

Township 8 N Range 39 W 6th PM

Chains	
	North on True line bet- SEC 1 and 2 Va 14°.5' E
40.00	Set Post deposit charred Stake raised mound of Earth with Pits as per Instruction for 1/4 SEC cor
82.98	Intersect 2nd Standard Parallel North. 2.90 links West of SEC cor to SEC 31 and 36 Town 9 N Ranges 38 & 39 W When I set Post deposit charred stake raised mound of Earth with Pits as per Instructions for closing cor to Sec 1 & 2 T 8 N Range 39 W
	Land Sand Hills

Township 8 N Range 39 W 6th PM

Chains	
	North bet Sec 34 & 35 Va 14°.10' E
40.00	Set Post deposit charred Stake raised mound of Earth with Pits as per Instruction for 1/4 sec cor
80.00	Set Post deposit charred Stake raised mound of Earth with Pits ~~for~~ as per Instructions for cor to sec 26 27 34 and 35
	Land Sand Hills

Township 8 N R 39 W 6th P M

Chains	
	East on a random line bet Sec 26 and 35
	Va 14°10' E
40.00	Set Post for Temporary 1/4 SEC cor
80.12	Intersect N and S line 9 links South of cor to Sec 25 26 35 & 36 from which cor S run South 89 56 W on a true bet Sec 26 and 35
	Va 14°10' E
40.06	Set Post deposit charred stake raised mound of Earth with Pits as per Instruction for 1/4 SEC Cor
80.12	Cor to Sec 26 27 34 and 35
	Land Sand Hills

October 4th 1872

Township 8 N R 39 W 6th P M

Chains	
	North bet SEC 26 & 27
	Va 14°10' E
40.00	Set Post deposit charred stake raised mound of Earth with Pits as per instruction for 1/4 Sec cor
80.00	Set Post deposit charred stake raised mound of Earth with Pits as per instruction for cor to Sec 22. 23. 26. and 27
	Land Rolling Sand Hills

Township 8 N R 39 W 6th P M

Chains	
	East on a random line bet Sec 23 & 26 Va 14°.10' E
40.00	Set Post for Temporary 1/4 Sec cor
80.22	Intersect N and S line 21 links South of cor to Sec 23 24 25 & 26 from which cor S 2 mm South on a true line 89°.51' W bet Sec 23 & 26 Va 14°.10' E
40.11	Set Post deposit charred Stake raised mound of Earth with Pits as per Instructions for 1/4 Sec cor
80.22	cor to Sec 22.23.26 and 27
	Land Rolling Sand Hills

Township 8 N R 39 W 6th P M

Chains	
	North bet Sec 22 & 23 Va 14°.5' E
40.00	Set Post deposit charred charred Stake raised mound of Earth with Pits as per Instruction for 1/4 Sec cor
80.00	Set Post deposit charred Stake raised mound of Earth with Pits as per Instructions for cor to Sec 14.15.22. and 23.
	Land Sand Hills

Township 8 N Range 39 W 6th P.M.

Chains	
	East on a random line bet- SEC 14 and 23 Va 14°10' E
40.00	Set Post for Temporary 1/4 SEC cor
80.18	Intersect N & S line 19 links N of cor to sec 13.14.23. and 24. From which cor S run North 89°52' W on a true line bet- SEC 14 & 23 Va 14°10' E
40.09	Set Post deposit charred Stake raised mound of Earth with Pits as per Instruction for 1/4 sec cor
80.18	Cor to Sec 14 15 22 and 23
	Land Sand Hills

Township 8 N Range 39 W 6th P.M.

Chains	
	North bet sec 14 and 15 Va 14°7' E
40.00	Set Post deposit charred Stake raised Mound of Earth with Pits as per instruction for 1/4 sec cor
80.00	Set Post deposit charred Stake raised mound of Earth with Pits as per Instruction for Corner to SEC 10, 11, 14 and 15.
	Land Sand Rolling Soil 3rd Rate

Township 8 N R 39 W 6th P M

Chains	
	East on random line bet Sec 11 and 14 Va 14° 7' E
40.00	Set Post for Temporary 1/4 Sec cor
68.00	Ravine Bears S E
80.20	Intersect N and S line at cor to Sec 11, 12, 13 and 14 from which cor I run west on true line bet sec 11 and 14 Va 14° 7' E
40.15	Set Post deposit charred Stake raised mound of Earth with Pits as per Instruction for 1/4 sec cor
80.30	Corner to sec 10, 11, 14 & 15

Township 8 N Range 39 W 6th P M

Chains	
	North bet sec 10 and 11 Va 14° 5' E
18.00	Ravine Bears S E
40.00	Set Post deposit charred Stake raised mound of Earth with Pits as per Instruction for 1/4 sec cor
80.00	Set Post deposit charred Stake raised mound of Earth with Pits as per Instruction for cor to Sec 2, 3, 10 and 11.
	Land Sand Hills

Township 8 N R 39 W 6th P M

Chains	
	East on random line bet Sec 2 and 11 Va 14.5 E
40.00	Set Post for Temporary 1/4 Sec cor
80.40	Intersect N and S 12 links S of cor to Sec 1, 2, 11, and 12 from which cor I run South 89.55 W on true line bet Sec 2 and 11. Va 14.5 E
40.20	Set Post deposit charred Stake raised mound of Earth with Pits as per Instruction for 1/4 Sec cor
80.40	Corner to Sec 2, 3, 10 & 11

Township 8 N Range 39 W 6th P M

Chains	
	North on true line bet Sec 2 & 3 Va 14.5 E
40.00	Set Post deposit charred Stake raised mound of Earth with Pits as per Instructions for 1/4 Sec cor
83.41	Intersect 2nd Standard Parallel N 3 chs & 40 links West of sec cor to Sec 35 & 36 Town 9 N Range 39 West where I set Post deposit charred Stake raised mound of earth as with Pits as per Instructions for closing cor to Sec 2 & 3

Also T 8 N 39 W
Land Sand Hills

Township 8 N Range 39 W 6th Pm

Chains	
	North bet SEC 33 and 34
	Va 14°10' E
40.00	Set Post deposit charred Stake raised mound of Earth with Pits as per instruction for 1/4 Sec cor
80.00	Set Post deposit charred Stake raised mound of Earth with Pits as per Instruction for cor to Sec 27, 28, 33, and 34
	Land Sandy 3rd rate

Township 8 N Range 39 W 6th Pm

Chains	
	East on a random line bet Sec 27 and 34
	Va 14°10' E
40.00	Set Post for temporary 1/4 Sec cor
80.18	Intersect N & S line at cor to Sec 26 & 27 34 & 35 from which cor Trim West on true line bet Sec 27 & 34
	Va 14°10' E
40.09	Set Post deposit charred stake raised mound of Earth with Pits as per instruction for 1/4 Sec cor
80.18	corner to Sec 27, 28, 33, and 34
	Land Sandy 3rd rate

Township 8 N Range 39 W 6th P M

Chains	North bet SEC 27 and 28 Va 14°10' E
40.00	Set Post deposit charred Stake raised mound of Earth with Pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charred Stake raised mound of Earth with Pits as per Instruction for cor to SEC 21.22.27 and 28

Land Sand Hills 3rd rate

October 5th '72

Township 8 N Range 39 W 6th P M

Chains	East on a random line bet SEC 22 and 27 Va 14°10' E
40.00	Set Post for Temporary 1/4 SEC cor
80.16	Intersect N and S line 9 link South of cor to SEC 22.23.26. and 27 from which cor I run South 89°56' W on true
4[illegible]	bet Sec 22 and 27 Va 14°10'
40.08	Set Post deposit charred Stake raised mound of Earth with Pits as per Instruction for 1/4 Sec cor
80.16	Corner to Sec 21.22 27 and 28

Land Sand Hills

Township 8 N R 39 W 6th P M

Chains	
	North bet SEC 21 & 22 Va 14° 5' E
40.00	Set Post deposit charred Stake raised mound of Earth with Pits as per Instructions for 1/4 Sec Cor
80.00	Set Post deposit charred Stake raised mound of Earth with Pits as per Instructions for cor to SEC 15, 16, 21 and 22
	Sand Hills

Township 8 N Range 39 W 6th P M

Chains	
	East on a random bet Sec 15 & 22 Va 14° 5' E
40.00	Set Post for Temporary 1/4 SEC Cor
80.00	Intersect N. and S. line at cor to SEC 14 15 22 and 23 from which cor I run West on true line bet Sec 15 & 22 Va 14° 5' E
40.00	Set Post deposit charred Stake raised mound of Earth with Pits as per instruction for 1/4 Sec cor
80.00	corner to Sec 15 16 21 & 22
	Sand Hills

Township 8 N R 39 W 6th P M

Chains	North bet SEC 15 & 16 Va 14° 7' E
40.00	Set Post deposit charred Stake raised mound of Earth with Pits as per instructions for 1/4 SEC Cor
80.00	Set Post deposit charred Stake raised mound of Earth with Pits as per Instruction for cor to SEC 9.10.15. and 16.

Land Sand Hills

Township 8 N Range 39 W 6th P M

Chains	East on a random line bet SEC 10 and 15 Va 14° 7' E
40.00	Set Post for Temporary 1/4 SEC Cor
79.80	Intersect N and S line 16 links N of cor to SEC 10 11 14 & 15 from which cor I am North 89.53 West on true line bet SEC 10 & 15 Va 14° 7' E
39.90	Set Post deposit charred Stake raised mound of Earth with Pits as per instructions for 4 SEC cor
79.80	cor to SEC 9.10. 15. and 16.

Sand Hills

Township 8 N Range 39 W 6th P.m.

Chains	
	North bet SEC 9 & 10 Va 14°10' E
40.00	Set Post deposit charred stake raised mound of with Pits as per instructions for ¼ SEC cor
80.00	Set post deposit charred stake raised mound of earth with Pits as per instructions for cor to SEC 3.4.9 & 10 Sand Hills
	Land Sand Hills

Township 8 N Range 39 W 6th P.m.

Chains	
	East on a random line bet Sections 3 and 10 Va 14°10' E
40.00	Set Post for temporary ¼ SEC cor
79.82	Intersect N & S line at cor to SECS 2.3.10 & 11 from which cor I run West on true line bet SEC 3 & 10 Va 14°10' E
39.91	Set Post deposit charred stake raised mound of Earth with Pits as per Instructions for ¼ SEC cor
79.82	Corner to SEC 3.4.9 & 10
	Land Sand Hills

Township 8 N Range 39 W 6th P.M.

Chains	
	North bet SEC 3 & 4 on a true line Va 14° E
40.00	Set post deposit charred Stake raised mound of Earth with Pits as per instruction for 1/4 SEC cor
83.60	Intersect 2nd Standard Parallel N 3.30 links West of cor to SEC 34 & 35 Town 9 N Range 39 W where I set Post deposit charred Stake raised mound of Earth with Pits as per Instruction for a closing corner to Sections 3 & 4 T8 N R 39 W
	Land Sand Hills

Township 8 N Range 39 W 6th P.M.

Chains	
	North bet 32 & 33 Va 14°15' E
40.00	Set Post deposit charred stake raised mound of earth with pits as per instruction for a 1/4 SEC cor
80.00	Set Post deposit charred Stake raised mound of Earth with Pits as per instruction for cor to SEC 28, 29, 32 and 33
	Sandy Hills 3rd rate

Township 8 N R 39 W 6th PM

Chains	
	East on a random line bet SEC 28 and 33 Va 14°15' E
40.00	Set Post for Temporary 1/4 SEC cor
80.00	Intersect N and S line 14 links South of cor to SEC 27 28 33 and 34 from which corner I run South 89°54' W on true line bet SEC 28 & 33 Va 14°15' E
40.00	Set Post deposit Charred Stake raised mound of Earth with pits as per Instruction for 1/4 SEC cor
80.00	Corner to SEC 28, 29, 32, and 33
	Sandy Hills

Township 8 N R 39 W 6th PM

Chains	
	North bet SEC 28 & 29 Va 14°15' E
40.00	Set Post deposit Charred Stake raised mound of Earth with pits as per Instruction for 1/4 SEC cor
80.00	Set post deposit Charred Stake raised mound of Earth as per instruction for cor to SEC 20, 21, 28 and 29
	Sand Sandy Hills

Township 8 N R 39 W 6th PM

Chains	
	East on a random bet SEC 21 & 28 Va 14°15' E
40.00	Set Post for Temporary 1/4 SEC Cor
80.20	Intersect N and S line 7 links N of cor to SEC 21, 22, 27 and 28, from which cor I run N 89°57' W on true line bet SEC 21 & 28 Va 14°15' E
40.40	Set Post deposit charred Stake raised mound of East with pits as per instruction for 1/4 SEC Cor
80.20	Corner to SECs 20, 21, 28, and 29.
	Sandy Hills
	October 7th 1872

Township 8 N Range 39 W 6th PM

Chains	
	North bet SEC 20 & 21 Va 14°15' E
40.00	Set post deposit charred Stake raised mound of Earth as per Instruction for 1/4 Sec Cor
80.00	Set post deposit charred Stake raised mound of with pits as per instruction for cor to SEC 16 17 20 & 21
	Land Sandy Hills

Township 8 N R 39 W 6th Pm

Chains	
	East on random line bet: SEC 16 & 21 Va 14° 15' E
40.00	Set Post for temporary 1/4 Sec Cor
80.16	Intersect N & S line 23 lks North of cor to Sec 15, 16, 21, and 22, from which cor I run N 89° 50' W on true line bet SEC 16 & 21 Va 14° 15' E
40.08	Set post deposit charred stake raised mound of Earth with Pits as per instruction for 1/4 Sec cor
80.16	Corner to SEC 16, 17, 20 & 21.
	Land Sandy Hills

Township 8 N Range 39 W 6th Pm

Chains	
	North bet SEC 16 & 17 Va 14° 15' E
40.00	Set post deposit charred stake raised mound of Earth pits as per instruction for 1/4 sec cor
80.00	Set post deposit charred stake raised mound of Earth with pits as per instruction for cor to SEC 8, 9, 16 & 17.
	Land Sandy Hills 3rd rate

Township 8 N R 39 W 6th Pm

Chains	
	East on a random bet SEC 9 and 16 Va 14° 15' E
40.00	Set post for Temporary 1/4 SEC cor
80.12	Intersect N and S. line at cor to SEC 9.10.15 & 16. from which cor S run W on true line bet SEC 9 & 16 Va 14°15 E
40.06	Set post deposit charred Stake raisid mound of earth with pits as per instructions for 1/4 SEC cor
80.12	Corner to SEC 8.9.16 and 17.
	Land Sandy Hills

Township 8 N R 39 W 6th Pm

Chains	
	North bet SEC 8 & 9 Va 14°15' E
40.00	Set Post deposit charred Stake raisid mound of earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charred Stake raisid mound of earth with Pits as per instruction for cor to SEC 4.5.8 and 9
	Land Sandy Rolling

Township 8 N R 39 W 6th P M

Chains	
	East on a random bet SEC 4 & 9 Va 14°15' E
40.00	Set post for Temporary 1/4 SEC Cor
80.04	Intersect N and S line 14 lks South of cor to SEC 3.4.9 & 10. from which cor I run South 89°54' West on true line bet SEC 4 & 9 Va 14°15' E
40.02	Set post deposit chained Stake raised mound of Earth with pits as per instruction for 1/4 SEC Cor
80.04	Cor to SEC 4.5.8 & 9.

Land Sandy Hill

Township 8 N R 39 W 6th P M

Chains	
	North on true line bet SECS 4 & 5 Va 14°15' E
40.00	Set post deposit chained Stake raised mound of earth with pits as per instruction for 1/4 SEC cor
84.05	Intersect 2nd Standard Parallel North 3.05 links West of cor to SEC 33 & 34 T 9 N Range 39 W where I set post deposit chained Stake raised mound of Earth with pits as per instruction for closing corner to SEC 4 & 5 T 8 N Range 39 W

Land Sandy Rolling

Township 8 N R 39 W 6th PM

Chains	
	North bet Sec 31 & 32 Va 14°15' E
40.00	Set post deposit chased Stake raised mound of Earth with pits as per Instruction for 1/4 Sec Cor
80.00	Set post deposit chased Stake raised mound of Earth with pits as per instruction for cor Secs 29, 30, 31 and 32
	Soil Sand Hills

Township 8 N Range 39 W 6th PM

Chains	
	East on a random bet Sec 29 & 32 Va 14°15' E
40.00	Set post for Temporary 1/4 Sec cor
80.20	Intersect N & S line 9 lks S. of cor to Sec 28, 29, 32, and 33 from which cor I run South 89°56' W on true line bet Sec 29 & 32 Va 14°15' E
40.10	Set post deposit chased Stake raised mound of Earth with pits as per instruction for 1/4 Sec Cor
80.20	Corner to Sections 29, 30, 31, and 32
	Land Sandy Sandy

Township 8 N Range 39 W 6th Pm

Chains	
	West on a random bet SEC 30 and 31 Va 14°15' E
40.00	Set Post for temporary 1/4 SEC cor
79.70	Intersect west boundary of Township at cor to SEC 30 and 31 from which cor S run East on true line bet SEC 30 & 31 Va 14°15'
39.70	Set Post deposit charred stake raised mound of earth with pits as per Instruction for 1/4 SEC cor
79.70	Cor to SEC 29 30 31 and 32
	Land Sandy Hills

Township 8 N R 39 W 6th Pm

Chains	
	North bet SEC 29 & 30 Va 14°15' E
40.00	Set post deposit charred stake raised mound of earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit charred stake raised mound of earth with pits as per instruction for cor to SECS 19.20. 29. and 30
	Land Sand Hills

Township 8 Range 39 W 6th Pm

Chains	
	East on a random bet SEC 20 & 29 Va 14°15' E
40.00	Set post for temporary 1/4 SEC cor
80.10	Intersect N and S line 12 links South of cor to SEC 20 21 28 & 29 from which cor I run South 89°55' West on true line between SEC 20 & 29 Va 14°15' E
40.05	Set post deposit charcoal Stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
80.10	Corner to SEC 19.20.29 & 30
	Sand Hills

Township 8 N R 39 W 6th PM

Chains	
	West on a random bet SEC 19 & 30 Va 14°15' E
40.00	Set post for temporary 1/4 SEC cor
79.43	Intersect west boundary 16 links North of cor to SEC 19 & 30 from which cor I run North 89°55' E on true line bet SEC 19 & 30 Va 14°15' E
39.43	Set post deposit charcoal Stake raised mound of earth with pits as per instruction for 4 SEC cor
79.43	Corner to SEC 19.20.29 & 30
	Sand Sand Hills

October 8th 1872

Township 8 N Range 39 W 6th PM

Chains	
	North bet- SEC 19 & 20
	Va 14°15' E
40.00	Set post deposit charcoal Stake raised mound of Earth with pits as per instruction for 1/4 SEC Corner
80.00	Set post deposit charcoal Stake raised mound of Earth with pits as per instruction for corner to SEC 17, 18, 19 & 20.
	Land Sandy Hills

Township 8 N Range 39 West 6th PM

Chains	
	East on a random bet- SEC 17 & 20
	Va 14°15' E
40.00	Set post for Temporary 1/4 SEC cor
80.17	Intersect N and S line 28 lks North of cor to SEC 16, 17, 20, and 21 from which cor S run N 89°48' West on true line between SEC 17 & 20
	Va 14°15' E
40.08½	Set post deposit charcoal Stake raised mound of Earth with pits as per instructions for 1/4 SEC cor
80.17	Cor to SEC 17 18 19 & 20

Township 8 N Range 39 W 6th PM

Chains	
	WEST on a random bet SEC 18 & 19 Va 14°15' E
40.00	Set post for temporary 1/4 SEC cor
78.91	Intersect West boundary of Township 25 link North of cor to SEC 18 & 19 from which cor I run S North 89°48' East on true line bet SEC 18 & 19 Va 14°15' E
3671	Set post deposit charred Stake raised mound of Earth with Pits as per instruction for 1/4 SEC cor
78.91	Corner to SEC 17, 18, 19, and 20
	Land Sandy Hills

Township 8 N range 39 W 6th PM

Chains	
	North bet SEC 17 & 18 Va 14°15' E
40.00	Set post deposit charred Stake raised mound of earth with pits as per instructions for 1/4 SEC cor
80.00	Set post deposit charred Stake raised mound of Earth with pits as per instruction for cor to SEC 7, 8, 17, and 18
	Land Sandy Hills

Township 8 N R 39 W 6th P M

Chains	
	East on a random bet SEC 8 & 17 Va 14°15' E
40.00	Set post for temporary 1/4 SEC corner
80.12	Intersect N and S line 33 lks N of cor 8.9.16. and 17 from which cor I run North 89°46' West on a true line bet SEC 8 & 17 Va 14°15' E
40.06	Set post deposit charred Stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
80.12	Corner to SEC 7.8.17.&18.

Sandy Hills

Township 8 N R 39 W 6th P M

Chains	
	West on a random line bet SEC 7 & 18 Va 14°15' E
40.00	Set post for temporary 1/4 SEC corner
78.60	Intersect West boundary of Township 26 links North of the cor to SEC 7 & 18 from which cor I run North 89°49' E on true line bet SEC 7 & 18 Va 14°15' E
38.60	Set post deposit charred Stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
78.60	Cor to SEC 7 8.17.&18.

Land Sand Hills

Township 8 N Range 39 W 6th PM

Chains	
	North bet SEC 7 & 8 Va 14°15' E
40.00	Set Post deposit chased Stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
80.00	Set post deposit chased stake raised mound of Earth with pits as per instruction for cor to SEC 5.6.7.& 8
	Land Sand Hills

Township 8 N. R 39 W 6th PM

Chains	
	East on a random line bet SEC 5 & 8 Va 14°15' E
40.00	Set post for temporary 1/4 SEC cor
80.22	Intersect N and S line 31 links N of cor to SEC 4 5 8 & 9 from which cor S run N 89°47' W on true line bet SEC 5 & 8 Va 14°15' E
40.11	Set post deposit chased Stake raised mound of Earth with pits as per instruction for 1/4 SEC cor
80.22	Cor to sec 4.5.6.7 and 8 set Stake raised mound of Earth with pits as per instruction for 1/4 SEC
	Land Sandy Hills

Township 8 N Range 39 W 6th P M

Chains	
	West on a random line bet SEC 6 & 7 Va 14°15' E
40.00	Set post for Temporary 1/4 SEC Cor
78.40	Intersect West boundary of township 35 links North of Cor to SEC 6 and 7 from which cor I run North 89°45' E on true line bet sec 6 & 7 Va 14°15' E
38.40	Set post deposit charred Stake raised mound of Earth with pits as per Instruction for 1/4 SEC Cor
78.40	Cor to SEC 5, 6, 7, and 8.

Land Sand Hills

Township 8 N Range 39 W 6th P M

Chains	
	North on true line bet SEC 5 & 6 Va 14°15' E
40.00	Set post deposit charred Stake raised Mound of Earth with pits as per instruction for 1/4 SEC corner
84.23	Intersect 2nd Standard Parallel North 2.76 West of cor to SEC 32 & 33 29 N Range 39 W Where I set post deposit charred stake with pits as per instructions for closing cor to SEC 5 & 6 T 8 N Range 39 W

Land Sand Hills 3rd rate

October 9th 1872

General Description

There is no good land in this Township it is all Sandy Hills and is not fit for any thing but Grazing

A List

Of the Names of the individuals who assisted in running, measuring and marking the Subdivision Lines and Corners (of the foregoing Subdivision) of Township No 8 North Range No 39 West of the 6th Principal Meridian

W. P. Smith Chainman
C. W. Fuers Chainman
J. M. Clarke Axeman and Moundman
Chas F. Logue Flagman
James L. Slocum Compassman

We hereby certify that we assisted James L. Slocum Deputy Surveyor in Subdividing Township No 8 North Range No 39 West of the 6th Principal Meridian and that said Township has been in all respects to the best of our knowledge and belief well and faithfully Surveyed and the boundary monuments planted according to the instructions of the Surveyor General

W P Smith Chainman
C W Fuers Chainman
J. M. Clark Axeman and Moundman
C. F. Logue Flagman

Subscribed and sworn to by the above named persons before me a Notary Public in and for the County of Webster in the State of Nebraska this 1st day of November AD 1872

O. W. Brown
Notary Public

I James L. Slocum do solemnly swear that in pursuance of a joint Contract No 63. wherein James L Slocum, David T. Stephenson and Geo L. Slocum are joint Contractors with E E Cunningham United States Surveyor General for the District of Nebraska and Iowa bearing date the 29th day of June AD 1872

I have well faithfully & truly in my own proper person and in strict conformity with the Instructions of the Surveyor General, the Surveying Manual and the Laws of the United States, Surveyed all those part or portions of Township No 8 North of the base line of Range No 39 West of the 6th Principal Meridian in the State of Nebraska as are represented in the foregoing Field Notes as having been Surveyed under my direction, and I do further solemnly swear that all the Corners of such Surveys have been established and perpetuated in strict accordance with the Surveying Manual and Printed Instructions, and that the foregoing are the true & original Field Notes of said Survey

James L Slocum

Deputy Surveyor

Subscribed by the said James L. Slocum Deputy Surveyor and sworn to before me a Notary Public in and for the County of Webster in the State of Nebraska this 1st day of Nov AD 1872

O. W. Brown
Notary Public

Survey Commenced
October 4th 1872 and
Completed October 9th 1872

Surveyor Generals Office
Plattsmouth Jan 10th 1873

The foregoing Field Notes of of the Survey and Subdivision of Township No 8 North of the Base line. of Range No 39 West of the 6th Principal Meridian. Executed by James L Sloeum Deputy Surveyor. under joint Contract No 63 dated June 29th 1872 wherein James L. Sloeum David V. Stephenson and Geo. L. Sloeum are joint Contractors, in the Month of October 1872 having been Critically Examined. the necessary Corrections and Explanations made, the said Field Notes and Surveys they describe are hereby approved

E. E. Cunningham
Surveyor General

General Land Office • Original Field Notes

Book Number

612

The images in this file are photographs of the notes of the original surveys of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The original surveys in Nebraska began in the mid 1850's and were completed in the mid 1880's. The Nebraska office of the Surveyor General was closed June 30, 1886.