General Land Office • Original Field Notes

Book Number

18

The images in this file are photographs of the notes of the original surveys of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The original surveys in Nebraska began in the mid 1850's and were completed in the mid 1880's. The Nebraska office of the Surveyor General was closed June 30, 1886.

Filed Sep 30. 1857

Field Notes of the Survey of the Exterior boundaries of Township Five Six seven Eight (nine ten Eleven and twelve) north of Range Five Six seven and Eight East of the Sixth principal Meridian, in the Territory of Nebraska by Jonathan C Jones, Deputy Surveyor under his contract No 149 bearing date the Eighteenth day of October 1856

Commenced November the 18th 1856

Completed August the 6th 1857

Names

A list of the names of individuals employed to assist in Running measuring or marking the lines and corners of the following field notes

Jonathan Gray	chainman
William P. Manning	chainman
Levi Springer	flagman
Daniel Bistine	flagman
William Moore	axman

Index

Jonathan P. Jones,
Township lines

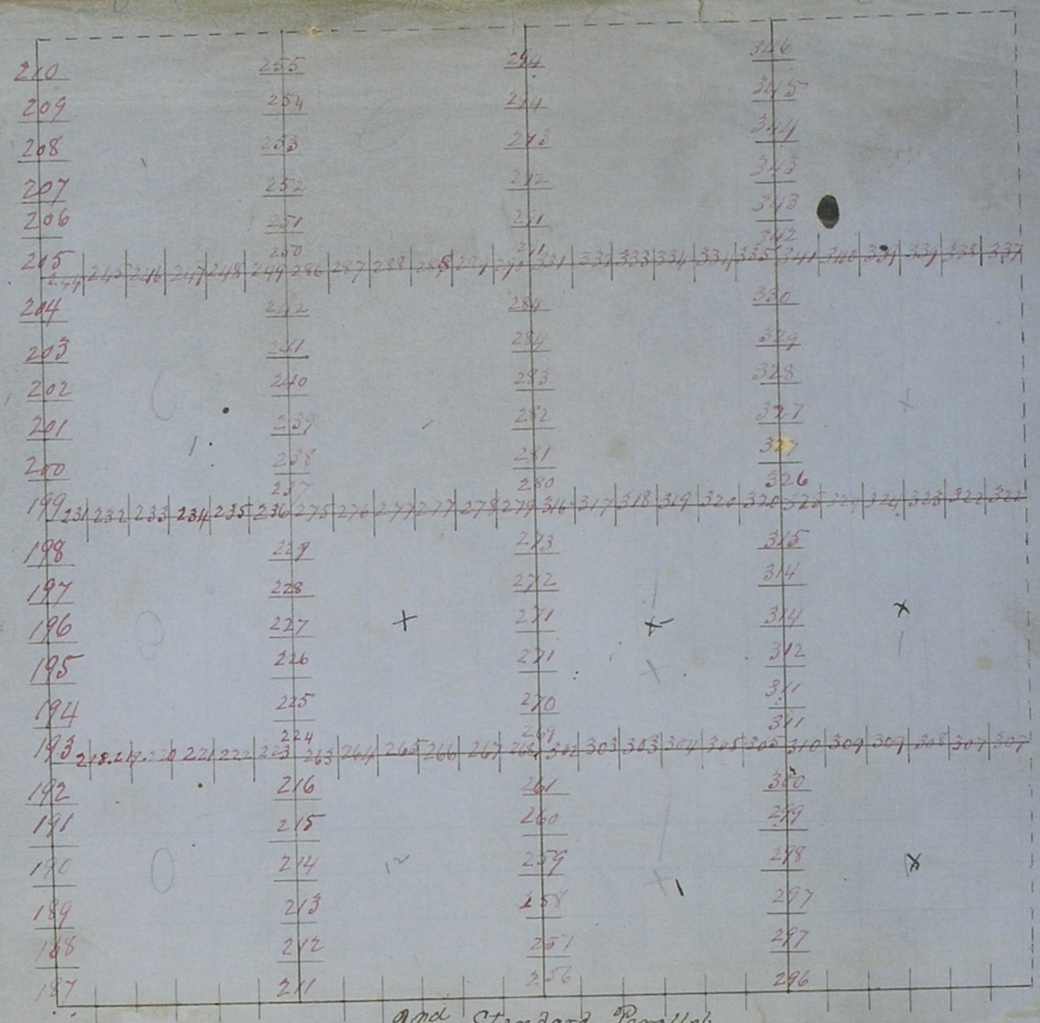
12
11
10
9
9th Standard Parallel

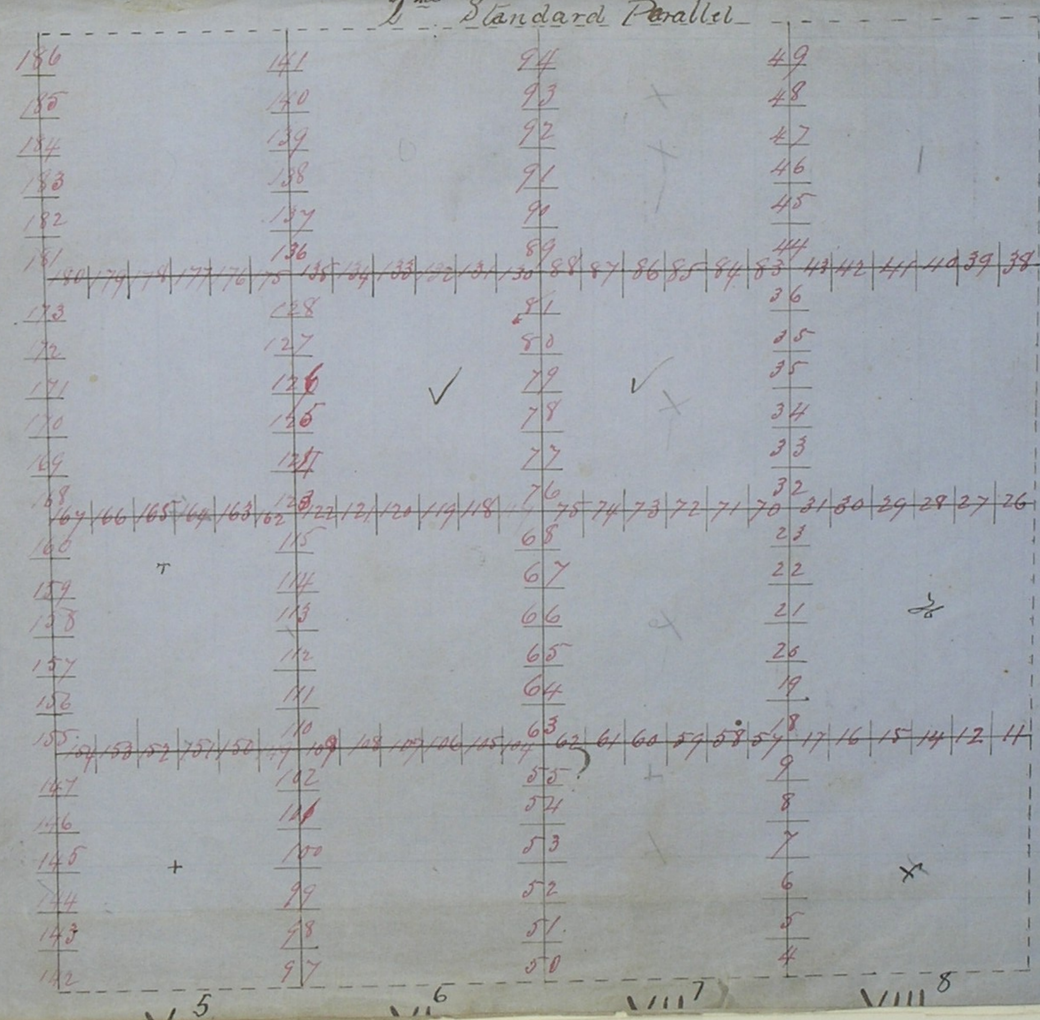
2nd Standard Parallel
8
7
6
5
V 5
VI 6
VII 7
VIII 8

United States of America } I Jonathan Gray
Territory of Nebraska } do solemnly

swear that I will execute the duties of chain carrier: that I will level the chain upon uneven ground, and plumb the tally pins, whether by sticking or dropping the same: that I will report the true distance to all notable objects: and the true lengths of all lines that I assist in measuring: to the best of my skill and ability

Jonathan Gray

Subscribed and sworn to before me this thirty day of June A. D. 1857

James Bishop Probate Judge
Of Johnston County N.T.

United States of America } I, William T. Manning
Territory of Nebraska } do solemnly

swear that I will perform the duties of chain carrier: that I will level the chain upon uneven ground, and plumb the tally pins, whether by sticking or dropping the same: that I will report the true distance to all notable objects: and the true length of all lines that I assist in measuring, to the best of my skill and ability

William T. Manning

Subscribed and sworn to before me this third day of June A.D. 1857

James Bishop Probate Judge
Of Johnston County, N.T.

United States of America } Levi Springer
Territory of Nebraska } do solemnly

swear that I will well and truly perform the duties of Flagman according to instructions given me and to the best of my skill and ability

Levi Springer

Subscribed and sworn to before me this thirtieth day of June A.D. 1857

James Bishop Probate Judge
of Johnston County N.T.

United States of America } I Daniel Kistine
Territory of Nebraska } do solemnly

swear that I will well and
and truly perform the duties
of flagman according to inst
ructions given me over to
the best of my skill and
ability.

Daniel Kistine

Subscribed and sworn to before
me this three day of June A.D.
1857
James Bishop Probate Judge
Of Johnston County Nt.

United States of America } A. William. Moore
Territory of Nebraska } do solemnly

swear that I will well and truly perform the duties of a person according to instructions given me and to the best of my skill and ability

William Moore

Subscribed and sworn to before me this third day of June A.D. 1857

James Bishop Probate Judge
Of Johnston County N.T.

Between Ranges 7 + 8 E. [illegible]

Begins at the Post in Mound on the first Standard Parallel & the established Corner to Township four and five North of the Base line of Ranges Seven and Eight East of the sixth principal Meridian.

I ascertained the variation of the needle by running a half mile East and West on the Parallel line

Between Ranges 7 & 8 E. Ly. S.S.N.

With the variation so
ascertained which being
11°30' East I run

North on the Range line
Between sections 31 & 36

~~Variation 11°30' E~~

40 00 Set a Lime stone
12 in long 11 in wide and 6
in thick for quarter
section Corner ~~Lower~~
~~Lower or Gently Rolling Gover~~
~~Wide Soil~~

80 00 Set a Lime Stone 16 in
long 11 in wide and 5 in
thick for Corner to sections
30. 31. and 25. 36. Lower
Gently Rolling 3rd rate soil

Between Ranges 7 & 8 E. Ly. S.S.N.

North Between sections
30 and 25

Variation 11°30' E.

40 00 Set a Lime Stone 11 in
long 11 in wide and 6
in thick for quarter
section Corner ~~Lower~~
~~Lower or Gently Rolling~~
~~first rate Soil~~

2

80 00 Set a Lime Stone
17 in long 12 in wide and
6 in thick for Corner
to sections
19. 30. and 24. 25.
Lower Gently Rolling
first rate Soil Gover
for forming purposes

Between Ranges 7 & 8 E. T. 5 N.

North Between
Sections 17 and 24
Variation 11° 30' E

40 00 Set a Red flint Stone
18 in long 10 in wide
and 7 in thick for quarter
section corner. ~~[illegible]~~
~~[illegible] rolling first~~
~~[illegible] soil~~

3

80 00 Set a Red flint Stone
14 in long 12 in wide
and 5 in thick for
corner to sections
18 N. and 13 & 24.
land Gently first
rate soil fit for
cultivation

Between Ranges 7 & 8 E. T. 5 N.

North Between
Sections 18 and 13
Variation 11° 30' E

40 00 Set a Red flint Stone
13 in long 10 in wide
and 4 in thick for
quarter section corner
~~land Gently rolling~~
~~first rate soil~~

4

80 00 Set a Red flint Stone
11 in long 10 in wide and
5 in thick for corner
to sections 7 & 18 and
12 N. land Broken
sandy and poor

November the 20th 1856

Between Ranges 7 & 8 E. 3rd Ln

North Between
Sections 7 and 12
Variation 11°30' E

40 00 Set a Red flint Stone
11 in long 10 in wide and
6 in thick for quarter
section Corner. ~~[illegible]~~
~~[illegible]~~
5

80 00 Set a Red flint
Stone 12 in long 11
in wide and 7 in
thick for Corner to
sections 6 & 7 and
1 & 12. land Gently
Rolling 3rd rate
soil not fit for cultivation

Between Ranges 7 & 8 E. 3rd Ln

North Between
Sections 6 and 1
Variation 11°30' E

40 00 Set a Red flint Stone
15 in long 12 in wide
and 7 in thick for
quarter section Corner.
~~land Broken Stony~~
6 ~~and poor not fit for~~
~~cultivation~~.

70 00 to Revene 10 links wide
Runs East

80 00 Set a Sand Stone 18
in long 14 in wide and
5 in thick for Corner
to Townships 5 and 6 North
of Ranges 7 and 8 East
land Broken and poor

Between Townships 5 & 6 N. R. 8 E.

From the Corner to Townships 5 and 6 North of Range 7 and 8 East

I Run East on a Random line Between said Townships. the Variation of the Needle being 11° 30' East

I Set temporary half mile and Mile Posts at 40.00 and 80.00 Chains

I find the Township line to be 5 Miles 55 chains. and the falling to be 90 links South of the Township Corner. the correction for the

Between Townships 5 & 6 N. R. 8 E.

true line will therefore be 25 chains West and 17 1/2 links North per Mile

From the Corner to Townships 5 and 6 North of Range 8 and 9 East I Run

West on a true line Between sections 1 & 36

Variation 11° 37' E

40.00 Set a Sand Stone 18 in long & in wide and 3 in thick. for Quarter Section Corner ~~[illegible] Brokene first [illegible]~~

Between Townships 5 & 6 N. R. 8 E.

80 00 Set a Red flint Stone 12 in long 11 in wide and 4 in thick. for Corner to Sections 1. 2. and 35. 36. land Gently Rolling first rate soil

Crest on a true line
5 Between Section 2 & 35
2 Variation 11° 37' E

40 00 Set a sand stone 18 in long 11 in wide and 3 in thick for quarter section Corner. ~~land Rolling first rate soil~~

Between Townships 5 & 6 N. R. 8 E.

40 00 to Revene 10 links wide Runs N. 45° E.

56 00 to Revene 10 links wide Runs North

80 00 Set a sand stone 13 in long 11 in wide and 6 in thick. for
2 Corner to Sections 2. 3. and 34. 35. land Gently Rolling first rate soil fit for cultivation

November the 21st 1856

Between Townships 5 & 6 N. R. 8 E.

West on a true line
between sections 3 & 34
Variation 11° 37' E.

40 00 Set a Red flint stone 13
in long 11 in wide and
6 in thick for quarter
section corner. ~~land~~
~~Rolling first rate soil~~

5

3 80 00 Set a Red flint stone
13 in long 10 in wide and
6 in thick for corner
to sections
3. 4. and 33. 34.
land Gently Rolling
first rate soil fit
for cultivation

Between Townships 5 & 6 N. R. 8 E.

West on a true line
between sections 4 & 33
Variation 11° 37' E.

40 00 Set a Red flint stone 14
in long 13 in wide
and 6 in thick for
quarter section corner
~~land Rolling first rate~~
~~soil~~

4

80 00 Set a Red flint stone
11 in long 10 in wide
and 5 in thick for
corner to sections
4. 5. and 32. 33.
land Rolling first
rate soil fit for
cultivation

Between Townships 5 & 6 N. R. 8 E.

West on a true line
between sections 5 & 32.
Ob. 11° 37' E.

40 00 Set a Red flint stone
12 in long 10 in wide
and 5 in thick. for
quarter section corner ~~land~~
~~Rolling first rate~~
~~soil~~

5 5

60 00 To ~~Pawnee 7 links~~ wide
Runs North

80 00 Set a sand stone 14
in long 14 in wide
and 5 in thick for corner
to sections 5 & 6 and 31, 32.
land level good
Rich Bottom not
subject to inundation

Between Townships 5 & 6 N. R. 8 E.

West on a true line
Between sections 6 & 31
Variation 11° 37' E.

40 00 Set a Red flint stone
14 in long 8 in wide
and 8 in thick. for
quarter section corner
~~land level or Rolling~~
~~Rolling 3a rate soil~~
~~not fit for cultivation~~

6

55 00 To the Established Corner
to Townships 5 and 6
North of Ranges 7 and 8
East

November the 22d 1856

Between Ranges 7 & 8 E. T. C. N.

From the corner to Township 5 & 6 North of Ranges 7 & 8 E. I Run North on the Ranges line Between Sections 31 & 36

Variation 11°30' E

40 00 Set a Red flint Stone 14 in long 10 in wide and 6 in thick for quarter section corner. ~~Land Rolling 2d rate soil~~

5

1

60 00 Set a Red flint Stone 16 in long 7 in wide and 6 in thick for corner to Sections 30 & 31 and 25 & 36 land Lently Rolling first rate soil

Between Ranges 7 & 8 E. T. C. N.

North Between Sections 30 and 25

Variation 11°30' East

40 00 Set a Red flint Stone 13 in long 9 in wide and 6 in thick for quarter section corner. ~~Land Rolling first rate soil~~

61 00 Leave Prairie and Enter timber

6.25 to creek 10 links wide

2 Runs East

72.50 Leave timber and Enter Prairie E & W.

80 00 Set a Red flint Stone 13 in long 10 in wide and 5 in thick for for corner to Sections 19 & 30 and 24 & 25 land Rolling first rate soil (Timber Cottonwood and Elm

Between Ranges 7 & 8 E. T. C. N.

North Between
Sections 19 and 24
Variation 11° 30' E

40 00 Set a Red flint Stone
13 in long 9 in wide and
7 in thick for quarter
section corner. ~~Land~~
~~Gently Rolling first~~
~~rate soil~~

3

80 00 Set a Red flint Stone
12 in long 7 in wide
and 5 in thick for
corner to sections
18 19 and 13. 24.
land level good rich
bottom, not subject
to inundation,

Between Ranges 7 & 8 E. T. C. N.

North Between
Sections 18 and 13
Variation 11° 30' E

40 00 Set a Red flint Stone
15 in long 11 in wide and
5 in thick for
quarter section corner
~~Land, [illegible] land or~~
4 ~~Gently Rolling first rate~~
~~soil~~

80 00 Set a Red flint Stone
13 in long 10 in wide
and 5 in thick for
corner to sections
7 18 and 12 13.
land Rolling first
rate soil

Between Ranges 7 & 8 E. T. C. N.

North Between
Sections 7 and 18
Variation 11° 30' E

40 00 Set a Red flint Stone
12 in long 10 in wide
5 in thick for quarter
section corner. ~~[illegible]~~
~~level good Rich Bottom~~

50 00 leave Prairie and Enter timber
bears E and West
5 55 00 leave timber & Enter Prairie E & W
56 00 to Dry creek 10 links wide
Runs East

80 00 Set a Red flint Stone
13 in long 9 in wide
and 6 in thick for corner
to sections 6 & 7 and 1 & 12.
land level good Rich
Bottom Dry Soil
Timber - Scrubby Oak & Elm

Between Ranges 7 & 8 E. T. C. N.

North Between
Sections 6 and 1
Variation 11° 30' E.

40 00 Set a Red flint Stone
11 in long 10 in wide and
6 in thick for quarter
section corner. ~~[illegible]~~
~~high and Smooth Rolling~~
~~first rate soil~~

6

80 00 Set a Sand Stone 18
in long 8 in wide and
4 in thick for corner
Corner to Townships
6 and 7 North of Range
7 and 8 East land
Rolling first rate
soil

Between Townships 6 & 7 N. R. 8 E.

From the Corner to Townships 6 & 7 North of Ranges 7 & 8 East

I Run East on a Random line Between said Townships. the variation of the needle being 11° 30' East

I set temporary half Mile and Mile Posts at 40.00 and 80.00 chains.

Between Townships 6 & 7 N. R. 8 E.

I find the Township to be 5 miles 55 chains and 10 links. and the falling to be 8 chains and 48 links North of the Township Corner.

the correction for the true line will there fore be 34 chains and 90 links west and 44 links south per Mile

Between Townships 6 & 7 N. R. 8 E

From the Corner to
Townships 6 & 7 North of
Ranges 8 and 9 East
I. Run
West on a true line
Between 1 and 36
Variation 11° 10' E

40 00 Set a Rear flint stone
14 in long 10 in wide and
5 in thick for quarter
1 section corner. ~~Land~~
~~Rolling & first rate soil~~
65 00 to Creek 20 links wide Runs South
80 00 Set a Rear flint stone
12 in long 8 in wide
and 5 in thick for
Corner to Sections 1. 2.
and 35. 36. land level
good Rich Bottom

Between Townships 6 & 7 N. R. 8 E

West on a true line
Between Sections 2 & 35
Variation 11° 10' E

40 00 Set a Rear flint stone
11 in long 10 in wide and
7 in thick for quarter
section Corner. ~~Land~~
~~Rolling and first~~

2 80 00 Set a Rear flint stone
12 in long 9 in wide
and 6 in thick for
Corner to Sections
2. 3. and 34. 35.
land level good
Rich soil fit for
cultivation

Between Townships 6 & 7. N. R. 8. E

West on a true line
Between Sections 3 & 34
Variation 11°.10'.E

40 00 Set a Red flint Stone
18 in long 8 in wide and
6 in thick for quarter
section Corner. ~~land~~
~~Rolling. 2d rate soil~~

3 80 00 Set a Sand Stone
18 in long 12 in wide
and 9 in thick for
Corner to sections
3. 4. and 33. 34.
land Gently Rolling
3d rate soil not fit
for forming purpises

Between Townships 6 & 7. N. R. 8. E

West on a true line
Between Sections 4. & 33.
Variation 11°.10'.E.

40 00 Set a lime Stone
13 in long 10 in wide
and 7 in thick. for
quarter section Corner
~~land Rolling. 3d~~
~~rate soil~~

4

80 00 Set a Sand Stone 12 in
long 10 in wide and
9 in thick. for
Corner to sections
4. 5. and 32. 33.
land Rolling 3d rate
soil not fit for cultivation

Betwene Townships 6 & 7. N. R. 8. E.

West on a true line
Betwene sections 5 & 32.
variation 11°.10'. E

40 00 Set a lime stone
10 in long 8 in wide
and 7 in thick for
quarter section corner
~~land Rolling. 3rd rate~~
~~soil not fit for cultivation~~

5

80 00 Set a Red flint stone
18 in long 9 in wide
and 6 in thick, for
corner to sections
5, 6, and 31, 32. land
Gently Rolling; first
rate soil

Betwene Townships 6 & 7. N. R. 8. E

West on a true line
Betwene sections 6 & 31
variation 11°.10'. E

40 00 Set a Red flint stone
10 in long 9 in wide and
6 in thick for quarter
section corner. ~~land~~
~~Rolling first rate soil~~
~~fit for cultivation~~

6

55 10 to the Established corner
to Townships 6 and 7
North of Ranges 7 and
8 East

November the 28th 1856

Between Ranges 7 & 8 E. T. 7 N.

From the Corner to Townships 6 and 7 North of Range 7 & 8 East
I Run North on the Range line Between sections 31 and 36

Variation 11°30' E

40 00 Set a sand stone 20 in long 16 in wide and 3 in thick. for quarter section Corner. ~~land level or Gently Rolling first rate soil~~

80 00 Set a sand stone 13 in long 10 in wide and 8 in thick. for Corner to sections 30, 31. and 25, 36. land Rolling first rate soil

Between Ranges 7 & 8 E. T. 7 N.

North Between sections 30 and 25

Variation 11°30' E

40 00 Set a sand stone 18 in long 10 in wide and 4 in thick. for quarter section Corner. ~~land Rolling first rate soil~~

80 00 Set a sand stone 16 in long 10 in wide and 6 in thick for Corner to sections 19, 30. and 24, 25. land Gently Rolling, first rate soil fit for cultivation

Between Ranges 7 & 8 E. T. 7. N.

North Between
Sections 19 & 24
Variation 11°.30'. E

40 00 Set a sand stone 15 in long 9 in wide and 4 in thick for quarter section corner. ~~lower. Gently Rolling. first rate soil~~

3

80 00 Set a red flint stone 14 in long 9 in wide and 5 in thick. for corner to sections 18. 19. and 13. 24. land level first rate soil. fit for cultivation

Between Ranges 7 & 8. E. T. 7. N.

North Between
sections 18 and 13
variation 11°.30'. East

40 00 Set a sand stone 12 in long 11 in wide and 8 in thick for quarter section corner

80 00 Set a sand stone 14 in long 10 in wide and 6 in thick for corner. to sections 7. 18. and 12. 13. land Gently Rolling first rate soil fit for cultivation

4

North Betone
Sections 7 and 12
variation 11°.30' East

40 00 Set a sand stone 15 in long 13 in wide and 7 in thick for quarter section corner

5

80 00 Set a sand stone 12 in long 9 in wide and 5 in thick for corner. to sections. 6. 7. and 1. 12.

Between Ranges 7 & 8 E. T. 7. N.

land broken soil poor. not fit for cultivation

North Between
sections 6 and 1
variation 11° 30' East

40 00 Set a sand stone 15 in long 13 in wide and 7 in thick for quarter section corner

80 00 Set a lime stone 20 in long 10 in wide and 10 in thick. for corner to Townships 7 and 8 north of Ranges 7 and 8 East land level good Birch bottom. not subject to inundation

June the 6th 1857

Between Townships 7 & 8. N. R. 8. E.

From the Corner to Townships 7 and 8 north of Ranges 7. and 8. East I Run East on a Random line between said Townships, the variation of the needle being 11° 30' East I set temporary half mile and mile Posts at 40.00 and 80.00 chains

I find the Township line to be 5 miles 55 chains and 50 links. and the falling to be 2 chains and 79 links north of the Township Corner.

the Correction for the true line will therefore be 24 chains and 50 links west and 51 links south per mile

Betwene Township 7 & 8. N. R. 8. E

From the Corner to Township 7 and 8 north of Ranges 9 and 8. East I Run
West on a true line betwene sections 1 and 36
variation 11° 08' East

40 00 Set a Red flint Stone 14 in long 7 in wide and 6 in thick. for quarter sections corner

6 1 80 00 Set a Red flint Stone 20 in long 10 in wide and 8 in thick. for corner to sections 1. 2. and 35. 36. land Rolling. first rate soil

Betwene Township 7 & 8. N. R. 8. E

West on a true line Betwene sections 2 and 35
variation 11° 08' E

40 00 Set a Red flint Stone 11 in long 10 in wide and 8 in thick. for quarter sections corner. ~~land~~ ~~land good Rich soil~~

2 80 00 Set a Red flint Stone 16 in long 10 in wide and 6 in thick. for corner to sections. 2. 3. and 34 35. land Gently Rolling first rate soil good for forming purposes

Between Townships 7 & 8 N. R. 8 E

West on a true line
Between sections 3 and 34
variation 11° 08' E.

40 00 Set a lime stone 16 in long 9 in wide and 3 in thick. for quarter section corner. ~~land Gently Rolling first rate soil~~

80 00 Set a Red flint stone 15 in long. 8 in wide and 8 in thick. for corner to sections. 3. 4. and 33. 34. land Broken and poor not fit for cultivation

Between Townships 7 & 8 N. R. 8 E

West on a true line
Between sections 4 & 33
variation 11° 08' E

40 00 Set a lime stone 18 in long 10 in wide and 3 in thick. for quarter section corner. ~~land Broken and poor not fit for cultivation.~~

80 00 Set a lime stone 19 in long 9 in wide, and 3 in thick. for corner to sections 4. 5. and 32. 33. land level good Rich Bottom. not subject to inundation

Between Townships 7 & 8 N. R. 8 E.

West on a true line
Between sections 5 & 32
variation 11° 08' E

40 00 Set a line stone 19 in long 9 in wide and 4 in thick. for quarter section corner. ~~land Gently Rolling. first rate soil~~

80 00 Set a line stone 16 in long 10 in wide and 3 in thick. for corner to sections 5 6 and 31. 32. land level. good Rich Bottom not subject to inundations

Between Townships 7 & 8 N. R. 8 E.

West on a true line
Between sections 6 & 31
variation 11° 08' E

38 00 to Creek 5 links wide
Runs North

40 00 Set a line stone 20 in long 10 in wide and 3 in thick. for quarter section corner. ~~land level good Rich Bottom not subject to inundations~~

55 50 to the Established Corner to Townships 7 and 8 North of Ranges 7 and 8 East

June the 8th 1857

Between Ranges 7 & 8 E. T. 8 N.

From the Corner to Townships 7 and 8 North of Ranges 7 and 8 East I Run
North on the Ranges line
Between sections 31 & 36
Variation 11° 30' E

8 00 leave Prairie and enter timber bears East and West
9 00 to Creek 15 links wide Runs East

10 00 leave timber and enter Prairie bears East and West
40 00 Set a lime Stone 24 in long 13 in wide and 6 in thick for quarter section corner. ~~land South Rolling first rate soil~~

80 00 Set a Sand Stone 18 in long 13 in wide and 6 in thick for Corner to sections 30, 31, and 25, 36, land Rolling, first soil

Between Ranges 7 & 8 E. T. 8 N.

North between
Sections 30 and 25
Variation 11° 30' E

40 00 Set a lime Stone 14 in long 13 in wide and 6 in thick. for quarter section corner. ~~land Rolling first rate soil~~

2

80 00 Set a lime Stone 15 in long 13 in wide and 5 in thick. for Corner to sections 19, 30, and 24, 25. land South Rolling first rate soil fit for cultivation

Between Ranges 7 & 8 E. T. 8 N.

North Between
Sections 19 and 24
Variation 11°30' E

40 00 Set a lime stone 18 in long 12 in wide and 2½ in thick for quarter section Corner ~~land Broken, first rate soil fit for cultivation~~

3

80 00 Set a lime stone 13 in long 13 in wide and 6 in thick. for Corner to sections 18, 19, and 13, 24. land Gently Rolling. first rate soil. fit for cultivation

Between Ranges 7 & 8 E. T. 8 N.

North Between
Sections 18 and 13
Variation 11°30' E

40 00 Set a lime stone 17 in long 9 in wide and 6 in thick. for quarter section Corner. ~~land Gently Rolling first rate soil~~

4

80 00 Set a lime stone 15 in long 13 in wide and 5 in thick. for Corner to sections 7, 18, and 12, 13. land Gently Rolling. first rate soil

Between Ranges 7 & 8 E. 4th S.M.

North Between
Sections 7 and 12
Variation 11° 30' E

40.00 Set a lime stone 20 in long 11 in wide and 4 in thick for quarter section corner ~~land Broken and Rough 2d rate soil~~

5

80.00 Set a lime stone 14 in long 14 in wide and 3 in thick for corner to sections 6 & 7, and 1 & 12. land broken 2d rate soil

Between Ranges 7 & 8 E. 4th S.M.

North Between
Sections 6 and 1
Variation 11° 30' E

40.00 Set a lime stone 17 in long 14 in wide and 3 in thick for quarter section corner. ~~land gently rolling first rate soil~~

6

77.81 to the second Standard Parallel North. falling 16 chains and 37 links West of the Standard corner.
Set in a lime stone 17 in long 10 in wide and 4 in thick for correction corner land gently rolling first rate soil

Betwene Ranges 6 & 7 E. T. 5. N.

Mr From the Corner to Townships 4 & 5 North (on the first Standard Parallel) of Ranges 6 and 7 East S Run

North on the Range line Betwene sections 31 and 36

Variation 11°30' E

40 00 Set a Red flint Stone 15 in long 13 in wide and 8 in thick for quarter Corner. ~~Land Rolling first rate soil~~

1

80 00 Set a Red flint stone 15 in long 8 in wide and 7 in thick. for Corner to Sections 30, 31, and 25, 36. land Gently Rolling. first rate soil

Betwene Ranges 6 & 7 E. T. 5. N.

North Betwene Sections 30 and 25

Variation 11°30' E

40 00 Set a White flint Stone 14 in long 9 in wide and 4 in thick. for quarter section Corner. ~~Land Gently Rolling first rate soil fit for cultivation~~

2

80 00 Set a Red flint stone 12 in long 11 in wide and 7 in thick. for Corner to Sections 19, 30, and 24, 25. land Gently Rolling. first rate soil

Betwene Ranges 6 & 7 E. T. 5 N.

North Betwene
sections 19 and 24
variation 11°.30' E

4000 Set a Red flint stone 15 in long 8 in wide and 7 in thick. for quarter section Corner. ~~land Rolling. first rate soil~~

3 8000 Set a sand stone 12 in long 11 in wide and 7 in thick. for Corner to sections 18. 19. and 13. 24. land Rolling first rate soil

Betwene Ranges 6 & 7 E. T. 5 N.

North Betwene
sections 18 and 13
variation 11°.30' E

4000 Set a Red flint stone 15 in long 10 in wide and 7 in thick. for quarter section section Corner ~~land Rolling. first rate soil fit for cultivation~~

4 8000 Set a Red flint stone 13 1/2 in long 8 in wide and 6 in thick. for Corner to sections 7. 18. and 12. 13. land Rolling. first rate soil

Between Ranges 6 & 7 E. T. 5 N.

North Between
Sections 7 and 12
Variation 11° 30' E.

40 10 Set a red flint stone 10 1/2 in long 10 in wide and 5 in thick. for quarter section corner ~~Corner land Rolling first rate soil~~

5 80 00 Set a sand stone 10 in long 10 in wide and 6 in thick. for Corner to sections 6. 7. and 1. 12. land ~~land~~ Rolling. first rate soil

Between Ranges 6 & 7 E. T. 5 N.

North Between
Sections 6 and 1
Variation 11° 30' E

40 10 Set a sand stone 14 in long 10 in wide and 4 in thick. for quarter section corner. ~~land Rolling first rate soil set for cultivation~~

6 80 00 Set a sand stone 16 in long 12 in wide and 4 in thick. for Corner to ~~Township~~ 5 and 6 North of Ranges 6 and 7 East land Rolling; first rate soil

June the 10th 1857

Between Townships 5 & 6 N. R. 7 E.

From the Corner to Townships 5 and 6. North of Ranges 6. and 7. East I Run East on Random line Between said Townships. the variation of the needle being 11°.30'.E

I set temporary half mile and mile Posts at 40.00 and 80.00. chains

I find the Township line to be 6 miles and 96 links and the falling to be one chain and 69 links north of the Township corner: the correction for the true line will therefore be 96 East and 28 1/4 links south per mile

Between Townships 5 & 6 N. R. 7 E ✓

From the Corner to Townships 5 and 6 North of Ranges 7 and 8 East I Run West on a true line Between sections 1 and 36

variation 11°16'E

40.00 Set a Red flint stone 14 in long 10 in wide and 8 in thick. for quarter section corner. ~~land Broken first rate soil~~

80.00 Set a Red flint Stone 16 in long 14 in wide and 8 in thick. for corner to sections 1, 2 and 35. 36. land Gently Rolling first rate soil

Between Townships 5 & 6 N. R. 7 E.

West on a true line
Between sections 2 and 35
variation 11° 16' E

40 00 Set a Red flint stone
18 in long 10 in wide and
9 in thick. for quarter
section corner. ~~land~~
~~level good Rich Bottom~~
~~not subject to inundation~~

2 80 00 Set a Red flint stone
16 in long 10 in wide and
9 in thick for corner
to sections 2. 3. and
34. 35. land level
good Rich Bottom fit
for cultivation. not subject
to inundation

Between Townships 5 & 6 N. R. 7 E.

West on a true line
Between sections 3 and 34
variation 11° 16' East

40 00 Set a Red flint stone
18 in long 12 in ~~long~~ wide and
8 in thick. for quarter
section corner. ~~land~~
~~Rolling. first rate soil~~
~~fit for cultivation~~

3 80 00 Set a Red flint stone
16 in long 10 in ~~long~~ wide
and 6 in thick. for
corner to sections
3. 4. and 33. 34. land
Rolling. first rate soil

Between Townships 5 & 6 N. R. 7. E

West on a true line
Between sections 4 and 33
variation 11° 16' E

40 00 Set a Red flint stone
15 in long 9 in wide
and 8 in thick for
quarter sections corner
~~land Rolling first~~
~~rate soil for cultivation~~

4 80 00 Set a Red flint 14
in long 12 in wide
and 7 in thick for
Corner to sections
4. 5. and 32. 33.
land Broken 2nd rate
soil

Between Townships 5 & 6 N. R. 7. E

West on a true line
Between sections 5 and 32
variation 11° 16' E

40 00 Set a Red flint stone
18 in long 12 in wide
and 8 in thick for
quarter section corner
~~land Rolling first rate~~

5 80 00 Set a Red flint stone
15 in long 10 in wide
and 7 in thick for
Corner to sections
5. 6. and 31. 32.
land high and Rolling
first rate soil

Betwene Townships 5 & 6 N. R. 7 E

West on a true line
Betwene sections 6 and 31
variation 11° 16' E

40 00 Set a Rear flint stone
14 in long 12 in wide
and 8 in thick for
quarter section Corner
~~land high and Rolling~~
~~2 or rate soil~~

6 80 96 to the Establishers Corner
to Townships 5 and 6 North
of Ranges 6 and 7 East

June the 11th 1857

Betwene Ranges 6 & 7 E. T. 6 N.

From the Corner to Townships
5 and 6 North of Ranges 6 and
7 East I Run
North on the Range line
Betwene sections 31 and 36.
variation 11° 30' E

40 00 Set a sand stone 13 in long
9 in wide and 6 in thick
for quarter section Corner
1 ~~land Rolling first rate~~
~~soil~~

80 00 Set a Rear flint stone
12 1/2 in long 6 1/2 in wide
and 5 in thick for
Corner to sections 30 & 31
and 25 & 36. land Rolling
first rate soil

Between Ranges 6 & 7. E. T. C. N.

North Between
sections 30 and 25
variation 11°30'. E

40 00 Set a Red flint Stone
12 in long 9 1/2 in wide
and 7 in thick for quarter
section Corner. ~~land~~
~~Rolling. 2d rate land~~

2 80 00 Set a Red flint stone
11 in long 9 in wide
and 8 in thick for
Corner to sections
19. 30. and 24. 25.
land Rolling. 2d rate
soil

Between Ranges 6 & 7. E. T. C. N.

North Between
sections 19 and 24
variation 11°30'. E.

40 00 Set a Red flint Stone
12 in long 11 in wide
and 8 in thick. for
quarter Section Corner
~~land Rolling. 2d rate~~
~~soil~~

3 80 00 Set a Red flint Stone
14 in long 7 in wide
and 5 in thick. for
Corner to sections
18. 19. and 13. 24.
land Rolling 2d rate
soil

Between Ranges 6 & 7 E. S.G.N.

North Between
Sections 18 and 13
Variation 11°30' E

40 00 Set a Red flint stone 14 in long 9 in wide and 5 1/2 in thick for quarter section corner. ~~land~~ ~~level~~ ~~and~~ ~~Rich~~ ~~soil~~

4 80 00 Set a Red flint stone 14 in long 11 in wide and 6 in thick. for corner to sections 7. 18. and 12. 13. land level or Gently Rolling. first rate soil fit for cultivation

Between Ranges 6 & 7 E. S.G.N.

North Between
Sections 7 and 12
Variation 11°30' E

40 00 Set a Corner Stone 13 in long 6 1/2 in wide and 6 in thick. for quarter section corner. ~~land gently rolling~~ ~~first rate soil~~

5 80 00 Set a Red flint stone 13 in long 9 in wide and 5 1/2 in thick for corner to sections 6. 7. and 1. 12. land Gently Rolling first rate soil

Betwene Ranges 6 & 7. E. T. 6. N.

North Betwene
sections 6 and 1
variation 11° 30' E

40 00 Set a Red flint stone
12 in long 10 in wide
and 7 in thick for
quarter section Corner
~~land Gently Rolling.~~
6 ~~first rate soil~~

80 00 Set a sand stone
18 in long 10 in wide
and 5 in thick, for
corner to Townships
6 and 7 North of Ranges
6 and 7 East. land
Rolling. first rate soil

Betwene Townships 6 & 7 N. R. 7 E

From the Corner to Townships
6 and 7 North of Ranges
6 and 7 East. I Run
East on a Random line
Betwene said Townships the
variation of the needle being
11° 30' East
I set temporary half mile
and mile Posts at 40.00
and 80.00 chains
I find the Township line
to be 5 mile 77 chains
and 11 links. and the
falling to be 2 chains and
25 links North of the
Township corner. the correction
for the true line will therefore
be 2 chains. and 89 links west
and 37 3/4 links south per mile

Between Townships 6 & 7. N. R. 7. E

From the Corner to Townships 6 and 7. North of Ranges 7 and 8 East. I Run West on a true line between sections 1 and 36

Variation 11° 20' E

40 00 Set a Red flint stone 14 in long 9 in wide and 6 in thick. for quarter section Corner. ~~land Lenty Rolling. first rate soil~~

80 00 Set a Red flint stone 11 in long 10 ½ wide and 5 in thick. for corner to sections 1. 2. and 35. 36. land Rolling first rat soil

Between Townships 6 & 7. N. R. 7. E

West on a true line Between sections 2 and 35

Variation 11° 20' E

40 00 Set a Red flint stone 11 in long 10 in wide and 7 in thick. for quarter section Corner. ~~land Rolling. first rate soil~~

80 00 Set a Red flint stone 17 in long 12 in wide and 8 in thick. for corner to sections 2. 3. and 34. 35. land Broken and Rough. first rate soil

Between Township 6 & 7 N. R. 7 E

West on a true line
Between sections 3 and 34
variation 11° 20' E

40 00 Set a Red flint stone
18 in long 10 in wide
and 8 in thick for
quarter section corner
~~land Rough and broken~~
~~first rate soil~~

3

80 00 Set a Red flint stone
16 in long 12 in wide
and 9 in thick. for
corner to sections
3. 4. and 33. 34.
land Broken and poor

Between Township 6 & 7 N. R. 7 E

West on a true line
Between sections 4 and 33
variation 11° 20' E

40 00 Set a Red flint stone
18 in long 12 in wide
and 8 in thick. for
quar section corner
4 ~~corner. land Rough and~~
~~broken. 2d rate rate soil~~

80 00 Set a Red flint stone
18 in long 14 in wide
and 8 in thick. for
corner to sections
4. 5 and 32. 33. land
rough and Broken
2d rate soil

Between Townships 6 & 7. N. R. 7. E

West on a true line
Between sections 5 and 32
variation 11° 20' E

40 00 Set a Red flint stone
12 in long 10 in wide
and 8 in thick for
quarter section corner
~~land level or gently~~
5 ~~Rolling. first rate~~
soil

80 00 Set a Red flint stone
12 in long 8 in wide
and 7 in thick. for
corner to sections
5. 6. and 31. 32. land
level good Rich soil

Between Townships 6 & 7. N. R. 7. E

West on a true line
Between sections 6 and 31
variation 11° 20' E

40 00 Set a Red flint stone
16 in long 12 in wide
and 8 in thick. for
quarter section corner
6 ~~land rough and broken~~
~~2d rate soil~~

77 11 to the Established corner
to Townships 6 and 7 North
of Ranges 6 and 7. East

June the 12th 1857

×P 97

Between Ranges 6 & 7 E. T. 7 N.

From the corner to Townships 6 and 7 North of Ranges 6 and 7 East I Run
North on the Range line
Between sections 31 and 36
variation 11°30' E

40 00 Set a sand stone 18 in long 9 in wide and 8 in thick. for quarter section corner. ~~land Rolling first rate soil~~

80 00 Set a sand stone 14 in long 11 in wide and 8 in thick. for corner to sections 30. 31. and 25. 36. land Rolling 2d rate soil

Between Ranges 6 & 7 E. T. 7 N.

North Between
Sections 30 and 25
variation 11°30' East

40 00 Set a Red flint stone 15 in long 13 in wide and 5 in thick. for quarter section corner ~~land Rolling. first rate soil~~

80 00 Set a sand stone 13 1/2 in long 11 in wide and 6 in thick for corner to sections 19. 30. and 24. 25. land Rolling. first rate soil

Between Ranges 6 & 7 E. G.S.R.

North Between
Sections 19 and 24
Variation 11° 30' East

33 00 Ft. Creek 5 links wide runs East

40 00 Set a sandy stone 13 in long 9 in wide and 7 in thick. for quarter section corner. ~~land~~ ~~South Rolling. first rate soil~~

3

80 00 Set a sandy stone 13 1/2 ins long 11 in wide and 6 in thick. for corner to sections 18. 19 and 13. 24. land Rolling. first rate soil

Between Ranges 6 & 7 E. G.S.R.

North Between
Sections 18 and 13
Variation 11° 30' East

40 00 Set a red flint stone 14 in long 10 in wide and 6 in thick. for quarter section corner ~~land level. first rate soil~~

4

80 00 Set a sandy stone 17 in long 7 in wide and 6 in thick for corner to sections 7. 18. and 12. 13. land level. first rate soil

Betwene Ranges 6 & 7 E. T. 7. N.

North Betwene
Sections 7 and 12
variation 11° 30' East

40 00 Set a Red flint stone
14 1/2 in long 11 in wide
and 6 1/2 in thick. for
quarter section corner
~~land Rolling 2d rate~~
~~soil~~

5 80 00 Set a Sand stone
13 1/2 in long 8 in wide
and 5 in thick for
corner to sections
6. 7. and 1. 12. land
Rolling first rate
soil

Betwene Ranges 6 & 7 E. T. 7. N.

North Betwene
Sections 6 and 1
variation 11° 30' East

40 00 Set a Red flint stone
14 in long 8 in wide
and 6 in thick. for
quarter section corner
~~land Rolling first~~
~~rate soil~~

6 80 00 Set a Sand stone
15 in long 10 in wide
and 4 in thick. for
corner to Townships
7 and 8 North of Ranges
6 and 7 East
land Gently Rolling.
first rate soil

June the 13th 1857

Between Townships 7 & 8 N. R. 7. E

From the corner to Townships 7 and 8 North of Ranges 6 and 7 East I Run

East on a Random line betwene said Townships. the variation of the Needle being 11° 30' East. I set temporary half mile and mile Posts at 40 00 and 80.00 chains. I find the Township line to be 6 mile, one chain and 50 links and the falling to be 3 chains and 15 links North of the Township corner. the correction for the true line will therefore be one chain and 50 links East and 52½ links South per mile

Between Townships 7 & 8. N. R. 7. E

From the Corner to Townships 7 and 8 North of Ranges 7. and 8. East I Run

West on a true line betwene sections 1. and 36.

variation 11° 05' East

12 00 to Creek 5 links wide Runs. North

40 00 Set a sand stone 18 in long 12 in wide. and 6 in thick. for quarter section corner. ~~land Rolling 2 or rate soil~~

78 00 to Creek 20 links wide runs south 55° west

80 00 Set a Red flint stone 12 in long 10 in wide and 7 in thick for corner. to sections 1, 2, and 35, 36. land level good Rich bottom not subject to inundation

Between Townships 7 & 8 N. R. 7. E

West on a true line
between sections 2 and 35
Variation 11° 05' East

40 00 Set a Red flint Stone
12 in long 12 in wide
and 8 in thick. for
quarter section corner
~~land level Rolling first~~
~~rate soil~~

2 80 00 Set a Red flint Stone
16 in long 9 in wide
and 6 in thick for
corner to sections
2, 3, and 34, 35,
land Rolling, first
rate soil

Between Townships 7 & 8 N. R. 7. E

West on a true line
between sections 3 & 34
Variation 11° 05' East

36 00 to Creek 20 links wide runs
North 30° west

40 00 Set a Red flint Stone
12 in long 10 in wide and
7 in thick. for quarter
section corner. ~~land level~~
~~good Rich Bottom, and~~
~~Subject to inundation~~

3 80 00 Set a Red flint Stone
15 in long 11 in wide
and 9 in thick for
corner to sections 3, 4,
and 33, 34, land
level good Rich Bottom
Not Subject to inundation

Between Townships 7 & 8 N. R. 7 E

West on a true line
between sections 4 and 33
variation 11° 05' East

18 00 to Creek 10 links wide runs
North 45° west

40 00 Set a Red flint stone
18 in long 12 in wide and
4 in thick. for quarter
section corner. ~~land~~
~~Gently Rolling. first~~
~~rate soil~~

4

80 00 Set a Red flint stone 12
in long 10 in wide and
8 in thick. for corner
to sections 4. 5. and
32. 33. land Gently
Rolling. first rate soil

Between Townships 7 & 8 N. R. 7 E

West on a true line
between sections 5 and 32
variation 11° 05'. East

40 00 Set a Red flint stone
12 in long 8 in wide
and 8 in thick. for
quarter section corner
~~land Rolling. first~~
~~rate soil~~

5

80 00 Set a White flint
stone 14 ~~in~~ long 9 in
wide and 8 in thick
for corner to sections
5. 6. and 31. 32.
land Rolling. first rate
soil

Between Townships 7 & 8 N. R. 7 E

West on a true line
between sections 6 and 31
Variation 11° 15' East

40 00 Set a Red flint stone
16 in long 12 in wide
and 6 in thick, for
quarter section corner
~~long Rolling~~
~~first rate soil~~

81 50 to the Established corner
to Townships 7 and 8
North of Range 6 and 7
East

June the 15th 1857

Between Ranges 6 & 7 E. P. S. M.

From the Corner to Townships
7 and 8 North of Ranges
6 and 7 East. I run
North on the Range line
between sections 31 and 36
Variation 11° 30' East

24 00 to Creek 10 links wide Runs North
45° East

40 00 Set a Red flint stone
12 in long 8 in wide and 8 in
thick for quarter section
corner. ~~long Rolling first~~
~~rate soil~~

80 00 Set a Red flint stone
12 in long 8 in wide and
4 in thick for corner to
sections 30, 31, and 25, 36,
long Rolling, first
rate soil

Between Ranges 6 & 7 E. T. 8. N.

North Between
Sections 30 and 25
Variation 11° 30' East

40 00 Set a Sand stone
14 in long 8 in wide
and 8 in thick. for
quarter section corner
~~land Rolling first~~
~~rate soil~~

80 00 Set a Red flint Stone
13 in long 9 in wide
and 8 in thick. for
corner to sections
19. 30. and 24. 25.
land level. good Rich
soil

Between Ranges 6 & 7 E. T. 8. N.

North Between
Sections 19 and 24
Variation 11° 30' East

32 50 to Creek 20 links wide Runs East

40 00 Set a Sand Stone
17 in long 9 in wide
and 4 in thick. for
quarter section corner
~~land Gently Rolling~~
~~first rate soil~~

80 00 Set a Red flint stone
13 in long 10 in wide
and 6 in thick. for
corner to sections
18. 19. and 13. 24.
land Gently Rolling first
rate soil

Between Ranges 6 & 7 E. W. S. N.

North Between
Sections 18 and 13
Variation 11° 30' East

40 00 Set a sandy stone
12 in long 7 in wide
and 7 in thick, for
quarter section corner
~~land Rolling, first~~
~~rate soil~~

4 80 00 Set a sandy stone 11 in
long 10 in wide and
5 in thick, for corner
to sections, 7, 18, and
12, 13, land Gently
Rolling, first rate
soil

Between Ranges 6 & 7 E. W. S. N.

North Between
Sections 7 and 12
Variation 11° 30' East

40 00 Set a red flint stone
13 in long 12 in wide
and 7 in thick, for
quarter section corner
~~land, Gently Rolling~~
~~first rate soil~~

5 80 00 Set a sandy stone
12 in long 8 in wide
and 7 in thick, for
corner to sections
6, 7 and 1, 12,
land, Rolling, first
rate soil

Betwene Ranges 6 & 7 E. T. 8. N.

North Betwene
Sections 6 and 1
Variation 11°.30' East

18 00 Leave Prairie and Enter
timber bears East and west
20 50 to Saline River 30 links
wide Runs west
26 00 to Saline River 30 links
wide Runs North 45° East
29 50 to Saline River 32 links
wide. Runs North 30°
west
35 50 to Saline River 35 links
wide Runs East
40 00 Set a Red flint Stone
12 in long 10 in wide
and 8 in thick. for
Quarter section corner
from which a Red

Betwene Ranges 6 & 7 E. T. 8. N.

Elm 30 inches in diameter
Bears North 22° East
1 chain 20 1/2 links distant
a Red Elm 18 inches in
diameter. Bears south 9°
west. 4 chains 10 links
distant. ~~land level~~
~~Rich Bottom not subject~~
~~to inundation~~
~~timber Elm and cottonwood~~
41 50 to Saline River 30 links
wide Runs west
42 00 Leave timber and Enter
Prairie East and west
48 50 to Saline River. Runs North
on the line
55 00 the River Runs North
30° west, leaves the line

100

Between Ranges 6 & 7, E. W. S. N.

55 10 Enter timber bears East and West
60 00 to Saline River runs East
64 00 to Saline River runs West
69 13 to Saline River runs North 85° East
69 70 leave timber and Enter Prairie. ~~the timber on this stream consists of Bur Oak Elm and cottonwood~~
81 56 to the second Standard Parallel North. falling 12 chains and 64 links west of the Standard corner set a sand stone 15 in long 8 in wide and 3 in thick. for closing ~~correction~~ corner land level good rich Bottom. timber cottonwood Elm & Oak.

June the 16th 1857

Between Ranges 5 & 6 E. W. S. N.

From the Corner to Township 4 and 5 North (on the first Standard Parallel North) of Ranges 5 and 6 East. I run North on the Range line between sections 31 and 36

variation 11° 30' East

40 00 Set a Red flint stone 17 in long 10 in wide and 6 in thick for quarter section corner. ~~land Rolling first rate soil~~

80 00 Set a Red flint stone 12 in long 9 in wide and 5 in thick. for corner to sections 30. 31. and 25. 30. land Rolling. first rate soil

Between Ranges 5 & 6 E. T. 5. N.

North Between
Sections 30 and 25
Variation 11° 30' East

40 00 Set a red flint stone 13 in long 9 in wide and 5 in thick. for quarter section corner ~~land Rolling first rate soil~~.

2 80 00 Set a sand stone 28 in long 12 in wide and 2 1/2 in thick for corner to sections 19. 30. and 24. 25. land Rolling. first rate soil

Between Ranges 5 & 6 E. T. 5. N.

North Between
Sections 19 and 24
Variation 11° 30' East

40 00 Set a red flint stone 12 in long 8 in wide and 6 in thick. for quarter section corner ~~land Rolling. first rate soil~~

3 80 00 Set a red flint stone 12 in long 8 in wide and 6 in thick for corner to sections 18. 19. and ~~13~~ 24. land low good rich soil

Between Ranges 5 & 6 E. G.S.M.

North Between
Sections 18 and 13
Variation 11° 30' East

40 00 Set a Red flint stone 15 in long 8 in wide and 6 in thick. for quarter section corner ~~land Rolling first rate soil~~

4

80 00 Set a Red flint stone 11 in long 10 in wide and 6 in thick for corner to sections 7. 18. and 12. 13. land Rolling. first rate soil

Between Ranges 5 & 6 E. G.S.M.

North Between
Sections 7 and 12
Variation 11° 30' East

40 00 Set a sand stone 14 in long 9 in wide and 6 in thick for quarter section corner. ~~land Rolling first rate soil~~

5

80 00 Set a white flint stone 16 in long 10 in wide. and 5 in thick. for corner to sections 6. 7. and 1. 12. land Rolling first rate soil

Betwene Ranges 5 & 6. E. T. 5. N.

Sections North Betwene 6 and 1
Variation 11° 30' East

144/432

40 00 Set a sand stone 16 in long 9 in wide and 3 in thick. for quarter section corner ~~land Rolling. first rate soil~~

6 80 00 Set a sand stone 20 in long 14 in wide and 5 in thick. for corner. to Townships 5 and 6 North of Ranges 5 and 6 East
land Rolling. 3d rate soil

Betwene Townships 5 & 6 N. R 6. E

From the Corner to Townships 5 and 6 North of Ranges 5 and 6 East I Run East on a Random line betwene said Townships. the variation of the needle being 11° 30' East. I set temporary half mile and mile Posts at 40 00 and 80 00 chains I find the Township line to be 6 miles and 57 links and the falling to be 3 chains and 25 links south of the Township corner.
the correction. for the true line will therefore be 57 links East. and 54 1/6 links north per mile

Betwene Townships 5 & 6 N. R. 6. E

From the Corner to Township 5 and 6 North of Ranges 6 and 7 East. I Run
West on a true line
Betwene sections 1 and 36
variation 11° 56' East

40 00 Set a Red flint stone 23 in long 16 in wide and 14 in thick. for quarter section corner. ~~land Rolling. first rate soil~~

80 00 Set a Red flint Stone 18 in long 16 in wide and 12 in thick. for corner to sections 1. 2. and 35. 36. land Rolling. first rate soil

Betwene Townships 5 & 6 N. R. 6 E

West on a true line
Betwene sections 2 and 35
variation 11° 56' East

28 00 leave Prairie and Enter timber
30 00 to Creek 18 links wide Runs bears N. E. and south west south 45° west

30 25 leave timber and Enter Prairie
40 00 Set a Sand stone 17 in long 16 in wide and 8 in thick. for quarter section corner. ~~land Rolling first rate soil~~ bears N. E. and S. W.

80 00 Set a Sand stone 15 in long 10 in wide and 9 in thick. for corner to sections 2. 3. and 34. 35. land Rolling. first rate soil

Betwene Townships 5 & 6. N. R. 6. E

West on a true line
Betwene sections 3 and 34
Variation 11° 56' East

40 00 Set a sand stone 18 in long 9 in wide and 8 in thick. for quarter section corner. ~~land level or Gently Rolling. first rate soil~~

3 80 00 Set a sand stone 16 in long 10 in wide and 6 in thick. for corner to sections 3. 4. and 33. 34. land Rolling. first rate soil

Betwene Townships 5 & 6 N. R. 6. E

West on a true line
Betwene sections 4 and 33
Variation 11° 56' East

15 00 leave Prairie and Enter timber
19 00 to bears north west and south East Rovene 5 links wide
Runs south 45° East
20 00 leave timber and Enter Prairie
40 00 Set a sand stone 12 in long 10 in wide and 5 in thick. for quarter section corner ~~land level good Rich Bottom not subject to inundation~~

4 80 00 Set a Red flint stone 18 in long 10 in wide and 6 in thick. for corner to sections 4. 5. and 32. 33. land level good Rich soil

Between Townships 5 & 6 N. R. 6. E

West on a true line
between sections 5 and 32
Variation 11° 56' East

40 00 Set a Red flint stone
20 in long 10 in wide and
8 in thick. for quarter
section corner. ~~land~~
~~Rolling. first rate~~
~~soil~~

5 80 00 Set a Red flint
stone 12 in long 8
in wide and 8 in
thick. for corner to
sections 5. 6. and 31. 32.
land. Rolling. first
rate soil

Between Townships 5 & 6 N. R. 6. E

West on a true line
between sections 6 and 31
Variation 11° 56' East

40 00 Set a Red flint stone
12 in long 10 in wide
and 6 in thick. for
quarter section corner
~~land Rolling. 2d rate~~
~~soil~~

6 80 57 to the Established corner
to Townships 5 and 6
North of Ranges 5 and 6
East.

June the 18th 1857.

Between Ranges 5 & 6 E. G. & M.

From the Corner to Townships 5 and 6 North of Ranges 5 and 6 East. I run North on the Range line between sections 31 and 36
Variation 11° 30' East

40 00 Set a Red flint stone 18 in long 10 in wide and 7 in thick, for quarter section corner. ~~land Rolling first rate soil~~

1 80 00 Set a sandy stone 18 in long 12 in wide and 5 in thick, for corner to sections 30, 31, and 25, 36. land Rolling, first rate soil

Between Ranges 5 & 6 E. G. & M.

North between
Sections 30 and 25
Variation 11° 30' East

40 00 Set a Red flint stone 18 in long 12 in wide and 6 in thick, for Quarter section corner ~~land Rolling, first rate soil~~

2 80 00 Set a Red flint stone 16 in long 11 in wide and 4 in thick, for corner to sections 19, 30, and 24, 25, land Rolling, first rate soil

Between Ranges 5 & 6 E. G. & M.

North Between
Sections 19 and 24
Variation 11° 30' East

40 00 Set a Red flint Stone 12 in long 12 in wide and 6 in thick. for quarter section corner ~~land Rolling 2d rate soil~~

3 80 00 Set a Gray flint Stone 12 in long 11 in wide and 7 in thick. for corner to sections 18, 19, and 13, 24. land Rolling. 2d rate soil

Between Ranges 5 & 6 E. G. & M.

North Between
Sections 18 and 13
Variation 11° 30' East

40 00 Set a sand Stone 18 in long 9 in wide and 4 in thick. for quarter section corner. land ~~Rolling. 1st rate soil~~

4 80 00 Set a lime Stone 18 in long 17 in wide and 5 in thick. for corner to sections 7, 18, and 12, 13. from which a Red Elm 16 inches in diameter. Bears North 62° west 75 links distant
a White ash 17 inches in diameter Bears North. 38° East 85 links distant. No timber in

Betwene Ranges 5 & 6 E. T. C. N.

sections 13 and 18. land level. good Rich Bottom

North Betwen
Sections 7 and 12
Variation 11° 30' East

00 50 leave Prairie and Enter Timber
bears North East and south West
2 00 leave timber and Enter Prairie
East and west
~~Timber Elm and Ash~~
5 40 00 Set a Sand stone
22 in long 8 in wide
and 5 in thick for
quarter section corner
~~land Gently Rolling~~
~~first rate soil~~
80 00 Set a Sand stone 16
in long 9 in wide and
5 in thick. for corner

Betwene Ranges 5 & 6 E. T. C. N.

to Sections 6. 7. and 1. 12.
land Broken and poor
timber Elm and Ash

North Betwene
Sections 6 and 1
Variation 11° 30' East

6 40 00 Set a lime Stone 24 in long
15 in wide and 8 in thick
for quarter section corner
~~land Rolling. first rate~~
~~soil~~
80 00 Set a Sand stone 18 in
long 10 in wide and
8 in thick. for corner
to Townships 6 and 7 North
of Ranges 5 and 6 East: land
Gently Rolling. first rate
soil

Between Townships 6 & 7 N. R 6 E

From the Corner to Townships
6 and 7 North of Range 5 and
6. East I run
East on a random line
between said Townships the
variation of the Needle being 11° 30'
East. I set temporary half
mile and mile posts at 40.00
80.00 chains.
I find the Township line to
be 5 Miles 78 chains and
47 links. and the falling to
be 2 chains and 38 links south
of the Township corner. —
the correction. for the true line
will therefore be one chain
53 links West. and 37 1/2
links North per mile

Between Townships 6 & 7 N. R. 6 E

From the Corner to Townships
6 and 7 North of Range 6 and 7
East I run
West on a true line
between sections 1 and 36
variation 11° 47' East

40 00 Set a red flint stone 18 in
long 12 in wide and 3 in
thick. for quarter section
corner. ~~land Rolling. first~~
~~rate soil~~

80 00 Set a sand stone 16 in
long 14 in wide (and 14
in wide) and 7 in thick
for corner to sections
1 2 and 35. 36
land Rolling. first rate
soil

Between Townships 6 & 7 N. R. 6. E

West on a true line
Between sections 2 and 35
Variation 11° 45' East

40 00 Set a sandy stone 17
in long 13 in wide
and 8 in thick. for
quarter section corner
~~land, gently rolling.~~
~~first rate soil~~

2 80 00 Set a sandy stone 24
in long 8 in wide
and 4 in thick. for
corner to sections
2, 3, and 34, 35.
land gently rolling
3rd rate soil

Between Townships 6 & 7 N. R. 6. E

West on a true line
Between sections 3 and 34
Variation 11° 45' East.

40 00 Set a red flint stone
18 in long 11 in wide
and 4 in thick. for
quarter section corner
~~land, gently rolling~~
~~3rd rate soil~~

3 80 00 Set a sandy stone 16 in
long 10 in wide and 4
in thick. for corner
to sections 3, 4, and
33, 34, land gently
rolling. 3rd rate soil

Between Township 6 & 7 N. R. 6. E

West on a true line
Between sections 4 and 33
variation 11° 47' East

40 00 Set a Red flint stone
12 in long 11 in wide
and 6 in thick.
for quarter section
corner. ~~land Gently~~
~~Rolling. 3rd rate soil~~

4

80 00 Set a sand stone
16 in long 14 in wide
and 4 in thick. for
for corner to section
4. 5. and 32. 33.
land Gently Rolling
3rd rate soil

Between Township 6 & 7 N. R. 6. E

West on a true line
Between sections 5 and 32
variation 11° 47' East

40 00 Set a sand stone 18 in
long 8 in wide and 7 in
thick. for quarter
section corner. ~~land~~
~~Gently Rolling. 3rd rate~~
~~soil~~

5

80 00 Set a sand stone
21 in long 11 in wide
and 4 in thick. for
corner to sections
5. 6. and 31. 32.
land Broken. 3rd
rate soil

Betwene Townships 6 & 7. N. R. 6. E

West on a true line
Betwene sections 6 and 31
variation 11° 47' East

40 00 Set a sand stone 21
in long 7 in wide and
6 in thick. for quarter
section corner. ~~land~~
~~Braken. 3d rate soil~~

6

78 47 to the Established corner
to Townships 6 and 7
North of Ranges 5 and
6. East

land Braken. third rate
soil

June the 19th 1857

Betwene Ranges 5 & 6. E. T. 7. N.

From the Corner to Townships
6 and 7 North of Ranges
5 and 6 East I Run
North on the Range line
betwene sections 31 and 36
variation 11° 30' East

40 00 Set a sand stone 24 in
long 12 in wide. and 10
in thick. for quarter
section corner. ~~land~~
~~braken. first rate soil~~

80 00 Set a sand stone 21
in long 9 in wide. and
8 in thick. for corner to
sections 30. 31. and 25. 36.
land Rolling. first
rate soil

Between Ranges 5 & 6 E. T. 7. N.

North Between
sections 30 and 25
variation 11° 30' East

40 00 Set a sand stone 18 in long 12 in wide and 8 in thick. for quarter section corner ~~land Rolling. 2d rate soil~~

2 80 00 Set a sand stone 16 in long 12 in wide and 10 in thick. for corner to sections 19, 30, and 24, 25. land Rolling. first rate soil

Between Ranges 5 & 6 E. T. 7. N.

North Between
sections 19 and 24
variation 11° 30' East

40 00 Set a sand stone 15 in long 13 in wide and 7 in thick. for quarter section corner. ~~land Rolling. first rate soil~~

3 80 00 Set a sand stone 16 in long 10 in wide and 4 in thick for corner to sections 18, 19, and 13, 24. land Rolling. first rate soil

Between Ranges 5 & 6 E. 3. 7. N.

North Between
Sections 18 and 13
Variation 11° 30' East

40 00 Set a sandy stone 17 in long 13 in wide and 10 in thick, for quarter section corner ~~land rolling, first rate soil~~

80 00 Set a sandy stone 17 in long 13 in wide and 6 in thick for corner to sections 7, 18, and 12, 13, land rolling, first rate soil

4

Between Ranges 5 & 6 E. 3. 7. N.

North Between
Sections 7 and 12
Variation 11° 30' East

40 00 Set a red flint stone 13 in long 10 in wide and 5 in thick, for quarter section corner ~~land rolling, first rate soil~~

5

80 00 Set a sandy stone 14 in long 10 in wide and 6 in thick, for corner to sections 6, 7, and 1, 12, land level good rich bottom, not subject to inundation

Betwene Ranges 5 & 6 E. T. 7. N.

North Betwene
Sections 6 and 1
Variation 11° 30' East

00 90 to Creek 5 links wide
Runs East
40 00 Set a sand Stone 16
in long 12 in wide
and 6 in thick. for
quarter section corner
6 ~~land level or Gently Rolling~~
~~first rate soil~~
80 00 Set a lime stone
24 in long 13 in wide
and 3 in thick. for
corner to Townships
7 and 8 North of Ranges
5 and 6. East. land
broken first rate soil
June the 20th 1857

Betwene Townships 7 & 8. N. R. 6. E

From the Corner to Townships
7 and 8 North of Ranges 5 and
6. East I Run
East on a Random line
betwene sord Townships. the
variation of the needle being
11° 30' East. I Set temporary
half mile and mile Posts
at 40 00 and 80.00 chains
I find the Township line
to be 5 miles 78 chains
and 90 links. and the
falling to be 3 chains and
43 links North of the Township
corner. the correction. for
the true line. will there
fore be one chain and
10 links. west. and 57 1/6 links
south. per mile

Between Townships 7 & 8 N. R. 6 E

From the Corner to Townships
7 and 8 North of Ranges 6 and
7 East 8 Runs
West on a true line between
sections 1 and 36
Variation 11° 06' East

40 00 Set a sand stone 21 in
long 15 in wide and
4 in thick. for quarter
section corner. ~~bond~~
~~Broken and poor~~

1

80 00 Set a sand stone 22
in long 20 in wide
and 8 in thick. for
corner to sections 1. 2.
and 35. 36. bond
Broken and poor

Between Townships 7 & 8 N. R. 6 E

West on a true line
Between sections 2 and 35
Variation 11° 06' East

40 00 Set a sand stone 21
in long 18 in wide and
3 in thick. for quarter
section corner.
~~bond Broken and poor~~

80 00 Set a sand stone 22
in long 20 in wide and
2½ in thick. for corner
to sections 2. 3. and 34. 35.
~~poor~~ Whence a Burr Oak
10 inches in diameter bears
north 71°. 65'. west. 52 links
distant
a Burr Oak 14 inches in
diameter bears south 65° west
1 chain 5½ links distant
land Rolling first rate soil

2

Between Townships 7 & 8 N. R. 6. E

West on a true line
Between sections 3 and 34
variation 11° 06' East

00 20 Leave Prairie and Enter timber
00 65 bears North and south to Creek 5 links wide
Runs North
7 22 Leave timber and Enter Prairie
40 00 bears North and south Set a sand stone 26
in long 15 in wide and
3 3 in thick. for quarter
section corner. ~~land~~
~~Broken 3d rate soil~~
80 00 Set a sand stone 17 in
long 14 in wide and 3
in thick. for corner
to sections 3, 4, and
33, 34. land Broken
3d rate soil

Between Townships 7 & 8 N. R. 6. E

West on a true line
Between sections 4 and 33
variation 11° 06' East

40 00 Set a sand stone 20
in long 17 in wide and
2 1/2 in thick. for
quarter section corner
~~land Broken 3d rate~~
~~soil~~
4
80 00 Set a sand stone
19 in long 16 in wide
and 2 1/2 in thick for
corner to sections
4, 5, and 32, 33.
land level good Rich
Bottom. not subject to
inundation

Betwene Townships 7 & 8. N. R. 6. E

West on a true line
Betwene sections 5 and 32
variation 11° 06' East

15 00 to Creek 20 links wide
Runs North 55° East
40 00 Set a sand stone 17
in long 16 in wide and
3 in thick. for quarter
section corner. ~~land level~~
~~good rich soil~~
5
80 00 Set a sand stone 17
in long 16 in wide
and 2 in thick. for
corner to sections
5, 6, and 31, 32.
land Gently Rolling
first rate soil

Betwene Townships 7 & 8. N. R. 6. E

West on a true line
Betwene sections 6 and 31
variation 11° 06' East

40 00 Set a sand stone 17
in long 12 in wide and
3 in thick. for quarter
section corner. ~~land~~
~~Broken first rate soil~~
6
78 90 to the Established Corner
to Townships 7 and 8 North
of Ranges 5 and 6 East
land broken first rate soil

June the 22d 1857

Between Ranges 5 & 6 E. G. S. R.

From the Corner to Townships
7 and 8 North of Ranges 5 and
6. East I run
North on the Range line
between sections 31 and 36
Variation 11° 30' East

40 00 Set a red flint stone 18
in long 8 in wide and
8 in thick, for quarter
section corner. ~~land rolling~~
~~3 or rate soil~~

80 00 Set a lime stone
22 in long 18 in wide
and 3 in thick, for
corner to sections
30, 31, and 25, 36 land
rolling, 3 or rate soil

Between Ranges 5 & 6 E. G. S. R.

North between
sections 30 and 25
Variation 11° 30' East

40 00 Set a red flint stone
17 in long 9 in wide and
8 in thick, for quarter
section corner. ~~land~~
~~rolling, 3 or rate soil~~

2 75 00 to Revene 3 links wide
runs East

80 00 Set a sandy stone 16 in
long 11 in wide and 8 in
thick, for corner to section
19, 30, and 24, 25,
land level good rich
soil

Between Ranges 5 & 6 E. W. S. & N.

North Between
Sections 19 and 24
variation 11° 30' East

19 30 to Creek 15 links wide
Runs south 60° East
34 00 to Rovene 3 links wide
Runs west
40 00 Set a Red flint Stone
16 in long 10 in wide and
9 in thick. for Quarter
section corner. ~~land Rolling, first rate soil~~
3
80 00 Set a lime stone 19
in long 17 in wide and
3 in thick. for corner
to sections 18, 19, and
13, 24. land Rolling
first rate soil

Between Ranges 5 & 6 E. W. S. & N.

North Between
Sections 18 and 13
variation 11° 30' East

40 00 Set a Red flint stone
17 in long 9 in wide
and 5 in thick. for
Quarter section corner
~~land Rolling, first rate soil~~
4
80 00 Set a lime stone
26 in long 13 in wide
and 2 in thick. for
corner to sections
7, 18, and 13, 12.
land Rolling, first
rate soil

Between Ranges 5 & 6 E. G. S. R.

North Between
Sections 7 and 12
Variation 11° 30' East

40.00 Set a sandy stone 18 ins long 12 ins wide and 7 ins thick. for quarter section corner ~~land rolling, first rate soil~~

5

80.00 Set a lime stone 18 ins long 12 ins wide and 3 ins thick for corner to sections 6, 7, and 1, 12, land rolling 2d rate soil

Between Ranges 5 & 6 E. G. S. R.

North Between
Sections 6 and 1
Variation 11° 30' East

40.00 Set a sandy stone 16 ins long 10 ins wide and 4 ins thick. for quarter section corner. ~~land rolling, first rate soil~~

6

83.35 to the second standard parallel north. falling 13 chains and 85 links west of the standard corner.
Set a lime stone 24 ins long 16 ins wide and 2 ins thick. for ~~closing section~~ corner
June the 23d 1857

Between Ranges 4 & 5. E. T. 5. N.

From the Corner to Townships 4 and 5 North. (on the first Standard Parallel North) of Ranges 4 and 5. East
I Run
North on the Range line Between. Sections 31 and 36
Variation 11° 00' East

40 00 Set a white flint stone 13 in long 11 in wide and 7 in thick. for quarter section corner land ~~Gently Rolling~~ ~~first rate soil~~

80 00 Set a Grey flint stone 17 in long 7 in wide and 5 in thick. for corner to Sections 30, 31, and 25, 36. land Gently Rolling. 3rd rate soil

Between Ranges 4 & 5. E. T. 5. N.

North between Sections 30 and 25
Variation 11° 00' East

40 00 Set a Red flint stone 16 in long 9 in wide and 4 in thick for quarter section corner. land ~~Gently Rolling~~ 3rd rate ~~soil~~

80 00 Set a Sandy stone 13 in long 10 in wide and 4 in thick for corner to Sections 19, 30. and 24, 25. land Gently Rolling 3rd rate soil

Betwene Ranges 4 & 5. E. T. 5. N.

North Betwene
sections 19 and 24
variation 11° 00' East

32 94 to Creek 50 link wide
Runs East
40 00 Set a Gray flint stone
18 in long 11 in wide
and 3 in thick. for
quarter section corner
~~land level Bottom~~
~~3d rate soil~~
3
80 00 Set a sand stone 17
in long 11 in wide and
3 in thick. for corner
to sections 18. 19. and
13. 24. land. level
bottom. not subject to
inundation. 3d rate
soil

Betwene Ranges 4 & 5 E. T. 5. N.

North Betwene
sections 18 and 13
variation 11° 00' East

40 00 Set a Gray flint stone
14 in long 9 in wide and
5 in thick. for quarter
section corner. ~~land level~~
~~Bottom. 3d rate soil~~
~~not subject to inundation~~
67 60 leave Prairie and Enter
timber. bears East and west
67 70 to Big Blue River 120 links
wide Runs south 85° East
69 10 leave timber and Enter
Prairie. bears North west & south. East
80 00 Set a sand stone 15
in long 11 in wide and
3 in thick. for corner
to sections 7. 18. and
12. 13. land level

Betwene Ranges 4 & 5 E. T. 5. N.

good Rich Bottom. not subject to inundation timber cottonwood and Elm

North Betwene
sections 7 and 12
variation 11° 00' East

40 00 Set a Red flint stone 24 in long 10 in wide and 6 in thick. for quarter section corner. ~~land broken 3d rate soil~~

5 80 00 Set a sand stone 16 in long 10 in wide and 4 1/2 in thick. for corner to sections 6. 7. and 1. 12. land Gently Rolling 3d rate soil

Betwene Ranges 4 & 5 E. T. 5. N.

North Betwene
sections 6 and 1
variation 11° 00' East

40 00 Set a Red flint stone 15 in long 9 in wide and 6 in thick. for quarter section corner ~~land Gently Rolling 3d rate soil~~

6 80 00 Set a sand stone 17 in long 11 in wide and 4 in thick for corner to Townships 5 and 6 north of Ranges 4 and 5 East. land Gently Rolling 3d rate soil

July the 3d 1857

Between Townships 5 & 6 N. R. 5. E

From the Corner to Townships 5 and 6 North of Ranges 4 and 5. East I Run East on a Random line between said Townships the Variation of the Needle being 11° 00 East & set temporary half mile and mile Posts at 40.00 and 80.00 chains I finds the Township line to be 6 miles one chain and 80 links and the folling to be 78 links. North. of the Township corner. the correction. for the true line will therefore be one chain and 80 links East. and 13 links south. per mile

Between Townships 5 & 6 N. R. 5. E

From the Corner to Townships 5 and 6 North. of Ranges 5 and 6 East I Run West on a true line between sections 1 and 36

Variation 10° 54' East
11.34

40 00 Set a Red flint stone 18 ins long 11 ins wide and 7 ins thick. for quarter section corner. ~~land broken & poor soil~~

80 00 Set a pond stone 14 ins long 9 ins wide and 5 ins thick. for corner to section 1. 2. and 35. 36. land broken and poor.

Between Townships 5 & 6 N. R. 5. E.

West on a true line
between sections 2 and 35
Variation 10° 54' East
14° 34'

40 00 Set a sandy stone
17 ins long 11 ins wide
and 3 ins thick, for
quarter section corner
~~land broken and~~
~~poor not fit for cultivation~~

2 80 00 Set a sandy stone
36 ins long 12 in wide
and 12 ins thick
for corner to sections
2, 3, and 34, 35,
land broken and
poor.

Between Townships 5 & 6 N. R. 5. E.

West on a true line
between sections 3 and 34
Variation 10° 54' East
11° 34'

40 00 Set a sandy stone 12
ins long 11 ins wide
and 5 ins thick, for
quarter section corner
~~land broken and~~
~~poor~~

3 80 00 Set a sandy stone
15 ins long 11 ins wide
and 5 ins thick, for
corner to sections
3, 4, and 33, 34,
land gently rolling
3rd rate soil not fit
for cultivation

Betwene Townships 5 & 6 N. R. 5. E.

West on a true line
Betwene sections 4 and 33
Variation ~~10° 9'~~ 11° 34' East

40 00 Set a Red flint stone
16 in long 14 in wide
and 9 in thick. for
quarter section corner
~~land broken and~~
~~poor~~

4 80 00 Set a Red flint stone
14 in long 11 in wide
and 8 in thick.
for corner to sections
4, 5, and 32, 33.
land level good
Rich Bottom not
subject to inundation

Betwene Townships 5 & 6 N. R. 5. E

West on a true line
Betwene sections 5 and 32
Variation ~~10° 9'~~ 11° 34' East

12 00 Cave Prairie and Enter
timber North and south
12 75 to Creek dry 10 links wide
Bears south
15 00 Cave timber and Enter Prairie
North and south
40 00 bars Set a Red flint stone
24 in long 20 in wide
and 12 in thick. for quarter
section corner. ~~land level~~
~~level good Rich soil~~

5

80 00 Set a sand stone 12
in long 8 in wide
and 6 in thick. for
corner to sections 5, 6, and
31, 32, land Rolling
first rate soil

Between Townships 5 & 6 N. R. 5. E.

West on a true line
between sections 6 and 31
Variation 10° 54' East
11°.34

40 00 Set a sand stone
9 in long 8 in wide
and 3 in thick, for
quarter section corner
~~land, Gently Rolling~~
~~first rate soil~~

6

81 80 to the Established
corner to Townships 5
and 6 north of Ranges
4 and 5 East. lands
Gently Rolling first rate soil
July the 4th 1857

Between Ranges 4 & 5 E. S. 6. N.

From the Corner to Townships
5 and 6 north of Ranges
4 and 5 East, I run
north on the Range line
between sections 31 and 36
Variation 11° 0' East

40 00 Set a red flint stone
22 in long 15 in wide
and 6 in thick, for
quarter section corner
~~land Gently Rolling~~
~~3d rate soil~~

81 00 Set a sandy stone 20
in long 11 in wide
and 5 in thick, for
corner to sections 30, 31,
and 25, 36, lands
Gently Rolling. 3d rate
soil

Between Ranges 4 & 5 E. T. C. N.

Northy Between
Sections 30 and 25
Variation 11° 00' East

40 00 Set a Red flint stone
16 in long 11 in wide
and 4 in thick.
for quarter section
corner. ~~land Gently~~
2 ~~Rolling. 3d rate soil~~

80 00 Set a sand stone
14 in long 10 in wide
and 7 in thick, for
corner to sections
19, 30, and 24, 25,
land Gently Rolling
3d rate soil

Between Ranges 4 & 5 E. T. C. N.

Northy Between
Sections 19 and 24
Variation 11° 00' East

40 00 Set a Red flint stone
16 in long 9 in wide
and 6 in thick, for
quarter section corner
~~land Gently Rolling~~
~~3d rate soil~~

3 80 00 Set a sand stone
13 in long 9 in wide
and 8 in thick for
corner to sections
18, 19, and 13, 24.
land Gently Rolling
2d rate soil

Between Ranges 4 & 5 E. W. G. & M.

North Between
Sections 18 and 13
Variation 11° 00' East

40 00 Set a Red flint stone 12 in long 7 in wide and 7 in thick, for quarter section corner ~~land Rolling, first rate soil~~

4 80 00 Set a sand stone 14 in long 11 in wide and 8 in thick for corner to sections 7, 8, 12 & 13. land Gently Rolling first rate soil

Between Ranges 4 & 5 E. W. G. & M.

North Between
Sections 7 and 12
Variation 11° 00' East

40 00 Set a Red flint stone 16 in long 10 in wide and 4 in thick for quarter section corner. ~~land Gently Rolling, 1st rate soil~~

5 7 00 to Reverse 3 links wide Runs west

80 00 Set a sand stone 12 in long 11 in wide and 5 in thick. for corner to sections 6, 7, and 1, 12. land level good Rich bottom, not subject to inundation

Betwene Ranges 4 & 5 E. T. 6. N.

North Betwene
sections 6 and 1
variation 11° 00' East

40 00 Set a Red flint stone
15 in long 9 in wide
and 5 in thick. for
quarter section corner
~~land broken and poor~~
6 41 00 to Rovene 5 links
wide Runs south 75° East
80 00 Set a sand stone
18 in long 7 in wide
and 5 in thick. for
corner to Townships
6 and 7 North of Ranges
4 and 5 East
land broken and
poor

Betwene Townships 6 & 7. N. R. 5. E.

From the Corner to Townships
6 and 7 North. of Ranges
4 and 5 East. I Run
East on a Random line
Betwene said Townships
the variation of the needle
being 11° 00' East. I set
temporary. half mile and
Mile Posts at 40.00 and
80.00 chains
I find the Township line
to be 6 miles and 90
links. and the falling to be
77 links south of the
Township corner. the correction
for the true line will there
fore be 90 links East
and 12 3/4 links North
per mile

Betwene Township 6 & 7 N. R. 5. E

From the Corner to Townships
6 and 7 North of Ranges
5 and 6. East I Run
West on a true line
betwene sections 1 and 36
variation 11° 06' East

40 00 Set a Red flint stone
16 in long 11 in wide
and 9 in thick. for
quarter section corner
~~land Broken 2d rate~~
~~soil~~

80 00 Set a sand stone
17 in long 9 in wide
and 9 in thick. for
corner to sections
1 2 and 35. 36.
land Gently Rolling 2d
rate soil

Betwene Township 6 & 7 N. R. 5. E

West on a true line
betwene sections 2 and 35
variation 11° 06' East

40 00 Set a sand stone
14 in long 11 in wide
and 7 in thick. for
quarter section corner
~~land Broken 3d rate~~
~~soil~~

80 00 Set a Red flint stone
14 in long 8 in wide
and 6 in thick. for
corner to sections
2. 3. and 34. 35.
land Broken 3d rate
soil

Between Townships 6 & 7 S. R. 5 E.

Coast on a true line
Between sections 3 and 34
variation 11° 06' East

40 00 Set a red flint stone
12 in long 9 in wide
and 7 in thick. for
quarter section corner
~~land hilly Rolling~~
~~& rate soil~~

3

80 00 Set a red flint stone
16 in long 10 in
wide and 4 in thick
for corner to sections
3, 4, and 33, 34,
land broken & rate
soil

Between Townships 6 & 7 N. R. 5 E.

Coast on a true line
Between sections 4 and 33
variation 11° 06' East

40 00 Set a sand stone
14 in long 10 in wide
and 8 in thick. for
quarter section corner
~~land gently Rolling~~
~~& rate soil~~

4

80 00 Set sand stone
12 in long 10 in wide
and 6 in thick. for
corner to sections
4, 5, and 33, 33,
land gently Rolling
& rate soil

Betwene Townships 6 & 7 N. R. 5 E

West on a true line
Betwene Sections 5 and 32
variation 11° 06' East

40 00 Set a sand stone
14 in long 11 in wide
and 4 in thick. for
quarter section corner
~~land Gently Rolling~~
~~first rate soil~~

5

80 00 Set a sand stone
16 in long 10 in wide
and 4 in thick
for corner to sections
5. 6. and 31. 32.
land Broken 3d
rate soil

Betwene Townships 6 & 7 N. R. 5 E

West on a true line
Betwene Sections 6 and 31
variation 11° 06' East

40 00 Set a Gray flint Stone
15 in long 11 in wide
and 9 in thick. for
quarter section corner
~~land Broken 3d rate~~
~~soil~~

6

80 90 to the Established
Corner to Townships
6 and 7. north of Rongs
4 and 5. East. land broken
third rate soil

July the 6th 1857

Between Ranges 4 & 5 E. T. 7. N.

From the Corner to Townships 6 and 7 north of Ranges 4 and 5. East I Run
North on the Range line between Sections 31 and 36
Variation 11° 00' East

40 00 Set a Red flint Stone 14 in long 11 in wide and 6 in thick. for quarter sector corner ~~land Broken 3d rate soil~~

1 80 00 Set a Red flint stone 19 in long 18 in wide and 7 in thick for corner to sections 30, 31. and 25, 36. land Broken 3d rate soil

Between Ranges 4 & 5 E. T. 7. N.

North Between Sections 30 and 25
Variation 11° 00' East

40 00 Set a sand stone 13 in long 10 in wide and 10 in thick. for quarter. section corner. ~~land Broken and poor~~

2 80 00 Set a sand stone 13 in long 12 in wide and 10 in thick for corner to sections 19, 30. and 24, 25. land ~~and~~ poor not fit for cultivation

Between Ranges 4 & 5 E. G. T. N

North Between
Sections 19 and 24
Variation 11° 00' East

40 00 Set a red flint stone 15 ins long 10 ins wide and 6 ins thick. for quarter section corner ~~lands broken 3 or rate soil~~

3 80 00 Set a sand stone 17 ins long 11 in wide and 4 ins thick for corner to sections 18. 19. and 13. 24. lands Broken 3 or rate soil

Between Ranges 4 & 5 E. G. T. N.

North Between
Sections 18 and 13
Variation 11° 00' East

40 00 Set a red flint stone 15 ins long 9 in wide and 5 in. thick. for quarter section corner ~~lands broken 3 or rate soil~~

4 80 00 Set a sand stone 14 ins long 12 ins wide. and 6 in thick for corner to sections 7. 18. and 12. 13. lands Broken. 3 or rate soil

Between Ranges 4 & 5 E. G. & M.

North Between
sections 7 and 12
variation 11° 00' East

40 00 Set a sandy stone
12 ins long 8 ins wide
and 6 ins thick. for
quarter section corner
~~land rolling. first~~
~~rate soil~~

5 80 00 Set a sandy stone
14 ins long 10 in wide
and 8 ins thick. for
corner to sections
6 7 and 1. 12.
land rolling. 2nd
rate soil

Between Ranges 4 & 5 E. G. & M.

North Between
sections 6 and 1
variation 11° 00' East

40 00 Set a sandy stone
16 ins long 12 in wide
and 2 ins thick. for
quarter section corner
~~land rolling 2nd rate~~
~~soil~~

6 80 00 Set a sandy stone
20 ins long 10 in wide
and 3 ins thick
for corner to Townships
7 and 8 North of Range
4 and 5 East
land Broken 2nd
rate soil

Betwene Township 7 & 8 N. R. 5 E.

From the Corner to Townships 7 and 8 North of Ranges 4 and 5 East I Run East on a Random line Betwene said Townships the variation of the needle being 11° 00' East.

I Set temporary half mile and mile Posts. at 40 00 and 80 00 chains I find the Township line to be 5 miles 78 chains and 2 links. and the falling to be 31 links North of the Township corner the correction. for the true line will therefore be one chain and 98 links. West. and 5 1/6 links South per mile

Betwene Township 7 & 8 N. R. 5 E

From the Corner to Townships 7 and 8 North of Ranges 5 and 6 East I Run West on a true line betwene sections 1 and 36

Variation ~~10° 98'~~ 11° 38' East

40 00 Set a Red flint stone 15 in long 13 in wide and 8 in thick. for quarter section corner ~~land Broken 2d rate soil~~

80 00 Set a sand stone 16 in long 12 in wide and 3 in thick. for corner to sections 1. 2. and 35. 36. land Broken 3d rate soil

Between Townships 7 & 8 N. R. 5. E

West on a true line
Between Sections 2 and 35
Variation 10° 58' East
10°. 38'

40 00 Set a red flint stone
15 in long 10 in wide
and 5 in thick.
for quarter section
corner. ~~land broken~~
~~3rd rate soil~~

2

4

80 00 Set a sandy stone
30 in long 10 in wide
and 3 in thick
for corner to sections
2. 3. and 34. 35.
land broken 2nd
rate soil

Between Townships 7 & 8 N. R. 5. E

West on a true line
Between Sections 3 and 34
Variation 10° 58' East
10°. 38'

40 00 Set a red flint stone
13 in long 10 in wide
and 5 in thick. for
quarter section corner
~~land broken 3rd rate~~
~~soil~~

3

80 00 Set a sandy stone
14 in long 10 in wide
and 8 in thick. for
corner to sections
3. 4. and 33. 34.
land broken 2nd
rate soil

West on a true line
between sections 4 and 33
Variation ~~10° 9'~~ East
11° 38' E

40 00 Set a red flint stone
20 ins long 9 in wide
and 5 in thick. for
quarter section corner
~~land broken 3 rate~~
~~soil~~

4 80 00 Set a sand stone
16 ins long 10 in wide
and 6 in thick.
for corner to sections
4, 5, and 32, 33.
land broken 3 rate
soil to pass for
cultivation

West on a true line
between sections 5 and 32
Variation ~~10° 9'~~ East
11° 38' "

40 00 Set a red flint stone
12 ins long 9 in wide
and 6 in thick. for
quarter section corner
~~land broken 3 rate~~
~~soil~~

5 80 00 Set a lime stone
15 ins long 13 in wide
and 3 in thick. for
corner to sections
5, 6 and 31, 32.
land. Rolling first
rate soil

Between Townships 7 & 8 N. R. 5. E

West on a true line
between sections 6 and 31
Variation 10° 9' East
11° 38'

40 00 Set a sand stone
11 ins long 9 in wide
and 7 in thick. for
quarter section corner
~~Land Rolling 2d rate~~
soil

78 02 to the Established
Corner to Townships
7 and 8 North of Range
4 and 5. East. land
Rolling 2d Rate soil
July the 7th 1857

Between Ranges 4 & 5 E. T. 8. N.

From the Corner to Townships
7 and 8 North of Range 4 and
5 East I Run
North on the Range line
between sections 31 and 36
Variation 11° 0' East

40 00 Set a sand stone
22 ins long 10 in wide
and 6 in thick. for
quarter section corner
~~Land Rolling 2d Rate~~
~~soil~~

80 00 Set a sand stone
16 in long 10 in wide
and 7 in thick. for
corner to sections
30. 31. and 25. 36.
land Level. Rolling
first rate soil

Between Ranges 4 & 5 E. T. 8. N.

North Between
Sections 30 and 25
Variation 11° 00 East

40 00 Set a Red flint stone 14 in long 12 in wide and 6 in thick for Quarter section corner. ~~Land Gently Rolling 1st rate soil~~

2

80 00 Set a sand stone 16 in long 9 in wide and 7 in thick. for corner to sections 19, 30, and 24, 25. Land Gently Rolling 2nd rate soil

Between Ranges 4 & 5 E. T. 8. N.

North Between
Sections 19 and 24
Variation 11° 00 East

40 00 Set a Red flint stone 14 in long 11 in wide and 5 in thick. for Quarter section corner ~~Land Gently Rolling 2nd rate soil~~

3

80 00 Set a Red flint stone 12 in long 10 in wide and 4 in thick for corner to Sections 18, 19 and 13, 24. land broken 3rd rate soil

Betwene Ranges 4 & 5 E. T. 8. N

North Betwene
sections 18 and 13
Variation 11° 00' East

40 00 Set a sand stone
14 in long 12 in wide
and 7 in thick. for
quarter section
corner. ~~land Sandy~~
~~Rolling. first rate soil~~

4

80 00 Set a Red flint stone
14 in long 9 in wide
and 6 in thick
for corner to sections
7. 18. and 12. 13.
land Rolling
2d rate soil

Betwene Ranges 4 & 5 E. T. 8. N.

North Betwene
sections 7 and 12
Variation 11° 00' East

40 00 Set a sand stone
11 in long 10 in wide
and 7 in thick.
for quarter section
corner. ~~land Broken~~
~~2d rate soil~~

5

80 00 Set a sand stone
20 in long 7 in wide
and 4 in thick. for
corner to sections
6. 7. and 1. 12.
land Broken. 2d
rate soil

Betwene Ranges 4 & 5 E. T. 8 N.

North Betwene
sections 6 and 1
variation 11° 00' East

40 00 Set a sand stone
16 in long 9 in wide
and 5 in thick
for quarter section
corner. ~~land broken~~
~~stony and poor~~

6

80 77 to the second standard
Parallel. north. falling
10 chains and 20 links
west of the standard
corner
Set a sand stone
18 in long 10 in wide and
3 in thick. for ~~correction~~ closing
corner. land broken stony & poor
July the 8th 1857

Betwene Ranges 4 & 5 E. T. 9 N.

From the Corner to Townships
8 and 9 North. (on the second
Standard Parallel north)
of Ranges 4 and 5 East
I Run
North on the Range line
Betwene sections 31 and 36
variation 12° 00' East

40 00 Set a sand stone
19 in long 12 in wide
and 8 in thick. for
quarter section corner
~~land broken stony~~
~~and poor. not fit for~~
~~cultivation~~

68 00 to Creek 5 links wide
Runs East

80 00 Set a sand stone
15 in long 9 in wide
and 7 in thick

for corner to sections
30. 31. and 25. 36. land
Broken and Stony & poor
rate soil

North Between
sections 30 and 25
Variation 12° 0' East

40 00 Set a Red flint stone
12 in long 11 in wide and
6 in thick. for quarter
section corner. ~~land Broken~~
~~and stony to poor~~
~~for cultivation~~

80 00 Set a sandy stone
15 in long 10 in wide and
5 in thick. for corner
to sections 19. 30. and 24.
25. land Broken and

Stony to poor for cultivation

North Between
sections 19 and 24
Variation 12° 0' East

40 00 Set a Red flint stone
16 in long 9 in wide
and 7 in thick. for quarter
section corner. ~~land Broken~~
~~& poor rate soil~~

80 00 Set a sandy stone
22 in long 14 in wide
and 2 in thick
for corner to sections
18. 19. and 13. 24.
land Broken and stony
to poor for cultivation

Betwene Ranges 4 & 5 E. T. 9. N

North Betwene
sections 18 and 13
variation 12° 00' East

40 00 Set a Red flint stone
13 in long 10 in wide
and 6 in thick
for quarter section
corner. ~~land broken~~
~~and stony to poor for~~
~~cultivation~~

4

68 80 to Creek 10 links wide
Runs North 45° East

80 00 Set a sand stone
23 in long 10 in wide
and 2½ in thick. for
corner to sections
7. 18. and 12. 13. land
Gently Rolling. first
rate soil

Betwene Ranges 4 & 5 E. T. 9. N

North Betwene
sections 7 and 12
variation 12° 00' East

40 00 Set a Red flint stone
16 in long 10 in wide
and 5 in thick for
quarter section corner
~~land Gently Rolling~~
~~first rate soil~~

5

80 00 Set a sand stone
17 in long 10 in wide
and 4 in thick
for corner to sections
6. 7. and 1. 12.
land Rolling. first
rate soil

Between Ranges 4 & 5 E. T. 9. N.

North between
sections 6 and 1
Variation 12° 00' East

40 00 Set a sandy Stone
18 ins long 8 ins wide
and 8 ins thick for
Quarter section corner
~~Land gently Rolling~~
~~first rate Soil~~

6

80 00 Set a sandy Stone
17 ins long 10 ins wide
and 5 ins thick for
corner to Townships
9 and 10 North of
Ranges 4 and 5 East
land gently Rolling
first rate soil

July the 9th 1857

Between Ranges 4 & 5 E. T. 10. N.

From the corner to Townships
9 and 10 North of Ranges
4 and 5 East I Run
North on the Range line
between sections 31 and 36
Variation 12° 00' East

40 00 Set a sandy Stone
16 ins long 10 ins wide
and 8 ins thick, for
Quarter section corner
~~land level good Rich~~
~~soil~~

80 00 Set a sandy Stone
23 ins long 16 ins wide
and 8 ins thick, for
corner to sections
30, 31, and 25, 36, from
which a cottonwood
30 inches in diameter, Bears
North 24° 30' West 1 chain

Betwene Ranges 4 & 5 E. T. 10. N.

and 56½ links distant
a cottonwood 24 inches in
diameter. Bears North 3° 45'
East. 3 chains 42 links
distant. land level
good Rich Bottom not
subject to inundation

North Betwene
Sections 30 and 25
Variation 12° 00' East

2

1 20 leave Prairie and Enter timber
bears North East and south west
5 00 to Creek 15 links wide
Runs North 50 East
12 00 leave timber and Enter Prairie
bears East and west
~~timber cottonwood and Elm~~
40 00 Set a Red flint stone
14 in long 9 in wide
and 5 inches thick

Betwene Ranges 4 & 5 E. T. 10. N.

for Quarter section corner
~~land Broken and Stony~~
~~to poor for cultivation~~
80 00 Set a sand stone
15 in long 10 in wide
and 4 in thick. for
corner to sections
19, 30. and 24, 25.
land Rolling 2d rate
soil. timber cottonwood and Elm

North Betwene
Sections 19 and 24
Variation 12° 00' East

3

40 00 Set a Red flint stone
18 in long 9 in wide
and 5 in thick. for
quarter section corner
~~land Rolling first rate soil~~

200

Betwene Ranges 4 & 5 E. T. 10. N

80 00 Set a sand stone 17 in long 10 in wide and 5 in thick. for corner to sections 18. 19. and 13. 24. land Rolling. first rate soil

North Betwene sections 18 and 13
variation 12° 00' East

40 00 Set a Red flint stone 15 in long 10 in wide and 4 in thick. for quarter section corner. ~~land Rolling. 2d rate soil~~

4

80 00 Set a sand stone 17 in long 9 in wide and 5 in thick. for corner to sections 7. 18. and 12. 13.

Betwene Ranges 4 & 5 E. T. 10. N.

land Rolling. first rate soil

North Betwene sections 7 and 12
variation 12° 00' East

40 00 Set a sand stone 22 in long 10 in wide and 6 in thick. for quarter section corner. ~~land Rolling. 2d rate soil~~

5

80 00 Set a sand stone 20 in long 7 in wide and 4 in thick. for corner to sections 6. 7. and 1. 12. land Broken and poor

Betwene Ranges 4 & 5 E. T. 10. N.

North Betwene
Sections 6 and 1
Variation 12° 00' East

40 00 Set a sand stone
17 in long 9 in wide
and 5 in thick
for quarter section
corner. ~~land Gently~~
~~Rolling first rate~~
~~soil~~

6

80 00 Set a sand stone
19 in long 6½ in
wide, and 5 in thick
for corner to Townships
10 and 11 North of Ranges
4 and 5 East.
land level good
Rich soil

July the 10th 1857

Betwene Ranges 4 & 5 E. T. 11. N.

From the Corner to Townships
10 and 11 North of Ranges
4 and 5 East I Run
North on the Range line
betwen sections 31 and 36
Variation 12° 00' East

25 40 to Creek 15 links wide Runs
south 40° East

40 00 Set a sand stone 30 in long
10 in wide and 4 in thick
for quarter section corner
~~land Broken stony and poor~~

52 85 to Creek 15 links wide Runs
south 35° East

80 00 Set a sand stone 15 in long
9 in wide and 6 in in thick
for corner to sections
30, 31, and 25, 36. land
level good Rich Bottom
not subject to inundation

Betwene Ranges 4 & 5 E. T. 11. N.

North Betwene
sections 30 and 25
variation 12° 00' East

40 00 Set a sand stone
16 in long 12 in wide
and 4 in thick. for
quarter section corner
~~land level good rich~~
~~soil~~

2

80 00 Set a sand stone
16 in long 9 in wide
and 5 in thick. for
corner to sections
19. 30. and 24. 25.
land Broken and
stony to poor for
cultivation

Betwene Ranges 4 & 5 E. T. 11. N

North Betwene
sections 19 and 24
variation 12° 00' East

40 00 Set a sand stone
24 in long 12 in wide
and 4 in thick. for
quarter section corner
~~land broken & rate soil~~

3

80 00 Set a sand stone
24 in long 14 in wide
and 3 in thick. for
corner to sections
18. 19. and 13. 24.
land Broken and
poor not fit for
cultivation

Betwene Ranges 4 & 5 E. T. 11. N

North Betwene
Sections 18 and 13
Variation 12° 00' East

40 00 Set a sand stone
22 in long 13 in wide
and 3 in thick, for
quarter section corner
4 ~~Land, Broken, first~~
~~rate soil.~~

56 00 Cove Prairie and Enter timber
bears N. W. and S. E.
57 00 to Creek 34 links wide
Runs South 45° East
59 00 Cove timber and Enter Prairie
bears East and West
80 00 Set a sand stone 10 in
long 9 in wide and 7 in
thick, for corner to
sections 7, 18, and 12, 13.
Land Broken, first rate
soil Timber cottonwood and Elm

Betwene Ranges 4 & 5 E. T. 11. N

North Betwene
Sections 7 and 12
Variation 12° 00' East

40 00 Set a sand stone
17 in long 12 in wide
and 8 in thick, for
quarter section corner
~~Land Broken, first~~
~~rate soil~~

80 10 Set a sand stone
5 23 in long 9 in
wide and 5 in
thick, for corner
to sections
6, 7, and 1, 12, Land
Broken 2d. rate soil

Betwene Ranges 4 & 5 E. T. 11 N.

North Betwene
sections 6 and 1
variation 12° 00' East

40 00 Set a sand stone
21 in long 9 in wide
and 4 in thick. for
quarter section corner
~~land broken and~~
~~poor~~

6 80 00 Set a sand stone
16 in long 7 in wide
and 6 in thick
for corner to Townships
11 and 12 North of
Ranges 4 and 5 East.
land broken and
stony. to poor for
cultivation.

Betwene Ranges 4 & 5 E. T. 12 N.

From the Corner to Townships
11 and 12. North of Ranges
4 and 5 East I Run
North on the Range line
Betwene sections 31 and 36
variation 12° 00' East

40 00 Set a sand stone
23 in long 12 in wide
and 3 in thick. for
quarter section corner
~~land level and dry good~~
~~Rich soil~~

80 00 Set a sand stone
17 in long 9 in wide
and 4 in thick. for
corner. to sections
30. 31. and 25. 36.
from which
a cottonwood 18 inches
in diameter. Bear south

Between Ranges 4 & 5 E. B. 12. N.

44° 30' East. 1 chain 55 1/2 links distant. land level and dry good rich soil

North between sections 30 and 25
variation 12° 0' East

2 00 to Creek 30 links wide runs south 35° East

2 40 00 Set a sandy stone 17 ins long 12 ins wide and 6 ins thick. for quarter section corner ~~land broken stony and poor. not fit for cultivation~~

80 00 Set a sandy stone 18 ins long 10 ins wide and

Between Ranges 4 & 5 E. B. 12. N.

6 ins thick. for corner to sections 19. 30. and 24. 25. land broken and poor not fit for cultivation.

July the 11th 1857

North between sections 19 and 24
variation 12° 0' East

3 40 00 Set a sandy stone 22 ins long 7 ins wide and 7 ins thick. for quarter section corner ~~land rolling & rocky soil~~

80 00 Set a sandy stone 13 ins long 11 ins wide and 4 ins thick. for

corner to sections 18, 19, and 13, 24. land broken and stony to poor for cultivation.

North Between
sections 18 and 13
variation 12° 00' East

40 00 Set a sandy stone 10 in long 9 in wide and 5 in thick, for quarter section corner. ~~land sandy~~ rolling ~~first rate soil~~

4

79 70 to creek 15 links wide
Runs south 50° East

80 00 Set a sandy stone 21 in long 10 in wide and 4 in thick, for corner to sections 7, 18, and 12, 13.

land level good thick soil fit for cultivation

North Between
sections 7 and 12
variation 12° 00' East

37 00 to Reverse 10 links wide
Runs South 10° East

5 40 00 Set a red flint stone 24 in long 13 in wide and 3 in thick, for quarter section corner. ~~land level good thick soil~~

80 00 Set a sandy stone 15 in long 14 in wide and 3 in thick, for corner to sections 6, 7, and 1, 12. land broken stony and poor

Betwene Ranges 4 & 5 E. T. 12 N

North Betwene
Sections 6 and 1
Variation 12° 00' East

40 00 Set a sand stone
15 in long 12 in wide
and 4 in thick for
quarter section
corner. ~~land level~~
~~and dry good rich~~
~~soil~~

6

81 16 To the third standard
Parallel north. falling
26 chains and 88 links
west of the standard Corner.
Set a sand stone 26 in long
9 in wide and 6 in thick
for correction corner. at the
distance of 10 chains west of
the standard Corner

July the 13th 1857

Gridley's
Says the falling
is 10.02 chs
see note pg 52
T 12 N R 5 E

Betwene Ranges 5 & 6 E. T. 9 N.

I retraced and corrected the
Range line south. Making
all corrections in the Notes
on said line

From the Corner to Townships
8 and 9 north. (on the second standard
Parallel north) of Ranges 5 and
6. East I Run
North on the Range line
betwene Sections 31 and 36
Variation 11° 30' East

40 00 Set a sand stone 17 in
long 12 in wide and 5 in
thick. for quarter section
corner. ~~land Gently Rolling~~
~~good rate soil~~

80 00 Set a sand stone 17 in
long 12 in wide and 6
in thick. for corner

Between Ranges 5 & 6 E. Ry. G. N.

to sections 30, 31, and 25, 36. land Gently Rolling first rate soil

North Between sections 30 and 25
variation 11° 30' East

40 00 Set a sand stone 18 in long 11 in wide and 6 in thick. for quarter section ~~land Gently Rolling first rate soil~~

2 64 75 to Creek 10 links wide Runs North 45° East

80 00 Set a sand stone 13 in long 12 in wide and 6 in thick. for corner to sections 19, 30, and 24, 25. land Rolling, first rate soil

Between Ranges 5 & 6 E. Ry. G. N.

North Between sections 19 and 24
variation 11° 30' East

40 00 Set a sand stone 14 in long 13 in wide and 6 in thick. for quarter section corner ~~land Rolling first rate soil~~

3 80 00 Set a sand stone 22 in long 11 in wide and 4 in thick. for corner to sections 18, 19, and 13, 24. land Rolling, first rate soil

Between Ranges 5 & 6 E. B.G.N.

North Between
sections 18 and 13
Variation 11° 30' East

40 00 Set a Red flint Stone
15 ins long 9 in wide
and 4 in thick. for
quarter section.
~~Land Gently Rolling~~
~~first rate Soil~~

4 80 00 Set a sand Stone
30 in long 12 in wide
and 4 in thick
for corner to sections
7. 18. and 12. 13.
land gently Rolling
first rate soil

Between Ranges 5 & 6 E. B.G.N.

North Between
sections 7 and 12
Variation 11° 30' East

40 00 Set a Red flint stone
17 in long 10 in wide
and 4 in thick. for
quarter section corner
~~land Gently Rolling~~
~~first rate Soil~~

5 61 10 to Creek 11 links wide
Runs East

80 00 Set a sand stone
16 ins long 11 in wide
and 5 in thick. for
corner to sections
6. 7. and 1. 12.
land level first
rate soil.

Between Ranges 5 & 6 E. T. 9. N.

North Betwene
sections 6 and 1
variation 11° 30' East

40 00 Set a sand stone
15 in long 10 in wide
and 5 in thick. for
quarter section corner
~~land Gently Rolling~~
~~first rate soil~~

6 80.00 Set a sand stone
26 in long 9 in
wide and 3 in thick.
for corner to Townships
9 and 10 North of Ranges
5 and 6. East
land Gently Rolling
2d rate soil

July the 15th 1857

Betwene Township 9 & 10 N. R. 5. E.

From the Corner to Townships
9 and 10 North of Ranges
5 and 6 East I Run
West on a Random line
betwene said Townships the
variation of the needle being
11° 30' East. I set temporary
half mile and mile Posts
40 00 and 80 00 chains
I find the Township line
to be 5 miles and 78 chains
and the falling to be 22 links
South of the Township Corner
the correction for the true
line. will therefore be
3 1/2 links North per mile

Between Townships 9 & 10 N. R. 5 E.

From the Corner to Townships 9 and 10 North of Ranges 4 and 5 East I run East on a true line between sections 6 and 31 variation 11° 28' East

38 00 Set a red flint stone 15 in long 9 in wide and 6 in thick, for quarter section corner ~~land broken first rate soil~~

78 00 Set a red flint stone 16 in long 11 in wide and 6 in thick, for corner to sections 5, 6, and 31, 32, land gently rolling first rate soil

Between Townships 9 & 10 N. R. 5 E.

East on a true line between sections 5 and 32 variation 11° 28' East

40 00 Set a sandy stone 14 in long 10 in wide and 5 in thick, for quarter section corner ~~land broken first rate soil~~

2

80 00 Set a sandy stone 14 in long 10 in wide and 5 in thick, for corner to sections 4, 5, and 32, 33, land broken first rate soil

Between Township 9 & 10 N. R. 5. E

East on a true line
between sections 4 and 33
Variation 11° 28' East

40 00 Set a sandy stone
15 ins long 9 in wide
and 5 ins thick
for quarter section
corner. ~~Land broken~~
~~first rate soil~~

3

80 00 Set a red flint
stone 14 in long 13
ins wide and 6 in
for corner to sections
3, 4, and 33, 34,
land broken first
rate soil

Between Township 9 & 10 N. R. 5. E

East on a true line
between sections 3 and 34
Variation 11° 28' East

40 00 Set a red flint
stone 10 ins long 10 in
wide and 6 ins thick
for quarter section
corner. ~~Land gently~~
~~Rolling. first rate~~
~~soil~~

4

80 00 Set a sandy stone
14 ins long 11 in wide
and 6 ins thick
for corner to sections
2, 3, and 34, 35,
land gently rolling
first rate soil

Between Townships 9 & 10 N. R. 5. E

East on a true line
between sections 2 and 35
Variation 11° 28' East

40 00 Set a sandy stone
12 ins long 10 in wide
and 6 ins thick. for
quarter section corner
~~land broken 2d~~
~~rate soil~~

5 80 00 Set a hard flint
stone 16 ins long
12 ins wide and 7 in
thick. for corner
to sections
1, 2 and 35, 36.
land broken 2d
rate soil

Between Townships 9 & 10 N. R. 5. E

East on a true line
between sections 1 and 36
Variation 11° 28' East

40 00 Set a sandy stone
11 ins long 8 in wide
and 7 in thick. for
quarter section corner
~~land 2d rate soil~~

6 80 00 to the Established
corner to Townships
9 and 10 North of
Ranges 5 and 6 East
land Rolling 2d rate soil

July the 16th 1857

Between Ranges 5 & 6 E. T. 10. N.

From the Corner to Townships
9 and 10 North of Ranges
5 and 6 E. I Run
North on the Range line
between sections 31 and 36
Variation 11° 30' East

40 00 Set a sand stone
22 in long 12 in wide
and 4 in thick. for
quarter section corner
~~land broken, 2d rate~~
~~soil~~

80 00 Set a Red flint stone
18 in long 10 in wide
and 4 in thick, for
corner to sections
30, 31, and 25, 36.
land Rolling, first
rate soil

Between Ranges 5 & 6 E. T. 10. N.

North between
sections 30 and 25
Variation 11° 30' East

40 00 Set a sand stone
17 in long 11 in wide
and 4 in thick, for
quarter section corner
~~land level, good rich~~
~~bottom, not subject to~~
~~inundation~~

2

59 00 to Creek 15 links wide
Runs East

80 00 Set a sand stone
16 in long 12 in wide
and 5 in thick for
corner to sections
19, 30, and 24, 25.
land Gently Rolling
2d rate soil

Between Ranges 5 & 6 E. T. 10. N.

North Between
Sections 19 and 24
Variation 11° 30' East

40 00 Set a new flint stone 19 in long 9 in wide and 4 in thick for quarter section corner. ~~land hilly rolling 2nd rate soil~~

3 80 00 Set a new flint stone 15 in long 9 in wide, and 4 in thick for corner to sections 18, 19, and 13, 24. land hilly rolling 2nd rate soil

Between Ranges 5 & 6 E. T. 10. N.

North Between
Sections 18 and 13

Variation 11° 30' East

40 00 Set a sand stone 14 in long 10 in wide and 5 in thick for quarter section corner. ~~land hilly rolling 2nd rate soil~~

4 80 00 Set a new flint stone 20 in long 15 in wide and 7 in thick for corner to sections 7, 18, and 12, 13. land broken and stony. to pass for cultivation

Between Ranges 5 & 6 E. T. 10. N.

North between
Sections 7 and 12
variation 11° 30' East

12 50 to Ravene 3 links wide
Runs East.
40 00 Set a Red flint stone
13 in long 11 in wide
and 7 in thick. for
quarter section
5 corner. ~~land broken~~
~~2d rate soil~~
80 00 Set a sand stone
12 in long 7 in
wide and 7 in thick
for corner. to sections
6 & 7. and 1 & 12.
land broken and
poor. not fit for
cultivation

Between Ranges 5 & 6 E. T. 10. N.

North between
Sections 6 and 1
variation 11° 30' East

40 00 Set a Red flint
Stone 15 in long 10 in
wide and 6 in thick
for quarter section
corner. ~~land Rolling~~
~~2d rate soil~~
6 80 00 Set a sand stone
34 in long 10 in
wide and 4 in thick
for corner to Townships
10 and 11. North of
Ranges 5. and 6. East
land Gently Rolling
first rate soil

Betwene Townships 10 & 11 N. R. 5. E

From the Corner to Townships
10 and 11 North of Ranges
5 and 6 East. I Run
West on a Random line
betwene said Townships
the variation of the Needle being
11°30'. East. I set temporary
half mile and mile
Posts at 40 00 and 80 00
chains.
I find the Township line
to be 5 mile 79 chains
and 46 links, and the
falling to be 92 links
North of the Township Corner
the correction for the
true line. will therefore
be 15 2/6 links south per
mile

Betwene Townships 10 & 11 N. R. 5. E

From the Corner to Townships
10 and 11 North of Ranges
4 and 5 East I Run
East on a true line
betwene sections 6 and 31
variation 11°36' East

Subdivision commenced

9 00 to Creek 20 links wide
Runs south 45° East

39 46 Set a sand stone 17 in
long 10 in wide and
3 in thick, for quarter
section corner. ~~land~~
~~level good rich soil~~

79 46 Set a sand stone
14 in long 10 in wide
and 5 in thick, for
corner to sections
5, 6, and 31, 32. land
Rolling. first rate soil

Between Townships 10 & 11 N. R. 5. E.

East on a true line
between sections 5 and 32
Variation 11° 36' East

40 00 Set a red flint stone
16 ins long 10 ins
wide and 4 in thick
for quarter section
corner. ~~Land Rolling~~
~~first rate soil~~

2 80 00 Set a sandy stone
16 ins long 10 in wide
and 6 ins thick
for corner to sections
4. 5. and 32. 33.
land gently Rolling
first rate soil

Between Townships 10 & 11 N. R. 5. E.

East on a true line
between sections 4 and 33
Variation 11° 36' East

40 00 Set a sandy stone
15 ins long 12 in wide
and 6 ins thick
for quarter section
corner. ~~Land Rolling~~
~~first rate soil~~

3 80 00 Set a red flint
stone 14 in long
10 ins wide and 6 in
thick, for corner
to sections
3. 4. and 33. 34.
land gently Rolling
first rate soil

Betwene Townships 10 & 11 N. R. 5. E

East on a true line
Betwene sections 3 and 34
variation 11° 36' East

40 00 Set a Red flint stone
14 in long 11 in wide
and 5 in thick
for quarter section
corner. ~~land broken~~
~~stony and poor~~

4 80 00 Set a Red flint
stone 16 in long
10 in wide and
6 in thick. for
corner to sections
2. 3. and 34. 35.
land Gently Rolling
first rate soil

Betwene Townships 10 & 11 N. R. 5. E

East on a true line
Betwene sections 2 and 35
variation 11° 36' East

40 00 Set a Red flint
stone 17 in long
11 in wide and 6
in thick. for quarter
section corner. ~~land~~
~~broken. 2d rate soil~~

5 80 00 Set a Red flint
stone 14 in long 12
in wide. and 6 in
thick. for corner to
sections.
1. 2. and 35. 36.
land Rolling. 2d
rate soil

Between Townships 10 & 11 N. R. 5 E.

East on a true line
between sections 1 and 36
Variation 11° 26' East

40 00 Set a red flint stone
30 in long 17 in wide
and 10 in thick.
for quarter section
corner. ~~land broken~~
~~first rate soil~~

6

80 00 to the Established
Corner to Townships
10 and 11 North of
Ranges 5 and 6 East
land broken first rate soil

July the 17th 1857

Between Ranges 5 & 6 E. T. 11 N.

From the Corner to Townships
10 and 11 North of Ranges
5 and 6 East & Run
North on the Range line
between sections 31 and 36
Variation 11° 26' East

40 00 Set a sand Stone
18 ins long 13 in wide
and 6 ins thick, for
quarter section corner
~~land broken stony not~~
~~good.~~

80 00 Set a red flint stone
18 ins long 11 in wide
and 8 in thick for
corner to sections
30, 31, and 25, 36.
land level good rich
soil

Betwene Ranges 5 & 6 E. T. 11. N

North Betwene
sections 30 and 25
variation 11° 30' East

9 00 to Creek 18 links wide
Runs East

40 00 Set a Red flint Stone
17 in long 12 in wide
and 6 in thick
for quarter section
2 corner. ~~land level~~
~~good Rich soil~~

80 00 Set a sand Stone
15 in long 10 in
wide and 6 in thick
for corner to sections
19. 30. and 24. 25.
land Rolling. good
Rich soil

Betwene Ranges 5 & 6 E. T. 11. N.

North Betwene
sections 19 and 24
variation 11° 30' East

40 00 Set a sand Stone
16 in long 11 in wide
and 6 in thick
for quarter section
corner. ~~land~~
~~Rolling. good Rich~~
3 ~~soil~~

80 00 Set a sand Stone
22 in long 9 in wide
and 4 in thick. for
corner to sections
18. 19. and 13. 24.
land Rolling first
rate soil

Between Ranges 5 & 6 E. T. 11. N.

North Between
Sections 18 and 13
Variation 11° 30' East

40 00 Set a Red flint stone
14 in long 10 in wide
and 4 in thick. for
quarter section corner
4 ~~land Rolling. first~~
~~rate soil~~

80 00 Set a sand stone
20 in long 9 in
wide and 4 in
thick. for corner to
section
7. 18. and 12. 13.
land Rolling. first
Rate soil

Between Ranges 5 & 6 E. T. 11. N.

North Between
Sections 7 and 12
Variation 11° 30' East

40 00 Set a Red flint stone
17 in long 7 in wide
and 6 in thick
for quarter sections
5 corner. ~~land Rolling~~
~~first rate soil~~

80 00 Set a sand stone
16 in long 10 in
wide and 6 in
thick. for corner to
sections
6. 7. and 1. 12.
land Rolling. first
rate soil

Between Ranges 5 & 6 E. T. 11. N.

North Between
Sections 6 and 1
Variation 11° 30 East

24 00 leave Prairie and Enter
timber bears East and West
24 50 to Creek 18 links wide
Runs North 75° East
35 00 leave timber and Enter Prairie
bears East and West
40 00 Set a Sand Stone 15 in
long 10 in wide and 8 in
thick, for quarter section
corner. ~~land level good~~
~~dry bottom, first rate soil~~
80 00 Set a Sand Stone
28 in long 9 in wide and
4 in thick, for corner to
Townships 11 and 12 north
of Ranges 5 and 6 East
land level good rich bottom
not subject to inundation
timber Cottonwood Elm Ash

Between Townships 11 & 12 N. R. 5. E.

From the Corner to Townships
11 and 12 North of Ranges
5 and 6 East I run
West on a ~~true~~ Random line
between said Townships, the
variation of the needle being
11° 30' East, I set temporary
half mile and mile posts
at 40 00 and 80 00 chains
I find the Township line
to be 6 miles and
33 links; and the falling
to be 59 links south of
the Township Corner.
the condition, for the true
line will therefore be
9 50 links, North per mile

Between Townships 11 & 12 N. R. 5. E

From the Corner to Townships
11 and 12. North of Ranges
4 and 5 East I run
East on a true line
between sections 6 and 31
Variation 11° 36' East

40 23 Set a red flint stone
14 in long 10 in wide
and 4 in thick. for
quarter section corner
~~land broken and stony~~
~~to pass for cultivation~~

80 23 Set a sand stone
17 in long 9 in wide
and 7 in thick. for
corner to sections
5, 6, and 31, 32.
land broken and
stony. to pass for cultivation

Between Townships 11 & 12 N. R. 5. E

East on a true line
between sections 5 and 32
Variation 11° 26' East

40 00 Set a red flint stone
15 in long 9 in wide
and 6 in thick. for
quarter section corner
~~land broken good~~
~~rich soil~~

80 00 Set a sand stone
14 in long 12 in wide
and 6 in thick.
for corner to sections
4, 5, and 32, 33.
land gently rolling
good rich soil

Between Townships 11 & 12 N. R. 5. E

East on a true line
between sections 4 and 33
Variation 11° 26 East

40 00 Set a Red flint stone
30 ins long 10 in wide
and 6 in thick.
for quarter section
corner. ~~Land broken~~
~~and stony to pass for~~
~~cultivation~~

3

80 00 Set a Red flint stone
16 in long 15 in wide
and 6 in thick. for
corner to sections
3, 4, and 33, 34,
land level good rich
bottom. not subject to
inundation

Between Townships 11 & 12 N. R. 5. E

East on a true line
between sections 3 and 34
Variation 11° 26 East

40 00 Set a Red flint stone
15 in long 14 in wide
and 6 in thick.
for quarter section
corner. ~~land level~~
~~good rich bottom not~~
~~subject to inundation~~

4

80 00 Set a same stone
17 ins long 11 ins wide
and 6 in thick
for corner to sections
2, 3, and 34, 35,
land level good rich
bottom. not subject
to inundation

Between Townships 11 & 12 N. R. 5. E

East on a true line
between sections 2 and 35
Variation 11° 26' East

40 00 to Creek 18 links wide
runs south 45° East
40 00 Set a red flint stone
13 in long 10 in wide
and 6 in thick
for quarter section corner
~~land level dry good~~
~~Rich soil~~
80 00 Set a sand stone
17 in long 10 in wide
and 5 in thick
for Corner to sections
1. 2. 35. 36.
land level good Rich
bottom not subject
to inundation

Between Townships 11 & 12 N. R. 5. E

East on a true line
between sections 1 and 36
Variation 11° 26' East

40 00 Set a sand stone
11 ins long 9 in wide
and 6 in thick for
quarter section corner
~~land level good Rich~~
~~bottom not subject to~~
~~inundation~~
80 00 to the Established
corner to Townships
11 and 12. North of
Ranges 5 and 6 East
land level good Rich bottom
not subject to inundation
July the 18th 1857

Between Ranges 5 & 6 E. G. S. R. M.

From the Corner to Townships
11 and 12 North of Ranges
5 and 6 East I Run
North on the Range line
between Sections 31 and 36
Variation 11° 30' East

40 00 Set a Red flint Stone
11 in. long 10 in wide and
8 in thick. for quarter
section corner. ~~land level good Rich bottom not subject to inundation~~

80 00 Set a Sand Stone
18 in long 12 in wide
and 4 in thick. for
corner to sections.
30. 31. and 25. 36. land
level good Rich bottom
not subject to inundation.

Between Ranges 5 & 6 E. G. S. R. M.

North Between
Sections 30 and 25
Variation 11° 30' East

40 00 Set a Sand Stone
16 in long 12 in wide
and 5 in thick
for quarter section
corner. ~~land level~~
~~good Rich bottom not~~
~~subject to inundation~~

80 00 Set a Sand Stone
17 in long 12 in wide
and 4 in thick for
corner to sections
15. 30. and 24. 25.
land level good Rich
bottom. not subject
to inundation

Between Ranges 5 & 6 E. B.M. N.

North Between
sections 18 and 24
variation 11° 30' East

40 00 Set a sand stone
18 in long 10 in wide
and 5 in thick, for
quarter section corner
~~land level and dry~~
~~good rich soil~~

3 47 00 Leave Prairie and Enter
Timber bears E & W

47 32 To Creek 30 links wide
runs south 15° East

52 00 Leave Timber and Enter
Prairie bears N.W. & S.E.

57 00 Leave Prairie and Enter
Timber bears E & W

63 00 Leave Timber and Enter
Prairie bears East and West

80 00 Set a sand stone 17 in
long 11 in wide and

Between Ranges 5 & 6 E. B.M. N.

5 in thick, for corner
to sections 18, 19, and
13, 24, land level good
rich bottom not subject to
inundation. Timber Oak
and Elm

North Between
sections 18 and 13
variation 11° 30' East

4 40 00 Set a red flint stone
12 in long 11 in wide
and 8 in thick, for
quarter section corner
~~land level and dry~~
~~to plow for cultivation~~

80 00 Set a red flint stone
16 in long 11 in wide and
5 in thick, for corner
to sections, 7, 18, and

Betwene Ranges 5 & 6 E. T. 12 N.

12 . 13 . lands broken and stony to poor for cultivation

North Betwene
sections 7 and 12
variation 11° 30' East

40 00 Set a Red flint stone 15 in long 11 in wide and 6 in thick for quarter section corner ~~lands broken and stony to poor for cultivation~~

5

80 Set a Red flint stone 15 in long 10 in wide and 5 in thick for corner to sections 6 . 7 . and 1 . 12 . lands broken 2d rate soil

Betwene Ranges 5 & 6 E. T. 12 N.

North Betwene
sections 6 and 1
variation 11° 30' East

40 00 Set a Red flint stone 13 in long 12 in wide and 4 in thick for quarter section corner. ~~lands broken 2d rate soil~~

6

80.05 To the third standard parallel north falling 7 chains and 43 links west of the standard corner
Set a sand stone 24 in long 9 in wide and 3 in thick for ~~correction~~ closing corner
broken 2d rate soil July the 20th 1857 lands

Betwene Ranges 6 & 7 E. T. 9. N.

From the Corner to Townships 8 and 9 North. on the second Standard Parallel North of Ranges 6 and 7. East

I Run

North on the Range line betwene sections 31 and 36

Variation 11° 45' East

40 00 Set a sand stone 24 in long 12 in wide and 3 in thick. for quarter section corner. ~~lands level good rich soil~~

52 00 to Ravene 3 links wide Runs south 85 west

80 00 Set a sand stone 18 in long 11 in wide and 5 in thick for corner to sections 30. 31. and 25. 36.

Betwene Ranges 6 & 7 E. T. 9. N.

lands Gently Rolling first rate soil

North Betwene

Sections 30 and 25

Variation 11° 45' East

40 00 Set a sand stone 17 in long 10 in wide and 4 in thick. for quarter section corner. ~~lands Gently Rolling first rate soil~~

80 00 Set a sand stone 24 in long 14 in wide and 2 in thick. for corner to sections 19. 30. and 24. 25. lands Gently Rolling. first rate soil

Between Ranges 6 & 7 E. G. S. R. N

North Between
sections 19 and 24,
Variation 11° 45' East

40 00 Set a sandy stone
22 in long 9 in wide
and 3 in thick
for quarter section
corner. ~~lands broken~~
~~first rate soil~~

3 80 00 Set a sandy stone
24 in long 13 in
wide and 3 in
thick. for corner
to sections
18, 19, and 13, 24.
lands broken first
rate soil

Between Ranges 6 & 7 E. G. S. R. N

North Between
sections 18 and 13
Variation 11° 45' East

40 00 Set a sandy stone
24 in long 8 in
wide, and 4 in thick
for quarter section
corner. ~~lands broken~~
~~first rate soil~~

4 80 00 Set a sandy stone
18 in long 8 in
wide and 4 in
thick, for corner
to sections
7, 18, and 12, 13,
lands broken first
rate soil

Between Ranges 6 & 7. E. T. 9. N

North Between
Sections 7 and 12
variation 11° 45' East

40 00 Set a sand stone
15 in long 12 in
wide and 4 in
thick, for quarter
sections. corner. ~~land~~
~~Gently Rolling. first~~
~~rate soil~~

5

67 26 to Raven 5 links
wide Bears west

80 00 Set a sand stone
22 in long 12 in wide
and 3 in thick, for
corner to sections
6 a 7. and 1. 12.
land Gently Rolling
first rate soil

Between Ranges 6 & 7. E. T. 9. N

North Between
Sections 6 and 1
variation 11° 45' East

40 00 Set a sand stone
17 in long 10 in wide
and 4 in thick
for quarter sections
corner. ~~land Gently~~
~~Rolling first rate~~
~~soil~~

6

80 00 Set a sand stone
30 in long 9 in wide
and 4 in thick
for corner to Townships
9 and 10 North of Ranges
6 and 7 East.
land Gently Rolling
first rate soil

July the 21st 1857

Between Townships 9 & 10 N. R. 6 E

From the Corner to Townships 9 and 10 North of Ranges 6 and 7. East I run West on a Random line between said Townships the variation of the needle being 11° 45' East

I set temporary half mile and mile posts at 40.00 and 80.00 chains

I find the Township line to be 5 miles 77 chains and 57 links and the falling to be one chain and 77 links south of the Township corner. the correction for the true line will therefore be 25 1/4 links north per mile

Between Townships 9 & 10 N. R. 6 E

From the Corner to Townships 9 and 10 North of Ranges 5 and 6. East I run. East on a true line between sections 6 and 31

Variation 11° 31' East

3757 Set a Rear flint stone 16 in long 7 in wide and 6 in thick for quarter section corner. ~~lands broken first note side~~

7757 Set a same stone 16 in long 11 in wide and 3 in thick. for corner to sections 5. 6. and 31. 32. lands broken first note side

Between Townships 9 & 10. N. R. 6. E

East on a true line
between sections 5 and 32
Variation 11° 31' East

40 00 Set a new flint stone
34 in long 9 in wide
and 7 in thick. for
quarter section corner
~~land broken first~~
~~rate soil~~

2 80 00 Set a new flint
stone 19 in long 14
in wide and 4 in
thick. for corner
to sections
4. 5. and 32. 33.
land Gently Rolling
first rate soil

Between Townships 9 & 10 N. R. 6. E

East on a true line
between sections 4 and 33
Variation 11° 31' East

40 00 Set a new flint stone
16 in long 10 in wide
and 5 in thick. for
quarter sections corner
~~land Gently Rolling~~
~~first rate soil~~

3 80 00 Set a new flint
stone 16 in long
11 in wide. and 4
in thick. for corner
to sections
3. 4. and 33. 34.
land level good
rich bottom. not
subject to inundation

Betwene Townships 9 & 10 N. R.6.E

East on a true line
betwene sections 3 and 34
variation 11° 31' East

13 64 to creek 30 links wide
Runs. North 35° East
30 00 to the same creek 30 links
wide Runs south 45° west
40 00 Set a Red flint stone
17 in long 10 in wide
and 6 in thick. for
4 quarter section corner
~~land level good Rich~~
~~bottom Not subject to~~
~~inundation~~
42 50 to the same creek 30 links
wide Runs North 20°
East. water salty
59 00 leave Prairie and Enter
timber bears North East & south west
60 20 to the Saline River

Betwene Townships 9 & 10 N. R.6.E

50 links wide Runs. North
20° East
63 80 leave timber and Enter
Prairie bears East and west
80 00 Set a Red flint stone
15 in long 10 in wide
and 5 in thick. for
corner to sections
2, 3, and 34, 35.
land level good
Rich bottom not
subject to inundation
timber cottonwood and Elm

East on a true line
betwen sections 2 and 35
variation 11° 31' East

40 00 Set a Red flint stone
11 in long 10 in wide
and 6 in thick for

Betwene Townships 9 & 10 N. R. 6. E

quarter section corner
~~land level good rich bottom not subject to inundation~~

80 00 Set a sand stone
5 18 in long 12 in wide and 4 in thick, for corner to sections 1. 2. and 35. 36. land Rolling first rate soil.

East on a true line betwene sections 1 and 36
variation 11° 31' East

40 00 Set a sand stone
6 15 in long 14 in wide and 4 in thick, for quarter section corner
~~land level or Gently Rolling first rate soil~~

Betwene Ranges 6 & 7 E. T. 10. N.

80 00 to the Established corner to Townships. 9 and 10
6 north. of Ranges 6 and 7 East

July the 22nd 1857

From the Corner to Townships 9 and 10 north of Ranges 6 and 7. East I Run
North on the Range line betwene sections 31 and 36
variation 11° 45' East

40 00 Set a sand stone 18 in long 12 in wide and 5 in thick, for quarter section corner ~~land Gently Rolling first rate soil~~

80 00 Set a sand stone 22 in long 11 in wide and 4 in thick, for corner

Betwene Ranges 6 & 7 E. T. 10. N.

to sections 30. 31. and 25. 36. land Rolling. first rate soil

North Betwene
sections 30. and 25
variation 11° 45' East

40 00 Set a sand stone 17 in long 14 in wide and 3 in thick. for quarter section corner. ~~land Rolling first rate soil~~

80 00 Set a sand stone 20 in long 9 in wide and 4 in thick. for corner to sections 19. 30. and 24. 25. land Gently Rolling first rate soil

Betwene Ranges 6 & 7 E. T. 10. N.

North Betwene
sections 19 and 24
variation 11° 45' East

40 00 Set a Red flint stone 15 in long 9 in wide and 6 in thick. for quarter section corner. ~~land Gently Rolling. first rate soil~~

80 00 Set a sand stone 21 in long 15 in wide and 3 in thick. for corner to sections 18. 19. and 13. 24. land Gently Rolling. first rate soil

North Betwene
sections 18 and 13
variation 11° 45' East

40 00 Set a Red flint stone 14 in long 8 in wide and

Betwene Ranges 6 & 7 E. T. 10 N.

6 in thick. for quarter sections corner. ~~lands level. good Rich bottom. not subject to inundation~~

4 80 00 Set a sand stone 20 in long 8 in wide and 4 in thick. for corner to sections 7. 18. and 12. 13. lands level dry bottom first rate soil

North Betwene

sections 7 and 12

variation 11° 45' East

23 00 Cove Prairie and Enter timber bears East and west

5 24 80 to the Saline River. 50 links wide Runs East. 2. small salt Springs 3 chains to the East of the line

26 00 Cove timber and Enter Prairie bears East and west

Betwene Ranges 6 & 7 E. T. 10 N.

40 00 Set a Red flint stone 18 in long 13 in wide and 4 in thick. for quarter sections corner. ~~lands level good Rich bottom subject to inundation to the dept of 2 feet~~

5 80 00 Set a sand stone 15 in long 12 in wide and 6 in thick. for corner to sections 6. 7. and 1. 12. lands Gently Rolling. first rate soil. timber cottonwood Elm & boxelder

North Betwene

sections 6 and 1

variation 11° 45' East

40 00 Set a Red flint stone 17 in long 11 in wide and 4 in thick. for quarter sections

6

Betwene Townships 10 & 11 N. R. 6 E

Corner. ~~land Gently Rolling first rate soil~~

80 00 Set a sand Stone 27 in long 11 in wide and 4 in thick. for corner to Townships 10 and 11 North of Ranges 6 and 7 East. land broken. first rate soil

6

From the Corner to Townships 10 and 11 North of Ranges 6 and 7 East. I Run west on a Random line betwene said Townships. the variation of needle being 11° 45' East. I set temporary half mile and Mile Posts at 40 00 and 80 00 chains I find the Township line to be 5 miles 77 chains and 35 (25) links: and the

Betwene Townships 10 & 11 N. R. 6 E

falling to be 2 chains and one links south of the Township corner. the correction for the true line will therefore be 33 1/2 links North per mile

From the Corner to Townships 10 and 11 North of Ranges 5 and 6 East. I Run East on a true line betwene sections 6 and 31 variation 11° 29' East

37 25 Set a Red flint stone 17 in long 7 in wide and 7 in thick. for quarter section corner. ~~land broken. gover Rich soil.~~

68 00 leave Prairie and Enter timber

67 25 begars North and south to Creek 30 links wide Runs south.

Between Townships 10 & 11 N. R. 6. E

70 00 leave timber and enter Prairie
bears North and South
77 25 Set a sandy stone
20 in long 10 in wide and
3 in thick, for corner
to sections 5, 6, and 31, 32.
land level good rich bottom
not subject to inundation
Timber, Oak and Elm

East on a true line
between sections 5 and 32
variation 11° 25' East

40 00 Set a red flint stone
13 in long 11 in wide and
4 in thick, for quarter
2 section corner. ~~land hilly Rolling, first rate soil~~

80 00 Set a sandy stone 32 in
long 6 in wide and 5
in thick, for corner to
sections 4, 5, and 32, 33,

Between Townships 10 & 11 N. R. 6. E

land hilly Rolling, first
rate soil

East on a true line
between sections 4 and 33
variation 11° 25' East

40 00 Set a red flint stone
15 in long 9 in wide and
8 in thick, for quarter
3 section corner. ~~land hilly Rolling, first rate soil~~

80 00 Set a red flint stone.
17 in long 10 in wide and
4 in thick, for corner to
sections 3, 4, and 33, 34,
land Rolling first rate
soil

East on a true line
between sections 3 and 34
variation 11° 25' East

Between Townships 10 & 11 N. R. 6 E

40 00 Set a Red flint stone 14 in long 10 in wide and 7 in thick for quarter section corner. ~~Lines broken first rate soil~~

4 80 00 Set a Red flint stone 18 in long 12 in wide and 3 in thick for corner to sections 2, 3 and 34, 35. lines broken, first rate soil

East on a true line between sections 2 and 35
variation 11° 25' East

40 00 Set a Red flint stone 14 in long 10 in wide and 6 in thick for quarter section corner. ~~lines broken, first rate soil~~

5

Between Townships 10 & 11 N. R. 6 E

80 00 Set a Red flint stone 16 in long 12 in wide and 5 in thick for corner to sections 1, 2 and 35, 36. lines broken, first rate soil

East on a true line between sections 1 and 36
variation 11° 25' East

40 00 Set a Red flint stone 15 in long 10 in wide and 5 in thick for quarter section corner. ~~lines broken, first rate soil~~

6

80 00 To the Established corner to Townships 10 and 11, North of Ranges 6 and 7 East. lines broken first rate soil

July the 13th 1857

Between Ranges 6 & 7 E. T. 11. N

From the Corner to Townships
10 and 11 North of Ranges
6 and 7. East I Run
North on the Range line
between sections 31 and 36
variation 11° 45' East

10 20 to Ravene 5 links wide.
Runs East
40 00 Set a Red flint stone
12 in long 9 in wide and
9 in thick. for quarter
section corner. ~~land~~
~~land Rolling. first rate soil~~
80 00 Set a Red flint stone
13 in long 11 in wide
and 5 in thick. for
corner. to sections
30. 31. and 25. 36.
land level good Rich
bottom. not subject to
inundation

Between Ranges 6 & 7 E. T. 11. N.

North Between
sections 30 and 25
variation 11° 45' East

37 24 to creek 20 links wide
Runs south 12° East
40 00 Set a Red flint stone
14 in long 9 in wide and
4 in thick. for quarter
section corner. ~~land level~~
~~good Rich bottom not subject~~
~~to inundation~~
46 87 to the same creek 20 links
wide Runs west
57 15 to the same creek 20 links
wide Runs south 45° East
59 16 to the same creek 20 links
wide Runs west
80 00 Set a Red flint stone 13
in long 10 in wide and 4
in thick. for corner to

Betwene Ranges 6 & 7 E. T. 11. N.

Sections 19. 30. and 24. 25. land bad good Rich bottom subject to inundation to the dept of 2 feet

North Betwene
Sections 19 and 24
variation 11° 45' East

21 25 to the same creek 25 links wide Runs south 45° East

3 40 00 Set a Rear flint stone 16 in long 8 in wide and 6 in thick. for quarter section corner. ~~land bad bottom subject to inundation to the dept of 2 feet.~~

80 00 Set a sand stone 14 in long 9 in wide. and 7 in thick. for corner to sections 18. 19. and 13. 24. land

Betwene Ranges 6 & 7 E. T. 11. N.

Rolling. 3d rate soil not fit for cultivation

North Betwene
Sections 18 and 13
variation 11° 45' East

39 00 to Ravene 4 links wide Runs west

40 00 Set a Rear flint stone 14 in long 8 in wide and 8 in thick. for quarter section corner. ~~land bad good Rich soil~~

4 80 00 Set a Rear flint stone 17 in long 9 in wide and 6 in thick. for corner to sections 7. 18. and 12. 13. land Rolling. first rate soil

North between
sections 7 and 12
variation 11°45' East

40 00 Set a Red flint stone
13 in long 11 in wide and
5 in thick. for 2 north
section corner. ~~land, rolling~~
~~first rate soil~~

5

80 00 Set a Red flint stone
17 in long 9 in wide
and 4 in thick. for
corner to sections
6 & 7 and 1 & 12. land
rolling. first rate soil

North between
sections 6 and 1
variation 11°45' East

40 00 Set a Red flint stone
17 in long 14 in wide and 6
in thick. for quarter

section corner. ~~land, rolling~~
~~first rate soil~~

80 00 Set a Stone 21 in
long 7 in wide and 7 in
thick. for corner to
Townships 11 and 12 North
of Ranges 6 and 7 East
land rolling. 2d rate
soil

6

From the corner to Townships
11 and 12 North of Ranges
6 and 7 East. I run
West on a random line
between said Townships the
variation of the needle being
11°45' East. I set temporary
half mile and mile posts
at 40 00 and 80 00 chains
I find the Township line to
be 5 miles 78 chains and

Betwene Townships 11 & 12 N. R. 6. E

23 links. and the falling to be one chain and 72 links. south of the Township corner. the correction for the true line. will there fore be 28 ½ links north per mile

From the corner to Townships 11 and 12 north of Ranges 5 and 6 East I Run East on a true line betwene sections 6 and 31
variation 11° 31' East

29 00 leave Prairie and Enter timber
29 73 to bears north west and south East Creek 30 links wide Runs south 15° East
36 00 leave timber and Enter Prairie
38 23 bears East and west Set a Red flint stone 13 in long 10 in wide and 4 in thick. for quarter

Betwene Townships 11 & 12 N. R. 6. E

section corner. ~~land bad~~ ~~good Rich soil~~
78 23 Set a Red flint stone 18 in long 8 in wide and 5 in thick. for corner to sections 5. 6. and 31. 32. land Gently Rolling first rate soil. timber cottonwood and Elm

East on a true line betwene sections 5 and 32
variation 11° 31' East

40 00 Set a Red flint stone 14 in long 11 in wide and 6 in thick. for quarter section corner. ~~land Gently Rolling first rate soil~~
80 00 Set a sand stone 18 in long 12 in wide and 3 in thick for corner. to sections 4. 5. and 32. 33. land

Betwene Townships 11 & 12 N. R. 6. E.

broken 2 or rate soil not fit for forming purposes

East on a true line betwene sections 4 and 33
variation 11° 31' East

40 00 Set a Red flint stone 17 in long 9 in wide and 6 in thick. for quarter section corner ~~land broken 2 or rate soil~~

3 80 00 Set a Red flint stone 13 in long 12 in wide and 7 in thick. for corner to sections 3. 4. and 33. 34. land level and Rich

East on a true line betwee sections 3 and 34
variation 11° 31' East

40 00 Set a Red flint stone 19 in long 9 in wide and 7 in thick

Betwene Townships 11 & 12 N. R. 6. E.

for quarter section corner ~~land broken 2 or rate soil~~

41 00 to Ravene 3 links wide
Runs north 45° East

67 00 to Salty Ravene 5 links wide
Runs south 25 East

80 00 Set Red flint stone 15 in long 11 in wide and 3 in thick. for corner to sections 2. 3. and 34. 35. land level. parts boggy soil good

East on a true line betwene sections 2 and 35
variation 11° 31' East

40 00 Set a Red flint stone 19 in long 9 in wide and 6 in thick. for quarter section corner. ~~land Rolling first rate soil~~

5

297.

Betwene Townships 11 & 12 N. R. 6. E.

56 50 to Creek 10 links wide Runs south 45° west

80 00 Set a sandy stone 14 in long 10 in wide and 4 in thick for corner to sections, 1. 2. and 35. 36. land broken 2d rate soil

East on a true line betwene sections 1 and 36
variation 11° 31' East

40 00 Set a Red flint stone 20. in long 10 in wide and 6 in thick. for quarter section corner. ~~land level good Rich soil~~

6

80 00 to the Established corner to Townships 11 and 12 North of Ranges 6 and 7 East

July the 24th 1857

Betwene Ranges 6 & 7 E. T. 12. N.

From the Corner to Township 11 and 12 North of Ranges 6 and 7 East I Run North on the Range line betwene sections 31 and 36
variation 11° 45' East

40 00 Set a Red flint stone 16 in long 12 in wide and 3 in thick. for quarter section corner. ~~land broken 2d rate soil~~

80 00 Set a sandy stone 15 in long 10 in wide and 7 in thick. for corner to sections 30. 31. and 25. 36. land broken 2d rate soil

North betwene sections 30 and 25
variation 11° 45' East

40 00 Set a Red flint stone 18 in

Betwene Ranges 6 & 7 E. T. 12. N.

long 11 in wide and 3 in thick. for quarter section corner. land broken. first rate soil

80 00 Set a Red flint stone 21 in long 8 in wide and 6 in thick. for corner to sections 19. 30. and 24. 25. land broken. first rate soil

2

North Betwene

sections 19 and 24

Variation 11° 45' East

5 51 to Ravene 4 links wide Runs East

40 00 Set a Red flint stone 15 in long 8 in wide and 8 in thick. for quarter section corner ~~land level good rich soil~~

3

Betwene Ranges 6 & 7 E. T. 12. N.

80 00 Set a Red flint stone 18 in long 9 in wide and 5 in thick for corner to sections 18. 19. and 13. 24. land Rolling first rate soil

North Betwene

sections 18 and 13

Variation 11° 45' East

40 00 Set a Red flint stone 13 in long 11 in wide and 6 in thick. for quarter section corner. ~~land Rolling first rate soil~~

4

80 00 Set a Red flint stone 16 in long 9 in wide and 4 in thick. for corner to sections 7. 18. and 12. 13. land level. first rate soil

Between Ranges 6 & 7 E. T. 12 N.

North Between
Sections 7 and 12
Variation 11°45' East

0 43 to Raven 3 links wide
Runs North 75 East

40 00 Set a Red flint stone
30 in long 9 in wide and
4 in thick, for quarter
section corner. ~~land~~
~~Rolling. first rate soil~~

80 00 Set a Red flint stone
15 in long 11 in wide and
5 in thick, for corner
to sections. 6. 7. and
1. 12. lands Rolling. first
rate soil

North Between
sections 1 and 6
Variation 11°45' East

40 00 Set a Red flint stone

Between Ranges 6 & 7 E. T. 12 N.

14 in long 9 in wide and
4 in thick, for quarter
section corner. ~~land level~~
~~first rate soil~~

40 05 to Rave 5 links wide
Runs East

80 10 to the third standard
Parallel North, falling
10 chains and 14 links
West of the standard
Corner
Set a sandstone stone 21 in
long 10 in wide and 3 in
thick, for closing ~~section~~ corner
lands level. first rate soil

July the 25th 1857

From the Corner to Townships
8 and 9 North (on the second
standard Parallel North)
of Ranges 7 and 8 East
I Run
North on the Range line
between sections 31 and 36
Variation 11° 15' East

40 00 Set a paper stone 16
in long 11 in wide and
4 in thick for quarter
section corner. ~~land~~
~~Rolling first rate soil~~

80 00 Set a paper stone
20 in long 7 in wide
and 3 in thick for
corner to sections
30, 31 and 25, 36.
land Rolling first
rate soil

North between
Sections 30 and 25
Variation 11° 15' East

40 00 Set a paper stone 17 in
long 10 in wide and 5 in
thick for quarter section
corner. ~~land Rolling~~
~~first rate soil~~

2 80 00 Set a paper stone 21 in
long 12 in wide and 3
in thick for corner to
sections 19, 30, and 24, 25.
land Rolling first
rate soil

North between
Sections 19 and 24
Variation 11° 15' East

40 00 Set paper stone 18 in
long 11 in wide and 6 in
thick for quarter sections

Betwene Ranges 7 & 8 E. T. 9. N

corner. ~~lands Rolling. first rate soil~~

59 23 to Ravene 5 links wide Runs south 70° East

80 00 Set a sand stone 19 in long 10 in wide and 3 in thick. for corner to sections 18. 19. and 13. 24. lands level first rate soil

3

North Betwene Sections 18 and 13
variation 11° 15' East

40 00 Set a sand stone 16 in long 11 in wide and 7 in thick. for quarter section corner. ~~lands Rolling. first rate soil~~

4

Betwene Ranges 7 & 8 E. T. 9. N

80 00 Set a sand stone 17 in long 11 in wide and 3 in thick. for corner to sections 7. 18. and 12. 13. lands Gently. Rolling. first rate soil

North Betwene Sections 7 and 12
variation 11° 15' East

40 00 Set a sand stone 18 in long 10 in wide and 7 in thick. for quarter section corner. ~~lands Gently Rolling first rate soil~~

5

80 00 Set a Red flint stone 17 in long 11 in wide and 8 in thick. for corner to sections 6. 7. and 1. 12. lands Rolling. first rate soil

Between Ranges 7 & 8 E. B. M. N.

North Between
sections 6 and 1
variation 11° 15' East

40 00 Set a new flint stone 15 in long 12 in wide and 6 in thick. for quarter section corner. ~~Land Rolling and first rate soil~~

80 00 Set a same stone 28 in long 9 in wide and 4 in thick. for corner to Townships 9 and 10 North. of Ranges 7 and 8. East.
lands Gently Rolling first rate soil

July the 28th 1857

Between Townships 9 & 10 N. R. 7 & 8

From the corner to Townships 9 and 10 North of Ranges 7 and 8 East I run west on a random line between said Townships the variation of the needle being 11° 15' East. I set temporary half mile and mile posts at 40.00 and 80.00 chains. —
I find the Township line to be 6 miles and 70 links and the polling to be 70 links south of the Township corner the correction for the true line will therefore be 15 links north per mile

Between Townships 9 & 10. N. R. 7. E.

From the corner to Townships
9 and 10. North of Ranges
6 and 7 East & Runs
East on a true line
between sections 6 and 31
variation 11° 08' East

40 70 Set a ~~sandstone~~ 18 in
long 12 in wide and 3 in
thick. for quarter section
corner. ~~land broken~~
~~first rate soil~~

80 70 Set a sandstone
18 in long 12 in wide
and 4 in thick. for
corner to sections
5. 6. and 31. 32. land
broken. first rate
soil

Between Townships 9 & 10 N. R. 7. E.

East on a true line
between sections 5 and 32
variation 11° 08' East

40 00 Set a red flint stone
18 in long 9 in wide and
3 in thick. for quarter
section corner. ~~land broken~~
~~rolling. first rate soil~~

2 80 00 Set a sandstone 18 in
long 12 in wide and 5 in
thick. for corner to sections
4. 5. and 32 & 33. land
broken. first rate soil

East on a true line
between sections 4 and 33
variation 11° 08' East

50 to Raven 5 links wide
Runs north 85° East

110 00 Set a sandstone 18 in
long 12 in wide and 6 in

Between Townships 9 & 10 N. R. 3 E

thick, for quarter section corner. ~~Lands Gently Rolling. first rate soil.~~

80 00 Set a stone 12 in long 9 in wide ones 8 in thick. for corner to sections 3, 4. ones 33, 34. lands Gently Rolling. first rate soil

East on a true line between sections 3 ones 34
variation 11° 08' East

40 00 Set a stone. 16 in long 10 in wide ones 6 in thick. for quarter section corner. ~~lands Rolling. first rate soil~~

80 00 Set a stone 16 in long 8 in wide ones 6 in thick. for corner to sections 2, 3. ones 34, 35. lands broken 2nd rate soil

Between Townships 9 & 10 N. R. 3 E

East on a true line between sections 2 ones 35
variation 11° 08' East

40 00 Set a stone 17 in long 12 in wide ones 4 in thick. for quarter section corner. ~~land Rolling. first rate soil~~

80 00 Set a stone 30 in long 8 in wide ones 4 in thick. for corner to sections. 1, 2 ones 35, 36. lands Gently Rolling. first rate soil

East on a true line between sections 1 ones 36
variation 11° 08' East

2 50 to Ravine 10 links wide
Runs ~~East~~ North

40 00 Set a stone 16 in long 7 in wide ones 5 in thick

for quarter section corner. ~~land~~
~~Rolling, first rate soil~~

6 80 00 to the Established, corner to Townships 9 and 10, North of Ranges 7 and 8 East. lands Rolling first rate soil July the 28th 1857

From the Corner to Townships 9 and 10 North of Ranges 7 and 8 East. I Run East on a Random line between said Townships, the variation of the needle being 11° 15' East. I set temporary half mile and mile posts at 40 00 and 80 00 chains. I find the Township line to be 5 miles 37 chains and 20 links and the following to be 42 links south of the Township Corner. the correction, for the true line will therefore, be 2 chains and 80 links west and 7 15 links north per mile

From the Corner to Townships 9 and 10 North of Ranges 8 and 9, East I Run West on a true line between Sections 1 and 36
variation 11° 18' East

40 00 Set a sandstone 15 in long 8 in wide and 7 in thick for quarter section corner
~~lands Gently Rolling first rate soil~~

80 00 Set a sandstone 16 in long 11 in wide and 4 in thick for corner to sections 1, 2, 35, 36. lands Gently Rolling, first rate soil

West on a true line between sections 2 and 35
variation 11° 18' East

40 00 Set a sandstone 17 in long 9 in wide and 4 in thick

Between Townships 9 & 10 N. R. 8. E.

for quarter section corner. ~~lands~~ ~~Gently Rolling, first rate soil~~

80 00 Set a sandstone 23 in long 7 in wide and 4 in thick. for corner to sections 2, 3, and 34 & 35. lands Rolling, first rate soil

2

West on a true line between sections 3 and 34

Variation 11° 8' East

40 00 Set a sandstone 22 in long 8 in wide and 4 in thick. for quarter section corner. ~~lands Rolling first rate soil~~

3

80 00 Set a sandstone 22 in long 7 in wide and 5 in thick for corner to sections 3 & 4 and 33 & 34. lands Gently Rolling, first rate soil

Between Townships 9 & 10 N. R. 8. E.

West on a true line between sections 4 and 33.

Variation 11° 18' East

40 00 Set a sandstone 18 in long 9 in wide and 4 in thick for quarter section corner ~~lands Rolling, first rate soil~~

4

80 00 Set a sandstone 20 in long 7 in wide and 5 in thick. for corner to sections 4 & 5. and 32 & 33. lands broken. first rate soil

West on a true line between sections 5 and 32

Variation 11° 18' East

10 00 leave Prairie and enter timber bears north west and south east

10 75 to Creek 20 links wide Runs north 40° west

5

11 50 leave timber and enter Prairie bears east and west

40 00 Set a sandstone 16 in long 9 in wide and 6 in thick for quarter section corner

Between Townships 9 & 10 N. R. 8. E

~~lands Gently Rolling, first rate soil~~

80 00 Set a sand stone 30 in long 6 in wide and 6 in thick for corner to sections 5, 6, and 31, 32, lands Rolling, first rate soil

West on a true line between sections 6 and 31
variation 11° 18' East

6 37 20 to the Establishers corner to Townships 9 and 10 north of Ranges 7 and 8 East lands Gently Rolling first rate soil
July the 29th 1857

Between Ranges 7 & 8. E. T. 10. N.

From the Corner to Townships 9 and 10 north of Ranges 7 and 8 East I Run, North on the Range line between sections 31 and 36
variation 11° 15' East

40 00 Set a sand stone 17 in long 10 in wide and 9 in thick, for quarter section corner. ~~lands Rolling, first rate soil~~

80 00 Set a Reef flint stone 22 in long 8 in wide and 7 in thick, for corner to sections 30, 31, and 25 36, lands Gently Rolling first rate soil

North Between Sections 30 and 25
variation 11° 15' East

40 00 Set a Reef flint stone

Betwene Ranges 7 & 8 E. T. 10 N.

16 in long 10 in wide and
8 in thick. for quarter
section corner. land
Rolling. first rate soil
80 00 Set a Red flint stone
13 in long 11 in wide and
7 in thick. for corner
to sections 19. 30. and 24
25. land Rolling
first rate soil

North Betwene
sections 19 and 24
Variation 11° 15' East.
40 00 Set a Red flint stone
16 in long 10 in wide
and 6 in thick. for quarter
section corner. ~~land level~~
~~good Rich bottom. not~~
~~subject to inundation~~
58 00 Leave Prairie and Enter timber
bears North west and south East
59 25 to Creek. 20 links wide Runs
North 20° west

Betwene Ranges 7 & 8 E. T. 10. N.

62 50 to the same creek. 20 links
wide Runs. North 55° East
62 70 Leave timber and Enter Prairie
bears East and west
65 50 Leave Prairie and Enter timber
bears East and west
66 30 to the same creek 20 links
wide Runs North 85° west
67 00 Leave timber and Enter Prairie
75 00 Leave Prairie and Enter timber
bears East and west
80 00 Set a Red flint stone 13
in long 10 in wide and 6 in
thick for corner to sections
18. 19. and 13. 24. from
which a Burr Oak 12 in
in diameter bears south 14° 15'
East. 61 links distant
A Burr Oak 10 in. in diam
eter Bears south 43° 15' west
44 links distant
A Burr Oak 18 in in
diameter Bears. North 50° west
45 links distant. land
broken. first rate soil
timber Oak Elm and Boxelder ~~bears East & west~~
~~50 Leave timber and Enter Prairie~~

Betwene Ranges 7 & 8 E. T. 10. N

North Betwene
Sections 18 and 13
Variation 11° 15' East

40 00 (59) Leave timber and Enter Prairie bears East & West
Set a Red flint stone 13 in long 9 in wide and 6 in thick. for quarter section corner. ~~land Gently Rolling. first rate soil~~

4 80 00 Set a sand stone 13 in long 10 in wide and 6 in thick. for corner to sections 7. 18. and 12. 13. land Gently Rolling. first rate soil

North Betwene
Sections 7 and 12
Variation 11° 15' East

5 40 00 Set a Red flint stone 13 in long 8 in wide and 6 in thick. for quarter section corner. ~~land Rolling. first rate soil~~

Betwene Ranges 7 & 8 E. T. 10. N

80 00 Set a sand stone 18 in long 9 in wide. and 5 in thick. for corner to sections 6. 7. and 1. 12. land Rolling. first rate soil

X North Betwene
Sections 6 and 1
Variation 11° 15' East

40 00 Set a Red flint stone 13 in long 9 in wide and 5 in thick. for quarter section corner. ~~land Rolling first rate soil~~

80 00 Set a sand stone 26 in long 9 in wide and 3 in thick. for corner to Townships 10 and 11 north of Ranges 7 and 8 East land Rolling. first rate soil

July the 30th 1857

Betwene Townships 10 & 11 N. R. 7. E

From the Corner to Townships 10 and 11 North of Ranges 7 and 8 East I Run west on a Random line betwene said Townships the variation of the needle being 11° 15' East. I set temporary. half mile and mile Posts at 40 00 and 80.00 Chains.
I find the Township line to be 6 miles 1 chain and 14 links. and the falling to be 2 chains and 84 links south of the Township corner the correction. for the true line will therefore. be 47 1/2 links north per mile

From the Corner to Townships 10 and 11 North of Ranges 6 and 7. East I Run
East on a true line

Betwene Townships 10 & 11 N. R. 7. E

betwene sections 6 and 31
Variation ~~10° 9½'~~ 11° 32' East

41 14 Set a Red flint stone 14 in long 10 in wide and 6 in thick for quarter section corner. ~~land broken and poor~~

52 50 to Saline River 50 links wide Runs North 45° East

53 25 leave Prairie and Enter timber bears North East and south west

57 00 leave timber and Enter Prairie bears North East and south west

81 14 Set a Red flint stone 19 in long 9 in wide and 6 in thick. for corner to sections 5. 6. and 31. 32. land level good Rich bottom. Subject to inundation to the dept of 18 inches timber Elm and Box Elder

East on a true line betwene 5 and 32
Variation ~~10° 9½'~~ 11° 32' East

Between Townships 10 & 11 N. R. 7 E.

40 00 Set a new flint stone 16 in long 9 in wide ones 5 in thick. for quarter section corner. ~~lands level bottom not not fit for cultivation~~

2 80 00 Set a new flint stone 15 in long 9 in wide ones 6 in thick. for corner to sections 4. 5. ones 32. 33. lands level good rich bottom not subject to inundation

East on a true line between sections 4 ones 33.
Variation ~~10° 9'~~ 11.32 East

40 00 Set a new flint stone 15 in long 11 in wide ones 5 in thick. for quarter section corner. ~~lands level good rich bottom not subject inundation~~

3

Between Townships 10 & 11 N. R. 7 E.

80 00 Set a sandy stone 14 in long 10 in wide ones 5 in thick. for corner to sections 3. 4 ones 33. 34. lands level ones dry first rate soil

East on a true line between sections 3 ones 34
Variation ~~10° 9'~~ 11.32 East

40 00 Set a sandy stone 15 in long 10 in wide ones 5 in thick. for quarter section corner. ~~lands level and dry bottom first rate soil~~

4

80 00 Set a new flint stone 14 in long 9 in wide ones 5 in thick. for corner to sections 2. 3. ones 34. 35. lands level dry bottom first rate soil

Between Townships 10 & 11 N. R. 7. E

East on a true line
between sections 2 and 35
variation 10° 54' East

11 20 to creek 10 links wide 11.32 Runs
north

40 00 Set a Red flint stone
17 in long 10 in wide and 5 in
thick for quarter section
corner. ~~land level good~~
~~dry bottom, first rate soil~~

5

80 00 Set a Red flint stone 16
in long 10 in wide and 7
in thick for corner to sections
1 & 2 and 35 & 36. land
gently Rolling. first rate
soil

East on a true line
between sections 1 and 36
variation 10° 54' East

40 00 Set a Red flint 11.32 stone
18 in long 9 in wide and
5 in thick. for quarter

Between Townships 10 & 11 N. R. 8. E

section corner. ~~land Rolling~~
~~first rate soil~~

6 80 10 to the Established corner to
Townships 10 and 11 north of
Range 7 and 8 East
July the 31st 1857

From the Corner to Townships
10 and 11 north of Range 7 and 8
East I Run
East on a Random line between
said Townships. the Variation of the
Needle being 11° 15' East. I set
temporary half mile and mile Posts
at 40.00 and 80 00 chains.
I find the Township line to be
5 miles 35 chains and 80 links and
the following to be 2 chains and 99 links
north of the Township corner. the
correction. for the true line will
therefore be. 4 chains and 20 links
west. and 54 ½ links south
for mile

Betwene Townships 10 & 11 N. R. 8. E

From the Corner to Townships 10 and 11 North of Range 8 and 9 East I Run West on a true line between sections 1 and 36

variation ~~10° 9'~~ 11° 31' East

40 00 Set a Red flint stone 12 in long 8 in wide and 7 in thick. for quarter section corner. ~~land broken first rate soil~~

1

80 00 Set a sand stone 15 in long 9 in wide and 4 in thick for corner to sections 1, 2, and 35, 36, land broken first rate soil

West on a true line between sections 2 and 35

variation ~~10° 9'~~ 11° 31' East

38 00 to Ravene 3 links wide Runs. North 25° East

Betwene Townships 10 & 11 N R. 8. E

40 00 Set a Red flint stone 11 in long 8 in wide and 7 in thick. for quarter section corner ~~land Rolling first rate soil~~

2

80 00 Set a Red flint stone 14 in long 9 in wide and 6 in thick. for corner to sections 2, 3, and 34, 35. land Rolling first rate soil

West on a true line between sections 3 and 34

variation ~~10° 9'~~ 11° 31' East

40 00 Set a Red flint stone 14 in long 9 in wide and 5 in thick for quarter section corner. ~~land Rolling first rate soil~~

3

80 00 Set a Red flint stone 16 in long 10 in wide and 6 in thick. for corner to sections 3, 4, and 33, 34, land broken first rate soil

Betwene Townships 10 & 11 N. R. 8 E.

West on a true line
betwene sections 4 and 33
variation ~~10° 91'~~ 11° 31' East

40 00 Set a sand stone 17 in
long 11 in wide and 4 in
thick, for quarter section
corner. ~~land broken, first~~
4 ~~rate soil~~

80 00 Set a Red flint stone 13 in
long 9 in wide and 6 in thick
for corner to sections 4, 5,
and 32, 33, land Rolling
first rate soil

West on a true line
betwene sections 5 and 32
variation ~~10° 91'~~ 11° 31' East

40 00 Set a sand stone 15 in
long 11 in wide and 7 in
5 thick, for quarter section
corner. ~~land Rolling, first~~
~~rate soil~~

Betwene Townships 10 & 11 N. R. 8 E.

80 00 Set a Red flint stone 13 in
long 10 in wide and 3 in
thick, for corner to sections
5, 6, and 31, 32, land
Rolling, first rate soil

West on a true line
betwene sections 6 and 31
variation ~~10° 91'~~ 11° 31' East

5 50 to Ravene 3 links wide
Runs north 30° west

6 35 80 to the Established corner
to Townships 10 and 11 north
of Ranges 7 and 8 East
land Rolling first rate soil
August the 1st 1857

Betwene Ranges 7 & 8 E. T. 11 N.

From the corner to Townships 10 and 11 North of Ranges 7 and 8. East I Run North on the Range line betwene sections 31 and 36

Variation 11° 15' East

40 00 Set a sand stone 17 in long 8 in wide and 8 in thick for quarter section corner ~~land Gently Rolling first rate soil~~

35 50 To Ravene 3 links wide Runs North 45° West

80 00 Set a sand stone 21 in long 9 in wide and 5 in thick. for corner to sections 30, 31, and 25, 36, land level good Rich bottom, not subject inundation

Betwene Ranges 7 & 8 E. T. 11 N.

North Betwene

Sections 30 and 25

Variation 11° 15' East

40 00 Set a sand stone 20 in long 7 in wide and 4 in thick for quarter section corner. ~~land, level and dry bottom first rate soil~~

80 00 Set a sand stone 21 in long 10 in wide and 3 in thick, for corner to sections 19, 30, and 24, 25, land level good dry bottom first rate soil

North Betwene

Sections 19 and 24

Variation 11° 15' East

40 00 Set a sand stone 15 in long 8 in wide and 6 in thick. for quarter section corner. ~~land level dry bottom, first rate soil~~

Betwene Ranges 7 & 8. E. T. 11. N.

80 00 Set a sandy stone 18 in long 12 in wide and 3 in thick. for corner to sections 18. 19. and 13. 24. from which a cottonwood 18 in in diameter Bears south 56° 10' west 1 chain and 15 links distant

3 a cottonwood 24 in in diameter Bears north 66° 25' west 1 chain 79 links distant land level good Rich bottom subject to inundation to the dept of 18 inches

North Betwene

sections 18 and 13

variation 11° 15' East

14 50 leave Prairie and Enter timber bears East and west

15 78 to Saline River 55 links wide Runs East

18 50 leave timber and Enter Prairie bears East and west

40 00 Set a sandy stone 17 in long 7 in wide and 5 in thick

Betwene Ranges 7 & 8. E. T. 11. N.

for quarter sections corner ~~land level good Rich bottom not subject to inundation~~

69 50 to Ravene 5 links wide Runs south 55° East

4 80 00 Set a sandy stone 15 in long 10 in wide and 5 in thick for corner to sections 7. 18. and 12 13. land level good Rich bottom dry timber cottonwood woods Elm and Boxelder

North Betwene

sections 7 and 12

variation 11° 15' East

40 00 Set a sandy stone 15 in long 7 in wide and 7 in thick for quarter sections corner

5 ~~land gently rolling first rate soil~~

80 00 Set a sandy stone 15 in long 9 in wide and 4 in thick for corner to sections

Between Ranges 7 & 8 E. T. 11 N.

6 7 and 1 12 land Rolling. first rate soil

North Between sections 6 and 1

Variation 11° 15' East

40 00 Set a sand stone 15 in long 9 in wide and 4 in thick. for quarter section corner. ~~land Rolling first rate soil~~

80 00 Set a sand stone 16 in long 8 in wide and 5 in thick. for corner to Townships 11 and 12 North of Ranges 7 and 8 East. land Gently Rolling first rate soil

August the 3d 1857

Between Townships 11 & 12 N. R. 7 E

From the corner to Townships 11 and 12 North of Ranges 7 and 8 East I Run west on a Random line between said Townships. the variation of the needle being 11° 15' East. I set temporary half mile and mile Posts at 40.00 and 80 00 chains I find the Township line to be 5 miles 78 chains and 19 links. and the falling to be 3 chains and 22 links south of the Township corner. the correction for the true line will therefore be 53 1/2 links north per mile

From the Corner to Townships 11 and 12 North of Ranges 6 and 7 East. I Run East on a true line

Betwene Townships 11 & 12 N. R. 7. E

betwene sections 6 aner 31
variation 10° 90' East

38 19 Set a saner stone 18 in long 10 in wide aner 4 in thick. for quarter section corner. ~~lanes broken, first rate soil~~

1 78 19 Set a Reer flint stone 15 in long 10 in wide aner 5 in thick. for corner. to sections 5. 6. aner 31. 32. lanes broken. first rate soil

East on a true line betwene section 5 aner 32
variation 10° 90' East

40 00 Set a Reer flint stone 16 in long 10 in wide aner 6 in thick. for quarter section corner. ~~lanes high aner Rolling 2 a rate soil~~

Betwene Townships 11 & 12 N R. 7. E

80 00 Set a Reer flint stone 18 in long 11 in wide aner 7 in thick. for corner to sections 4. 5. aner 32. 33. lanes high aner Rolling first rate soil

2

East on a true line betwene section 4 aner 33
variation 11° 90' East

40 00 Set a Reer flint stone 14 in long 13 in wide aner 7 in thick. for quarter section corner. ~~lanes high broken aner stony to poor for cultivation~~

3

70 00 to Ravene 3 links wide Rans South 35° East

80 00 Set a Reer flint stone 21 in long 10 in wide aner 6 in thick. for corner to sections 3. 4. aner 33. 34 lanes gently Rolling. first rate soil

Betwene Townships 11 & 12 N. R. 7 E

East on a true line
betwene sections 3 aner 34
variation 10° 90' East

40 00 Set a Reer flint stone
14 in long 9 in wide aner 5
in thirk. for quarter sections
corner. ~~lanes broken~~
~~first rate soil~~

4

80 00 Set a Reer flint stone
12 in long 9 in wide aner
6 in thirk. for corner to
sections 2. 3. aner 34. 35.
lanes Gently Rolling. first
rate soil

East on a ~~true~~ line
betwene sections 2 aner 35
variation 10° 90' East

22 00 to Ravene 3 links wide
Runs south

40 00 Set a Reer flint stone 14 in
long 10 in wide aner 5 in thirk
for quarter sections corner

6

Betwene Townships 11 & 12 N. R. 7 E

~~lanes level good dry bottom~~
~~first rate soil~~

80 00 Set a saner stone 21 in
long 11 in wide aner 3 in
thirk. for corner to sections
1. 2. aner 35. 36. lanes Gently
Rolling. first rate soil

5

East on a true line
betwene sections 1 aner 36
variation 10° 90' East

40 00 Set a Reer flint stone 14 in
long 11 in wide aner 5 in
thirk. for quarter sections
corner. ~~lanes Gently~~
~~Rolling first rate soil~~

80 00 to the Establishers corner
to Townships 11 aner 12
north of Ranges 7 aner 8 East

August the 4th 1857

Betwene Townships 11 & 12. N. R. 8. E

From the Corner to Townships
11 and 12 north of Ranges 7
and 8. E. I Run
East on a Random line
betwene said Townships. the
variation of the needle being
11° 15'. East. I set temporary
half mile and mile Posts
at 40 00 and 80. 00. chains
I find the Township line
to be 5 miles 35 chains
and 80 links. and the
falling to be 2 chains and
6 links. South of the
Township corner.
the correction. for the true
line will therefore be
4 chains and 20 links west
and 37 1/2 links. North
per mile

Betwene Townships 11 & 12 N. R. 8. E

From the Corner to Townships
11 and 12 north of Ranges 8 and
9 E. ast I Run
west on a true line
betwene sections 1 and 36
variation 11° 00' East

12 leave Prairie and Enter timber
bears north and south
85 to Saline River 40 links wide
Runs south
6 55 to Saline River 50 links wide
Runs north 12° East
9 00 leave timber and Enter Prairie
bears north and south
22 50 leave Prairie and Enter timber
bears north and south
24 80 to Saline River 50 links wide
Runs south 20° East
31 30 to Saline River 50 links wide
Runs North 15° East
33 20 leave timber and Enter Prairie
bears north East and south west
40 00 Set a sand stone 14 in long
9 in wide and 7 in thick
for quarter section corner ~~[illegible]~~
~~level good rich bottom~~
~~not subject to inundation~~

Between Townships 11 & 12 N. R. 8. E

80 00 Set a sand stone 16 in long 12 in wide and 4 in thick for corner to sections 1. 2. and 35. 36. land level good dry bottom Rich
Timber Cottonwood Elm and Boxelder

West on a true line between sections 2 and 35
variation 11° 00' East

40 00 Set a sand stone 23 in long 8 in wide and 2½ in thick. for quarter section corner. ~~land level bottom wet soil good~~

2

62 00 Enter timber bears North and South

63 00 to creek 25 links wide runs south. 75 links Empty in to the Saline

63 10 Leave timber and Enter Prairie bears N. & S.

80 00 Set a sand stone 23 in long 9 in wide and 3 in thick for corner to sections 2. 3. and 34. 35. land level and dry first rate soil Timber Elm & Boxelder

Between Townships 11 & 12 N. R. 8. E

West on a true line between sections 3 and 34
variation 11° 00' East

40 00 Set a sand stone 17 in long 10 in wide and 4 in thick for quarter section corner ~~land level good Rich soil~~

80 00 Set a sand stone 19 in long 10 in wide and 4 in thick. for corner. to sections 3. 4. and 33. 34. land Gently Rolling first rate soil

West on a true line between sections 4 and 33
variation 11° 00' East

40 00 Set a sand stone 16 in long 9 in wide and 5 in thick. for quarter section corner. ~~land Gently Rolling first rate soil~~

80 00 Set a sand stone 19 in long 11 in wide and 4 in thick

Between Townships 11 & 12 N. R. 8 E.

for corner to sections 4. 5. ones 32. 33. lands Gently Rolling first rate soil

West on a true line between sections 5 ones 32
variation 11° East

40 00 Set a ones stone 18 in long 10 in wide ones 4 in thick. for quarter section corner. ~~lands Gently Rolling first rate soil~~

5 80 00 Set a ones stone 22 in long 9 in wide ones 4 in thick. for corner to sections 5. 8 ones 31. 32. lands Gently Rolling. first rate soil

Between Townships 11 & 12 N. R. 8 E.

West on a true line between sections 6 ones 31
variation 11° 00 East

6 35 80 To the Established corner to Townships 11 ones 12 North of Ranges 7 ones 8 East lands Rolling. first rate soil.
August the 5 1857

Betwene Ranges 7 & 8 E. T. 12 N.

From the Corner to Townships 11 aner 12 North of Ranges 7 aner 8 East I Run North on the Range line betwene sections 31 aner 36
variation 11° 15' East

40.00 Set a saner stone 16 in long 14 in wide aner 3 in thick. for quarter section corner. ~~laner Rolling first rate soil~~

80.00 Set a saner stone 18 in long 7 in wide aner 7 in thick. for corner to sections 30. 31. aner 25. 36. laner Gently Rolling first rate soil

Betwene Ranges 7 & 8 E. T. 12 N.

North betwene sections 30 aner 25
variation 11° 15' East

40.00 Set a saner stone 19 in long 10 in wide aner 5 in thick. for quarter section corner. ~~laner Gently Rolling. first rate soil~~

80.00 Set a saner stone 16 in long 11 in wide aner 4 in thick. for corner to sections 19. 30. aner 24. 25. laner Rolling. first rate soil

North betwene sections 19 aner 24
variation 11° 15' East

40.00 Set a saner stone 17 in long 14 in wide aner

Between Ranges 7 & 8 E. T. 12 N.

4 in thick. for quarter section corner. ~~lands Gently Rolling. first rate soil~~

80 00 Set a sand stone 19 in long 15 in wide and 4 in thick. for corner to sections 18. 19. and 13. 24. lands Rolling first rate soil

3

North Between

Sections 18 and 13.
variation 11° 15' East

40 00 Set a sand stone 22 in long 11 in wide and 4 in thick. for quarter section corner ~~lands Rolling first rate soil~~

Between Ranges 7 & 8 E. T. 12 N.

80 00 Set a sand stone 20 in long 12 in wide and 4 in thick. for corner to sections 7. 18. and 12. 13. lands Rolling first rate soil

4

North Between

Sections 7 and 12
variation 11° 15' East

40 00 Set a sand stone 13 in long 10 in wide and 4 in thick. for quarter section corner. ~~lands Rolling first rate soil~~

80 00 Set a sand stone 16 in long 14 in wide and 4 in thick. for corner to sections 6. 7. and 1. 12. lands Gently Rolling. first rate soil

Between Ranges 7 & 8 E. T. R. N

North Between
Sections 6 and 1
variation 11° 15' East

40 00 Set a sand stone 18 in long 14 in wide and 4 in thick. for quarter section corner. ~~Land bed or Gently Rolling first rate soil~~

70 00 to Creek 15 links wide Runs East

6

81 50 * to the third standard Parallel north. falling 15 chains and 82 links West of the Standard corner

Set a sand stone 17 in long 11 in wide and 4 in thick. for ~~correction~~ closing corner

This closing of Jones as reported by him is a miserable blunder the true closing is 1 chain & 64 links East of the Standard corner, See Cooks field Notes of Examination under instructions of Sept 2 1858.

August the 6th 1857

General Description

Townships 8. 9. 10 and 11 north of Ranges 5 6 and 7. E Contains a large amount of first rate land for forming. the bottoms are Generly large dry and Rich. well adapted for Cultivation. timber chiefly cottonwood Elm hackberry Oak and Ash. Confined to the Watter courses altogether the uplands are Generly Rolling sandy soil not good for forming.

List of Names

A list of the Names of individuals employed to assist in running measuring & marking the lines and corners described in the foregoing field Notes of Townships Five Six seven Eight Nine Ten Eleven and Twelve North of Ranges Five Six seven and Eight East of the Seventh Principle Meridian Showing the respective Capacities in which they acted:

Sebastian	Gray	Chainman
William	Manning	Chainman
Levi	Springer	Flagman
Daniel	Christine	Flagman
William	Moore	Axman

We hereby certify that we assisted Joseph Jones deputy Surveyor in Surveying the exterior boundaries of Townships Five six seven Eight nine Ten Eleven and Twelve North of the base line of Ranges Five six seven and Eight East of the fifth principle Meridian and that said Townships has been in all repects to the best of our knowledge and belief well and faithfully Surveyed, and the boundary corners planted according to the instructions furnished by the Surveyor General.

Jonathan Gray Chainman
William T. Manning Chainman
Levi Springer Flagman
Daniel Ristine Flagman
William Moore Axman

Subscribed and sworn to by the above named persons before me a justice of the Peace for the County of Platt and State of Missouri on this the 15th day of August AD 1857

Henry Colman justice of the Peace

I Jonathan T. Jones deputy Surveyor do solemnly swear that in pursuance of a contract with J. Calhoun Surveyor of the public lands of the United States in the territory of Nebraska bearing date the Eighteenth day of October 1856. and in strict conformity to the laws of the United States and the instructions furnished by the said Surveyor General. I have faithfully surveyed the Exterior boundaries of Townships number Five. six. seven. Eight. nine. ten. Eleven. and twelve. North of the base line. of Ranges number Five six seven and Eight. East. of the fifth principal Meridian. in

the territory aforesaid, and further solemnly swear that the foregoing are the true and original field notes of said survey

Jonathan P. Jones
Deputy Surveyor.

Subscribed by said Jonathan P. Jones, deputy surveyor, and sworn to, before me a Justice of the Peace for the County of Douglas and Territory of Kansas this the 25th day of September AD 1857

R. L. Bishop J. P.

Surveyor Generals Office
Lecompton K.T. 13 Oct 1857.

The foregoing field notes of the Survey of the Exterior lines of Town Ships Five Six seven and eight nine ten Eleven and twelve North of Ranges Five six Seven and Eight East of the Sixth Principal Meridian in the territory of Nebraska Executed by Jonathan P Jones D S under his contract No 149 dated the 18th day of October 1856 during the months of November 1856 June July August 1857 having been critically examined the necessary corrections and explanations having been made the said field notes and the surveys they describe are hereby approved

J Calhoun
Surveyor Genl

General Land Office • Original Field Notes

Book Number

18

The images in this file are photographs of the notes of the original surveys of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The original surveys in Nebraska began in the mid 1850's and were completed in the mid 1880's. The Nebraska office of the Surveyor General was closed June 30, 1886.