General Land Office • Original Field Notes

Book Number

61

The images in this file are photographs of the notes of the original surveys of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The original surveys in Nebraska began in the mid 1850's and were completed in the mid 1880's. The Nebraska office of the Surveyor General was closed June 30, 1886.

(1)

T. 2-4 N.
R. 5 E.

1.

One Vol.

Khaki binding like sample

Cover to be not more than $8\frac{3}{8}$ inches

Top of label to be $6\frac{1}{2}$ inches from bottom

Sobel

top to be $6\frac{1}{2}$ inches from bottom

Black leather

of ... er
off

es

of Fractional
ange No 5 East
dian in the

by

W... is contract
bearing date the 24th day of October
1856

Contract No 162

Subdivision Commenced July 22nd 1857
Completed July 26th 1857

Note: For Certificate of Commissioner of General Land Office see Page 27.

Field Notes

of the subdivision lines of Fractional Township No. 2 North of Range No 5 East of the 6th Principal Meridian in the Territory of Nebraska.

Executed by

Waters W. Herbert Under his contract bearing date the 24th day of October 1856

Contract No 162

Subdivision Commenced July 22nd 1857
Completed July 26th 1857

Township No 2 North Range No 5 East
6 Mer.

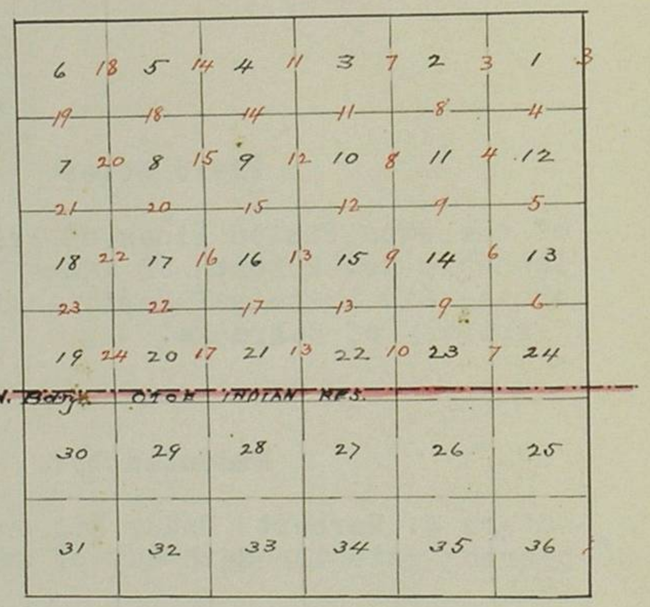

A list of the names of the individuals employed to assist in running, measuring, or marking the lines and corners described in the following field notes of Fractional Township No 2 North of Range No 5 East of the 6th Principal Meridian, showing the respective capacities in which they acted.

Charles Hirl	Chainman
James D. Thompson	Chainman
Robert Armstrong	Axeman
John Nelson	Flagman
Felix G. Herbert	Compassman

Fractional Township 2 N. R. 5 E. of
6th Principal Meridian

To determine the proper adjustment of my compass for subdividing this Township I commence at the Corner of Townships 2 and 3 North Ranges 5 and 6 East and run

South along the East boundary of Section 1
Variation 12° 00' East

39.92 To a point 7 lks. West of the quarter section corner

79.80 The corner of Sections 1 and 12

To retrace this line or run parallel thereto my compass must be adjusted to a Variation 12° 00' East
Subdivision commenced July 22nd 1857

- - - - - - - - - - - - - - - - - - - -

From the corner to sections 1, 2, 35 and 36 on North boundary of Township I run

South between sections 1 and 2
Variation 12° 00' East

8.00 A Ravine washes East

40.00 Set a Red flint stone 14 in. long, 8 ins. wide 4 in thick for quarter sec. corner

64.00 A Branch with high bank and standing pools, runs E. 20 lks. wide

65.75 A Drain washes N.E.

67.00 Same drain washes W.

68.10 Same drain washes N.E.

80.00 Set a limestone, 16 in. long, 10 in. wide 6 in. thick, for corner to sections 1, 2, 11 & 12

Surface rolling - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

East on a random line between sections 1 and 12

Variation 12° 00' East

23.00 A Branch with high banks runs S.E. 14 lks. wide

40.00 Set a stone for temporary quarter sec. corner

80.15 Intersected East boundary of the Township 15 lks. North of the corner to section 1 and 12, from which corner I run

West on a true line between sections 1 and 12

Variation 11° 54' East

40.07 Set a Red flint stone 16 in. long, 10 in. wide, 8 in. thick for quarter section corner

80.15 The corner to sections 1, 2, 11 & 12

Land rolling - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

South between sections 11 and 12

Variation 12° 00' East

16.00 A Drain washes East

40.00 Set a Red flint stone, 12 in. long 8 in. wide 6 in. thick, for quarter section corner

61.12 A Drain washes East

80.00 Set a Sandstone 15 in. long, 10 in. wide, 4 in. thick for corner to sections 11, 12, 13 and 14

Surface gently rolling - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

East on a Random line between sections 12 & 13

Variation 12° 00' East

40.00 Set a stone for temporary quarter sec. corner

48.95 A Drain washes S.E.

65.00 A Drain washes N.E.

80.15 Intersect East boundary of the Township 28 lks South of the corner to secs 12 & 13, from which corner I run

West on a true line between sections 12 and 13

Variation 12° 12' East

40.07 Set a Red flint stone, 14 in. long, 10 in wide, 5 in. thick, for quarter section corner.

80.15 The corner to sections 11, 12, 13 & 14

Land gently rolling - Soil 1st rate

South between sections 13 and 14
Variation 12° 00' East

40.00 Set a Red flint stone 12 in. long, 10 in. wide, 6 in. thick for quarter sec. corner.

80.00 Set a limestone 12 in. long, 9 in. wide, 8 in. thick, for corner to sections 13, 14, 23 & 24.

Land gently rolling - Soil 1st rate

- -

East on a random line between sections 13 and 24
Variation 12° 00' East

40.00 Set a stone for temporary ¼ sec. Corner.

80.25 Intersected East boundary of the Township 3 lks. North of the corner to secs. 13 & 24, from which corner I run

West on a true line between secs. 13 and 24
Variation 11° 59' East

40.12 Set a Red flint stone, 12 in. long, 10 in. wide, 5 in. thick, for quarter sec. corner,

80.25 The corner to sections 13, 14, 23 & 24

Land level - Soil 1st rate

- -

South between Fractional Sections 23 and 24.
Variation 12° 00' East

40.00 Set a Red flint stone, 12 in. long, 8 in. wide, 6 in. thick, for quarter sec. corner

76.28 Intersected the Northern boundary of the Otoe Reservation 12.42 links West of Trench for Corner.
Set a sandstone, 14 in. long, 12 in. wide, 4 in. thick, for Corner to Fractional sections 23 and 24.

Land gently rolling, Soil 1st rate

- -

The Northern boundary line of the Otoes Reservation is marked by holes dug in the ground evry Mile and half mile two feet square and one spade deep - the earth being thrown out upon the North side.

- -

South between sections 2 and 3.
Variation 12° 00' East

40.00 Set a Red flint stone, 14 in. long, 8 in wide, 6 in. thick for quarter sec. corner.

44.00 A Branch with standing pools 12 lks. wide runs E

80.00 Set a Sandstone, 23 in. long, 8 in. wide, 4 in. thick, for corner to sections 2, 3, 10 & 11

Land rolling - Soil 2nd rate

- -

Fractional Township 2 N. R. 5 E. of
6th Principal Meridian.

East on a random line between sections 2 and 11.

Variation 12° 00' East

34.28 A Drain, washes N.E.

40.00 Set a stone for temporary quarter sec. corner.

70.95 A Drain, washes N.E.

80.02 Intersected N. & S. line 47 lks. North of the corner to sections 1, 2, 11 & 12 from which corner I run

West on a true line between sections 2 and 11

Variation 11° 40' East

40.01 Set a Red Flint stone, 12 in. long, 8 in. wide, 6 in. thick, for quarter section corner

80.02 The corner to sections 2, 3, 10 and 11

Land broken - Soil 2nd rate

- -

South between sections 10 and 11

Variation 12° 00' East

37.80 A Drain washes N.E.

40.00 Set a Red flint stone, 15 in. long, 10 in. wide, 6 in. thick, for quarter sec. corner,

80.00 Set a limestone, 22 in. long, 8 in.wide, 6 in. thick, for corner to sections 10, 11, 14 & 15

Surface rolling - Soil good 2nd rate

July 22nd 1857

Fractional Township 2 N. R. 5 E. of
6th Principal Meridian.

East on a random line between sections 11 and 14

Variation 11° 30' East

40.00 Set a stone for temporary quarter sec. corner.

61.77 A Drain, washes N.E.

79.68 Intersected N. and S. line 88 lks.South of the corner to sections 11, 12, 13 and 14 from which corner I run

West, on a true line between sections 11 and 14

Variation 12° 00' East

39.84 Set a Grey flint stone 12, in. long, 7 in. wide, 7 in. thick for quarter section corner

79.68 The corner to sections 10, 11, 14 & 15

Land gently rolling- Soil good 2nd rate

- -

South between sections 14 and 15

Variation 12° 00' East

40.00 Set a Red flint stone, 12 in. long, 9 in. wide, 5 in. thick, for quarter sec. corner.

80.00 Set a limestone 14 in. long, 9 in. wide, 5 in. thick, for corner to sections 14, 15, 22 and 23

Land level - Soil 1st rate

- -

East on a random line between sections 14 and 23

Variation 12° 00' East

40.00 Set a stone for temporary quarter sec. corner.

69.00 A Drain washes South

79.43 Intersect N. and S. line 14 lks. North of the corner to sections 13, 14, 23 & 24, from which corner I run

West, on a true line, between sections 14 and 23

Variation 11° 54' East

39.71 Set a Grey flint stone, 12 in. long, 8 in. wide, 6 in. thick, for quarter section corner.

79.43 The Corner to sections 14, 15, 22 and 23

Land gently rolling - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

South between Fractional Sections 22 and 23

Variation 12° 00' East

40.00 Set a Grey flint stone, 16 in. long, 8 in. wide, 8 in. thick, for quarter sec. corner.

74.06 Intersected the North boundary line of the Otoes Reservation 10.80 links West of the Trench for Corner.
Set a sandstone 13 in. long, 10 in. wide, 4 in. thick for corner to Fractional Sections 22 and 23

Land level - Soil 1st rate

South between sections 3 and 4

Variation 12° 00' East

26.15 A Prairie Branch washes E. 11 lks. wide

40.00 Set a Red flint stone, 14 in. long, 12 in wide, 4 in. thick for quarter sec. corner.

80.00 Set a Grey flint stone 15, in. long, 10 in. wide, 6 in thick for corner to sections 3, 4, 9 & 10

Surface broken - Soil 2nd rate

- - - - - - - - - - - - - - - - - - - -

East on a random line between sections 3 and 10

Variation 12° 00' East

40.00 Set a stone for temporary quarter sec. corner.

50.75 A Prairie Branch washes N.E. 10 lks. wide

79.12 Intersected N. and S. line 73 lks. North, of the corner to sections 2, 3, 10 & 11, from which corner I run

West, on a true line between sections 3 and 10

Variation 11° 29' East

39.56 Set a Red flint stone, 14 in. long, 9 in. wide, 6 in. thick for quarter sec. corner.

79.12 The corner to sections 3, 4, 9 & 10

Land broken - Soil good 2d rate

South between sections 9 and 10
Variation 11° 30' East

14.68 A Drain washes N.E.

40.00 Set a Red flint stone, 12 in. long, 8 in. wide, & 7 in. thick, for quarter sec. corner

80.00 Set a Red flint stone, 18 in.long, 10 in wide, 5 in. thick, for corner to sections 9,10,15 and 16

Land gently rolling - Soil 1st rate

- -

East on a random line between sections 10 and 15
Variation 11° 30' East

40.00 Set a stone for temporary quarter sec. corner.

79.95 Intersected N and South line 63 lks. South of the corner to sections 10, 11, 14 and 15 from which corner I run

West on a true line between sections 10 and 15
Variation 11° 57' East

39.97 Set a Red flint stone, 14 in. long, 10 in. wide, 7 in. thick, for quarter sec. corner.

79.95 The corner to sections 9, 10, 15 and 16

Land level - Soil 1st rate

- -

South between sections 15 and 16
Variation 12° 00' East

40.00 Set a Red flint stone, 12 in. long, 8 in. wide, 6 in. thick for quarter sec. corner

80.00 Set a Red flint stone, 14 in. long, 12 in. wide, 3 in. thick for corner to sections 15, 16, 21 & 22

Surface broken - Soil 1st rate

- -

East on a random line between sections 15 and 22
Variation 12° 00' East

31.25 A Drain washes S. West

40.00 Set a stone for temporary quarter sec. corner,

79.50 Intersected N. and S. line 10 lks. North of the corner to sections 14, 15, 22 & 23 from which corner I run

West on a true line between sections 15 and 22
Variation 11° 56' East

39.75 Set a Grey flint stone,13 in. long, 9 in. wide, 5 in. thick for quarter sec. corner

79.50 The corner to sections 15, 16, 21 & 22

Land level - Soil 1st rate

- -

South between Fractional Sections 21 and 22
Variation 12° 00' East

Fractional Township 2 N. R. 5 E. of
~~6th Principal Meridian~~

2.00 A Drain, washes S. West

40.00 Set a Red flint stone, 14 in. long, 9 in. wide, 5 in. thick, for quarter section corner.

52.80 A Drain washes S. West

72.92 Intersected the North boundary of the Otoe Reservation 9.87 lks. West of the Trench for corner.
Set a sandstone 22 in. long, 6 in. wide, 4 in. thick, for corner to Fractional sections 21 and 22

Land gently rolling - Soil 1st rate

July 23rd 1857

- -

South between sections 4 and 5
Variation 12° 00' East

32.60 A Drain washes S.W.

40.00 Set a Red flint stone, 12 in. long, 9 in. wide, 5 in. thick for quarter sec. corner.

80.00 Set a Red flint stone, 14 in. long, 12 in wide, 3 in. thick, for corner to sections 4, 5, 8 and 9

Land gently rolling - Soil 1st rate

- -

East on a random line between sections 4 and 5

Fractional Township 2 N. R. 5 E. of
~~6th Principal Meridian.~~

Variation 12° 00' East

38.80 A Drain washes S.W.

40.00 Set a stone for temporary quarter sec. corner.

80.52 Intersected N. and S. line 74 lks. N. of the corner to sections 3, 4, 9 and 10 from which corner I run

West, on a true line between sections 4 and 9
Variation 11° 28' East

40.26 Set a Red flint stone, 12 in. long, 9 in. wide, 5 in. thick, for quarter sec. corner.

80.52 The corner to sections 3, 4, 8 and 9

Land gently rolling - Soil 1st rate

- -

South between sections 8 and 9
Variation 12° 00' East

40.00 Set a Red flint stone 12 in. long, 8 in. wide, 6 in. thick for quarter sec. corner

68.70 A Drain washes S.W.

80.00 Set a Red flint stone 12 in. long, 8 in. wide, 6 in. thick for Corner to sections 8, 9, 16 and 17

Land gently rolling - Soil 1st rate

- -

East on a random line between sections 9 and 16

Variation 11° 30' East

40.00 Set a stone for temporary quarter sec. corner.

77.30 A Drain washes S.W.

79.74 Intersected N. and S. line 39 lks. South of the Corner to sections 9, 10, 15 and 16, from which corner I run

West on a true line between sections 9 and 16

Variation 11° 47' East

39.87 Set a Grey flint stone 15 in. long, 9 in. wide, 6 in. thick for quarter sec. corner.

79.74 The Corner to sections 8, 9, 16 and 17

Land gently rolling - Soil 1st rate

- -

South between sections 16 and 17

Variation 12° 00' East

40.00 Set a Red flint stone, 16 in long, 8 in. wide, 8 in. thick for quarter sec. corner.

80.00 Set a Grey flint stone 12 in. long, 10 in. wide, 8 in. thick for corner to sections 16, 17, 20 & 21

Land gently rolling - Soil 1st rate

East on a random line between sections 16 and 21

Variation 12° 00' East

40.00 Set a stone for temporary quarter sec. corner.

58.54 A Drain washes S. West

79.74 Intersect N. and S. line 42 lks. North of the corner to sections 15, 16, 21 & 22 from which corner I run

West on a true line between sections 16 and 21

Variation 11° 42' East

39.87 Set a Red flint stone, 12 in. long, 8 in. wide, 6 in. thick for quarter sec. corner

79.74 The Corner to sections 16, 17, 20 & 21

Land rolling - Soil 1st rate

- -

South, between fractional sections 20 and 21

Variation 12° 00' East

40.00 Set a Red flint stone, 15 in. long, 10 in wide, 4 in. thick for quarter sec. corner.

59.00 A Ravine washes S. West

Fractional Township 2 N. R. 5 E. of
6th Principal Meridian.

71.66 Intersected North boundary of the Otoe Reservation 14.72 lks. West of the Trench for corner on reservation line. Set a sand, 14 in. long, 13 in. wide, 3 in. thick for corner to Fractional sections 20 and 21

Land rolling - Soil 1st rate

- -

South between sections 5 and 6

Variation 12° 00' East

40.00 Set a Grey flint stone, 12 in. long, 7 in. wide, 6 in. thick for quarter section corner.

73.00 A Ravine with high banks runs S.E.

80.00 Set a Red flint stone, 12 in. long 10 in. wide, 5 in. thick for corner to sections 5, 6, 7 & 8

Land rolling - Soil 1st rate

- -

East on a random line between sections 5 and 8

Variation 11° 30' East

9.00 A Ravine washes S.E.

20.10 A Prairie Bramch comes from North washes East

20.25 Leave branch washes South

Fractional Township 2 N. R. 5 E. of
6th Principal Meridian

40.00 Set a stone for temporary quarter sec. corner

79.10 Intersected N and S. line 21 lks. North of the Corner to sections 4, 5, 8 and 9 from which corner I run

West on a true line between sections 5 and 8

Variation 11° 21' East

39.55 Set a Red flint stone 14 in. long, 8 in. wide, 5 in. thick, for quarter sec. corner.

79.10 The corner to sections 5, 6, 7 and 8

Land gently rolling - Soil 1st rate

- -

West on a random line between sections 6 and 7

Variation 11° 30' East

40.00 Set a stone for temporary quarter sec. corner

56.85 A Drain washes S. West

79.33 Intersected West boundary of the Township 1.20 lks. South of the Corner to Secs. 6 & 7, from which corner I run

East on a true line between sections 6 and 7.

Variation 10° 39' East

Fractional Township 2 N. R. 5 E. of
6th Principal Meridian

39.33 Set a Red flint stone, 22 in. long, 8 in wide, 6 in. thick, for quarter sec. corner.

79.33 The corner to sections 5, 6, 7 & 8

Land gently rolling - Soil 1st rate

July 24th 1857

- -

South between sections 7 and 8

Variation 11° 30' East

10.00 A Drain washes S.E.

40.00 Set a Red flint stone, 12 ins. long, 8 in. wide, 8 in. thick for quarter sec. corner.

43.08 A Drain, washes S.E.

74.15 A Drain, washes East

80.00 Set a red flint stone 15 in. long, 11 in. wide, 6 in. thick, for corner to sections 7, 8, 17 & 18

Land rolling, - Soil 1st rate

- -

East on a random line between sections 8 and 17

Variation 11° 30' East

Fractional Township 2 N. R. 5 E.
of 6th Principal Meridian

3.74 A dry Branch 13 lks. wide washes S. Scattering timber on Banks

40.00 Set a stone for temporary quarter sec. corner.

51.00 A Drain washes S. West

79.12 Intersected N. and S. line 6 lks. North of the corner to sections 8, 9, 16 & 17 from which corner I run

West on a true line between sections 8 and 17

Variation 11° 27' East

39.56 Set a Red flint stone 12 in. long, 8 in. wide, 6 in. thick for quarter sec. corner

79.12 The corner to sections 7, 8, 17 & 18

Land rolling - Soil 1st rate
Timber cottonwood and Elm

- -

West on a random line between sections 7 and 18

Variation 10° 30' East

40.00 Set a stone for temporary quarter sec. corner

40.60 A Drain washes S.W.

80.02 Intersected West boundary of the Township

20 links North of the Corner to secs. 7 & 18, from which corner I run

East on a true line between sections 7 and 18.

Variation 10° 39' East

40.02 Set a Red flint stone, 12 in long, 7 in wide, 7 in. thick for quarter sec. corner.

80.02 The corner to sections 7, 8, 17 & 18

Land gently rolling - Soil 1st rate

- -

South between sections 17 and 18

Variation 11° 15' East

40.00 Set a Red flint stone, 12 in. long, 8 in. wide, 6 in. thick, for quarter sec. corner.

80.00 Set a Red flint stone, 11 in. long, 8 in. wide, 7 in. thick for corner to sections 17, 18, 19 and 20

Land gently rolling - Soil 1st rate

- -

East on a random line between sections 17 and 20

Variation 11° 30' East

40.00 Set a stone for temporary quarter sec. corner.

63.93 A Drain, washes South, Timber on banks

79.39 Intersected N and S. line 2 lks. North of the corner to sections 16, 17, 20 & 21, from which corner I run

West on a true line between sections 17 and 20.

Variation 11° 21' East

39.69 Set a Red flint stone, 14 in long, 9 in. wide, 5 in. thick, for quarter sec. corner.

79.39 The corner to sections 17, 18, 19 and 20

Surface rolling - Soil 2nd rate
Timber Cottonwood and Elm

July 25th 1857

- -

West on a Random line between sections 18 and 19.

Variation 10° 30' East

40.00 Set a Stone for temporary quarter sec. corner.

40.65 A Drain washes S. West

53.79 A Drain, washes S.W.

80.00 Intersected West boundary of the Township

57 lks. North of the corner to secs. 18 & 19 from which corner I run

East on a true line between sections 18 and 19

Variation 10° 54' East

40.00 Set a Red flint stone 12 in. long, 9 in. wide, 5 in. thick for quarter sec. corner.

80.00 The corner to sections 17, 18, 19 and 20

Land gently rolling - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

South between Fractional Secs 19 and 20

Variation 11° 30' East

20.00 A Drain washes S.W.

40.00 Set a Red flint stone, 14 in. long, 12 in. wide, 4 in. thick, for quarter sec. corner.

64.18 A Drain washes S.W.

71.66 Intersected the North boundary of the Otoe Reservation 13.41lks. West of the Trench for corner to reserve line.

Set a Red flint stone, 14 in. long, 10 in. wide, 4 in. thick, for corner to Fractional sections 19 and 20

Land gently rolling - Soil 1st rate

July 26th 1857

General Description.

This Township contains a fair average proportion of fine rolling and rich prairie tolerably well watered- but the scarcity of timber and stone suitable for building purposes renders it rather below the average, as regards the advantages for farming.

- -

A list of the names of the individuals employed to assist in running, measureing or marking the lines and corners described in the foregoing field notes of Township 2 North, Range 5 East of the 6th Principal Meridian, showing the respective capacities in which they acted

Charles Hirl	Chainman
James D. Thompson	Chainman
Robert Armstrong	Axeman
John Nelson	Flagman
Felix G. Herbert	Compassman

Fractional Township 2 N. R. 5 E. of
6th Principal Meridian

Surveyor General's Office

Lecompton K.T. 25 Sep 1857

I certify that the foregoing transcript of the field notes of the survey of the subdivisional lines of Fractional Township Number two North of Range number Five East of the Sixth Principal Meridian in the Territory of Nebraska, has been correctly copied from the original notes on file in this office.

J. Calhoun

Surveyor General.

Department of the Interior.

General Land Office.

Washington, D. C. August 7, 1914.

I hereby certify that the annexed copy of the field notes of the survey of the subdivisional lines in Township 2 North, Range 5 East, Nebraska, north of the Otoe Indian Reservation, is a true and literal exemplification of the official field notes which are in my custody in this office.

(SEAL) In Testimony Whereof I have hereunto subscribed my name and caused the seal of this office to be affixed, at the city of Washington, on the day and year above written.

C. M. Bruce,

Assistant Commissioner of the General Land Office.

Note: For Certificate of Commissioner of General Land Office see Page 42.

Field Notes

of the subdivision lines of Township No. 3 North of Range No. 5 East of the 6th Principal Meridian in the Territory of Nebraska.

Executed by

Waters W. Herbert Under his Contract bearing date the 24th day of October 1856.

Contract 162

Subdivision Commenced July 16th 1857.
Completed July 22nd 1857.

Township 3 N. Range 5 E of the
6th Principal Meridian

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

A list of the names of the individuals employed to assist in running, measureing or marking the lines and corners described in the following field notes of Township No. 3 North of Range No. 5 East of the 6th Principal Meridian showing the respective Capacities in which they acted.

Charles Hirl,	Chainman
James D. Thompson,	Chainman
Robert Armstrong,	Axeman
John Nelson,	Flagman
Felix G. Herbert,	Compassman.

Township 3 N. Range 5 E of the
6th Principal Meridian

To determine the proper adjustment of my Compass for subdividing this Township I commence at the Corner to Townships 2 and 3 North of Ranges 5 and 6 East and run

North along the East boundary of section 36.
Variation 12° 00' East.

39.92 To Quarter sec. Corner.

79.94 The Corner to sections 25 and 36.

To retrace this line or run parallel there to my compass must be adjusted to a
Variation 12° 00' E

From the corner to Townships 2 and 3, Ranges 5 and 6 E. I run

West along the South boundary of sec. 36.
Variation 12° 00'. East.

39.88 To a point 16 lks. South of Quarter sec. Corner

79.88 To a point 31 lks. South of the corner to secs. 35 & 36.

To retrace this line or run parallel thereto my compass must be adjusted to a
Variation 11° 47' East.
Subdivision Commenced July 16th 1857.

- - - - - - - - - - - - - - - - - -

From corner to sections 1, 2, 35 & 36 on South boundary I run

North between sections 35 and 36.

Township 3 N. Range 5 E of the
6th Principal Meridian

Variation 12° 00' East.

16.25 A Drain washes East.

40.00 Set a Red flint Stone 14 in. long, 8 in. wide, 7 in. thick, for Quarter sec. Corner.

80.00 Set a Red flint Stone, 14 in. long, 9 in. wide, 8 in. thick, for Corner to sections 25, 26, 35 & 36.

Surface level - Soil 2nd rate.

- - - - - - - - - - - - - - - -

East on a random line between sections 25 & 36.

Variation 11° 47' East.

24.45 A Drain washes S.E.

40.00 Set a Stone for temporary Quarter sec. Corner.

79.88 Intersected East boundary of the Township 18 lks. North of the Corner to sections 25 and 36, from which corner I run

West, on a true line between sections 25 and 36.

Variation 11° 39' East.

39.94 Set a Red flint stone, 14 in. long, 14 in wide, 4 in. thick for Quarter sec. Corner.

79.88 The corner to sections 25, 26, 35 & 36.

Surface rolling- Soil 1st rate.

- - - - - - - - - - - - - - - -

Township 3 N. Range 5 E. of
6th Principal Meridian

North between sections 25 and 26.

Variation 12° 00' East.

40.00 Set a Red flint, 14 in. long, 8 in. wide, 5 in. thick for Quarter sec. Corner.

67.84 A Drain washes S. E.

80.00 Set a Red flint Stone, 14 in. long, 10 in. wide, 5 in. thick, for Corner to sections 23, 24, 25 & 26.

Surface rolling - Soil 2nd rate.

- - - - - - - - - - - - - - - -

East on a random line between secs 24 and 25

Variation 11° 39' East

40.00 Set a Stone for temporary quarter sec. corner

41.74 A Drain washes South.

80.37 Intersect East boundary of the Township 64 lks North of the corner to sections 24 & 25 from which corner I run

West on a true line between sections 24 and 25

Variation 11° 12' East

40.18 Set a Grey flint stone, 12in. long, 8 in. wide, 7 in thick, for quarter sec. Corner.

80.37 The corner to sections 23, 24, 25 and 26.

Land rolling - Soil good 2nd rate.

- - - - - - - - - - - - - - - -

Township 3 N. Range 5 E. of
6th Principal Meridian

North between sections 23 and 24.

Variation 11° 15' East.

40.00 Set a Red flint stone, 14 in. long, 9 in. wide, 4 in. thick for quarter sec. corner.

80.00 Set Limestone 20 in. long, 8 in. wide, 5 in. thick for corner to sections 13, 14, 23 & 24.

Land gently rolling - Soil 1st rate.

- - - - - - - - - - - - - - - -

East on a random line between sections 13 & 24.

Variation 11° 11' East.

40.00 Set a Stone for temporary quarter sec. corner

61.00 A Drain washes N.

80.21 Intersected East boundary of the Township 18 lks. North of the corner to sections 13 & 24, from which corner I run

West on a true line between sections 13 & 24.

Variation 11° 04' East.

40.10 Set a Red flint stone, 13 in. long, 10 in. wide 6 in. thick for quarter sec. corner.

80.21 The corner to sections 13, 14, 23 & 24.

Land on East half level
West gently rolling - Soil 1st rate.

- - - - - - - - - - - - - - - - -

Township 3 N. Range 5 E. of
6th Principal Meridian

North between sections 13 and 14.

Variation 11° 15' East.

40.00 Set a Red flint stone, 14 in. long, 9 in. wide, 7 in. thick, for quarter sec. corner

53.71 A Drain washes N.E.

80.00 Set a limestone, 13 in. long, 12 in. wide, 5 in. thick, for corner to sections 11, 12, 13 and 14.

Land rolling - Soil 2nd rate.

- - - - - - - - - - - - - - - - -

East on a random line between sections 12 & 13.

Variation 11° 03' East.

18.60 A Prairie Branch washes North 10 lks wide.

37.20 A Drain washes N.

40.00 Set a stone for temporary quarter sec. corner.

80.10 Intersect N and S. line 30 lks. North of the corner to sections 12 & 13 from which corner I run

West on a true line between sections 12 and 13.

Variation 10° 50' East.

Township 3 N. Range 5 E. of
6th Principal Meridian

40.05 Set a Red flint, 14 in. long, 8 in. wide 6 in. thick, for quarter sec. corner

80.10 The corner to sections 11, 12, 13 & 14

Land broken - Soil 2nd rate.

- - - - - - - - - - - - - - - - - -

North between secs 11 and 12.

Variation 11° 15' East.

40.00 Set a Red flint stone, 12 in. long, 10 in. wide, 6 in. thick for quarter sec. corner.

80.00 Set a Red flint stone 14 in. long, 12 in. wide, 4 in. thick for corner to sections 1, 2, 11 and 12.

Surface broken - Soil 2nd rate.

- - - - - - - - - - - - - - - - - -

East on a Random line between sections 1 & 12

Variation 10° 50' East.

40.00 Set a Stone for temporary quarter sec. corner

21.26 A Prairie Branch washes N. 8 links wide.

75.10 A Prairie Branch washes N. 8 lks. wide.

80.24 Intersected East boundary of Township 21 lks. North of corner to secs 1 and 12, from which corner I run

Township 3 N. Range 5 E. of
6th Principal Meridian

West on a true line between secs 1 and 12.

Variation 10° 41' East.

40.12 Set a Red flint stone, 12 in. long, 8 in. wide, 6 in. thick for quarter sec. corner.

80.24 The corner to sections 1, 2, 11 & 12.

Surface broken - Soil 2nd rate.

- - - - - - - - - - - - - - - - - -

North on a random line between secs 1 and 2.

Variation 11° 25' East

40.00 Set a stone for temporary quarter sec. corner.

79.22 Intersected North boundary of Township 63 lks. West of the corner to secs 1 & 2, from which corner I run

South on a true line between secs 1 and 2.

Variation 10° 58' East.

39.22 Set a Red flint stone, 12 in. long, 8 in. wide, 8 in. thick for quarter sec. corner.

79.22 The corner to sections 1, 2, 11 and 12.

Land rolling - Soil 3rd rate.

July 16th 1857.

Township 3 N. Range 5 E. of
6th Principal Meridian

North between sections 34 and 35

Variation 12° 00' East

17.46 A Drain washes East.

40.00 Set a Red flint stone, 14 in. long, 8 in. wide, 5 in. thick for quarter sec. corner.

60.50 A Drain washes East

80.00 Set a Sandstone, 21 in. long, 9 in. wide 5 in. thick, for corner to sections 26, 27, 34 and 35.

Land rolling - Soil 2nd rate.

- - - - - - - - - - - - - - - - - -

East, on a random line between 26 and 35.

Variation 12° 00' East.

37.76 A Prairie Branch washes South 6 lks wide

40.00 Set a Stone for temporary quarter sec. corner.

80.62 Intersected N. and S. line 59 lks. North of the corner to sections 25, 26, 35 and 36, from which corner I run

West on a true line between sections 26 and 35

Variation 11° 35' East.

40.31 Set a Red flint stone, 12 in. long, 10 in. wide, 5 in. thick for quarter sec. corner.

Township 3 N. Range 5 E. of
6th Principal Meridian

80.62 The corner to sections 26, 27, 34 & 35.

Land broken - Soil 2nd rate.

- - - - - - - - - - - - - - - - - -

North between secs 26 and 27

Variation 11° 30' East.

15.07 A Drain washes S.E.

40.00 Set a Grey flint Stone, 15 in. long, 12 in. wide, 3 in. thick for quarter sec. corner.

43.81 A Prairie Branch washes S.E. 7 lks. wide.

54.25 Same Branch washes S.W. 7 lks. wide.

68.00 Same Branch washes S.E. 7 lks. wide.

75.30 Same Branch washes S.W. 7 lks. wide.

77.10 Same Branch washes S.E. 7 lks. wide.

80.00 Set a Sand stone 16 in. long, 10 in. wide 5 in. thick for corner to sections 22, 23, 26 & 27.

Surface broken - Soil 1st rate.

- - - - - - - - - - - - - - - - - -

East on a random line between sections 23 & 26.

Variation 11° 35' East

40.00 Set a Stone for temporary quarter sec. corner.

Township 3 N. Range 5 E. of
6th Principal Meridian

75.09	A Drain washes South.
80.08	Intersect N. and S. line, 15 lks. North of the corner to secs 23, 24, 25 & 26, from which corner I run
	West on a true line between sections 23 and 26.
	Variation 11° 29' East.
40.04	Set a Red flint stone 15 in. long, 12 in. wide, 3 in. thick, for quarter sec corner.
80.08	The corner to sections 22, 23, 26 and 27
	Land rolling - Soil 1st rate.
	- - - - - - - - - - - - - - - - - -
	North between sections 22 and 23.
	Variation 11° 15' East.
1.09	A Prairie Branch washes S.W. 7 lks. wide
37.00	A Drain washes S.E.
40.00	Set a Red flint stone, 15 in. long, 10 in. wide, 10 in. thick for quarter sec. Corner.
80.00	Set a limestone 14 in. long, 9 in. wide, 5 in. thick, for corner to sections 14, 15, 22 & 23.
	Surface rolling - Soil 1st rate.
	- - - - - - - - - - - - - - - - - -

Township 3 N. Range 5 E. of
6th Principal Meridian

	East on a random line between sections 14 & 23.
	Variation 11° 30' East.
18.11	A Drain washes South.
40.00	Set a Stone for temporary quarter sec. corner.
80.50	Intersected N and S. line 29 lks. North of the corner to sections 13, 14, 23 & 24, from which corner I run
	West on a true line between sections 14 and 23.
	Variation 11° 18' East.
14.25	Set a Red flint stone, 13 in. long, 10 in. wide 7 in. thick for quarter sec. corner
80.50	The corner to sections 14, 15, 22 & 23.
	Surface gently rolling - Soil 1st rate
	- - - - - - - - - - - - - - - - - -
	North between sections 14 and 15.
	Variation 11° 00' East.
40.00	Set Red flint Stone 14 in. long, 9 in. wide, 8 in. thick for quarter sec. corner.
73.48	A Drain washes N.E.

Township 3 N. Range 5 E. of
6th Principal Meridian

80.00	Set a Sandstone, 14 in. long, 11 in. wide 5 in. thick, for corner to sections 14, 15, 10 & 11
	Surface level - Soil 1st rate.
	- - - - - - - - - - - - - - - - - -
	East on a random line between sections 11 and 14.
	Variation 11° 18' East.
4.55	A Drain washes N.E.
14.27	A Drain washes N.
40.00	Set a Stone for temporary quarter sec. Corner.
77.53	A Drain washes N.
80.28	Intersect N and S. line 5 lks. North of the corner to sections 11, 12, 13 & 14, from which corner I run
	West on a true line between sections 11 and 14.
	Variation 11° 16' East.
40.14	Set a Red flint stone, 12 in. long, 9 in wide, 5 in. thick, for quarter sec. Corner.
80.28	The corner to sections 10, 11, 14 & 15.
	Land broken - Soil 2nd rate.
	- - - - - - - - - - - - - - - - - -

Township 3 N. Range 5 E. of
6th Principal Meridian

	North between secs 10 and 11.
	Variation 11° 00' East.
40.00	Set a Red flint stone, 12in. long, 8 in. wide, 7 in. thick, for quarter section Corner.
57.19	A Prairie Branch washes N.E. 8 lks. wide
80.00	Set a Sandstone, 22 in. long, 10 in. wide, 3 in. thick, for corner to sections 2, 3, 10 & 11.
	Surface broken - Soil good 2nd rate.
	- - - - - - - - - - - - - - - - - -
	East on a random line between sections 2 and 11.
	Variation 11° 16' East.
9.17	A Prairie Branch washes N.E. 7 lks. wide
40.00	Set a Stone for temporary quarter sect corner.
58.15	A Prairie Branch washes N.W. 7 lks. wide
80.10	Intersect N and S. line 32 lks North of the corner to sections 1, 2, 11 & 12, from which corner I run
	West on a true line between sections 2 and 11.
	Variation 11° 01' East

Township 3 N. Range 5 E. of
6th Principal Meridian

40.05 Set a Red flint Stone 12 in. long, 10 in. wide 5 in. thick for quarter sec. corner.

80.10 The corner to sections 2, 3, 10 & 11

Surface broken - Soil 2nd rate

- - - - - - - - - - - - - - - - - -

North on a random line between secs 2 and 3.

Variation 11° 00' East.

0.90 A Drain washes N.E.

37.22 A Drain washes E.

40.00 Set a Stone for temporary quarter sec. corner.

79.65 Intersect N. Boundary of Township 28 lks. West of the corner to secs 2 & 3, from which corner I run

South on a true line between sections 2 and 3

Variation 10° 48' East.

39.65 Set a Red flint stone, 12 in. long, 12 in. wide 8 in. thick for quarter sec. corner.

79.65 The corner to sections 2, 3, 10 & 11.

Land broken - Soil 2nd rate.

July 17th 1857.

Township 3 N. Range 5 E. of
6th Principal Meridian

North between sections 33 and 34.

Variation 12° 00' East

40.00 Set a Red flint stone, 12 in. long, 10 in. wide, 6 in. thick for quarter sec. Corner.

50.40 A Drain washes S.West.

71.12 A Drain washes S.W.

80.00 Set a Grey flint stone 14 in. long, 11 in. wide 5 in. thick, for corner to sections 27, 28, 33 & 34.

Land rolling - Soil good 2nd rate.

- - - - - - - - - - - - - - - - - -

East on a random line between sections 27 & 34.

Variation 11° 30' East

3.54 A Drain washes S.W.

37.93 A Drain washes S.East.

40.00 Set a Stone for temporary quarter sec. corner.

80.37 Intersected N and S. line 70 lks. North of the corner to secs 26, 27, 34 & 35, from which corner I run

West, on a true line between sections 27 & 34.

Variation 11° 00' East.

Township 3 N. Range 5 E. of
6th Principal Meridian

40.18 Set a Red flint stone 14 in. long, 7 in. wide, 5 in. thick for quarter sec. corner.

80.37 The corner to sections 27, 28, 33 & 34.

Land rolling - Soil good 2nd rate.

- - - - - - - - - - - - - - - - - -

North between sections 27 and 28.

Variation 11° 30' East.

40.00 Set a Red flint stone, 12 in. long, 7 in. wide, 7 in. thick for quarter sec. corner.

80.00 Set a Red flint stone, 17 in. long, 11 in. wide, 4 in. thick for corner to sections 21, 22, 27 & 28

Land level - Soil 1st rate.

- - - - - - - - - - - - - - - - - -

East on a random line between sections 22 & 27.

Variation 11° 00' East.

40.00 Set a Stone for temporary quarter sec. corner.

54.75 A Drain washes S.East.

79.27 A Prairie Branch runs S.East 9 lks. wide.

80.50 Intersect N. and S. line 9 lks. North of the corner to sections 22, 23, 26 & 27,

Township 3 N. Range 5 E. of
6th Principal Meridian

from which corner I run

West, on a true line between sections 22 and 27.

Variation 10° 56' East.

40.25 Set a Red flint stone, 12 in. long, 9 in. wide, 5 in. thick for quarter sec. corner.

80.50 The corner to sections 21, 22, 27 and 28.

Surface rolling- Soil 1st rate.

- - - - - - - - - - - - - - - - - -

North between sections 21 and 22.

Variation 11° 15' East.

40.00 Set a Red flint stone 15 in. long, 8 in. wide, & 7 in. thick for quarter sec. corner.

80.00 Set a Sandstone, 15 in. long, 9 in. wide, 4 in. thick, for corner to sections 15, 16, 21 & 22.

Land level - Soil 1st rate.

- - - - - - - - - - - - - - - - - -

East on a random line between sections 15 & 22.

Variation 11° 00' East.

40.00 Set a Stone for temporary quarter sec. corner.

Township 3 N. Range 5 E. of
6th Principal Meridian

80.47 Intersected N and S. line 24 lks. South of the corner to sections 14, 15, 22 & 23, from which corner I run

West on a true line between sections 15 and 22.

Variation 11° 10' East

40.23 Set a Red flint stone 12 in. long, 9 in. wide, 8 in. thick, for quarter sec. corner.

80.48 The corner to sections 15, 16, 21 and 22.

Surface level - Soil 1st rate.

- - - - - - - - - - - - - - - - - -

North between sections 15 and 16.

Variation 11° 00' East.

40.00 Set a Red flint stone, 16 in. long, 10 in. wide, 4 in. thick for quarter sec. corner.

80.00 Set a Grey flint stone 13 in. long, 9 in. wide, 9 in. thick for corner to sections 9, 10, 15 & 16.

Land broken - Soil 3rd rate.

- - - - - - - - - - - - - - - - - -

East on a random line between sections 10 and 15.

Variation 11° 10' East

Township 3 N. Range 5 E. of
6th Principal Meridian

37.84 A Drain washes N.E.

40.00 Set a Stone for temporary quarter sec. corner.

80.44 Intersected N and S. line 14 lks. N. of the corner to sections 10, 11, 14 & 15, from which corner I run

West, on a true line between sections 10 and 15.

Variation 11° 04' East.

40.22 Set a Red flint stone, 13 in. long, 9 in. wide, 8 in. thick, for quarter sec. corner.

80.44 The corner to sections 9, 10, 15 & 16.

Land broken - Soil 1st rate.

- - - - - - - - - - - - - - - - - -

North between sections 9 and 10

Variation 11° 00' East.

40.00 Set a Grey flint stone, 12 in. long, 8 in. wide, 5 in. thick, for quarter sec. corner.

80.00 Set a Grey flint stone, 12 in. long, 9 in. wide, 5 in. thick, for corner to sections 3, 4, 9 and 10

Land broken - Soil 1st rate.

- - - - - - - - - - - - - - - - - -

Township 3 N. Range 5 E. of
6th Principal Meridian

East on a random line between secs 3 and 10.

Variation 11° 04' East

40.00 Set a Stone for temporary quarter sec. corner

80.39 Intersected N. and S. line 9 lks South of the corner to secs 2, 3, 10 & 11, from which corner I run

West, on a true line between sections 3 and 10.

Variation 11° 08' East.

40.19 Set a Red flint stone 13 in. long, 12 in. wide, 7 in. thick for quarter sec. corner.

80.39 The corner to sections 3, 4, 9 & 10.

Land broken - Soil 3rd rate.

- - - - - - - - - - - - - - - - -

North on a random line between sections 3 and 4.

Variation 11° 00' East.

12.63 A Drain washes N.West.

40.00 Set a Stone for temporary quarter sec. corner.

79.79 Intersected North boundary of the Township 1.48 lks West of the corner to sections 3 & 4, from which corner I run

Township 3 N. Range 5 E. of
6th Principal Meridian

South on a true line between sections 3 and 4.

Variation 9° 57' East.

39.79 Set a Red flint stone, 14 in. long, 7 in. wide, 6 in. thick for quarter sec. corner.

79.79 The corner to sections 3, 4, 9 & 10

Land broken - Soil 3rd rate.

July 18th 1856

- - - - - - - - - - - - - - - - -

North, between sections 32 and 33.

Variation 11° 30' East.

40.00 Set a Red flint stone 12 in. long, 9 in. wide, 6 in. thick, for quarter sec. corner.

80.00 Set a Sandstone, 14 in. long, 13 in. wide, & 4 in. thick for corner to sections 28, 29, 32 & 33.

Land gently rolling - Soil 1st rate.

- - - - - - - - - - - - - - - - -

East on a random line between sections 28 & 33.

Variation 11° 00' East.

40.00 Set a Stone for temporary quarter sec. corner.

Township 3 N. Range 5 E. of
6th Principal Meridian

47.28 A Prairie Branch runs South 10 lks. wide.

79.88 Intersected N & S. line 37 lks. North of the corner to sections 27, 28, 33 & 34 from which corner I run

West on a true line between sections 28 & 33.

Variation 10° 44' East

39.94 Set a Grey flint stone 14 in. long, 8 in. wide, 7 in. thick, for quarter sec. corner.

79.88 The corner to sections 28, 29, 32 and 33.

Surface gently rolling- Soil 1st rate.

- - - - - - - - - - - - - - - - - -

North between secs 28 and 29.

Variation 11° 30' East.

40.00 Set a Grey flint stone 13 in. long, 10 in. wide, 5 in. thick for quarter sec. corner.

80.00 Set a Sandstone, 16 in. long, 12 in. wide, 4 in. thick, for corner to sections 20, 21, 28 and 29.

Land level - Soil 1st rate.

- - - - - - - - - - - - - - - - - -

East on a random line between sections 21 and 28.

Variation 10° 44' East

Township 3 N. Range 5 E. of
6th Principal Meridian

40.00 Set a Stone for temporary quarter sec. corner.

80.33 Intersected N & S. line, 5 lks. South of the corner to sections 21, 22, 27 & 28 from which corner I run

West, on a true line between sections 21 and 28.

Variation 10° 46' East.

40.16 Set a Red flint stone, 14 in. long, 10 in. wide, 8 in. thick for a quarter sec. corner.

80.33 The corner to sections 20, 21, 28 & 29.

Land level - Soil 1st rate.

- - - - - - - - - - - - - - - - - -

North between sections 20 and 21.

Variation 11° 15' East.

40.00 Set a Red flint stone, 12 in. long, 7 in. wide 6 in. thick for quarter sec. corner.

80.00 Set a Red flint stone, 12 in. long, 10 in. wide, 5 in. thick, for corner to sections 16, 17, 20 and 21

Land level - Soil 1st rate.

- - - - - - - - - - - - - - - - - -

East on a random line between sections 16 and 21.

Variation 11° 00' East

40.00 Set a Stone for temporary quarter sec. corner

79.87 Intersect N. and S. line 32 lks. North of the corner to sections 15, 16, 21 & 22 from which corner I run

West on a true line between sections 16 and 21.

Variation 10° 46' East.

39.93 Set a Red flint stone, 13 in. long, 9 in. wide & 5 in. thick for quarter sec. corner.

79.87 The corner to sections 16, 17, 20 & 21.

Land level - Soil 1st rate.

- - - - - - - - - - - - - - - - - - -

North between sections 16 and 17.

Variation 11° 00' East

40.00 Set a Red flint stone, 18 in. long, 10 in. wide, 4 in. thick for quarter sec. corner

80.00 Set a limestone 12 in. long, 8 in. wide, 5 in. thick, for corner to sections 8, 9, 16 & 17.

Land level - Soil 1st rate.

East on a random line between sections 9 & 16.

Variation 11° 00' East.

25.26 A Ravine washes North.

40.00 Set a Stone for temporary quarter sec. corner.

46.11 A Drain washes N.

79.88 Intersected N and S. line 12 lks. North of the corner to sections 9, 10, 15 & 16, from which corner I run

West on a true line between sections 9 & 16.

Variation 10° 55' East.

39.94 Set a Red flint stone, 12 in. long, 9 in. wide, 6 in. thick, for quarter sec. corner.

79.88 The corner to sections 8, 9, 16 & 17.

Land gently rolling - Soil 1st rate.

- - - - - - - - - - - - - - - - - - -

North between sections 8 and 9.

Variation 11° 00' East.

40.00 Set a Red flint stone 14 in. long, 10 in. wide, 8 in. thick for quarter sec. corner.

80.00 Set a Grey flint stone, 18 in. long, 10

Township 3 N. Range 5 E. of
6th Principal Meridian

in. wide, 8 in. thick for corner to sections 4, 5, 8 & 9.

Land level - Soil 1st rate.

- - - - - - - - - - - - - - - - - - -

East on a random line between sections 4 and 9.

Variation 11° 00' East.

25.60 A Drain washes N.E.

40.00 Set a stone for temporary quarter sec. corner.

50.27 A Branch 27 lks. wide runs North.

80.04 Intersect N & S. line 14 lks. North of the corner to sections 3, 4, 9 & 10, from which corner I run

West, on a true line between sections 4 and 9.

Variation 10° 54' East.

40.02 Set a Red flint stone, 12 in. long, 9 in. wide, 5 in. thick, for quarter sec. corner.

80.04 The corner to sections 4, 5, 8 & 9.

Land rolling - Soil 2nd rate.

- - - - - - - - - - - - - - - - - - -

Township 3 N. Range 5 E. of
6th Principal Meridian

North on a random line between sections 4 & 5.

Variation 11° 00' East.

40.00 Set a Stone for temporary quarter sec. corner.

76.17 A Branch 8 lks. wide runs N.E.

80.21 Intersected North boundary of Township 1.60 Lks. West of the corner to secs 4 & 5 from which corner I run

South on a true line between sections 4 and 5.

Variation 9° 51' East.

40.21 Set a Red flint stone, 14 in. long, 9 in. wide, 5 in thick, for quarter sec. corner.

80.21 The corner to sections 4, 5, 8 & 9.

Land broken - Soil 3rd rate.

July 19th 1857

- - - - - - - - - - - - - - - - - - -

North between sections 31 & 32.

Variation 11° 30' East

2.00 A Drain washes East.

25.40 A drain washes East.

40.00 Set a Red flint stone, 12 in. long, 10

in. wide, 8 in. thick for quarter sec. corner.

80.00 Set a Red flint stone 18 in. long, 10 in. wide, 6 in. thick, for corner to sections 29, 30, 31 & 32.

Surface gently rolling - Soil good 2nd rate.

- - - - - - - - - - - - - - - - - -

East on a random line between sections 29 & 32.

Variation 11° 30' East.

15.12 A Ravine washes South.

40.00 Set a Stone for a temporary quarter sec. corner.

42.21 A Drain washes South.

80.28 Intersected N & S. line 75 lks. North of the corner to sections 28, 29, 32 & 33 from which corner I run

West on a true line between sections 29 & 32.

Variation 10° 58' East

40.14 Set a Grey flint stone, 12 in. long, 8 in. wide, 5 in. thick for quarter sec. corner.

80.28 The corner to sections 29, 30, 31 & 32.

Land gently rolling - Soil good 2nd rate

West on a random line between sections 30 & 31.

Variation 11° 30' East

40.00 Set a stone for temporary quarter sec. corner.

77.76 Intersect West boundary of Township 1.38 lks. South of corner to sections 30 & 31, from which corner I run

East on a true line between sections 30 & 31.

Variation 10° 31' East.

37.76 Set a Red flint stone, 14 in. long, 10 in. wide, 6 in. thick for quarter sec. corner.

77.76 The corner to sections 29, 30, 31 & 32.

Land level - Soil 1st rate.

- - - - - - - - - - - - - - - - - -

North between sections 29 and 30.

Variation 11° 30' East.

31.00 A Drain washes East.

40.00 Set a Red flint stone 11 in. long, 10 in. wide, 7 in. thick, for quarter section corner.

80.00 Set a Sandstone 20 in. long, 11 in. wide 3 in. thick, for corner to sections

Township 3 N. Range 5 E. of
6th Principal Meridian

19, 20, 29 and 30.

Land gently rolling - Soil 1st rate
Upland.

- - - - - - - - - - - - - - - - - -

East on a Random line between sections
20 and 29.

Variation 11° 00' East

21.34 A Ravine washes South.

40.00 Set a stone for temporary quarter sec.
corner.

79.85 Intersected North & South line 13 lks.
South of the corner to sections 20, 21,
28 and 29, from which corner I run

West on a true line between sections
20 and 29.

Variation 11° 06' East.

39.92 Set a Red flint 14 in. long, 10 in. wide,
7 in. thick, for quarter section corner

79.85 The corner to sections 19, 20, 29 and 30.

Land gently rolling - Soil 1st rate
Upland.

- - - - - - - - - - - - - - - - - -

West on a Random line between sections
19 & 30.

Variation 10° 30' East

Township 3 N. Range 5 E. of
6th Principal Meridian

40.00 Set a Stone for temporary quarter sec.
corner.

75.94 Intersect West Boundary of the Township
13 lks. South of the corner to sections
19 & 30, from which corner I run

East on a true line between sections
19 and 30.

Variation 10° 24' East

35.94 Set a Red flint stone, 14 in. long 8 in.
wide, 7 in. thick for a quarter sec-
tion corner.

75.94 The corner to sections 19, 20, 29 & 30.

Surface level - Soil 1st rate.

- - - - - - - - - - - - - - - - - -

North between sections 19 and 20.

Variation 11° 00' East.

15.09 A Drain washes South East.

40.00 Set a Red flint stone, 12 in. long, 8 in.
wide, 7 in. thick for quarter sec.
corner.

60.25 A Drain washes S.E.

80.00 Set a Sandstone 12 in. long, 12 in. wide
4 in. thick, for corner to sections
17, 18, 19 & 20.

Surface gently rolling - Soil 2nd rate

Township 3 N. Range 5 E. of
6th Principal Meridian

East on a random line between sections 17 & 20.

Variation 11° 00' East

1.80 A Drain washes S.E.

40.00 Set a Stone for temporary quarter sec. corner

45.07 A Drain washes S.West.

80.30 Intersected North and South line 10 lks. South of the corner to sections 16, 17, 20 & 21, from which corner I run

West on a true line between sections 17 and 20.

Variation 11° 04' East.

40.15 Set a Red flint stone, 12 in. long, 8 in. wide, 6 in. thick, for quarter sec. corner.

80.30 The corner to sections 17, 18, 19 & 20.

Surface gently rolling - Soil 1st rate

July 20th 1857.

- - - - - - - - - - - - - - - - - -

West on a Random line between sections 18 and 19.

Variation 10° 30' East.

40.00 Set a Stone for temporary quarter sec. corner.

Township 3 N. Range 5 E. of
6th Principal Meridian

75.96 Intersect West boundary of the Township 53 lks. South of the corner to sections 18 and 19, from which corner I run

East on a true line between sections 18 and 19.

Variation 10° 07' East.

35.96 Set a Red flint stone, 12 in. long, 10 in. wide, 6 in. thick, for quarter sec. corner.

75.96 The corner to sections 17, 18, 19 and 20.

Surface level - Soil 1st rate.

- - - - - - - - - - - - - - - - - -

North between sections 17 and 18.

Variation 11° 00' East.

40.00 Set a Grey flint stone, 12 in. long, 8 in. wide, 6 in. thick, for quarter sec. corner.

80.00 Set a Red flint stone 14 in. long, 9 in. wide, 8 in. thick, for corner to sections 7, 8, 17 and 18.

Surface level - Soil 1st rate.

- - - - - - - - - - - - - - - - - -

East on a random line between sections 8 and 17.

Variation 11° 00' East.

Township 3 N. Range 5 E. of
6th Principal Meridian

40.00 Set a Stone for temporary quarter sec. corner.

80.30 Intersect N and S. line 22 lks. North of the corner to sections 8, 9, 16 & 17, from which corner I run

West on a true line between sections 8 and 17.

Variation 10° 51' East.

40.15 Set a Red flint stone, 13 in. long, 8 in. wide, 5 in. thick for quarter sec. corner

80.30 The corner to sections 7, 8, 17 and 18.

Land rolling - Soil 2nd rate.

- - - - - - - - - - - - - - - - - -

West on a random line between sections 7 and 18.

Variation 10° 00' East.

40.00 Set a stone for temporary quarter sec. corner.

51.12 A Prairie branch washes North 7 lks. wide

76.00 Intersected West boundary of the Township 46 lks. North of the corner to sections 7 and 18, from which corner I run

East on a true line between secs 7 and 18.

Township 3 N. Range 5 E. of
6th Principal Meridian

Variation 10° 20' East.

36.00 Set a Red flint stone, 12 in. long, 8 in. wide, 6 in. thick for quarter sec. corner.

76.00 The corner to sections 7, 8, 17 & 18.

Land rolling - Soil 2nd rate.

- - - - - - - - - - - - - - - - - -

North between sections 7 and 8.

Variation 11° 00' East.

40.00 Set a Red flint stone, 12 in. long, 10 in. wide, 4 in. thick for quarter sec. corner.

80.00 Set a Grey flint stone, 12 in. long, 8 in. wide, 6 in. thick, for corner to sections 5, 6, 7 & 8

Land gently rolling- Soil good 2nd rate

- - - - - - - - - - - - - - - - - -

East on a random line between sections 5 & 8.

Variation 11° 00' East.

40.00 Set a Stone for temporary quarter sec. corner.

50.25 A Ravine washes N.E.

80.58 Intersect N & S. line 10 lks. North of

Township 3 N. Range 5 E. of
6th Principal Meridian

the corner to sections 4, 5, 8 & 9, from which corner I run

West on a true line between sections 5 and 8.

Variation 10° 56' East

40.29 Set a Red flint stone, 11 in. long, 10 in. wide, 6 in. thick for quarter sec. corner.

80.58 The corner to sections 5, 6, 7 & 8.

Land broken - Soil 1st rate.

July 21st 1857

- - - - - - - - - - - - - - - - - -

West on a random line between sections 6 and 7.

Variation 10° 30' East

29.50 A Drain washes North.

40.00 Set a Stone for temporary quarter sec. corner.

75.49 Intersect West boundary of the Township 27 lks. South of the corner to secs 6 & 7 from which corner I run

East on a true line between sections 6 and 7.

Variation 10° 18' East.

Township 3 N. Range 5 E. of
6th Principal Meridian

35.49 Set a Red flint stone, 14 in. long, 10 in. wide, 4 in. thick for quarter sec. corner.

75.49 The corner to sections 5, 6, 7 & 8.

Land broken - Soil 3rd rate.

- - - - - - - - - - - - - - - - - -

North on a random line between sections 5 & 6.

Variation 11° 00' East.

40.00 Set a Stone for temporary quarter sec. corner.

42.00 A Drain washes N.W.

80.10 Intersected North boundary of the Township 247 lks. West of the corner to secs 5 and 6, from which corner I run

South on a true line between sections 5 & 6.

Variation 9° 14' East.

40.10 Set a Red flint stone, 12 in. long, 10 in. wide, 5 in. thick for quarter section corner

80.10 The corner to sections 5, 6, 7 and 8.

Land gently rolling - Soil 2nd rate.

Subdivision Completed July 22nd 1857.

- - - - - - - - - - - - - - - - - -

Township 3 N. Range 5 E. of
6th Principal Meridian

General Description

This Township contains a large proportion of rich Prairie, high and level well adapted to farming purposes, but it is destitute of timber and of stone.

- - - - - - - - - - - - - - - -

List of Names

A list of the names of the individuals employed to assist in running, measureing, or making the lines and corners described in the foregoing field notes of Township No 3 North of Range 5 East of the 6th Principal Meridian, Showing the respective capacities in which they acted.

Charles Hirl,	Chainman
James D. Thompson,	Chainman
Robert Armstrong,	Axeman
John Nelson,	Flagman
Felix G. Herbert	Compassman

- - - - - - - - - - - - - - - -

Township 3 N. Range 5 E. of
6th Principal Meridian

Surveyor Generals Office,

Lecompton K. T. 25 Sep 1857

I certify that the foregoing transcript of the field notes of the survey of the subdivisional lines of Township number Three North of Range number Five East of the Sixth Principal Meridian in the Territory of Nebraska, has been correctly copied from the original notes on file in this office

J. Calhoun

Surveyor General.

Department of the Interior,

General Land Office,

Washington, D. C.

August 7, 1914.

I hereby certify that the annexed copy of the field notes of the survey of the subdivisional lines in Township 3 North, Range 5 East, Nebraska, is a true and literal exemplification of the official field notes which are in my custody in this office.

In Testimony Whereof I have hereunto subscribed my name and caused the seal of this office to be affixed, at the city of Washington, on the day and year above written.

(Seal)

C. M. Bruce

Assistant Commissioner of the General Land Office.

Note; For Certificate of Commissioner of General Land Office see Page 45.

Field Notes

of the Subdivision lines of Township No. 4 North of Range No 5 East of the 6th Principal Meridian in the Territory of Nebraska.

Executed by

Waters W. Herbert, Under his contract bearing date the 24th day of October, 1856.

Subdivision Commenced July 9th 1857
Subdivision Completed July 15th 1857

Township 4 N. Range 5 E. of
6th Principal Meridian

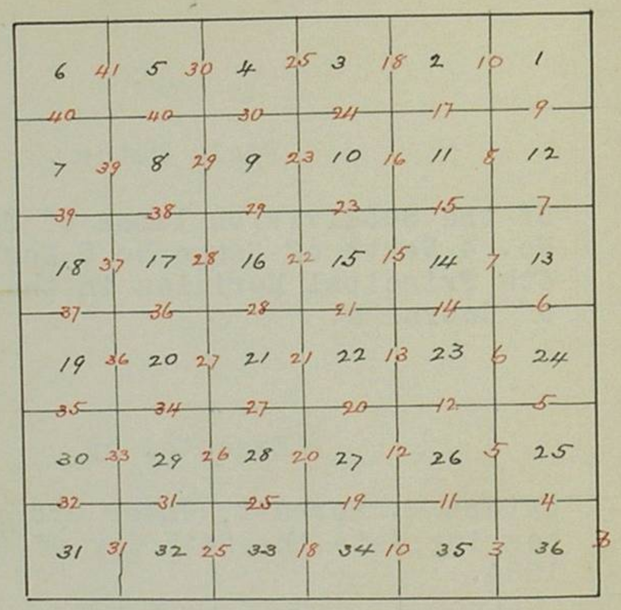

A list of the names of the individuals employed to assist in running, measureing or marking the lines and corners described in the following field notes of the Subdivision lines of Township No 4 North of Range No 5 East of the 6th Principal Meridian - showing the respective capacities in which they acted.

Charles Hirl	Chainman
James D. Thompson	Chainman
Robert Armstrong	Axeman
John Nelson	Flagman
Felix G. Herbert	Compassman

Township 4 N. Range 5 E. of
6th Principal Meridian.

To determine the proper adjustment of my compass for subdivising this Township I commence at the Corner to Townships 3 and 4 North, Ranges 5 and 6 East of the 6th Principal Meridian and run

North along the East boundary of Sec. 36

Variation 12° 00' East

39.88 To a point 32 links West of the quarter section corner

79.86 To a point 44 links West of the Corner to sections 25 & 36

To retrace this line or run parallel thereto my compass must be adjusted to a

Variation 11° 41' East

Subdivision commenced July 9th 1857

- -

From the corner to sections 1, 2, 35 and 36 on South boundary of the Township I run

North between secs. 35 and 36

Variation 11° 41' East

6.80 A Drain washes N. West

40.00 Set a Red flint stone 13 in. long, 8 in. wide, 6 in. thick, for quarter sec. corner,

Township 4 N. R. 5 E. of
~~6th Principal Meridian~~

41.06 A stream 12 lks. wide - High banks - runs N E.

80.00 Set a Red flint stone, 16 in. long, 9 in. wide, 4 in. thick, for corner to sections 25, 26, 35 and 36

Surface on South half broken - soil 3rd rate
North half gently rolling - Soil good 2nd rate

- -

East on a random line between sections 25 & 36

Variation 11° 41' East

40.00 Set a stone for temporary quarter sec. corner

69.85 A stream 11 lks. wide - runs N.E. high banks.

79.80 Intersected East boundary of the Township 63 lks North of the corner to sections 25 and 36 from which corner I run

West on a true line between sections 25 & 36

Variation 11° 14' East

39.90 Set a Red flint stone 17 in. long, 8 in. wide, 7 in. thick, for quarter section corner

Township 4 North Range 5 E. of
~~6th Principal Meridian~~

79.80 The corner to sections 25, 26, 35 & 36

Surface gently rolling - Soil good 2nd rate

- -

North between sections 25 and 26

Variation 11° 41' East

40.00 Set a Grey flint stone, 13 in long, 9 in wide, 6 in. thick for quarter section corner

76.00 Enter creek bottom bears E & W

80.00 Set a sandstone 14 in. long, 8 in. wide 5 in. thick, for Corner to sections 23, 24, 25 and 26

Surface gently rolling - Soil 2nd rate

- -

East on a random line between sections 24 & 25

Variation 11° 14' East

24.00 A Ravine washes North

40.00 Set a stone for temporary quarter sec. corner

46.00 Leave bottom bears N.E. and S. West

80.34 Intersected East boundary of the Township 16 lks North of the corner to Sections 24 and 25 from which corner I run

Township 4 North, Range 5 E. of
6th Principal Meridian

West on a true line between sections 24 and 25

Variation 11° 07' East

40.17 Set a Grey flint stone 14, in long. 8 in. wide, 6 in. thick for quarter section corner

80.34 The corner to sections 23, 24, 25 and 26

Surface gently rolling - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

North between Sections 23 and 24

Variation 11° 41' East

4.86 A creek 31 lks wide high banks runs East

40.00 Set a Grey flint stone 14 in. long, 9 in. wide, 5 in. thick for quarter section corner

80.00 Set a Gray flintstone, 14 in. long, 8 in. wide, 6 in. thick, for corner to sections 13, 14, 23 & 24

Surface level - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

East on a random line between sections 13 and 24

Variation 11° 07' East

40.00 Set a stone for temporary quarter sec. corner

Township 4 N R. 5 E. of
6th Principal Meridian

72.00 Entered Brush and vines bears N. and S.

80.42 Intersect East boundary of the Township 13 lks. North of the Corner to sections 13 and 24, from which corner I run

West on a true line between sections 13 and 24

Variation 11° 01' East

40.21 Set a Red flint stone, 13 in. long, 10 in. wide, 4 in. thick for quarter sec. corner

80.42 The corner to sections 13, 14, 23 and 24

Land level - Soil 1st rate
Undergrowth Plum and vines.

- - - - - - - - - - - - - - - - - - - -

North between sections 13 and 14

Variation 11° 15' East

40.00 Set a Red flint stone, 14 in. long, 8 in. wide, 7 in. thick for quarter sec. corner

80.00 Set a sandstone 14 in. long, 12 in. wide, 3 in. thick, for corner to sections 11, 12, 13 & 14

Surface level - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

East on a random line between sections 12 and 13

Township 4 N. R. 5 E. of
6th Principal Meridian

Variation 11° 00' East

12.62 To Big Blue River 217 lks wide runs S.E. gentle current

14.85 Enter timber bears S.E. & N.W.

21.60 Leave Timber bears N and South

40.00 Set stone for temporary quarter sec. corner

80.43 Intersected East boundary of the Township 19 lks North of the Corner to sections 12 & 13, from which Cor I run

West on a true line between sections 12 and 13

Variation 10° 52' East

40.21 Set a Grey flint 13 in. long, 10 in. wide, 5 in. thick for quarter section corner

80.42 The corner to sections 11, 12, 13 and 14

Surface level - Soil 1st rate
Timber Cottonwood and Elm
Undergrowth Plumb

- -

North, between sections 11 and 12

Variation 11° 00' East

40.00 Set a Grey flint stone 16 in. long, 8 in. wide, 4 in. thick for quarter section corner

Township 4 N. R. 5 E. of
6th Principal Meridian

41.57 To Big Blue 238 lks. wide, gentle current sandy bottom runs N.E

44.07 Enter timber - bears N.E. & S.W.

53.10 A Stream 10 lks wide - runs N.E.

64.00 Leave timber bears N.N.E. & S.W.

80.00 Set a limestone, 18 in. long, 8 in. wide, 6 in. thick, for corner to sections 1, 2, 11 & 12,

Surface level - Soil 1st rate
Timber Cottonwood and Elm.

- -

East on a random line between sections 1 and 12

Variation 10° 52' East

4.00 Leave bottom bears N.W. and S.E.

40.00 Set a stone for temporary quarter sec. corner

80.44 Intersected East boundary of the Township 31 lks. North of the Corner to sections 1 and 12, from which corner I run

West on a true line between sections 1 and 12

Variation 10° 40' East

40.22 Set a limestone, 14 in. long, 10 in. wide 6 in. thick for quarter sec. corner.

Township 4 N. Range 5 E. of
6th Principal Meridian

80.44 The corner to sections 1, 2, 11 & 12

Surface broken - Soil 2nd rate

- -

North between sections 1 and 2

Variation 11° 00' East

22.60 Leave bottom bears S.E. & N. West

40.00 Set a sandstone 12 in. long, 8 in. wide, 5 in. thick, for quarter sec. corner

53.81 A Ravine washes S. West with timber on Banks

77.37 Intersect the 1st Parallel North 14.98 lks. West of the corner to sections 35 & 36 &

Set a sand stone, 14 in. long, 12 in. wide, 5 in. thick, for corner to sections 1 and 2

Land rolling - Soil good 2nd rate
Timber Bur oak, Elm and Cottonwood

July 10th 1857

- - - - - - - - - - - - - - - - - - - -

North between sections 34 and 35

Variation 11° 41' East

40.00 Set Sandstone, 12 in long, 10 in. wide, 5 in. thick, for quarter sec. corner

Township 4 N. Range 5 E. of
6th Principal Meridian

52.28 A Branch comes from S. West then runs N. 32 lks.

79.48 Leave Branch runs N. West 32 lks wide

80.00 Set a sandstone, 24 in, long, 6 in. wide, 6 in. thick, for corner to sections 26, 27, 34 and 35

Land rolling - Soil 2nd rate

- -

East on a random line between sections 26 & 35

Variation 11° 41' East

40.00 Set a stone for temporary quarter sec. corner

80.33 Intersect N and S. line 30 lks. North of the corner to secs. 25, 26, 35 & 36 from which corner I run

West on a true line between sections 26 and 35

Variation 11° 28' East

40.16 Set a Sandstone, 14 in long, 8 in. wide, 6 in. thick, for quarter section corner

80.33 The corner to sections 26, 27, 34 & 35

Land gently rolling - Soil 2nd rate

- -

Township 4 N. Range 5 E. of
6th Principal Meridian

North between sections 26 and 27

Variation 11° 30' East

4.80	A Branch runs East 6 lks. wide
38.40	A creek runs N. 24 lks. wide.
40.00	The point for quarter sec. corner falling in Creek I set a sandstone, 15 in. long, 8 in. wide, 4 in. thick 35 lks. East of the point, for a witness corner
40.97	Leave creek runs N.W.
44.10	To timber bears E. and West
44.77	Same creek 18 lks. wide runs East
46.00	Leave timber bears N.E. and N.W.
59.00	Leave bottom bears E. and West.
80.00	Set a sandstone 17 in. long, 9 in. wide, 4 in. thick, for corner to sections 22, 23, 26 and 27

Surface gently rolling - Soil 1st rate
Timber, Bur oak, Elm and Walnut,
Undergrowth, Plumb & Vines.

- -

East on a random line between secs. 23 and 26

Variation 11° 28' East

Township 4 N. Range 5 E. of
6th Principal Meridian

40.00	Set a stone for temporary quarter sec. corner
56.70	Enter brush and scattering Timber bears N. E. and S.W.
60.44	To creek 30 lks. wide - runs N.E.
61.00	Leave timber bears N.E. and S. West
66.20	Same creek 35 lks. wide - runs S. East
66.75	Enter timber bears S.E. and N. West
72.33	Same creek 28 lks. wide runs N.E
73.00	Leave timber bears N.E. and S. West
80.32	Intersected N. and S. line 11 lks. North of corner to sections 23, 24, 25 & 26, from which corner I run

West on a true line between sections 23 and 26

Variation 11° 23' East

40.16	Set a sandstone, 14 in. long, 10 in. wide, 4 in. thick, for quarter sec. corner
80.32	The corner to sections 22, 23, 26 and 27

Land level - Soil 1st rate
Timber Bur Oak, Elm and Box Elder
Undergrowth - Same Plumb and Vines -

- -

Township 4 N. Range 5 E. of
6th Principal Meridian

North between sections 22 and 23

Variation 11° 30' East

40.00 Set a sandstone, 17 in. long, 7 in. wide, 5 in. thick, for quarter section corner

80.00 Set a sandstone 18 in. long, 8 in. wide, 4 in. thick, for corner to sections 14, 15, 22 & 23

Surface gently rolling - soil 1st rate

- -

East, on a random line between 14 and 23

Variation 11° 23 ' East

40.00 Set a stone for temporary quarter section corner

80.44 Intersect N. and S. line 40 lks. North of the corner to secs. 13, 14, 23 and 24, from which corner I run

West on a true line between sections 14 and 23

Variation 11° 06' East

40.22 Set a sandstone, 12 in. long, 11 in. wide 4 in. thick for quarter section corner

80.44 The corner to sections 14, 15, 22 & 23

Surface gently rolling - Soil 1st rate

Township 4 N. Range 5 E. of
6th Principal Meridian

North between sections 14 and 15

Variation 11° 00' East

40.00 Set a sandstone 14 in. long, 10 in. wide, 5 in. thick, for quarter section corner

80.00 Set a sandstone, 14 in. long, 12 in. wide, 3 in. thick for corner to sections 10, 11, 14 & 15

Surface level - Soil 1st rate

- -

East on a random line between sections 11 and 14

Variation 11° 06' East

40.00 Set a stone for temporary quarter sec. corner

80.02 Intersected N. and S. line 10 lks. North of the corner to sections 11, 12, 13 & 14, from which corner I run

West on a true line between sections 11 and 14

Variation 11° 02' East

40.01 Set a sandstone, 17 in. long, 9 in. wide 4 in. thick, for quarter section corner

80.02 The corner to sections 10, 11, 14 & 15

Land level - Soil 1st rate

Township 4 N. Range 5 E. of
6th Principal Meridian

North between sections 10 and 11

Variation 11° 00' East

33.70 Enter timber bears S.E. and W.

34.28 A stream 37 lks. wide - gentle current - high bank runs East

37.00 To Big Blue 200 lks. wide - high banks gentle current and sandy bottom - runs S.S.E.

40.00 Set a Grey flint stone, 14 in. long. 8 in. wide, 6 in. thick for quarter sec. corner, from which

A Cottonwood 10 in diam. bears N. 14° W 31 lks distant
A Cottonwood 9 in. diam. bears N. 51° E. 12 lks. distant

46.64 To Big Blue river 183 lks. wide - rapid current runs S.W.

52.00 Leave timber bears N.W. and S. West

80.00 Set a sandstone 14 in. long, 10 in. wide, 4 in. thick, for corner to sections 2, 3, 10 & 11.

Surface level - Soil 1st rate
Timber Bur Oak, Elm, Black Walnut and Box Elder
Undergrowth same and vines

- - - - - - - - - - - - - - - - - - - -

Township 4 N. Range 5 E. of
6th Principal Meridian

East on random line between sections 2 and 11

Variation 11° 02' East

20.73 To Big Blue river 326 lks. wide high banks on West side gentle current - sandy bottom - runs E.S.E. Enter timber on E. bank

26.80 Leave timber bears S.E. and N.W.

40.00 Set a stone for temporary quarter sec. corner.

72.30 A Ravine washes South, Timber on banks.

80.02 Intersect N. and S. line 29 lks. North of the corner to sections 1, 2, 11 & 12, from which corner I run

West on a true line between sections 2 and 11

Variation 10° 50' East

40.01 Set a limestone 16 in. long, 10 in. wide, 4 in. thick, for quarter sec. corner

80.03 The corner to sections 2, 3, 10 & 11

Land level - Soil 1st rate
Timber maple, cottonwood, elm and Box elder
Undergrowth - same Plumb and vines.

- - - - - - - - - - - - - - - - - - - -

Township 4 N. Range 5 E. of
6th Principal Meridian

North between sections 2 and 3

Variation 11° 00' East

40.00 Set a sandstone 14 in. long, 10 in. wide, 4 in. thick, for quarter section corner.

69.74 Enter timber bears S.E. and N.W.

71.43 To Big Blue 150 lks. wide - high banks on North - sandy bottom runs East - leave timber on Banks.

77.88 Intersected 1st Parallel North 15.47 lks. West of the corner to sections 34 and 35. Set a sandstone 14 in. long, 10 in. wide, 4 in. thick, the corner to sections 2 and 3

Land level, - Soil 1st rate
Timber Bur oak, Elm and Cottonwood
Undergrowth same Plumb and Vines

July 11th 1857.

- -

North between sections 33 and 34

Variation 11° 30' East

40.00 Set a sandstone 12 in. long, 8 in. wide, 6 in. thick for quarter section corner.

42.45 A Drain washes N.E.

80.00 Set a sandstone 17 in. long, 8 in. wide,

Township 4 N. Range 5 E. of
6th Principal Meridian

5 in. thick, for corner to sections 27, 28, 33 & 34.

Land rolling - Soil good 2nd rate

- -

East on a random line between sections 27 and 34

Variation 11° 30' East

33.85 A Branch 18 lks. wide runs North

40.00 Set a stone for temporary quarter sec. corner.

49.00 A ravine washes North

78.90 A Fresh water spring 28 lks. North of line

79.19 A Drain washes North

79.91 Intersect N. and S line 91 lks. North of the corner to sections 26, 27, 34 & 35, from which corner I run

West on a true line between sections 27 and 34

Variation 10° 51' East

39.95 Set a sandstone 13 in. long, 12 in. wide, 4 in. thick, for quarter sec. corner

79.91 The corner to section 27, 28, 33 & 34

Surface broken - Soil good 2nd rate

Township 4 N. Range 5 E. of
6th Principal Meridian.

North between sections 27 and 28

Variation 11° 30' East

28.00 Enter timber bears N. E. and W.

28.45 To creek 36 lks. wide runs N.E.

36.00 Same creek 12 lks. wide runs N.W.

37.10 Same creek 12 lks. wide runs N.E.

38.60 Leave timber bears S.E. and S.W.

40.00 Set a sandstone 12 in. long, 8 in. wide, 6 in. thick, for quarter section corner.

50.32 A Drain washes S.E.

80.00 Set a sandstone 15 in. long, 12 in. wide, 4 in. thick, for corner to sections 21, 22, 27 and 28

Surface gently rolling - Soil 1st rate
Timber ~~Bur~~ oak, Elm, Mulberry and Box Elder
Undergrowth Same Plumb and Grape Vines.

- - - - - - - - - - - - - - - - - - - -

East on a random line between sections 22 & 27

Variation 10° 51' East

40.00 Set a stone for temporary quarter sec. corner.

Township 4 N. Range 5 E. of
6th Principal Meridian

53.00 Enter Bottom bears N.E. and S. West

80.00 Intersect N. and S. line 48 lks. North of the Corner to sections 22, 23, 26 and 27, from which corner I run

West on a true line between sections 22 and 27

Variation 10° 30' East

40.00 Set a sandstone, 15 in. long 12 in. wide 3 in. thick, for quarter sec. corner

80.00 The corner to sections 21, 22, 27 and 28

Surface gently rolling - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

North between sections 21 and 22

Variation 11° 00' East

40.00 Set a sandstone, 12 in. long, 9 in. wide, 5 in. thick for quarter sec. corner.

80.00 Set a sandstone 14 in. long, 9 in. wide, 4 in. thick, for corner to sections 15, 16, 21 & 22

Surface gently rolling - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

East on a random line between sections 15 and 22

Variation 10° 30' East

Township 4 N. Range 5 E. of
6th Principal Meridian

40.00 Set a stone for temporary quarter sec. corner.

80.21 Intersected N. and S. line 6 lks. South of the corner to sections 14, 15, 22 & 23, from which corner I run

West, on a true line between sections 15 and 22

Variation 10° 33' East

40.10 Set a sandstone 16 in. long, 10 in. wide, 4 in. thick, for quarter sec. corner

80.21 The corner to sections 15, 16, 21 & 22

Surface gently rolling - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

North, between sections 15 and 16.

Variation 11° 00' East

40.00 Set a sandstone 15 in. long, 10 in. wide, & 4 in. thick, for quarter sec. corner.

80.00 Set a sandstone 15 in. long, 9 in. wide, 5 in. thick, for corner to sections 9, 10, 15 & 16

Surface gently rolling - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

Township 4 N. Range 5 E. of
6th Principal Meridian

East on a random line between secs 10 and 15.

Variation 10° 33' East

40.00 Set a stone for temporary quarter sec. corner.

45.00 To bottom bears S.E.

80.40 Intersect N. and S. line 31 lks. North of the corner to secs. 10, 11, 14 & 15 from which corner I run

West, on a true line between sections 10 and 15

Variation 10° 20' East

40.20 Set a sandstone 18 in. long, 7 in. wide, 5 in. thick, for quarter sec. corner

80.40 The corner to sections 9, 10, 15 & 16

Surface gently rolling - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

North between sections 9 and 10

Variation 11° 00' East

40.00 Set a sandstone 14 in. long, 10 in. wide, 4 in. thick, for quarter sec. corner

56.30 A Ravine washes East

80.00 Set a sandstone 15 in. long, 12 in. wide, 3 in. thick, for corner to sections 3, 4, 9 and 10.

Township 4 N. Range 5 East of
6th Principal Meridian

Land level - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

East on a Random line between Secs 3 and 10.

Variation 10° 20' East

11.75 A Ravine washes S.E.

14.57 Same Ravine washes N.W.

40.00 Set a Stone for temporary quarter sec. corner

41.00 Same Ravine washes S.E.

80.33 Intersected N. and S. line 27 lks, South of the corner to sections 2, 3, 10 & 11, from which corner I run

West on a true line between secs 3 and 10

Variation 10° 32' East

40.16 Set a sandstone, 14 in. long, 10 in. wide, 4 in. thick, for quarter sec. corner.

80.33 The corner to sections 3, 4, 9 and 10

Land level - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

Township 4 N. Range 5 E. of
6th Principal Meridian.

North between sections 3 and 4

Variation 11° 00' East

4.76 A Ravine 20 lks. wide runs East

40.00 Set a sandstone 12 in. long, 12 in. wide, 4 in. thick for quarter sec. corner

77.69 Intersected 1st Parallel North 15.92 lks. West of the corner to secs 33 & 34 - Set a sandstone 16 in. long, 10 in. wide, 4 in. thick, for corner to secs 3 and 4

Land level - Soil 1st rate

July 12th 1857

- - - - - - - - - - - - - - - - - - - -

North between sections 32 and 33

Variation 11°30' East

40.00 Set a Red flint stone 14 in long, 10 in. wide, 4 in. thick, for quarter section corner

80.00 Set a sandstone, 16 in. long, 9 in. wide, 4 in. thick, for corner to sections 28, 29, 32 & 33

Surface rolling - Soil 2nd rate

- - - - - - - - - - - - - - - - - - - -

East, on a random line, between sections 28 & 33

Variation 11° 30' East

Township 4 N. Range 5 E. of
6th Principal Meridian

40.00	Set a stone for temporary quarter sec. corner.
49.15	A Branch with standing pools of water 12 lks. wide washes N.
80.00	Intersect N. and S. line 75 lks. North of the corner to sections 27, 28, 33 & 34, from which Corner I run
	West, on a true line between sections 28 and 33
	Variation 10° 58' East
40.00	Set a sandstone 17 in. long, 10 in. wide 4 in. thick, for quarter sec. corner
80.00	The Corner to sections 28, 29, 32 & 33
	Surface rolling - Soil 2nd rate
	- -
	North between sections 28 and 29
	Variation 11° 30' East
40.00	Set a sandstone 14 in. long, 10 in. wide, 4 in. thick, for quarter sec. corner
54.00	A Branch 8 lks. wide, runs East
80.00	Set a sandstone 17 in. long, 8 in. wide 8 in. thick, for corner to sections 20, 21, 28 and 29
	Surface gently rolling - Soil 1st rate

Township 4 N. Range 5 E. of
6th Principal Meridian

	East on a random line between secs 21 and 28
	Variation 11° 00' East
40.00	Set a stone for temporary quarter sec. corner
79.81	Intersected N. and S. line, 8 lks. North of the Corner to sections 21, 22, 27 & 28, from which corner I run
	West on a true line between sections 21 and 28
	Variation 10° 57' East
39.90	Set a sandstone, 14 in. long, 9 in. wide, 8 in. thick, for quarter sec. corner
79.81	The corner to sections 20, 21, 28 and 29
	Surface level - Soil 1st rate
	- -
	North between sections 20 and 21
	Variation 11° 00' East
40.00	Set a sandstone, 15 in. long, 10 in. wide, 4 in. thick, for quarter sec. corner
80.00	Set a sandstone 16 in. long, 8 in. wide, 4 in. thick, for corner to sections 16, 17, 20 & 21.
	Land level - Soil 1st rate

Township 4 N. Range 5 E. of
~~6th Principal Meridian~~

East on a random line between sections 16 and 21

Variation 11° 00' East

40.00 Set a stone for temporary quarter sec. corner.

80.02 Intersected N. and S. line, 25 lks. North of the corner to Sections 15, 16, 21 & 22, from which corner I run

West, on a true line between sections 16 and 21

Variation 10° 49' East

40.01 Set a Sandstone, 16 in. long, 9 in. wide, 6 in. thick, for quarter sec. corner

80.02 The corner to sections 16, 17, 20 & 21.

Surface level - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

North between sections 16 and 17

Variation 11° 00' East

40.00 Set a sandstone 12 in. long, 10 in. wide, 5 in. thick, for quarter sec. corner.

80.00 Set a sandstone, 20 in. long, 6 in. wide, 5 in. thick, for corner to sections 8, 9, 16 & 17.

Surface level, - Soil 1st rate

Township 4 N. Range 5 E. of
~~6th Principal Meridian~~

East on a random line between sections 9 and 16

Variation 11° 00' East

40.00 Set a stone for temporary quarter sec. corner

79.61 Intersected N. and S. line 8 lks. North of the Corner to secs. 9, 10, 15 and 16, from which corner I run

West on a true line between sections 9 and 16

Variation 10° 57' East

39.80 Set a sandstone, 12 in. long, 8 in. wide, 6 in. thick, for quarter sec. corner

79.61 The corner to sections 9, 10, 16 and 17

Surface level - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

North, between sections 8 and 9

Variation 11° 00' East

40.00 Set a sandstone, 12 in. long, 10 in. wide 6 in. thick, for quarter sec. corner.

80.00 Set a sandstone, 15 in. long, 9 in. wide, 5 in. thick, for corner to sections 4, 5, 8 & 9.

Land level - Soil 1st rate

Township 4 N. Range 5 E. of
6th Principal Meridian

East on a random line between sections 4 and 9

Variation 11° 00' East

40.00 Set a stone for temporary quarter sec. corner.

79.10 Intersected N. and S. line 12 lks. South of the corner to sections 3, 4, 9 & 10 from which corner I run

West, on a true line, between sections 4 and 9

Variation 11° 05' East

39.05 Set a sandstone 14 in. long, 8 in wide, 5 in. thick, for quarter sec. corner

79.10 The corner to sections 4, 5, 8 & 9

Surface level - Soil 1st rate

- - - - - - - - - - - - - - - - - - -

North between sections 4 and 5

Variation 11° 30' East

40.00 Set a sandstone 12 in. long, 10 in. wide, 5 in. thick, for quarter sec. corner

57.52 A Branch 8 lks. wide runs N.E.

78.20 Intersect 1st Parallel North 16.77 lks. West of the corner to sections 32 & 33 &
Set a sandstone 15 in. long, 10 in. wide, 4 in. thick, for corner to secs. 4 and 5

Township 4 N. Range 5 E. of
6th Principal Meridian

Surface level - Soil 1st rate

July 13th 1857

- - - - - - - - - - - - - - - - - - -

North between sections 31 and 32

Variation 11° 30' East

32.09 A Branch washes N.E. 8 links wide

40.00 Set a sandstone, 14 in. long, 9 in. wide, 5 in. thick, for quarter sec. corner.

42.50 Enter timber bears N.E. and S.W.

43.10 A Branch with standing pools 8 lks. wide washes N.W.

45.40 Same branch washes N.E. 8 lks. wide.

50.00 Same branch washes N.W.

51.00 Leave timber bears S.E. and N.W.

80.00 Set a sandstone 18 in. long, 8 in. wide, 5 in. thick, for corner to sections 29, 30, 31 and 32.

Land broken - Soil 2nd rate
Timber Bur oak and Elm.
Undergrowth same and Plumb

- - - - - - - - - - - - - - - - - - -

East on a random line between sections 29 and 32

Variation 11° 00' East

Township 4 N. Range 5 E. of
6th Principal Meridian

1.84 A Ravine washes South

40.00 Set a stone for temporary quarter sec. corner.

80.13 Intersected N. and S. line 7 lks. North of the corner to sections 28, 29, 32 & 33, from which corner I run

West on a true line between sections 29 and 32

Variation 10° 57' East

40.06 Set a Red flint stone, 26 in. long, 13 in. wide, 7 in. thick, for quarter sec. corner.

80.13 The corner to sections 29, 30, 31 and 32

Land broken - Soil 2nd rate

- -

West on a random line between sections 30 and 31

Variation 11° 00' East

36.00 Enter timber bears N.E. and S.E.

40.00 Set a stone for temporary quarter sec. corner.

44.28 A Ravine - with high banks runs N.

63.64 A creek 40 lks. wide runs N.

Township 4 N. Range 5 E. of
6th Principal Meridian

69.00 Leave timber bears N.W. & S.

74.91 Intersected West boundary of the Township 14 lks. South of the corner to secs. 30 & 31, from which corner I run

East, on a true line between sections 30 and 31

Variation 10° 54' East

34.91 Set a sandstone 14 in. long, 8 in. wide, 3 in. thick, for quarter sec. corner, from which

A Bur oak 17 in. diam, bears N. 29° W. 23 lks. distant.
An Elm 12 in. diam, bears S. 17° W. 50 lks. distant.

74.91 The corner to sections 29, 30, 31 and 32.

Surface broken - Soil good 2nd rate
Timber Bur oak, Elm, Hackberry and Black Walnut
Undergrowth same, Plumb and Hazle

- -

North between sections 29 and 30

Variation 11° 30' East

39.20 Enter timber, bears N.W. and S.E.

40.00 Set a sandstone, 24 in. long, 7 in. wide, 5 in. thick, for quarter sec. corner from which

A Bur Oak 18 in diam. bears S. 43° E 29 lks. distant

Township 4 N Range 5 E. of
6th Principal Meridian

A Bur Oak 20 in. diam. bears N. 59° W. 48 lks. distant.

40.45 A Ravine washes N.E.

55.00 A Ravine washes East

67.14 A Creek 17 lks. wide runs E.

70.00 Leave timber bears E. & West.

80.00 Set a sandstone 14 in. long, 10 in. wide, 4 in. thick, for corner to sections 19, 20, 29 & 30.

Surface broken - Soil good 2nd rate
Timber Bur oak, Elm, Black Walnut and Hickory
Undergrowth Plumb, Hazle and Grape Vines.

- - - - - - - - - - - - - - - - - - - -

East on a random line between sections 20 & 29

Variation 11° 00' East

40.00 Set a stone for temporary quarter sec. corner.

43.21 A Drain washes S.E.

80.18 Intersected N. and S. line 7 lks. North of the corner to sections 20, 21, 28 and 29, from which corner I run

West on a true ~~line~~ between sections 20 and 29

Township 4 N. Range 5 E. of
6th Principal Meridian

Variation 10° 57' East

40.09 Set a Sandstone 16 in. long, 10 in. wide, 4 in. thick, for quarter sec. corner

80.18 The corner to sections 19, 20, 29 & 30

Surface rolling - Soil 1st rate

- - - - - - - - - - - - - - - - - - - -

West on a random line between sections 19 and 30

Variation 11° 00' East

24.10 A Ravine washes S.E.

40.00 Set a stone for temporary quarter sec. corner.

74.80 Intersected West boundary of the township 19 lks.South of the corner to secs. 19 and 30, from which corner I run

East on a true line between sections 19 and 30

Variation 10° 52' East

34.80 Set a sandstone, 14 in. long, 12 in. wide, 3 in. thick, for quarter sec. corner.

74.80 The corner to sections 19, 20, 29 & 30.

Surface gently rolling - Soil 1st rate

Township 4 N. Range 5 E. of
6th Principal Meridian

North between secs. 19 and 20

Variation 11° 00' East

22.77 A Drain washes S.W.

40.00 Set a sandstone, 14 in. long, 10 in. wide, 4 in. thick, for quarter sec. corner.

80.00 Set a sandstone, 14 in. long, 8 in. wide, 5 in. thick, for corner to sections 17, 18, 19 & 20.

Surface gently rolling - Soil 1st rate

- -

East on a random line between sections 17 and 20

Variation 11° 00' East

40.00 Set a stone for temporary quarter sec. corner.

80.21 Intersected N. and S. line 27 lks. North of the corner to sections 16, 17, 20 & 21, from which corner I run

West on a true line between sections 17 and 20.

Variation 10° 48' East

40.10 Set a sandstone, 16 in. long, 8 in. wide, 5 in. thick, for quarter section corner

Township 4 N. Range 5 E. of
6th Principal Meridian

80.21 The corner to sections 17, 18, 19 and 20

Surface gently rolling - Soil 1st rate

- -

West on a random line between sections 18 and 19

Variation 11° 00' East

40.00 Set a stone for temporary quarter sec. corner.

74.42 Intersect West boundary of the Township 10 lks. S. of the corner to sections 18 & 19, from which corner I run

East on a true line between sections 18 and 19.

Variation 10° 56' East

34.42 Set a Red flint stone 16 in. long, 9 in. wide, 8 in. thick for quarter sec. corner.

74.42 The corner to sections 17, 18, 19 & 20

Surface gently rolling - Soil 1st rate

- -

North between sections 17 and 18

Variation 11° 00' East

40.00 Set a sandstone, 13 in. long, 9 in, wide, 8 in. thick, for quarter sec. corner.

Township 4 N. Range 5 E. of
6th Principal Meridian

80.00 Set a sandstone, 13 in. long, 11 in. wide, 4 in. thick, for corner to sections, 17, 18, 7 & 8.

Land level - Soil 1st rate

- - - - - - - - - - - - - - - - - -

East on a random line between sections 8 and 17

Variation 11° 00' East

40.00 Set a sandstone for temporary quarter sec. corner.

80.07 Intersected N. and S. line 14 lks. North of the Corner to sections 8, 9, 16 & 17, from which corner I run

West on a true line between sections 8 & 17.

Variation 10° 54' East

40.03 Set a Red flint stone, 14 in. long, 12 in. wide, 4 in. thick, for quarter sec. corner.

80.07 The corner to sections 7, 8, 17 & 18

Land gently rolling - Soil 1st rate

July 14th 1857

- - - - - - - - - - - - - - - - - -

Township 4 N. Range 5 E. of
6th Principal Meridian

West on a random line between sections 7 and 18.

Variation 11° 00' East

40.00 Set a Stone for temporary quarter sec corner.

74.64 Intersected the West boundary of the Township 14 lks. South of the Corner to sections 7 and 18, from which corner I run

East on a true line between sections 7 and 18.

Variation 10° 54' East

34.64 Set a Sandstone 14 in. long, 10 in. wide, 8 in. thick, for quarter sec. corner,

74.64 The corner to sections 7, 8, 17 and 18

Surface gently rolling - soil 1st rate

- - - - - - - - - - - - - - - - - -

North between sections 7 and 8

Variation 11° 00' East

40.00 Set a sandstone 19 in. long, 14 in. wide, 3 in. thick for quarter sec. corner.

80.00 Set a sandstone 15 in. long, 10 in. wide, 5 in. thick, for corner to secs. 5, 6, 7 & 8

Township 4 N. Range 5 E. of
6th Principal Meridian.

Surface rolling - Soil 1st rate

- - - - - - - - - - - - - - - - - - -

East on a random line between sections 5 and 8

Variation 11° 00' East

40.00 Set a stone for temporary quarter sec. corner.

79.76 Intersect N.and S. line 18 lks.South of the corner to secs. 4, 5, 8 & 9, from which corner I run

West on a true line between sections 5 and 8.

Variation 11° 05' East

39.88 Set a sandstone, 15 in. long, 9 in. wide, 5 in. thick, for quarter section corner,

79.76 The corner to sections 5, 6, 7 & 8

Land gently rolling - Soil 1st rate

- - - - - - - - - - - - - - - - - - -

West on a random line between sections 6 and 7

Variation 11° 00' East

4.20 A Drain washes N.E.

40.00 Set a stone for temporary quarter sec. corner.

Township 4 N. Range 5 E. of
6th Principal Meridian.

52.00 A Drain washes North

74.10 Intersected West boundary of the Township 60 links North of the corner to sections 6 & 7, from which corner I run

East on a true line between sections 6 and 7

Variation 11° 26' East

34.10 Set a sandstone 20 in. long, 8 in. wide, 3 in. thick for quarter sec. corner.

74.10 The corner to sections 5, 6, 7 & 8.

Surface gently rolling - Soil 1st rate

- - - - - - - - - - - - - - - - - - -

North between sections 5 and 6

Variation 11° 00' East

1.22 A Drain washes North

3.68 Same Drain turns N.W.

40.00 Set a sandstone, 18 in. long, 12 in. wide, 5 in. thick for quarter sec. corner.

47.32 A Drain washes N.E.

51.00 A Branch with standing pools washes E. 8 lks. wide.

78.74 Intersected 1st Parallel North 16.48 lks.

Township 4 N. Range 5 E. of
6th Principal Meridian

West of the corner to sections 31 & 32
Set a sandstone 23 in. long, 13 in. wide, 3 in. thick for corner to sections 5 and 6

Surface gently rolling - Soil 1st rate

July 15th 1857

- - - - - - - - - - - - - - - - - -

Township 4 N. Range 5 E. of
6th Principal Meridian

General Description.

The greater portion of land in this Township is of a superior quality and well suited for farming purposes also well watered by several small running streams. It contains about the avarage amount of timber growing principally on the banks of the creeks and Branches - consisting of the various kinds of Oak Black Walnut, Elm, Cottonwood and Box Elder. Stone suitable for building purposes is scarce.

- - - - - - - - - - -

List of Names.

A list of the names of the individuals employed to assist in running, measureing and marking the lines and corners described in the foregoing field Notes of Township No. 4 North of Ranges No 5 East of the 6th Principal Meridian, showing the respective capacities in which they acted;

Charles Hirl,	Chainman,
James D. Thompson,	Chainman,
Robert Armstrong,	Axeman,
John Nelson,	Flagman,
Felix G. Herbert,	Compassman.

Township 4 N. Range 5 E. of
6th Principal Meridian

Surveyor General's Office
Lecompton K. T.
25 Sep 1857

I certify that the foregoing transcript of the field notes of the survey of the subdivisional lines of Township number Four North, Range number Five East of the sixth Principal Meridian in the Territory of Nebraska, has been correctly copied from the original notes on file in this office.

J. Calhoun
Surveyor General.

Department of the Interior,
General Land Office,
Washington, D. C.
August 7, 1914.

I hereby certify that the annexed copy of the field notes of the survey of the subdivisional lines in Township 4 North, Range 5 East, Nebraska, is a true and literal exemplification of the official field notes which are in my custody in this office.

In Testimony Whereof I have hereunto subscribed my name and caused the seal of this office to be affixed, at the city of Washington, on the day and year above written.

(SEAL)

C. M. Bruce
Assistant Commissioner of the General Land Office.

Nebraska State Land Office.

Lincoln, Nebraska,
October 1, 1914.

I, Fred Beckmann, Commissioner of Public Lands and Buildings of the State of Nebraska, do hereby certify that the foregoing is a true exemplification of a photographic copy of the original notes of the subdivisional lines in fractional Township 2, Township 3 and 4, all North of the Otoe Indian Reservation in Range 5 East of the 6th Principal Meridian in Nebraska, as certified, August 7, 1914, by the Commissioner of the General Land Office at Washington, D. C., said photographic copies being on file on this office and numbered Vol. 155.

In Testimony Whereof, I have hereunto set my hand and affixed the Seal of this office at the City of Lincoln on the day and year above written.

Fred Beckmann
Commissioner of Public Lands and Buildings and Custodian of Government field notes of surveys in Nebraska.

By G. E. Emery
Deputy

General Land Office • Original Field Notes

Book Number

61

The images in this file are photographs of the notes of the original surveys of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The original surveys in Nebraska began in the mid 1850's and were completed in the mid 1880's. The Nebraska office of the Surveyor General was closed June 30, 1886.