General Land Office • Original Field Notes

Book Number

774

W.W. Alt - North & East bdy. T 22 N, South bdy. T 23 N, R 35 W

The images in this file are microfilm images of the notes of W.W. Alt resurveys of portions of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The W.W. Alt resurveys began in the mid 1890's and were completed in the early 1900's.

Duplicate

Ex OK. RH 7-8-1903

264

Excepting mineral

58493
1900

4—679.

Rec'd with letter from W. W. Alt. U.S. Surveyor, dated April 30, 1900.

FIELD NOTES

OF THE SURVEY OF THE

South Boundary T. 23 N.
North Boundary T. 22 N.
and The
East Boundary
of
Township No. 22 North
Range 35 West.

Of the 6th Principal Meridian,
State of Nebraska

AS SURVEYED BY

Willard W. Alt, United States ~~Deputy~~ Surveyor,

Under his Contract ~~No.~~ ——, dated April 17, 1899

Survey commenced June 9, 1899

Survey completed June 10, 1899

6—151

NAMES AND DUTIES OF ASSISTANTS.

Arthur H. Wielung, Chainman
Archie J. Stratton, "
Eugene C. Paine, Flagman
Daniel H Templeton, Monumenter

6—151

INDEX DIAGRAM.

Township 22 , *Range* 30

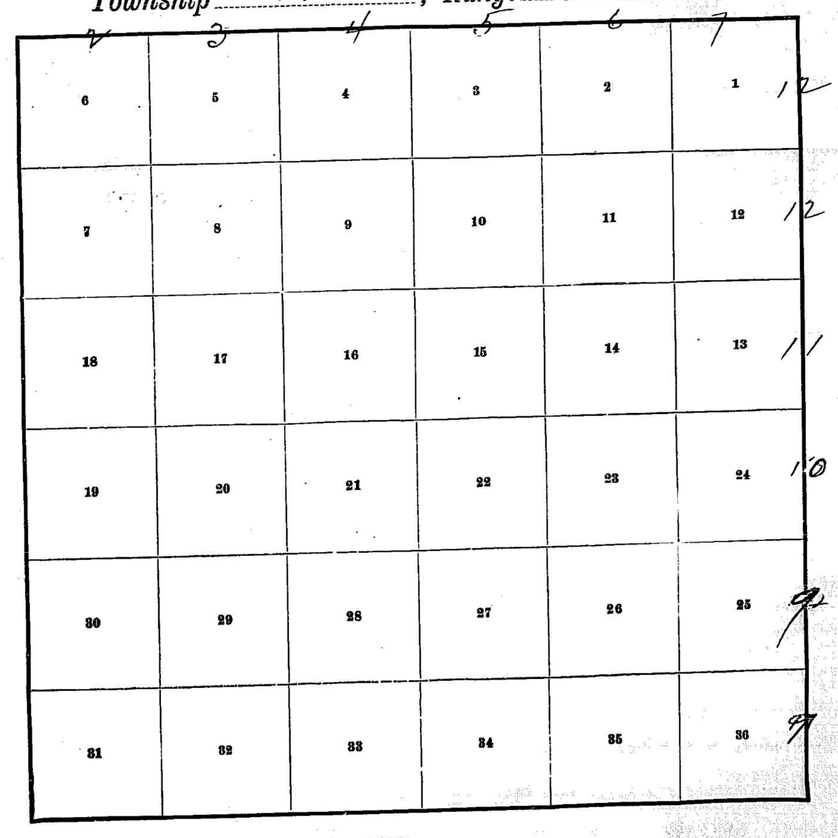

Meanders Page

6—151

PRELIMINARY OATHS OF ASSISTANTS.

We, ... and .....
do solemnly swear that we will well and faithfully execute the duties of chainmen; that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distances to all notable objects, and the true lengths of all lines that we assist in measuring, to the best of our skill and ability, and in accordance with instructions given us, in the survey of
.....

....., *Chainman.*

....., *Chainman.*

Subscribed and sworn to before me this .....
day of ....., 189

SEAL

We, ... and .....
do solemnly swear that we will well and truly perform the duties of moundmen in the establishment of corners, according to the instructions given us, to the best of our skill and ability, in the survey of
.....

....., *Moundman.*

....., *Moundman.*

Subscribed and sworn to before me this .....
day of ....., 189

SEAL

We, ... and .....
do solemnly swear that we will well and truly perform the duties of axmen in the establishment of corners and other duties, according to instructions given us, to the best of our skill and ability, in the survey of
.....

....., *Axman.*

....., *Axman.*

Subscribed and sworn to before me this .....
day of ....., 189

SEAL

I, ..., do solemnly swear that I will well and truly perform the duties of flagman according to instructions given me, to the best of my skill and ability, in the survey of .....

....., *Flagman.*

Subscribed and sworn to before me this .....
day of ....., 189

SEAL

South boundary T. 23 N. and
North boundary T. 22 N. Range 35 W.

Chains	
	Commence at the cor. of T. 22 and 23 N. R. 34 and 35 W, which is an Oak Post 4 ins. sq. 12 ins. above ground, marked T 23 N, S. 31 on NE. R 34 W, S. 6 on SE. T. 22 N S. 1 on SW and R. 35 W S. 36 on NW. Rides, with 6 notches on each edge — with pits 24 ins. sq dug on each line, NE and W, 4 ft. and S. of Post 8 ft. dist., with flat mound South of corner
	At this corner at 2:50 P.M. central Standard time, I observe Polaris at Eastern elongation in accordance with instructions in the manual, and ~~work~~ mark the line thus determined by tack in stake 2 chs. N. of corner.
	At 8:00 P.M. I lay off azimuth of Polaris 1°39' to the west, reverse telescope and mark the true meridian thus determined by a tack in stake firmly driven 8.30 chs. S. of corner.
	The magnetic bearing of the true meridian is N. 12°57' W., which reduced by the table on page 100 of the manual gives the mean magnetic declination 12°52' E.
	From the Township Cor. I run West on a random line bet. Secs. 1 and 36
39.84	Old 1/4 Sec. cor. on line
80.00	N. 1 lk from the tangent, set temp cor of Secs. 1 and 2.
	West on Random line through Sec. 2
0.18	The old cor. of Secs. 1, 2, 35 and 36, 3 lks. S.
40.30	Old 1/4 Sec. cor. 2 lks. N. of random
80.00	N. 3 1/2 lks. from tangent, set temp cor. of secs 2 and 3

South boundary T. 23 N. and
North boundary T. 22 N., R. 35 W.

Chains	
	West on Random line, through sec 3
0.44	Old cor. of secs. 2, 3, 34 and 35, 6 lks N.
40.48	Old 1/4 Sec. cor. 7 lks. S.
80.00	N. 8 1/4 lks. set temp cor. of secs. 3 and 4
	West on Random line through Sec 4.
0.78	Old cor. sec. 3, 4, 33 and 34, S. 19 lks from random
40.82	Old 1/4 Sec. cor. S. 22 lks. from random
80.00	N. 14 lks. from tangent, set. temp cor. secs. 4 and 5
	West on Random line through sec. 5
1.16	Old cor. Secs. 4, 5, 32 and 33, S. 28 lks from random
41.22	Old 1/4 Sec. cor. S. 35 lks from random
80.00	N. 23 lks. from tangent set. temp cor. of secs. 5 and 6
	West on random line through sec. 6
1.44	Old cor. of secs. 5, 6, 31 and 32, S. 44 lks. from random
41.52	Old 1/4 Sec cor. 43 lks. S of random
87.00	N. 33 lks. from tangent. set. temp. cor. of T. 22 and 23 N. R. 35 and 36. W. which falls N. 41 lks. from old cor. of T. 22 and 23, N. R 35 and 36 W.
	As the cor. of T. 22 and 23 N. R. 35 and 36 W is. S. 41 lks from random, and the old cor of secs. 5, 6, 31, and 32 is S, 43 lks from random — the true bearing of town line from Township cor. to cor. of secs 5, 6, 31, and 32 will be S. 89° 59' E.
	S. 89° 59' E., bet. secs. 6 and 31
	Along N. face hills.
1.50	Descend
20.10	Trail to Whitman at Bottom descent course N and S. over low hills
34.00	Ascend S.W. slope
45.48	Old 1/4 Sec. cor. which is flat mound with pits 18 ins. sq. dug 4 ft. E and W.

South boundary T. 23 N. and
North boundary T. 22 N., R. 35 W.

Chains	
	of cor — In E. pit there is a cedar stake 2 ins sq, firmly driven, marked 1/4 S. on N. side.
70.00	Top of ascent on S. face range.
80.00	Descend SE. face
85.58	Old cor. of secs. 5, 6, 31 and 32, which is a mound with pits 18 ins. sq. dug in each sec. 4 ft. dist. in SE pit I drove an Oak Stake 2 ft. long 2 ins. sq., marked T. 23 N.S. 32 on N.E. and R. 35 W.S. 31 on N.W. face with 5 notches on E. and 1 notch on W., for. cor. of secs. 31 and 32
87.00	Deposit charred stake 12 ins. in ground for. cor. secs. 5 and 6. dug pits 24 x 24 x 12 ins. in each sec. 4 ft. dist and raised a mound of earth 4 ft. base 2 ft. high overdeposit
	In NW. pit. drove an Oak stake 2 ft. long 2 ins. sq. 12 ins. in ground, marked T. 22 N.S. 5 on SE. and R. 35 W.S. 6 on NW. face with 5 notches on E. and 1 notch on W. edge
	As the old cor. of secs. 5, 6, 31 and 32 is S. 44 lks. from random line, and the old cor. of secs. 4, 5, 32 and 33 is. S. 28 lks. from the random line, the true bearing of town line from old cor. of secs. 5, 6, 31 and 32 to old cor. 4, 5, 32 and 33 will be N. 89° 53' E.
	N. 89° 53' E. on a true line bet. secs. 5 and 32
	Descend SE. face hills
10.00	Bottom over rolling ground
25.00	Ascend gently along N. slope
38.78	Old 1/4 Sec. cor. on line, which cor. is a flat mound with pits 18 ins. sq. dug 4 ft. E. and W. of cor. in E. pit there is a cedar stake 2 ins. sq. firmly driven marked 1/4 S. on N.E. side

South boundary T. 23 N. and
North boundary T. 22 N., R. 35 W.

chains.

51.00 Top of ascent, thence along N. slope low hills.

68.00 Descend slightly.

78.84 Old cor. secs. 4, 5, 32 and 33 – which is an oak post 4 ins. sq. 1 ft. above ground, with Pits 18 ins. sq. dug in each sec. 5½ ft dist. with a mound W. of cor. – I remark the post for cor. of secs. 32 and 33 – thus
T. 23 N.S. 33 on N.E.
R. 35 W. S. 32 on N.W. sides, with 4 notches on E. and 2 notches on W. edges.

80.00 Deposit charred stake 12 ins. in ground for. cor. of secs. 4 and 5. dug pits 24 x 24 x 12 ins. in each sec. 4 ft. dist. and raised a mound of earth 4 ft. base 2 ft. high, over deposit
In S.W. pit drove an Oak Stake 2 ft. long 2 ins sq. 12 ins. in ground, marked
T. 22 N.S. 4 on S.E. and
R. 35 W.S. 5 on S.W. sides, – with 4 notches on E and 2 notches on W. edge.

To the old cor. of secs. 4, 5, 32 and 33 is S 28 lks. from random line, and the old cor of secs. 3, 4, 33 and 34 is S. 19 lks. from random line – the true bearing of town line from cor. of secs. 4 and 5, to the old cor. of secs. 3, 4, 33 and 34 will be N. 89°56' E.
N. 89°56' E on a true line bet. secs. 4 and 33
Along N. slope low hills, over ridges

22.00 Ridge – ascend gently

39.16 Old ¼ Sec. cor. flat mound, with pits 18 ins. sq. E. and W. of cor. 4 ft. dist, with a cedar stake 2 ins. sq. firmly driven in E. pit. marked
¼ S. on N. face

67.00 Descend – over broken ridges

79.22 Old cor. of secs. 3, 4, 33 and 34, which is a mound, with pits 18 ins. sq. dug in each sec. 4 ft. dist – in SE pit. I drove an Oak stake 3 ft. long 2 ins. sq. marked
T. 23 N. S. 34 on N.E. and

South boundary T. 23 N. and
North boundary T. 22 N., R. 35 W.

chains

R. 35 W. S. 33 on N.W. faces, with 3 notches on E. and W. edges, for cor. of secs. 33 and 34

80.00 Deposit charred stake 12 ins in ground for cor. of secs. 3 and 4. dug pits 24 x 24 x 12 ins. in each sec. 4 ft. dist. and raised a mound of earth 4 ft. base 2 ft. high, over deposit
In S.W. pit drove an Oak Stake 2 ft. long 2 ins. sq. 12 ins. in ground, marked
T. 22 N.S. 3 on S.E. and
R. 35 W.S. 4 on S.W. faces, with 3 notches on E. and W. edges

---

As the old cor. of secs. 3, 4, 33 and 34 is S. 19 lks. from the random line and the old cor. of secs. 2, 3, 34 and 35 is 6 lks. North of the random line, the true bearing of the town line from cor. of secs 3 and 4 to the old cor. of secs. 2, 3, 34 and 35 will be N. 89°49' E. on true line bet. secs. 3 and 34
Ascend over ridges along N. slope hills

14.00 Top – thence along N. face hills.

39.52 Old ¼ Sec. cor. which is a mound with pits 18 ins. sq. dug E and W. 4 ft. dist. in the E. pit there is a cedar stake 2 ins. sq. firmly driven marked
¼ S. on N. face

45.00 Descend gradually S. W. slope

61.00 Bottom over rolling ground, on S. side valley

79.56 Old cor. of secs. 2, 3, 34 and 35 which is an Oak post 4 ins. sq. 12 ins. above ground with pits dug in each sec 5 ft. dist an flat mound W. of cor. I remark the post for. cor. of secs. 34 and 35, thus
T. 23 N.S. 35 on N.E. and
R. 35 W.S. 34 on N.W. faces, with 2 notches on E. and 4 notches on W. edges.

South boundary T. 23 N. and
North boundary T. 22 N., R. 35 W.

chains

80.00 Deposit charred stake 12 ins in the ground for cor. of secs 2 and 3, dug pits 24 x 24 x 12 ins. in each sec. 4 ft. dist. and raised a mound of earth 4 ft. base 2 ft. high, over deposit
In S.W. pit drove an Oak Stake 3 ft. long 2 ins. sq. 12 ins in the ground, marked T. 22 N.S. 2 on S.E. R. 35 W.S. 3 on S.W. faces with 2 notches on E. and 4 notches on W. edges.

As the old cor. of secs. 2, 3, 34 and 35 is N. 6 lks. from the random line and the old cor. of secs 1, 2, 35 and 36 S. 3 lks from the random line, the true bearing of the town line - from cor. of secs. 2 and 3 to the old cor. of secs. 1, 2, 35 and 36, will be S. 89° 56' E.
S. 89° 56' E. on a true line bet. Secs. 2 and 35
Over rolling ground
15.00 Ascend gently along N. slope low range of hills
39.70 Old 1/4 sec. cor. which is a mound with pits 18 ins. sq. dug E. and W 4 ft. - dist. with a cedar stake 2 ins. sq. firmly driven in E. pit, marked 1/4 D. on N. face
73.00 Top 50 ft. above valley, descend -
79.82 The old cor. of secs. 1, 2, 35 and 36 which is a mound, with pits 18 ins. sq. dug in each sec. 4 ft. dist. In the S.E. pit I drove an Oak stake 2 ft. long 2 ins. sq. marked for cor. of secs. 35 and 36 thus: -
T. 23 N.S. 36 on N.E. and
R. 35 W.S. 35 on N.W. faces, with 1 notch on E. and 5 notches on W. edge

---

80.00 Deposit a charred stake 12 ins. in the ground for cor. of secs. 1 and 2, dug pits 24 x 24 x 12 ins. in each sec. 4 ft. dist

South boundary T. 23 N. and
North boundary T. 22 N., R. 35 W.

chains.

and raised a mound of earth 4 ft. base 2 ft high over deposit
In S.W. pit drove an Oak Stake 3 ft. long 2 ins. sq. 12 ins. in the ground, marked T. 22 N.S. 1 on S.E. and R. 35 W.S. 2 on S.W faces with 1 notch on E. and 5 notches on W. edge.

As the old cor. of secs. 1, 2, 35 and 36 is S. 3 lks. from the random line, the true bearing of town line from cor. of secs 1 and 2 to cor. of T. 22 and 23 N., R. 34 and 35 W. will be N. 89° 59' E.
N. 89° 59' E. on a true line bet. secs. 1 and 36
Over ridges and ravines at foot of hills
25.00 Ascend along W. slope over ridges
39.84 Old 1/4 Sec. cor. which is a mound with pits 18 ins. sq. dug E. and W. of cor. 4 ft. dist. in the E. pit there is a cedar stake 2 ins. sq. firmly driven, marked 1/4 D. on N. face
73.00 Top. - over ridges and broken ground
Descending
80.00 Old cor. of T. 22 and 23 N. R. 34 and 35 West.
This line runs along slopes and top of rolling hills for its entire length
Soil Sandy 4th rate
Vegetation, Sand grass
June 9th 1899

East boundary T. 22 N., R. 35 W.

Chains	
	As the west boundary of this township is 482. 46 chs. and the bearing of North boundary N. 89°57' E. the theoretical length of east boundary will be 482.46 chs. + 41 lks = 482.87 therefore from the cor. of T. 22 and 23 N., R. 34 and 35, I run, S. on random line setting temporary corners as per. instructions.
	S. bet secs. 1 and 6 –
42.87	Set temp 1/4 Sec. cor.
82.87	Set. temp cor. of secs. 1, 6, 7 and 12
	S. bet. secs 7 and 12
40.00	Set. temp 1/4 Sec. cor.
80.00	Set. temp cor. of secs. 7, 12, 13 and 18
	S. bet. secs. 13 and 18
40.00	Set temp 1/4 Sec. cor.
80.00	Set. temp cor. of secs. 13, 18, 19 and 24
	S. bet. secs. 19 and 24
40.00	Set. temp 1/4 Sec. cor.
80.00	Set. temp cor. of secs. 19, 24, 25 and 30
	S. bet. secs. 25 and 30
40.00	Set temp 1/4 Sec. cor.
80.00	Set. temp cor. of secs 25, 30, 31, and 36
	S. bet. secs. 31 and 36
40.00	Set. temp 1/4 Sec. cor.
79.49	Intersect Desmal. River Correction Line at a point 7.20 chs. east of the temporary cor. T. 21 and 22 N., R. 34 and 35 W., where I Set an Oak post 3 ft. long 4 ins. sq. with charred stake 24 ins. in ground for cor. of

55'

East boundary T. 22 N., R. 35 W.

Chains	
	T. 21 and 22 N. R. 34 and 35 W., marked T. 22 N.S. 31 on N.E. R. 34 W.S. 6 on S.E. T. 21 N.S. 1 on S.W. and R. 35 W.S. 36 on N.W. sides with 6 notches on each edge. dug pits 24 x 24 x 12 ins. on each line N.E. and W. 4 ft. and S. of post 8 ft. dist. and raised a mound of earth 5 ft. base 2 1/2 ft. high S. of cor. The temporary corner should be moved North 51 lks.
	North bet. secs. 31 and 36
	Over rolling ground on W. face hills
37.00	Descend gently over ridges
40.00	Deposit charred stake 12 ins. in ground for 1/4 Sec. cor. dug pits 18 x 18 x 12 ins. N. and S. of cor. 4 ft. dist. and raised a mound of earth 3 1/2 ft. base 1 1/2 ft. high, over deposit. In S. pit drove an Oak Stake 2 ft. long 2 ins. sq. 12 ins. in the ground, marked 1/4 S. on W. face
78.00	Old river trail, course N.W. and S.E.
79.50	Deep ravine runs W. –
80.00	Deposit a charred stake 12 ins. in the ground for cor of secs. 25, 30, 31 and 36, dug pits 18 x 18 x 12 ins. in each sec. 4 ft. dist. and raised a mound of earth 4 ft. base 1 1/2 ft. high over deposit. In N.E. pit drove an Oak Stake 2 ft. long 2 ins. sq. 12 ins. in ground, marked T. 22 N.S. 30 on N.E. R. 34 W.S. 31 on S.E. S. 36 on S.W. and R. 35 W.S. 25 on N.W. sides with 1 notch on S. and 5 notches on N. edge –
	North bet secs 25 and 30
	Ascend gently over ridges
26.00	Top. thence along W. face hills.

East boundary T. 22 N. R. 35 W.

chains	
40.00	Deposit charred stake 12 ins. in the ground for 1/4 Sec. cor. dug pits 18x18x12 ins. N. and S. of cor. 4 ft. dist and raised a mound of earth 3 1/2 ft. base 1 1/2 ft. high over deposit. In S. pit drove an Oak Stake 2 ft. long 2 ins. sq. 12 ins. in the ground, marked 1/4 S. on W. face
45.00	Descend N.W. slope gradually
52.80	Old river trail course N.E. and S.W.
64.55	Dismal River, course E. 30 lks wide, ascend
67.00	River bluff 75 ft. above river, ascend gently
80.00	Set an Oak Post 3 ft. long 4 ins. sq. with charred stake 24 ins. in ground for cor of secs. 19, 24, 25 and 30 marked T. 22 N.S. 19 on N.E. R. 34 W.S. 30 on S.E. S. 25 on S.W. and R. 35 W., S. 24 on N.W. faces, with 2 notches on S. and 4 notches on edge. dug pits 18x18x12 ins. in each sec. 5 1/2 ft. dist. and raised a mound of earth 4 ft. base 2 ft. high W. of cor.

North bet. secs. 19 and 24
Over rolling hills.

29.00	Descend –
30.00	River trail course E. and W.
33.00	Descend river bank
38.40	"Bob Tail" creek E. from point 4 chs. west 4 lks. wide 6 in. deep. – over river bottom
40.00	Deposit charred stake 12 ins. in the ground for 1/4 Sec. cor. dug pits 18x18x12 ins. N. and S. of cor. 4 ft. dist and raised a mound of earth 3 1/2 ft. base 1 1/2 ft high, over deposit. In S. pit drove an Oak stake 2 ft. long 2 ins. sq. 12 ins. in the ground, marked 1/4 S. on W. face
	Ascend along S. face bluff abruptly
52.00	Top 100 ft. above river, over very broken ground
71.40	Descend along N.W. slope hills.

East boundary T. 22 N. R. 35 W.

chains.	
80.00	Deposit charred stake 12 ins. in the ground for cor. of secs. 13, 18, 19 and 24, dug pits 18x18x12 ins. in each sec. 4 ft. dist., and raised a mound of earth 4 ft base 2 ft. high over deposit. In S.E. pit drove an Oak stake 2 ft. long 2 ins. sq. 12 ins. in the ground, marked T. 22 N.S. 18 on N.E. R. 34 W.S. 19 on S.E. S. 24 on S.W. and R. 35 W.S. 13 on N.W. sides, with 3 notches on N. and S. edges

North bet. secs. 13 and 18
Descend along N.W. slope gradually

40.00	Deposit charred stake 12 ins. in ground for 1/4 Sec. cor., dug pits 18x18x12 ins. N. and S. of cor. 4 ft. dist. and raised a mound of earth 3 1/2 ft. base 1 1/2 ft. high over deposit. In S. pit drove a cedar stake 2 ft. long 2 ins. sq. 12 ins. in the ground, marked 1/4 S. on W. face.
50.00	Bottom of descent, in neck of valley – ascend
54.00	Top of low hills, over rolling ground
73.50	Descend gently
80.00	Set an Oak Post 3 ft. long 4 ins. sq. with charred stake 24 ins. in ground for cor. of secs. 7, 12, 13 and 18, marked T. 22 N.S. 7 on N.E. R. 34 W.S. 18 on S.E. S. 13 on S.W. and R. 35 W.S. 12 on N.W. faces. with 4 notches on S. and 2 notches on N. edges. dug pits 18x18x12 ins. in each sec. 5 1/2 ft. dist. and raised a mound of earth 4 ft. base 2 ft. high, west of corner

East boundary T. 22 N. R. 35 W.

Chains.	
	North bet. secs. 7 and 12
	Descend gently
10.00	Bottom descent, in narrow valley
18.00	Ascend, abrupt S. slope
29.00	Top. over rolling ground
40.00	Deposit charred stake 12 ins. in ground for 1/4 Sec. Cor. dug pits 18×18×12 ins. N and S. of cor. 4 ft. dist. and raised a mound of earth 3 1/2 ft. base 1 1/2 ft. high over deposit. In S. pit drove an Oak Stake 2 ft. long 2 ins. sq. 12 ins. in the ground, marked 1/4 S. on W. face
58.00	Descend N. slope gradually
80.00	Deposit charred stake 12 ins. in the ground for. cor. of secs. 1, 6, 7 and 12, dug pits 18×18×12 ins. in each sec. 4 ft. dist. and raised a mound of earth, 4 ft. base 2 ft. high, over deposit. In S.E. pit drove an Oak Stake 2 ft. long 2 ins. sq. 12 ins. in the ground, marked T. 22 N.S. 6 on N.E. R. 34 W.S. 7 on S.E. S. 12 on S.W. and R. 35 W.S. 1 on N.W. sides with 5 notches on S. and 1 notch on N. edge.

	North bet. secs. 1 and 6.
	Descend gently
10.00	Bottom descent in neck of valley, ascend
26.00	Top over low hills
30.00	Descend over low hills
40.00	Deposit a charred stake 12 ins. in ground for 1/4 Sec. cor. dug pits 18×18×12 ins. N. and S. of cor. 4 ft. dist. and raised a mound of earth, 3 1/2 ft. base 1 1/2 ft. high over deposit. In S. pit drove a Cedar stake 2 ft. long 2 ins. sq. 12 ins. in the ground, marked 1/4 S. on W. face

East boundary T. 22 N. R. 35 W.

Chains.	
52.00	Bottom of descent in neck of valley E. and W. Ascend gently over ridges
65.30	Top of ascent – on ridge Over rolling ground
74.00	Descend
82.36	Cor. of T. 22 and 23 N., R. 34 and 35 W.

The entire length of this line passes over a very broken country, consisting of an irregular series of sand ridges and hills. The vegetation consists of a light groth of sand grass – with scattering groth of plum bushes on Dismal River and "Bob Tail" Creek.

Soil, Sandy 4th rate

Boundaries of T. 22 N. R. 35 W.

Lines Designated	True Bearing	Distance	Latitude N.		Latitude S.		Departure E.		Departure W.	
Dismal River Correction Line	W –	487.20							487	20
West boundary	N.	482.46	482	46						
North boundary	N. 89 57 E (5-5)	487.00		70 41			487	00		
East boundary	South	482.36			482	36				
Convergency							0	65		
			482	3 16 87	482	36	487	65	487	20 # 80 lbs
			482	36			487	20		
Error in Latitude			0	80 51						
Error in Departure							0	45		

June 10th 1899

William W. Alt
U. S. Surveyor

FINAL OATHS OF DEPUTY SURVEYOR AND HIS ASSISTANTS.

LIST OF NAMES.

A list of the names of the individuals employed by .....

....., United States Deputy Surveyor, to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of .....

.....

showing the respective capacities in which they acted:

....., *Chainman.*

....., *Chainman.*

....., *Moundman.*

....., *Moundman.*

....., *Axman.*

....., *Axman.*

....., *Flagman.*

FINAL OATH OF ASSISTANTS.

We hereby certify that we assisted .....

....., United States Deputy Surveyor, in surveying all those parts or portions of the .....

.....

.....

..... of the .....

..... meridian, ... of ....., which are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the United States Surveyor General for .....

....., *Chainman.*

....., *Chainman.*

....., *Moundman.*

....., *Moundman.*

....., *Axman.*

....., *Axman.*

....., *Flagman.*

.....

Subscribed and sworn to before me this .....
day of ....., 189

SEAL

.....

.....

6—151

774

2/13r

16/283

FINAL OATH OF UNITED STATES DEPUTY SURVEYOR.

I, ..., United States Deputy Surveyor, do solemnly swear that, in pursuance of a contract received from ..... United States Surveyor General for ....., bearing date of the ..... day of ....., 189 , I have well, faithfully, and truly, in my own proper person, and in strict conformity with the instructions furnished by the United States Surveyor General for ....., the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of .....

.....

.....

.....

..... of the .....

..... meridian, in the ..... of ....., which are represented in the foregoing field notes as having been surveyed by me, and under my direction; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the United States Surveyor General for ..... and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey; and should any fraud be detected, I will suffer the penalty of perjury under the provisions of an Act of Congress approved August 8, 1846.

.....

United States Deputy Surveyor.

Subscribed by said ....., and sworn to before me this ..... day of ....., 189

SEAL

.....

.....

APPROVAL.

General Land OFFICE OF THE UNITED STATES ~~SURVEYOR GENERAL~~,

Nash W.C. June 30, 1900, ~~189~~

The foregoing field notes of the survey of South Boundary T 23 N. of North Boundary T 22 N. and the East Boundary of Township No. 22 North, Range 35 West

executed by Willard H. Alt, U.S. Surveyor under his contract No. —, dated April 17, 1899, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Bragg Hermann

~~United States Surveyor General.~~

Commissioner and ex-officio Surveyor General for Nebraska

I ~~certify that the foregoing transcript of the field notes of the above described surveys in~~ ....., has been correctly copied from the original notes on file in this office.

.....

United States Surveyor General.

6—151

General Land Office • Original Field Notes

Book Number

774

W.W. Alt - North & East bdy. T 22 N, South bdy. T 23 N, R 35 W

The images in this file are microfilm images of the notes of W.W. Alt resurveys of portions of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The W.W. Alt resurveys began in the mid 1890's and were completed in the early 1900's.