General Land Office • Original Field Notes

Book Number

775

W.W. Alt - East & North boundaries T 23 N, R 39 W

The images in this file are microfilm images of the notes of W.W. Alt resurveys of portions of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The W.W. Alt resurveys began in the mid 1890's and were completed in the early 1900's.

"Duplicate" X

(4—679.)

Received with letter from W. W. Alt, U.S. Surveyor, dated Sept 13, 1896 - 98725 - '96

FIELD NOTES

OF THE SURVEY OF

East and North Boundaries

of

Township 23 N., Range 39 W.

Of the 6th Principal Meridian,

State of Nebraska

AS SURVEYED BY

Willard W. Alt, United States Deputy Surveyor,

Under his Contract ~~No.~~ , dated December 26, 1894

Survey commenced September 30, 1895.

Survey completed October 1, 1895.

(1319—2,500.)

Names and Duties of Assistants.

Clarence P. Haggard, Chainman
Sidney Stout, Chainman
Theodore Needham, Flagman
James C. Rosengren, Monumentman

INDEX DIAGRAM.

Township 22 Extens. . Range 3 9 W.

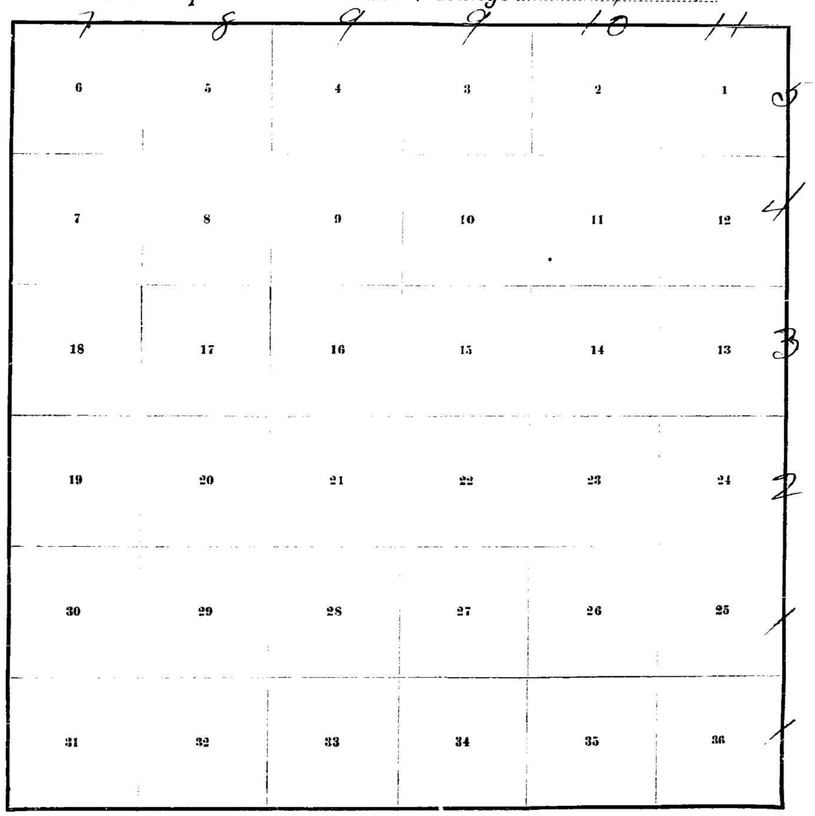

Meanders Page

6—151

203

Preliminary Oaths of Assistants.

We, ... and .....
do solemnly swear that we will well and faithfully execute the duties of chainmen; that we will level the chain upon even and uneven ground, and plumb the tally pins either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true lengths of all lines that we assist in measuring, to the best of our skill and ability, and in accordance with instructions given us in the survey of

.....

..... , *Chainman.*

..... , *Chainman.*

Subscribed and sworn to before me this .....
day of ....., 189 .

SEAL

.....

.....

We, ... and .....
do solemnly swear that we will well and truly perform the duties of moundmen in the establishment of corners, according to the instructions given us, to the best of our skill and ability, in the survey of .....

.....

..... , *Moundman.*

..... , *Moundman.*

Subscribed and sworn to before me this .....
day of ....., 189 .

SEAL

.....

We, ... and .....
do solemnly swear that we will well and truly perform the duties of axmen in the establishment of corners and other duties, according to instructions given us, to the best of our skill and ability, in the survey of

.....

..... , *Axman.*

..... , *Axman.*

Subscribed and sworn to before me this .....
day of ....., 189 .

SEAL

.....

I, ..., do solemnly swear that I will well and truly perform the duties of flagman according to instructions given me, to the best of my skill and ability in the survey of .....

.....

..... , *Flagman.*

Subscribed and sworn to before me this .....
day of ....., 189 .

SEAL

.....

.....

1.
204

East boundary T. 28 N., R. 39 W.,

Chains.	
	From the Cor. of Tps. 27 and 28 N., Rs. 38 and 39 W., and the Meridian established September 21 st. I run
	North bet. Secs. 31 and 36.
	Over lowland
18.64	Trail E. and W.
70.00	Foot of range of Sand Hills, Course E. and W. ascend.
40.00	Deposit a charred stake 1 x 1 ins in the ground for 1/4 Sec. Cor. dug pits 18 x 18 x 12 ins. N and S. of Cor. 4 ft. dist. and raised a mound of earth 3 1/2 ft. base 1 1/2 ft. high, over deposit.
	I ran S. pit drove an Oak stake 2 ft. long 2 ins. sq., 1 x ins. in the ground, marked
	1/4 S. on W. face
	ascend over rolling ground
45.00	Top of range 75 ft. above Valley, Course E. and W., descend
48.50	Descend over rolling foot hills.
80.00	Deposit a charred stake 1 ins. in the ground for Cor. of Secs. 25, 30, 31 and 36, dug pits 18 x 18 x 12 ins. in each Sec. 4 ft. dist. and raised a mound of earth, 4 ft. base 2 ft. high, over deposit
	I run S.E. pit drove an Oak stake 2 ft. long 1 ins. sq., 1 2 ins. in the ground, marked
	T 28 N., S. 30 on N.E.,
	R. 38 W., S. 31 on S.E.,
	S. 36 on S.W., and
	R. 39 W., S. 25 on N.W. faces, with 1 notch on S. and 5 notches on W. Edges
	Land, level and broken
	Soil, sandy 1st and 3rd rate.
	Prairie and bunch grass.
	North bet. Secs. 25 and 30.
	Over rolling foot hills.
6.00	Enter neck of Valley, extends to West.
70.72	Trail, course E. and W.
24.00	Foot of range of hills, Course N. 85° W., S. 80° E., ascend gradually.
40.00	Deposit a charred stake 1 ins. in the ground for 1/4 Sec. Cor., dug pits 18 x 18 x 12 ins. N. and S. of Cor., 4 ft. dist and raised a mound of earth, 3 1/2 ft.

E. boundary T. 23 N. R. 39 W. Continued.

Chains.	
	base 1½ ft. high, over deposit
	In S. pit drove an Oak stake 2 ft. long 2 ins. sq., 12 ins. in the ground, marked
	¼ S. on W. face
42.00	Top of range course E. and W., 70 ft. above valley
46.00	Begin descent along N. slope
64.20	Trail to Hyannis, Course N. 60° E., S. 60° W.,
65.53	Wire fence, course S. 70° W., N. 70° E.,
73.00	Enter Valley, Course E. and W.,
80.00	Set an Oak Post 3 ft. long, 4 ins. sq., with charred stake 24 ins. in the ground, for Cor. of Secs. 19, 24, 25 and 30, marked
	T. 23 N., S. 19 on N.E.,
	R. 38 W., S. 30 on S.E.,
	S. 25 on S.W., and
	R. 39 W., S. 24 on N.W. faces, with 2 notches on S. and 4 notches on N. Edges, dug pits 18×18×12 ins. in each Sec. 5½ ft. dist. and raised a mound of earth 4 ft. base 2 ft. high, W. of Cor.,
	Land, level and rolling.
	Soil, Sandy 2nd and 3rd rate.
	Sand and Bunch grass.

North bet. Secs. 19 and 24 –
Over level land

6.00	S. Edge of Slough, course E. and W.,
16.50	N. Edge of Slough, Extends to W. about ½ mile and to the East about 6 chains.
20.00	Foot of range of sand hills, Course E. and W., ascend abruptly.
31.60	Top of abrupt ascent 75 ft. above Valley, thence ascend along S.W. face over broken ground. –
40.00	Deposit a charred stake 2 ins. in the ground for ¼ Sec. Cor., dug pits 18×18×12 ins., N. and S. of Cor., 4 ft. dist. and raised a mound of earth 3½ ft. base 1½ ft. high, over deposit.
	In S. pit drove an Oak stake 2 ft. long 2 ins. sq., 12 ins. in the ground, marked
	¼ S. on W. face
42.75	Wire fence. Course N. 40° W. S. 40° E.,
48.00	Top of range 150 ft. above Valleys, Course N. 70° E. S. 70° W.

E. boundary T. 23 N. R. 39 W. Continued

Chains.	
49.83	Wire fence – E. and W. descend along
49.83	N.E. slope
77.00	Bottoms descent in ravine course N.W. and S.E.
77.50	Ascend gently along S.W. slope
80.00	Deposit a charred stake 12 ins. in the ground for Cor. of Secs. 13, 18, 19 and 24, dug pits 18×18×12 ins. in each Sec. 4 ft. dist., and raised a mound of earth 4 ft. base 2 ft. high, over deposit
	In S.E. pit drove an Oak Stake 2 ft. long 2 ins. sq. 12 ins. in the ground, marked
	T. 23 N., S. 18 on N.E.
	R. 38 W., S. 19 on S.E.,
	S. 24 on S.E., and
	R. 39 W., S. 13 on N.W. faces, with 3 notches on N. and S. edges
	Land level – and Broken Bluffs – Sand Hills
	Soil, Sandy 1st and 3rd rate
	Prairie, plough, and Bunch grass

North bet. Secs. 13 and 18
Ascend slightly, along S.W. slope

6.00	Top of ascent 16 above cor. descend gently,
35.00	Enter level ground – E. and W.
40.00	Deposit a charred stake 12 ins. in the ground for ¼ Sec. cor. dug pits 18×18×12 ins. N. and S. of cor. 4 ft. dist. and raised a mound of earth 3½ ft. base 1½ ft. high over deposit
	In S. pit drove an Oak Stake 2 ft. long 2 ins. sq. 12 ins. in the ground, marked
	¼ S. on N. face
	Mark Mangan's Sod house bears S. 58° W. about 10 chains
44.00	Foot of range – course N. 70° E. S. 70° W. ascend abruptly along S.E. slope
59.00	Top of abrupt ascent 100 ft. high – ascend along S.E. face
61.23	Wire fence S 70° W. N. 70° E.
65.00	Top of ascent 150 ft. high descend over broken ground
77.00	Descend over rolling ground along N. slope
80.00	Set an Oak Post 3 ft. long 4 ins. sq. with charred

E. boundary T. 23 N. R. 39 W. Continued

Chains.	
	stake, 24 ins. in the ground for cor. of Secs. 7, 12, 13, and 18 marked, T. 23 N. S. 7 on N. E. R. 38 W, S. 18 on S. E. S. 13 on S. W. and R. 39 W. S. 12 on N. W. faces, with 4 notches on S. and 2 notches on N. edges, dug pits 18×18×12 ins. in each Sec. 5½ ft. dist. and raised a mound of earth 4 ft. base 2 ft. high W. of cor.
	Land level and Broken Sand hills
	Soil, Sandy 2nd and 3rd rate
	Sand grass and Bunch grass
	North bet. Secs. 7 and 12
	Descend along N. slope through ravine
18.60	Wire fence course N. 50° W., S. 50° E.
23.00	Enter level land course E. and N. Wet Valley,
40.00	Deposit a charred stake 12 ins. in the ground for ¼ Sec. cor. dug pits 18×18×12 ins. N. and S. of cor. 4 ft. dist and raised a mound of earth 3½ ft. base 1½ ft. high over deposit
	5w S. pit drove an Oak Stake 2 ft. long 2 ins. sq. 12 ins. in the ground, marked ¼ S. on W. face
44.00	Foot of range course E. and N. ascend over rolling land
66.00	Top of range " " " 50 ft. high
66.63	Wire fence East and West
67.50	Began descent along N. slope over rolling ground
80.00	Deposit a charred stake 12 ins. in the ground for cor. of Secs. 1, 6, 7 and 12 dug pits 18×18×12 ins. in each Sec. 4 ft. dist. and raised a mound of earth 4 ft. base 2 ft. high over deposit
	5w S.E. pit drove an Oak stake 2 ft. long 2 ins. sq. 12 ins. in the ground marked T. 23 N., S 6 on N.E. R. 38 W. S. 7 on S.E. S. 12 on S. W. and R. 39 W. S. 1 on N. W. faces, with 5 notches on S. and 1 notch on N. edges
	Land level and Rolling - Sand hills
	Soil, Sandy 1st and 3rd rate

E. boundary T. 23 N., R. 39 W., Concluded

Chains.	
	Heavy prairie grass and bunch grass.
	North bet. Secs. 1 and 6.
	Descend over rolling foot hills sloping to N.W.
10.70	Bottom descent, in ravine, Course W. ascend along S.W. slope.
25.00	Trail to Hyannis Course E. and W.
30.00	Begin ascent along S. slope of range
40.00	Deposit a charred stake 12 ins. in the ground for ¼ Sec. Cor., dug pits 18×18×12 ins. N. and S. of Cor. 4 ft. dist. and raised a mound of Earth 3½ ft. base 1½ ft. high, over deposit
	Ascend along S. E. slope
44.00	Top of ascent 75 ft. above Valley, thence along E. face of bluffs over broken ground.
65.00	Top of range 100 ft. above Valley, Course E. and W.
66.50	Begin descent along N. slope.
75.00	Bottom of descent, thence over rolling ground
79.50	Trail to Hyannis S. 80° E., N. 80° W.
80.00	Set an Oak Post 3 ft. long 4 ins. sq. with marked stone 24 ins. in the ground. for Cor. of Tps. 22 and 24 N., Rs. 38 and 39 W, marked T. 24 N. S. 31 on N.E., R. 38 W, S. 6 on S.E., T. 23 N., S. 1 on S.W., and R. 39 W., S. 36 on N.W. faces, with 6 notches on Each edge, dug pits 24×24×12 ins. on Each line N., E. and W. 4 ft., and S. of post 8 ft. dist. and raised a mound of Earth, 5 ft. base 2½ ft. high S. of Cor.
	Land rolling sand hills.
	Soil, Sandy 3rd rate.
	Bunch and sand grass
	From this Cor., B. and M. R. R., Wind Mill bears S. 85°15' E.,
	N. P. Dillingers frame house bears N. 26°40' E.,
	September 30, 1895.

Start

End

N. boundary T. 23 N. R. 39 W.

Chains. At the Cor. of Tps. 23 and 24 N. Rs. 38 and 39 W. I turn an angle of 90° from Range line, from the South to the West, and run

Through Sec. 1.

West on the tangent.

40.00 N. ¼ lk. from the tangent, set temp. ¼ Sec. Cor.
80.00 N. 1 lk. from " " " " Cor. of Secs. 1, 2, 35 and 36.

Through Sec. 2.

S. 89° 59' W. on the tangent

40.00 N. 2½ lks. from the tangent, set temp. ¼ Sec. Cor.
80.00 N. 3½ lks. " " " " Cor. of Secs. 2, 3, 34 and 35.

September 30. 1895.

Through Sec. 3.

S. 89° 58' W. on the tangent

40.00 N. 6 lks. from the tangent, set temp. ¼ Sec. Cor.
80.00 N. 8¼ lks. " " " " Cor. of Secs. 3, 4, 33 and 34.

Through Sec. 4.

S. 89° 58' W. on the tangent

40.00 N. 11 lks. from the tangent, set temp. ¼ Sec. Cor.
80.00 N. 14 lks. " " " " Cor. of Secs. 4, 5, 32 and 33.

Through Sec. 5.

S. 89° 57' W. on the tangent

40.00 N. 18¼ lks. from the tangent, set temp. ¼ Sec. Cor.
80.00 N. 23 lks. " " " " Cor. of Secs. 5, 6, 31 and 32.

Through Sec. 6.

S. 89° 56' W. on the tangent

40.00 N. 27¼ lks. from the tangent, set temp. ¼ Sec. Cor.
80.50 N. 33 lks. from the tangent, set temp. Cor. of Tp., which falls 108 links N. of Cor. of Tps. 23 and 24 N.

N. boundary T. 23 N. R. 39 W. Continued

Rs. 39 and 40 W.

Therefore the true course is N. 89° 57' E., and the permanent corners will be set S. from the random line by offsets, decreasing 9 links per half mile."

October 1 - 1895.

Boundaries of T. 23 N. R. 39 W.
Latitudes, Departures and Closing Errors.

Lines Designated	True Bearing.	Distance.	Latitude		Departure.	
			N.	S.	E.	W.
		Chs.	Chs.	Chs.	Chs.	Chs.
South boundary	S. 89° 53' W.	481.04		0.96		481.04
West boundary	North	480.00	480.00			
North boundary	N. 89° 57' E.	480.50	1.08		480.50	
East boundary	South	480.00		480.00		
Convergency					0.65	
Totals			481.08	480.96	481.15	481.04
			480.96		481.04	
Error in Latitude - -			- 0.12			
Error in Departure - - - - -					- 0.11	

Chains.

Thence from
North 89° 52' E. Set Secs. 6 and 31.
Descend gently along N.E. slope

4.00 Bottom descent, in neck of basin, extends to N.
17.00 Begin ascent over rolling foot hills.
31.00 Top of ascent 30 ft. above basin, thence over broken foot hills.
40.50 Deposit a charred stake 1 x 1 ins. in the ground for ¼ Sec. Cor. dug pits 18 x 18 x 12 ins. E. and W. of Cor., 4 ft dist. and raised a mound of earth 3½ ft. base 1½ ft. high over deposit
On E. pit drove an Oak stake 2 ft. long 2 ins. sq., 12 ins. in the ground, marked ¼ S. on N. face.
45.00 Begin gentle descent over low ridges.
63.90 Trail, Course N. 10° W., S. 10° E., at bottom descent, ascend along S.W. slope over rolling ground.
78.00 Top of ascent 40 ft. above ¼ Cor. on S. slope of range

N. Boundary T. 23 N., R. 39 W., Continued.

Chains.

80.50 ⊙ Deposit a charred stake 1 2 ins. in the ground for Cor. of Secs. 5, 6, 31 and 32, dug pits 18 x 18 x 12 ins. in each Sec., 4 ft. dist. and raised a mound of earth 4 ft. base 1 ft. high, over deposit.

In S.E. pit drove an Oak stake 2 ft. long 2 ins. sq., 12 ins. in the ground, marked.

T. 24 N., S. 32 on N.E.,

R. 39 W., S. 5 on S.E.,

T. 23 N., S. 6 on S.W., and

S. 31 on N.W. faces, with 5 notches on E., and 1 notch on W. Edges.

Land, level and rolling

Soil, Sandy 3rd. rate.

Sand and bunch grass.

N. 89° 57' E. bet. Secs. 5 and 32.

Ascend along S.W. slope, gently.

87.00 Top of ascent 9 ft. above Cor. descend along S.E. slope.

90.00 Enter rolling Valley land. Course N. 70° E., S. 70° W.,

39.00 Trail to Hyannis. Course N. 70° E. S. 70° W.

40.00 Deposit a charred stake 1 2 ins. in the ground for 1/4 Sec. Cor., dug pits 18 x 18 x 12 ins. E. and W. of Cor. 4 ft. dist. and raised a mound of earth 3½ ft. base 1½ ft. high over deposit.

In S.E. pit drove an Oak stake 2 ft. long 2 ins. sq., 12 ins. in the ground, marked

1/4 S. on N. face

S.S. Sears Frame House, bears N. 77° 05' E.,

Over level land.

80.00 Set an Oak Post 3 ft. long 4 ins. sq., with charred stake 24 ins in the ground for Cor. of Secs. 4, 5, 32 and 33, marked

T. 24 N., S. 33 on N.E.,

R. 39 W., S. 4 on S.E.,

T. 23 N., S. 5 on S.W. and

S. 32 on N.W. faces., with 4 notches on E., and 4 notches on W. Edges. dug pits 18 x 18 x 12 ins. in each Sec. 5½ ft. dist. and raised a mound of earth, 4 ft. base 2 ft. high, W. of Cor.

S.S. Sears Frame House bears N. 79° 10' W.,

Land, level and rolling -

Soil, Sandy 2nd and 3rd rate. - Prairie and Sand grass.

N. boundary T. 23 N., R. 39 W. continued

Chains.

N. 89° 57' E. bet. Secs. 4 and 33

Over rolling valley.

10.00 Begin gentle ascent along N. slope

37.40 Wire fence course N. and S.

35.00 Top of ascent 56 high - fence over rolling ground

40.00 Deposit a charred stake 1 2 ins. in the ground for 1/4 Sec. Cor. dug pits 18 x 18 x 12 ins. E. and W. of cor. 4 ft. dist. and raised a mound of earth 3½ ft. base 1½ ft. high over deposit

In E. pit drove an Oak stake 2 ft. long 2 ins. sq. 12 ins in the ground marked

1/4 S. on N. face

Along S. face, range over rolling ground

58.00 Begin descent along S.E. face over broken ground

71.60 Sand Peak or bluff 16 high

80.00 Deposit a charred stake 1 2 ins. in the ground for cor. of Secs. 3, 4, 33 and 34, dug pits 18 x 18 x 12 ins. in each Sec. 4 ft. dist. and raised a mound of earth 4 ft. base 2 ft. high over deposit.

In S.E. pit drove an Oak stake 2 ft. long 2 ins. sq. 12 ins. in the ground marked

T. 24 N. S 34 on N.E.

R. 39 W., S 3 on S.E.

T. 23 N., S. 4 on S.W. and

S. 33 on N.W. faces with 3 notches on E. and W. edges

Land, level and rolling sand hills

Soil Sandy 2nd and 3rd rate

Thin Prairie grass and Bunch grass

N. 89° 57' E. bet. secs. 3 and 34

Ascend gently along S. face low range over broken ground

35.00 Top of ascent 60 on S. face range - descend along E. slope

40.00 Deposit a charred stake 1 2 ins. in the ground for 1/4 sec. cor. dug pits 18 x 18 x 12 ins. E. and W. of cor. 4 ft. dist. and raised a mound of earth 3½ ft. base 1½ ft. high over deposit

In E. pit drove an Oak stake 2 ft. long 2 ins sq. 12 ins. in the ground marked

1/4 S. on N. face

Over rolling ground, in neck of Valley extends to N.

40.60 Trail to Hyannis Course N. and S.

N. boundary T. 23 N. R. 34 W. continued

Chains	
42.50	Begin ascent along N.W. slope
58.00	Top of ascent 56' on N. face range, thence along N. face range over ridges
72.00	Descend from low ridges
76.40	Bottom descent in Pass 36' deep course N. and S. ascend slightly along S.W. slope
80.00	Set an Oak Post 3 ft. long 4 ins. sq. with charred stake 24 ins. in the ground for cor. of secs. 2, 3, 34 and 35 marked T. 24 N., R. 35 on N.E. R. 34 W., S. 2 on S.E. T. 23 N., S. 3 on S.W. and S. 34 on N.W. faces, with 4 notches on W. and 2 notches on E. edges, dug pits 18x18x12 ins. in each sec. 5½ ft. dist. and raised a mound of earth 4 ft. base 2 ft. high W. of cor.

Land, rolling sand hills
Soil, Sandy 3rd rate
Bunch grass

N. 89° 57' E. bet. Secs. 2 and 35
Ascend from ravine or pass along N.W. slope

3.00	Top of ascent 30' above cor. thence along N. face of range over rolling ground and low ridges
40.00	Deposit a charred stake 12 ins. in the ground for ¼ sec. cor. dug pits 18x18x12 ins E. and W. of cor. 4 ft. dist. and raised a mound of earth 3½ ft. base 1½ ft. high over deposit.

In E. pit drove an Oak Stake 2 ft. long 2 ins. sq. 12 ins. in the ground marked
¼ S. on N. face

43.00	Ascend along N.W. slope over rolling ground
55.70	Top of ascent on N. face range 75 high descend along N.E. slope over rolling ground
80.00	Deposit a charred stake 12 ins. in the ground for cor. of secs. 1, 2, 35 and 36 dug pits 18x18x12 ins. in each sec. 4 ft. dist. and raised a mound of earth 4 ft. base 2 ft. high over deposit.

In S.E. pit drove an Oak Stake 2 ft. long 2 ins. sq. 12 ins. in the ground, marked
T. 24 N., S. 36 on N.E.
R. 34 W., S. 1 on S.E.

N. boundary T. 23 N. R. 34 W. Concluded

Chains	
	T. 23 N., S. 1 on S.W. and S. 35 on N.W. faces, with 1 notch on E. and 5 notches on W. edges

Land, rolling sand hills
Soil, sandy 3rd rate
Bunch grass.

N. 89° 52' E. bet. Secs. 1 and 36.
Descend along N.E. slope

30.00	Bottom descent 30 ft. below Cor., thence over rolling ground sloping to N.
40.00	Deposit a charred stake 12 ins. in the ground for ¼ Sec. Cor., dug pits 18 x 18 x 12 in. E. and W. of Cor. 4 ft. dist. and raised a mound of Earth 3½ ft. base 1½ ft. high, over deposit.

In E. pit drove an Oak Stake 2 ft. long 2 ins. sq. 12 ins. in the ground, marked
¼ S. on N. face

	S.W. Cor. of Abandoned plowed field bears N. 80° W. 3.40 chs.
42.00	Enter abandoned plowed field, N. 70° W., S. 70° E.,
65.50	Leave plowed Course N. 70° W., S. 70° E.,
78.40	Trail to Hyannis, course S. 80° E., N. 80° W.
80.00	The Cor. of Tps. 23 and 24 North, Rs. 33 and 34 W.

Land, rolling
Soil, sandy 2nd and 3rd rate.
Bunch grass and sand grass.

October 1, 1895.

General Description.

This Township is very broken, consisting of sand ridges from 50 to 100 ft. high, running through township from E. to W. with narrow valleys between ranges, the valleys in East and North East portion of township are subject to overflow, thereby producing a rank growth of grass. No timber in township, vegetation consisting of "sand" and "bunch" grass.

Willard W. Alt
U.S. Deputy Surveyor

Oct. 1, 1895

Final Oaths of Deputy Surveyors and their Assistants.

LIST OF NAMES.

A list of the names of the individuals employed by ....

.................................., United States Deputy Surveyor, to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of ....

....

showing the respective capacities in which they acted:

...., *Chainman.*

...., *Chainman.*

...., *Moundman.*

...., *Moundman.*

...., *Axman.*

...., *Axman.*

...., *Flagman.*

For list of names and oaths see field notes of the north boundary line of T 3 North Range 37 West

FINAL OATH OF ASSISTANTS.

We hereby certify that we assisted ....

.................................., United States Deputy Surveyor, in surveying all those parts or portions of the ....

....

....

.... of the .... base and .... meridian, ... of ...., which are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the United States Surveyor General for ....

...., *Chainman.*

...., *Chainman.*

...., *Moundman.*

...., *Moundman.*

...., *Axman.*

...., *Axman.*

...., *Flagman.*

....

Subscribed and sworn to before me this ....

day of ...., 189 .

....

....

SEAL

12

14
217

Final Oath of United States Deputy Surveyor.

I, ..., United States Deputy Surveyor, do solemnly swear that, in pursuance of instructions received from ....., United States Surveyor General for ....., bearing date of the ..... day of ....., 189 , I have well, faithfully, and truly, in my own proper person, and in strict conformity with the instructions furnished by the United States Surveyor General for ....., the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of .....

..... of the ..... base and ..... meridian, in the ..... of ....., which are represented in the foregoing field notes as having been surveyed by me, and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the United States Surveyor General for ..... and in the specific manner described in the field notes, and that the foregoing are the *true* field notes of such survey; and should any fraud be detected, I will suffer the penalty of perjury under the provisions of an Act of Congress approved August 8, 1846.

.....
United States Deputy Surveyor.

Subscribed by said ....., United States Deputy Surveyor, and sworn to before me this ..... day of ....., 189 .

.....

SEAL

.....

APPROVAL.

Commissioner of the General Land Office

Office of the ~~United States Surveyor General~~,

Washington D.C. April 30, 1897.

The foregoing field notes of the ~~survey~~ resurvey of the East and North boundaries of Township No. 23 North Range No. 39 West of the 6th Principal Meridian State of Nebraska

..... executed by

Willard W. Alt U.S. Surveyor

under his Contract No. ....., dated December 26, 1894, having been critically examined, the necessary corrections and explanations made, the said field notes, and the ~~survey~~ resurveys they describe, are hereby approved.

Binger Hermann

~~United States Surveyor General~~

Commissioner and ex officio Surveyor General for Nebraska.

I certify that the foregoing transcript of the field notes of the above-described survey ~~is~~ of the East and North boundaries of T 23 N R 39 W, has been correctly copied from the original notes on file in this office.

Binger Hermann

~~United States Surveyor General.~~

Commissioner and ex officio Surveyor General for Nebraska.

218

General Land Office • Original Field Notes

Book Number

775

W.W. Alt - East & North boundaries T 23 N, R 39 W

The images in this file are microfilm images of the notes of W.W. Alt resurveys of portions of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The W.W. Alt resurveys began in the mid 1890's and were completed in the early 1900's.