General Land Office • Original Field Notes

Book Number

775

W.W. Alt - East & North boundaries T 23 N, R 40 W

The images in this file are microfilm images of the notes of W.W. Alt resurveys of portions of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The W.W. Alt resurveys began in the mid 1890's and were completed in the early 1900's.

8
267

275

"Duplicate" K

(4—679.)

276

Received with letter from W. W. Alt U.S. Surveyor, dated Sept 13, 1896. 98725—'96

FIELD NOTES

OF THE SURVEY OF

East and North Boundaries

Township No. 23 N., Range 40 W.

Of the 6th Principal Meridian,

State of Nebraska

AS SURVEYED BY

Willard W. Alt, *United States Deputy Surveyor,*

Under his Contract ~~No.~~ _____, *dated* December 26, 1894.

Survey commenced August 15, 1895.

Survey completed August 17, 1895.

(1319—2,500.)

Names and Duties of Assistants.

Clarence P. Huggard, Chainman
Sidney Blout, Chainman
James G. Gruver, Flagman
James C. Rosengren, Moundman

INDEX DIAGRAM.

Exterior

Township 23, Range 40

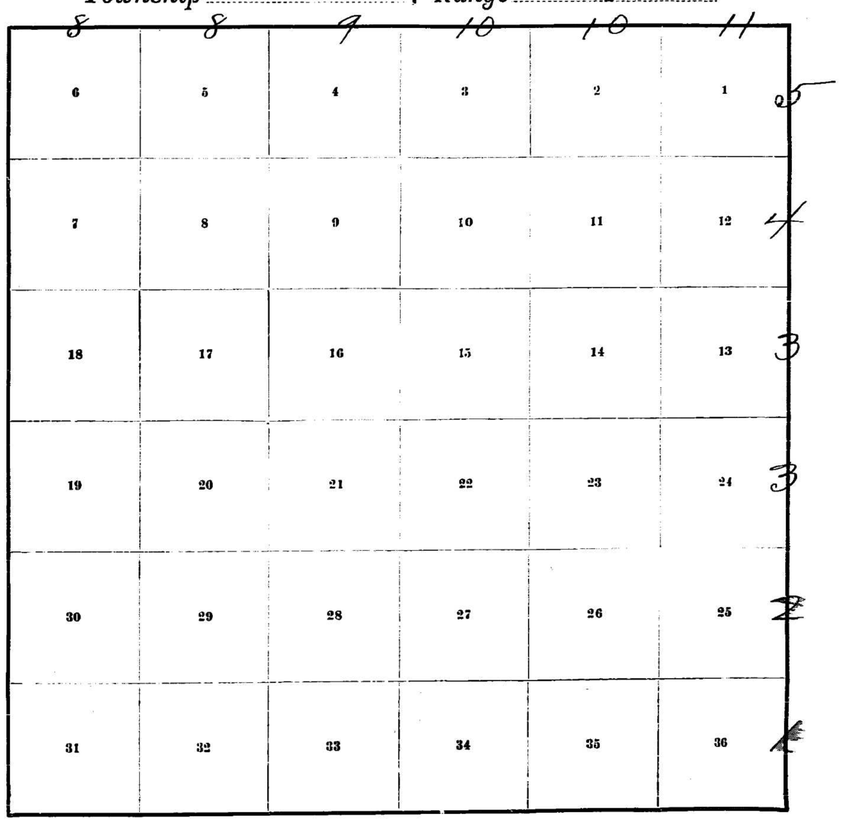

8	8	9	10	10	11	
6	5	4	3	2	1	5
7	8	9	10	11	12	4
18	17	16	15	14	13	3
19	20	21	22	23	24	3
30	29	28	27	26	25	2
31	32	33	34	35	36	1

Meanders Page

8
267

279

Preliminary Oaths of Assistants.

We, ... and .....
do solemnly swear that we will well and faithfully execute the duties of chainmen; that we will level the chain upon even and uneven ground, and plumb the tally pins either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true lengths of all lines that we assist in measuring, to the best of our skill and ability, and in accordance with instructions given us in the survey of .....

..... , *Chainman.*

..... , *Chainman.*

Subscribed and sworn to before me this .....
day of ....., 189 .

SEAL

.....

.....

We, ... and .....
do solemnly swear that we will well and truly perform the duties of moundmen in the establishment of corners, according to the instructions given us, to the best of our skill and ability, in the survey of .....

..... , *Moundman.*

..... , *Moundman.*

Subscribed and sworn to before me this .....
day of ....., 189 .

SEAL

.....

.....

We, ... and .....
do solemnly swear that we will well and truly perform the duties of axmen in the establishment of corners and other duties, according to instructions given us, to the best of our skill and ability, in the survey of .....

..... , *Axman.*

..... , *Axman.*

Subscribed and sworn to before me this .....
day of ....., 189

SEAL

.....

.....

I, ..., do solemnly swear that I will well and truly perform the duties of flagman according to instructions given me, to the best of my skill and ability in the survey of .....

..... , *Flagman.*

Subscribed and sworn to before me this .....
day of ....., 189 .

SEAL

.....

.....

For preliminary oaths see East boundary Tp. 23 N. R. 39 W. page 21 & 22

8
267

East boundary T. 23 N. R. 40 W.

1
2.80

Chains.

August 15. 1895, at 10h 36m A.M. central stand'd time, or 9h 48m local mean time, I observe Polaris at the cor of Tps. 22 and 23 N. Rs. 39 & 40 W. and mark the line thus determined, by point in stake driven north of corner, as per instructions in the Manual.

August 15, 1895.

August 16, at 8h A.M. I lay off the azimuth of Polaris, 1°41' to the West, and mark the true meridian thus determined, by tack in stake driven 5 chs. north of corner.

The magnetic bearing of the true meridian at 7 o'clock, local time is N. 13°10' W. the angle thus determined, reduced by the table on page 100 of the Manual, gives the mean magnetic decl. 13°04' E.

I find that my true meridian corresponds exactly with the range line through T. 22 N.

Thence I run

North, bet. secs. 31 and 36.

Over level ground.

5.00 Leave valley at foot of range of sand hills: ascend.

30.50 Top of ascent on range 75 ft above valley. Course NE. & SW.

32.00 Begin descent along N. slope, over broken ground.

40.00 Deposit a chained stake 12 ins in the ground for ¼ sec. cor.: dug pits 18x18x12 ins N & S of cor. 4 ft dist. and raised a mound of earth 3½ ft base 1½ ft high over deposit. In S. pit drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked ¼ S., on W. face.

Descend along a ravine or depression, running N.

56.00 Bottom of descent, Enter valley, course E and W.

65.00 Leave valley, ascend gently along Sw. slope.

80.00 Deposit a chained stake 12 ins in the ground for cor. of secs. 25. 30. 31. and 36.; dug pits 18x18x12 ins in each sec. 4 ft. dist. and raised a mound of earth 2 ft base 2 ft high over deposit.

In SE. pit drove an oak stake 2 ft long 2 ins sq. 12 ins in

Chains.

the ground. marked
T23NS30. on NE.
R39WS31. on SE.
S36. on SW. and
R40WS25. on NW. faces. with 1 notch on S. and 5 on N edges.
Land rolling sand hills, and level valley.
Soil, sandy; 3rd rate.
Sand and bunch grass.

North, bet. secs. 25 and 30.
Ascend slightly over rolling ground.
16.00 Begin slight descent along N. slope.
40.00 Deposit a chanel stake 12 ins in the ground for ¼ sec. cor. dug pits 18X18X12 ins N. of cor. 4 ft dist. and raised a mound of earth 3½ ft base 1½ ft high over deposit. In S pit drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked ¼ S, on W. face.
Descend gently through basin-like, valley.
47.00 Trail; N.60°E & S.60°W.; "Wild horse to Hyannis"
Begin ascent along SE. slope.
58.00 Ascend abruptly.
65.00 Top of ascent on E. face bluff 75 ft above basin; descend along E. face.
80.00 Bottom of descent in depression or ravine.
80.00 Set an oak post 3½ ft long 4 ins sq. with chanel stake 24 ins in the ground for cor. of secs. 19. 24. 25 and 30. marked
T23NS19. on NE.
R39WS30. on SE.
S25. on SW. and
R40WS24. on NW. faces, with 2 notches on S. and 4 on N edges; dug pits 18X18X12 ins. in each sec 5½ ft dist, and raised a mound of earth 4 ft base 2 ft high. N. of cor.
Land. rolling and broken sand hills.
Soil. sandy; 3rd rate.
Thin sand grass and bunch grass.

Chains.

North, bet. secs. 19 and 24.
Along E. slope range over ridges; descending.
31.00 Bottom descent in neck of valley. Course S. and W.
Ascend along SE. slope.
31.00 Top of ascent 75 ft high on SW. face of range.
40.00 Deposit a chanel stake 12 ins. in the ground for ¼ sec. cor. dug pits 18X18X12 ins. N. of cor. 4 ft dist. and raised a mound of earth 3½ ft base 1½ ft high, over deposit. In S. pit drove an oak stake 2 ft long. 2 ins sq. 12 ins in the ground, marked ¼ S., on W. face.
Ascend over rolling ground.
53.00 Top of ascent on W. face range 100 ft high.
66.00 Begin gentle descent along N.E. slope.
80.00 Deposit a chanel stake 12 ins in the ground for cor. of secs. 13. 18. 19. and 24.; dug pits 18X18X12 ins in each sec. 4 ft dist. and raised a mound of earth 4 ft base 2 ft. high over deposit.
In SE. pit. drove an oak stake 2 ft long 2 ins. sq. 12 ins in the ground, marked
T23NS18. on NE.
R39WS19. on SE.
S24. on SW. and
R40WS13. on NW. faces with 3 notches on N. and S. edges.
Land rolling sand hills.
Soil. sandy; 3rd rate.
Thin sand grass and bunch grass.

North, bet. secs. 13. and 18.
Descend gently along N. E. slope.
7.00 Bottom descent in basin; thence over level ground.
11.00 Trail: Course E & W. – to Hyannis.
13.00 Foot of range; course N. 80°E., and S. 80°W.; ascend
30.00 Top of ascent. 75 ft; course E & W. – over broken ground along top of range
40.00 Deposit a chanel stake 12 ins in the ground for ¼ sec. cor.; dug pits 18X18X12 ins. N. & S. of cor. 4 ft dist. and raised a mound of earth 3½ ft base 1½ ft high, over deposit.

E. boundary T. 23 N., R. 40 W., continued.

Chains

In S. pit, drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked
¼ S, on W. face.

46.00 Begin descent along N. slope.

60.00 Enter valley; course S. 60° E. & N. 60° W.; over level ground

68.00 Leave valley; E & W; ascend along S. slope.

80.00 Set an oak post 3 ft long 4 ins sq. with charred stake 24 ins in the ground for cor of secs 7, 12, 13, & 18; marked
T 23 N S 7, on NE.
R 39 W S 18, on SE.
S 13, on SW. and
R 40 W. S 12, on NW. faces, with 4 notches on S. and 2 on N. edges dug pits 18 x 18 x 12 ins. in each sec 5½ ft dist. and raised a mound of earth 4 ft base 2 ft high W. of cor.

Land, rolling sand hills, and level valley.

Soil, sandy, 3rd rate.

Thin sand and bunch grass.

North, bet. secs. 7 and 12.

Ascend over broken ground.

4.00 Top of range, Course E. and W.; 75 ft high.

12.00 Begin descent along N. slope over rolling ground.

31.90 Bottom descent, in depression; ascend along SW. slope, foot hills.

40.00 Deposit a charred stake 12 ins in the ground for ¼ sec. cor: dug pits 18 x 18 x 12 ins. N & S of cor 4 ft dist. and raised a mound of earth 3½ ft base 1½ ft high over deposit. In S pit, drove an oak stake 2 ft long 2 ins. sq. 12 ins in the ground, marked
¼ S, on W. face.

Ascend.

45.00 Top of ascent 20 ft above ¼ cor, descend over rolling foot hills.

59.00 Bottom descent at foot of bluffs. Course S. 60° W. ascend abruptly along SE. slope.

64.00 Top of ascent 50 ft high, thence along E. face range.

74.00 Begin descent along NE. slope.

80.00 Deposit a charred stake 12 ins in the ground for cor of secs 1, 6, 7, and 12.; dug pits 18 x 18 x 12 ins.

E. boundary T. 23 N., R. 40 W., continued.

Chains

in each sec 4 ft dist. and raised a mound of earth 4 ft base 2 ft high over deposit. In SE. pit, drove an oak stake 2 ft long 2 ins. sq. 12 ins in the ground, marked
T 23 N S 6, on NE.
R 39 W S 7, on SE.
S 12, on SW. and
R 40 W S 1, on NW. faces, with 5 notches on S., and 1 notch on N. edges.

Land, rolling and broken sand hills.

Soil, sandy; 3rd rate.

Bunch grass and sand grass.

North bet. secs. 1 and 6.

Descend along NE. slope over ridges.

31.00 Enter basin like ~~bottom~~; Course N. 70° W. & S. 70° E.

40.00 Deposit a charred stake 12 ins in the ground for ¼ sec. cor.; dug pits 18 x 18 x 12 ins N & S of cor 4 ft dist. and raised a mound of earth 3½ ft base 1½ ft high over deposit. In S. pit, drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked ¼ S, on W. face

44.05 Trail, course N. 80° E. & S. 80° W. - to Hyannis.

46.00 Foot of low range of hills: Course about E. & W. ascend

62.00 Top of ascent 50 ft above valley; on range, Course E & W., thence over rolling ground along top of range.

70.00 Begin descent along N. slope; over rolling ground.

80.00 Set an oak post 3 ft long 4 ins sq. with a charred stake 24 ins in the ground for cor of Tps. 23 and 24 N., Rs. 39 and 40 W., marked
T 24 N, S 31, on NE.
R 39 W S 6, on SE.
T 23 N S 1, on SW. and
R 40 W S 36, on NW faces, with 6 notches on each edge; dug pits 24 x 24 x 12 ins on each line, N., E., and W., 4 ft, and S of post 8 ft dist. and raised a mound of earth 5 ft base 2½ ft high S. of cor.

E. boundary T. 23 N. R. 40 W. concluded.

Chains

Land. level valley and rolling sand hills.
Soil. sandy: 3rd rate.
Thin sand grass, and bunch grass.

I prolong the range line to the North. by flag set about 10 chs. N. of Cor.
Aug. 16. 1895.

North boundary T. 23 N., R. 40 W.

At the cor of Tps. 23 and 24 N. Rs. 39 and 40 W. I turn an angle of 90° to the west from the range line prolonged, and run

Through Sec. 1

West, on the tangent.
40.00 N. ½ lk. from the tangent set temp ½ sec. cor.
80.00 N. 1 " " " " " Cor. of secs.
1. 2. 35. and 36.

Through Sec. 2.

S. 89°59' W. on the tangent.
40.00 N. 2½ lks from the tangent. set temp ½ sec. cor.
80.00 N. 3½ " " " " " Cor. of secs.
2. 3. 34. and 35.

Through Sec. 3.

S. 89°58' W. on the tangent.
40.00 N. 6 lks from the tangent set. temp. ½ sec. cor.
80.00 N. 8½ " " " " " Cor. of secs.
3. 4. 33. and 34.

Through Sec. 4.

S. 89°58' W. on the tangent.
40.00 N. 11 lks from the tangent set temp. ½ sec. cor.
80.00 N. 14 " " " " " Cor. secs. 4. 5. 32. & 33.

E. boundary T. 23 N. R. 40 W., continued.

Chains

Through Sec. 5.

S. 89°57' W. on the tangent.
40.00 N. 18½ lks. from the tangent set temp. ½ sec. cor.
80.00 N. 23 " " " " " Cor of secs.
5. 6. 31. and 32.

Through Sec. 6.

S. 89°56' W. on the tangent.
40.00 N. 27½ lks. from the tangent, set temp. ½ sec. cor.
74.37 N. 33 " " " " " Cor. of Tp.
which falls 72 lks N. of the cor of Tps. 23 and 24 N. R. 40 W.
Therefore the true course is N. 89°55' E. and the permanent corners will be set to the South. from the random line by offsets decreasing 6 lks. per half mile.

Boundaries of T. 23 N. R. 40 W.
Latitudes, Departures, and Closing Errors.

Lines Designated	True Bearing	Distance	Latitude N	Latitude S	Departure E	Departure W
		chs.	chs.	chs.	chs.	chs.
South boundary	N 89°58' W	477.75	0.29			477.75
W. bdy. 5th Guide	N 0°10' E.	480.00	480.00		1.40	
N. boundary	N 89°55' E.	474.37	0.72		474.37	
E. "	South	480.00		480.00		
Convergency					0.65	
Totals			481.01 / 480.00	480.00	476.42	477.75 / 476.42
Error in Latitude — — —			1.01			
Error in Departure — — — — — — —						1.33

Chains.

N. 89°55' E. bet. secs. 6. and 31.

Over nearly level land.

31.30 Enter alkali flat. Course N. & S.:- of Circular form.

34.37 Deposit a charred stake 12 ins in the ground for ¼ sec. cor. dug pits 18 x 18 x 12 ins. E. & W. of cor. 4 ft dist. and raised a mound of earth 3½ ft base 1½ ft high. over deposit.

In E. pit, drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground. marked

¼ S, on N. face.

41.00 Leave alkali flat; thence over rolling ground.

58.00 Begin ascent along W. slope over broken sand ridges.

72.30 Top of ascent on sand bluff. 75 ft above valley; descend along S. face of range.

74.37 Deposit a charred stake 12 ins in the ground for cor. of secs. 5, 6. 31, and 32.; dug pits 18 x 18 x 12 ins in each sec 4 ft dist. and raised a mound of earth 4 ft base 2 ft high. over deposit.

In SE. pit, drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked

T 24 N S 32. on NE.

R 40 W S 5. on SE.

T 23 N S 6. on SW. and

S 31. on NW faces with 5 notches on E. & 1 on W. edges

Land, level, rolling. and broken.

Soil. sandy and alkali: 3rd rate.

Thin sand grass. and bunch grass.

N. 89°55' E. bet. secs. 5 and 32.

ascend along S. face of range, over broken sand bluffs.

22.50 Top of ascent on sand bluff 100 ft above valley: thence along SE. face of range, over rolling ground.

40.00 Deposit a charred stake 12 ins in the ground for ¼ sec. cor.; dug pits 18 x 18 x 12 ins. E. & W. of cor 4 ft. dist. and raised a mound of earth 3½ ft base 1½ ft. high over deposit. In E. pit. drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked

¼ S, on N. face.

Descend along SE. face.

Chains

52.00 Begin abrupt descent along SE. slope.

55.00 Bottom descent; enter level land. N. 70° E.; thence over level land along N. edge circular basin.

75.00 Begin gentle ascent along SE. slope.

80.00 Set an oak post 3 ft long 4 ins sq., with charred stake 24 ins. in the ground for cor. of secs. 4. 5. 32. and 33. marked

T 24 N S 33. on NE.

R 40 W S 4. on SE.

T 23 N S 5. on SW. and

S 32. on NW. faces. with 4 notches on E. & 2 on W. edges. dug pits 18 x 18 x 12 ins. in each sec 5½ ft dist. and raised a mound of earth 4 ft base 2 ft high. W. of corner

Land. broken sand bluffs. and rolling valley.

Soil. sandy: 2nd & 3rd rates.

Thin sand grass and bunch grass.

N. 89°55' E. bet. secs. 4 and 33.

Ascend along SW. slope.

35.00 Top of ascent. 100 ft high. on S. face sand bluff; thence over rolling ground.

40.00 Deposit a charred stake 12 ins. in the ground for ¼ sec. cor. dug pits 18 x 18 x 12 ins. E. & W. of cor 4 ft dist, and raised a mound of earth 3½ ft base 1½ ft high over deposit. In E. pit, drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked

¼ S. on N. face.

ascend slightly along S. face of range over rolling ground.

74.00 Top of ascent on low ridge; course N. & S.: descend.

79.00 Bottom descent in ravine 40 ft deep: course N. & S.; ascend.

80.00 Deposit a charred stake 12 ins in the ground for cor of secs. 3. 4. 33. and 34.; dug pits 18 x 18 x 12 ins in each sec. 4 ft dist. and raised a mound of earth 4 ft base 2 ft high, over deposit.

In SE. pit. drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked

T 24 N S 34. on NE.

R 40 W S 3. on SE.

T 23 N S 4. on SW. and

S 33. on NW faces. with 3 notches on E. & W. edges.

Chains

Land. rolling sand hills.
Soil, sandy: 3rd rate.
Sand grass and bunch grass.

N. 89°55' E. bet. secs. 3 and 34.
Ascend along S. face range over rolling ground.
32.00 Top of ascent on S. face ridge: 100 ft high: descend.
40.00 Deposit a chained stake 12 ins in the ground for ¼ sec cor. dug pits 18x18x12 ins. E. & W. of cor. 4 ft dist. and raised a mound of earth 3½ ft base 1½ ft high over deposit.
In E. pit drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked
¼ S, on N. face.
Descend along S.E. slope.
55.00 Bottom descent in depression on S face range: ascend over broken ground.
75.00 Top of ascent 75 ft; thence over broken ground along S. face of range
80.00 Set an oak post 3 ft long 4 ins sq. with chained stake 24 ins in the ground for cor of secs. 2. 3. 34 & 35. marked
T24N S 35. on NE.
R40W S 2. on SE.
T23N S 3. on SW. and
S 34. on NW. faces. with 2 notches on E. and 4 on W. edges. dug pits 18x18x12 ins. in each sec. 5½ ft dist. and raised a mound of earth 4 ft base 2 ft high. W. of cor.
Land. rolling and broken sand hills.
Soil, sandy: 3rd rate.
Bunch grass.

N. 89°55' E. bet. secs. 2 and 35.
Ascend over low ridges and sand bluffs. along S. face of range.
10.00 Top of ascent 30 ft.: descend over broken ground.
15.00 Ravine 30 ft deep: course S.: ascend over broken ground
33.00 Top of ascent, 75 ft; thence along top of range over broken ground.
40.00 Deposit a chained stake 12 ins in the ground

Chains

for ¼ sec. cor.; dug pits 18x18x12 ins. E. & W. of cor. 4 ft dist. and raised a mound of earth 3½ ft base 1½ ft high, over deposit.
In E. pit, drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked.
¼ S, on N. face.
Ascend gently.
50.00 Top of ascent; descend over rolling ground.
80.00 Deposit a chained stake 12 ins in the ground for cor of secs 1. 2. 35. and 36.; dug pits 18x18x12 ins in each sec. 4 ft. dist. and raised a mound of earth 4 ft base 2 ft high over deposit.
In SE. pit, drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked
T 24 N S 36. on NE.
R 40 W S 1. on SE.
T 23 N S 2. on SW. and
S 35. on NW. faces. with 1 notch on E. and 5 notches on W. edges.
Land, broken and rolling sand hills.
Soil, sandy; 3rd rate.
Bunch grass.

N. 89°55' E. bet. secs. 1 and 36.
Descend slightly over rolling ground, along top of range.
14.00 Begin descent along E. slope.
25.00 Bottom of descent, enter neck of valley; course N & S.
33.00 Begin gentle ascent along N. W. slope.
40.00 Deposit a chained stake 12 ins in the ground for ¼ sec cor.; dug pits 18x18x12 ins. E. and W. of cor. 4 ft dist. and raised a mound of earth 3½ ft base 1½ ft high over deposit.
In E. pit, drove an oak stake 2 ft long 2 ins. sq. 12 ins in the ground, marked
¼ S, on N. face.
Ascend slightly along N. slope.
50.00 Top of ascent 30 ft above ¼ cor.; descend gently.
80.00 The cor. of Tps. 23 and 24 N., Rs. 39 and 40 W.
Land. rolling sand hills. and level valley.

N. boundary T. 23 N. R. 40 W, concluded,

Chains.

Soil, sandy: 3rd rate.
Thin sand grass, and bunch grass.
August 17 1895

General Description
This township is very broken and sandy. and consists of a series of almost regular ranges of hills. from 50 to 150 ft. high running through the township from E. to W.
Land unfit for cultivation.
A thin "sand grass" grows in the valleys, and a "Bunch grass" grows on the hills.
No natural water, and no timber of any description in the township.

Willard M. Alt.
Aug. 17, 1895. U. S. Deputy Surveyor.

Final Oaths of Deputy Surveyors and their Assistants.

LIST OF NAMES.

A list of the names of the individuals employed by .....

, United States Deputy Surveyor, to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of

.....

showing the respective capacities in which they acted:

....., *Chainman.*
....., *Chainman.*
....., *Moundman.*
....., *Moundman.*
....., *Axman.*
....., *Axman.*
....., *Flagman.*

FINAL OATH OF ASSISTANTS.

We hereby certify that we assisted .....

, United States Deputy Surveyor, in surveying all those parts or portions of the .....

.....

.....

of the ..... base and ..... meridian, ... of ....., which are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the United States Surveyor General for .....

....., *Chainman.*
....., *Chainman.*
....., *Moundman.*
....., *Moundman.*
....., *Axman.*
....., *Axman.*
....., *Flagman.*

.....

Subscribed and sworn to before me this .....
day of ....., 189 .

.....

.....

SEAL

1/2 14/293

Final Oath of United States Deputy Surveyor.

I, ..., United States Deputy Surveyor, do solemnly swear that, in pursuance of instructions received from ....., United States Surveyor General for ....., bearing date of the ..... day of ....., 189 , I have well, faithfully, and truly, in my own proper person, and in strict conformity with the instructions furnished by the United States Surveyor General for ....., the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of .....

..... of the ..... base and ..... meridian, in the ..... of ....., which are represented in the foregoing field notes as having been surveyed by me, and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the United States Surveyor General for ..... and in the specific manner described in the field notes, and that the foregoing are the *true* field notes of such survey; and should any fraud be detected, I will suffer the penalty of perjury under the provisions of an Act of Congress approved August 8, 1846.

.....
United States Deputy Surveyor.

Subscribed by said ....., United States Deputy Surveyor, and sworn to before me this ..... day of ....., 189 .

SEAL

.....

.....

APPROVAL.

Commissioner of the Genl Land Office

Office of the United States Surveyor General,

Washington D.C. April 30, 1897.

The foregoing field notes of the survey of the East and North boundaries of township No. 23 North Range No. 40 West of the 6th principal Meridian State of Nebraska.

..... executed by Wilhelm W. Alt. U.S. Surveyor under his Contract No. ....., dated December 26, 1894, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Binger Hermann
~~United States Surveyor General.~~
Commissioner and ex officio Surveyor General for Nebraska

I certify that the foregoing transcript of the field notes of the above-described surveys in the East and North boundaries of T. 23 N., R. 40 W., has been correctly copied from the original notes on file in this office.

Binger Hermann
~~United States Surveyor General.~~
Commissioner and ex officio Surveyor General for Nebraska.

General Land Office • Original Field Notes

Book Number

775

W.W. Alt - East & North boundaries T 23 N, R 40 W

The images in this file are microfilm images of the notes of W.W. Alt resurveys of portions of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The W.W. Alt resurveys began in the mid 1890's and were completed in the early 1900's.