


42-535-124
42-579-74

INDEX



CORNERS FOUND AND USED IN JOHNSON COUNTY

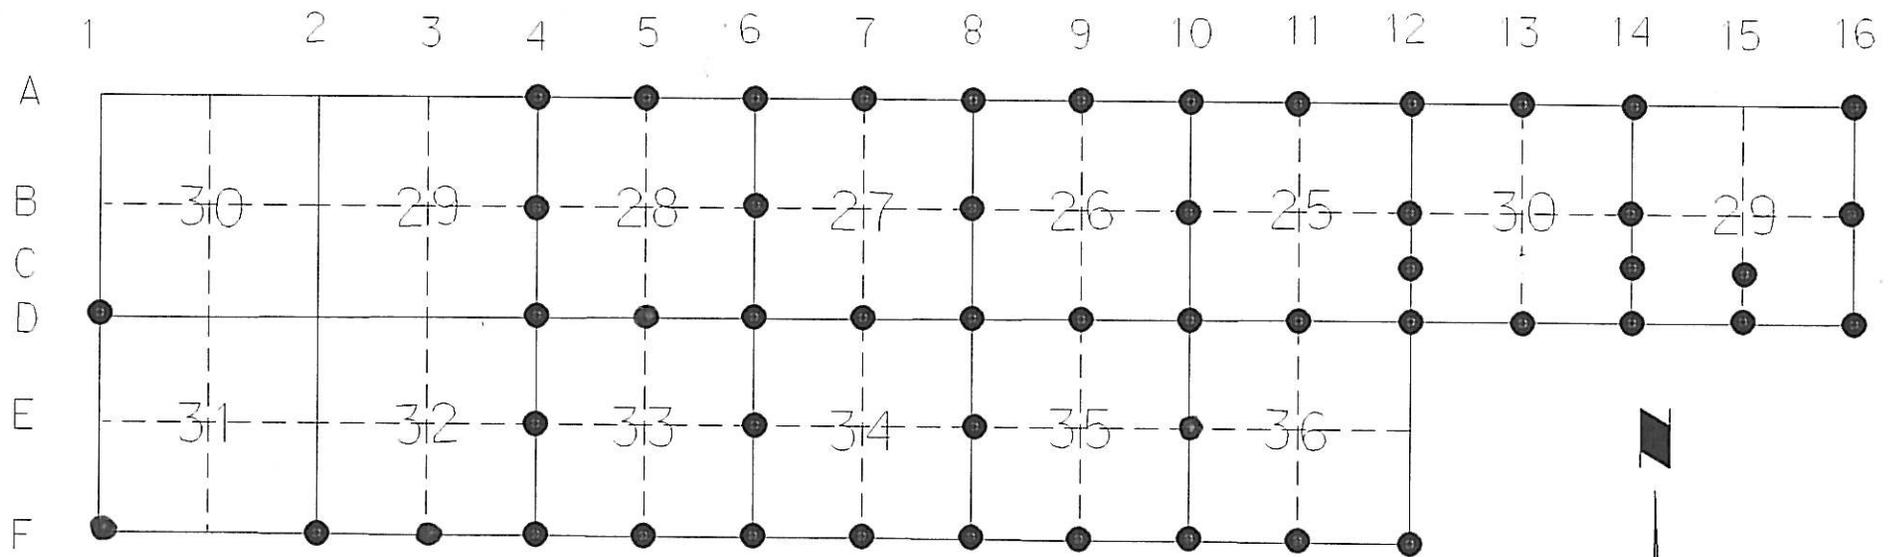

NOTES ABOUT SURVEY

EAST QUARTER OF SECTION 26 5N 10E

THE EAST QUARTER OF SECTION 26 5 NORTH 10 EAST WAS SET BY THE COUNTY SURVEYOR R. HAZARD ON A PROPORTIONAL DISTANCE BETWEEN THE NE CORNER AND THE SE CORNER OF SECTION 26. THIS POINT WAS ESTABLISHED BY A SURVEY OF J. MALONE. THE POINT ESTABLISHED WAS A 3/4 ICH REBAR. THERE WAS ALSO A TRAVERSE POINT 6 FEET AWAY WHICH WAS ALSO A REBAR. THE TRAVERSE POINT WAS APPARENTLY MONUMENTED AS THE CORNER WHICH HAS A BRASS CAP ON IT. THE POINT THAT MALONE LEFT FOR THE CORNER HAS NO CAP ON IT. USING THE TIES AND SURVEY OF G. BEERLINE IN WHICH HE FOUND THE GOVERNMENT STONE, WE ESTABLISH THIS CORNER TO BE 6 FEET FARTHER SOUTH. THIS POINT ALSO MATCHES A SURVEY DONE BY DAUGHERTY.

SOUTH SIXTEENTH CORNER BETWEEN SEC. 25 5N 10E AND SEC. 30 5N 11E

THE SOUTH 1/16 TH BETWEEN SECTIONS 25 5N 10E AND SECTION 30 5N 11E WAS A BRASS CAP SET BACK BY THE HIGHWAY PLAT. THIS PLAT HAD A ERROR IN IT AS TO THE DISTANCE THE CORNER WAS OFF OF THE TANGENT FOR CENTERLINE. THE TIES OF BEERLINE WERE ALSO IN ERROR SO BY A RETRACEMENT OF HIS DISTANCES WE SET THE CORNER BACK IN ITS TRUE POSITION.

CORNERS ALONG THE SOUTH BOUNDRY OF THE TOWNSHIP

THESE WERE SET BY SINGLE PROPORTION BETWEEN EXISTING CORNERS APPROVED BY THE COUNTY SURVEYOR

THE NORTH QUARTER OF SECTION 25 5N 10 E

THIS WAS SET BACK BY SINGLE PROPORTION AT A POINT APPROVED BY THE COUNTY SURVEYOR

CORNERS USED IN THIS SURVEY THAT WERE ALSO USED BY BEERLINE IN HIS APPLICATION SURVEY MATCHED WELL. BUT IN SOME CASES THERE WERE SEVERE ERRORS IN HIS PLAT DISTANCES AND ALSO HIS TIE DISTANCES. SINCE THE ORIGINAL FIELD NOTES WERE NOT FOUND THESE ERRORS COULD BE FROM THE TYPEING OF HIS NOTES. ALSO A SURVEY BY D. ZAGER TO THE WEST HAD FOUND SIMILAR ERRORS IN THIS SURVEY.

421-536 3/44
421-580 2/14

CORNER DESCRIPTION A-4

Township: 5 NORTH	Range: 10 EAST	6 P.M.
Cor. Location: NORTHEAST COR. SEC. 29		
Date: 12-1-98	Proj. No: 136-7 (118)	
Described By: G. HICKS		
County: JOHNSON	State: NEBR.	
Name Of Proj. TECUMSEH WEST		



Description Of Corner: FOUND 1" SMOOTH BAR. DUG WITH MACHINE AND FOUND 7" X 8" X 18" STONE UNDER BAR WITH 1/2" X 18" BAR ALONG SIDE. SET 1 5/8" X 24" PIPE OVER STONE BARS ALONG SIDE WITH MAGNET.

LICENSED LAND SURVEYOR

Glenn L. Hicks

History Of Corner:


DAUGHERTY 1935 FOUND STONES AND SET TIES WHICH WE HAVE TWO OF NE AND SE TIE SOUTHEAST MUST HAVE BEEN MOVED

Description Of Ties:

- NW 54.81 FEET TO TOP NEAR COR TELE. BOX
- NE 49.59 FEET TO "X" NAILS CORNER FENCE POST
- NE 46.22 FEET TO 2" AXLE
- SE 50.06 FEET TO "X" NAILS POWER POLE
- SE 40.97 FEET TO WORM GEAR ON ROD
- SSE 111.25 FEET TO "X" NAILS POWER POLE
- SW 39.91 FEET TO WEST END CMP

Plane X =
Coordinates Y =

Modified X =
Coordinates Y =

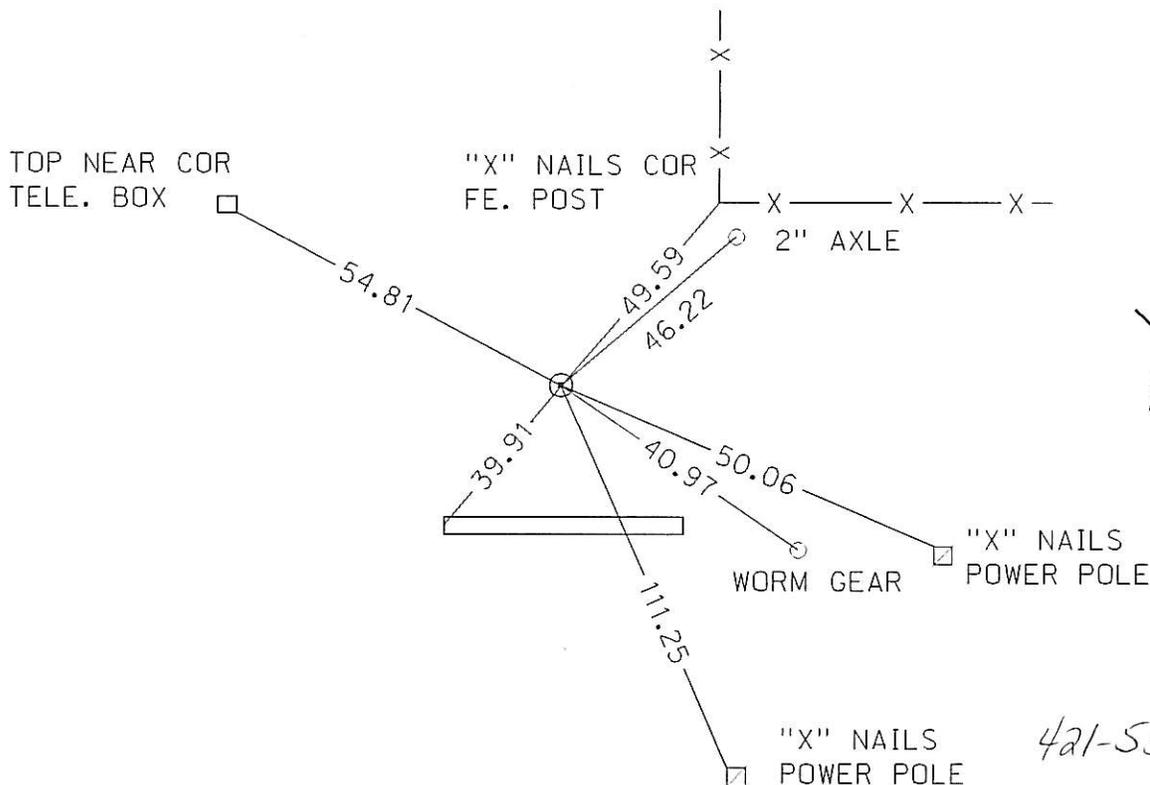

CORNER DESCRIPTION A-5


Township: 5 NORTH Range: 10 EAST 6 P.M.	21	
Cor. Location: NORTH QTR. COR. SEC. 28	⊙	
Date: 12-1-98 Proj. No: 136-7 (118)	28	
Described By: G. HICKS		
County: JOHNSON State: NEBR.		
Name Of Proj. TECUMSEH WEST		LICENSED LAND SURVEYOR
Description Of Corner: FOUND 5/8" REBAR		<i>Glenn L. Hicks</i>

History Of Corner: DIDNT FIND ANY RECORD OF THIS CORNER IN COUNTY RECORDS THIS IS SET ON SPLIT AND PROP. BETWEEN NW AND NE COR. OF 28

Description Of Ties:
 NW 68.84 FEET TO TOP NEAR CORNER HEADWALL
 NE 75.08 FEET TO "X" NAILS TOP CORNER FENCE POST
 SE 36.84 FEET TO PK NAIL IN POWER POLE
 SW 71.22 FEET TO NEAR CORNER CONCRETE POST FOR CULVERT

ON $\frac{1}{2}$ ROAD EAST AND WEST

Plane	X =	Modified	X =
Coordinates	Y =	Coordinates	Y =

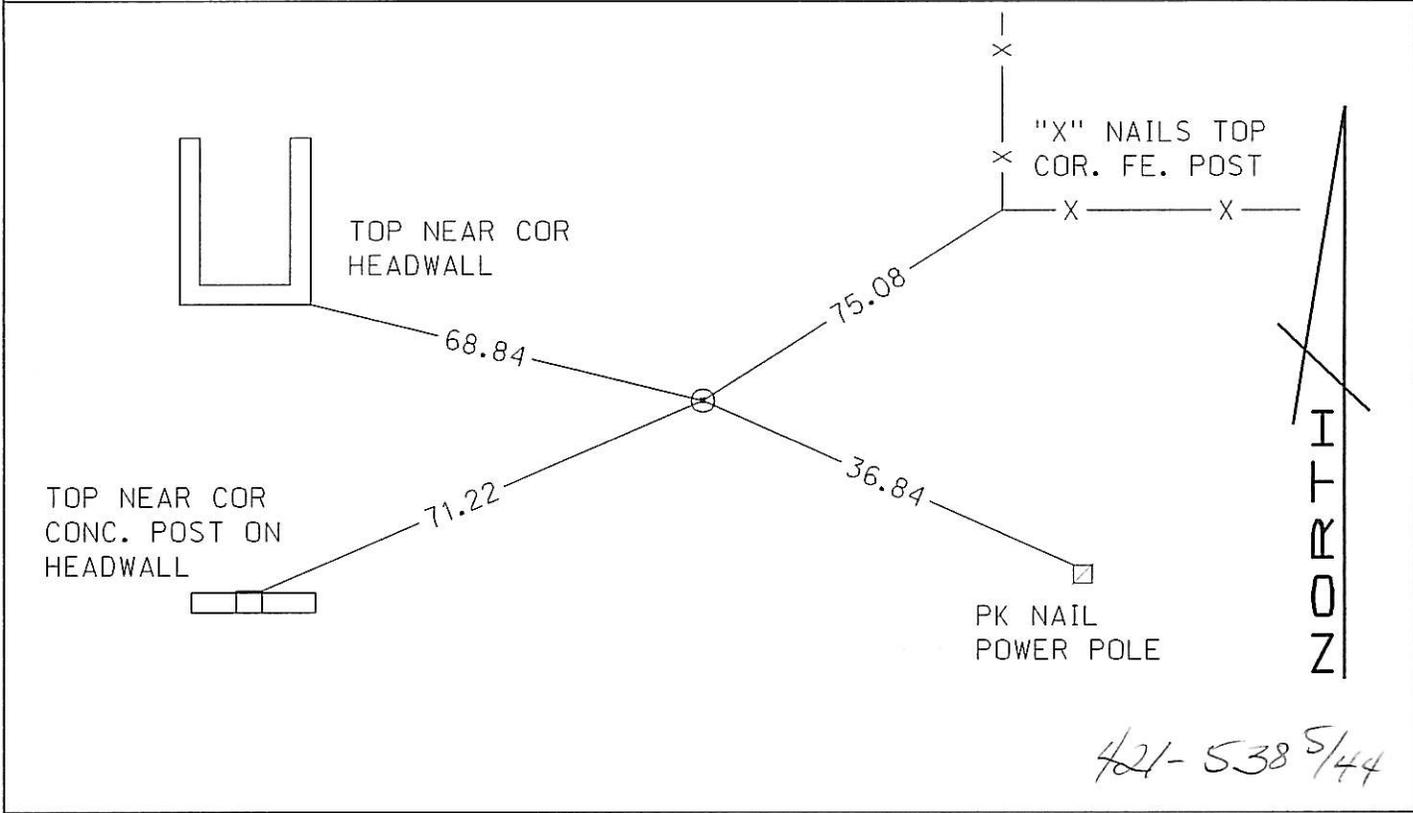

CORNER DESCRIPTION A-6

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: NORTHEAST COR SEC 28
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

21	22
28	27




LICENSED LAND SURVEYOR
Glenn L. Hicks

Description Of Corner: FOUND 1/4" REBAR WITH 3/4" X 8" PIPE TO SURFACE. DUG WITH MACHINE AND FOUND 2 STONES AND A LIME DEPOSIT 2.5 FEET DEEP. SET STONES SIDE BY SIDE WITH 1 1/4" X 24" DRIVE SHAFT AND 1 1/4" X 24" REBAR ABOVE AND SET 1 5/8" X 12" PIPE TO SURFACE. (STONES 12"X14"X2")

History Of Corner:
 STONES BY DAUGHERTY, HAZARD CALLS NO MATERIAL BUT TIES CROSSED CLOSE FILE FOLDER 5-10 1992

Description Of Ties:
 NW 51.73 FEET TO NEAR CORNER TELE. BOX
 NE 52.52 FEET TO PK NAIL AND WASHER IN CORNER FENCE POST
 SE 51.77 FEET TO SET 1/4" X 36" REBAR
 SW 48.36 FEET TO PK NAIL AND WASHER POWER POLE
 ON CENTERLINE ROADS NORTH-SOUTH-EAST-AND-WEST

Plane X =	Modified X =
Coordinates Y =	Coordinates Y =

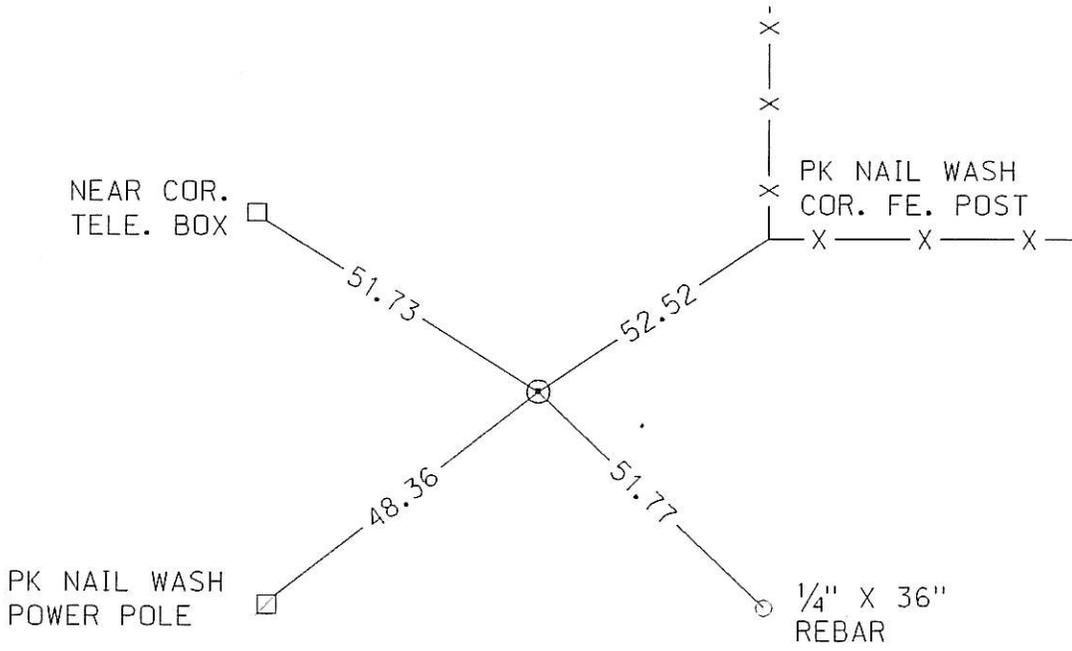

I
F
O
Z

421-539 6/44

CORNER DESCRIPTION A-8

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: NORTHEAST COR SEC. 27
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

22	23
27	26




LICENSED LAND SURVEYOR
Glenn L. Hicks

Description Of Corner:
 FOUND 3/4" ROD WITH STONE ON EAST SIDE

History Of Corner:
 DAUGHERTY FOUND SMALL STONE SET LIME CORE. BAR IS CALLED FOR IN COUNTY RECORDS
 BAR USED BY HAZARD 10-1-90

Description Of Ties:
 NW 48.77 FEET TO SPIKE IN POWER POLE
 NE 118.93 FEET TO "X" CHISLED IN CONC. BASE GRAIN BIN
 NE 46.28 FEET TO NEAR CORNER TELE. RISER BOX
 SW 47.37 FEET TO NAIL AND PLASTIC WASHER IN POWER POLE

Plane X =	Modified X =
Coordinates Y =	Coordinates Y =

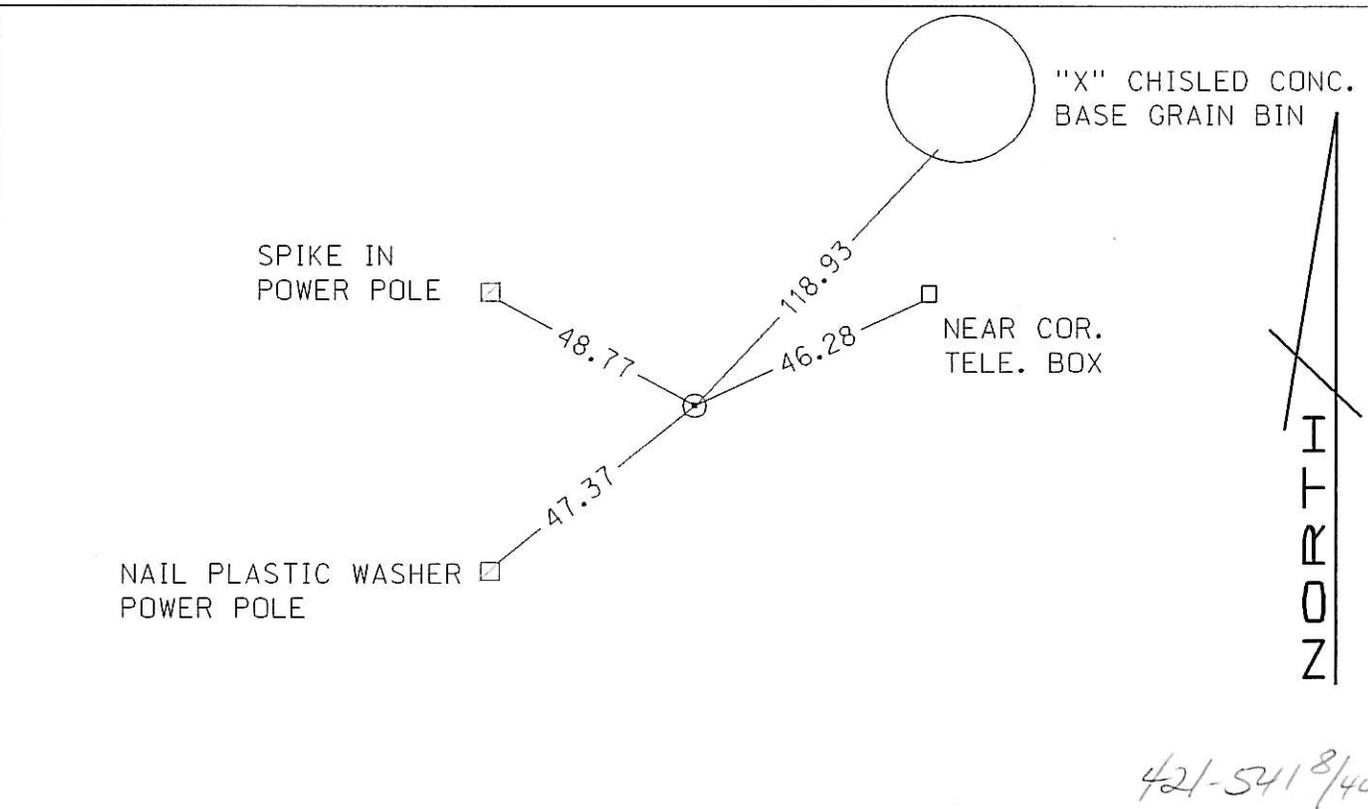

CORNER DESCRIPTION A-9

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: NORTH QTR. COR. SEC. 26
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST
 Description Of Corner: FOUND ALUM. CAP

23

26



LICENSED LAND SURVEYOR


Glenn L. Hicks

History Of Corner: FOUND ALUM. CAP AS DESCRIBED IN COUNTY RECORDS
 DAUGHERTY FOUND NO CORNER HERE. HAZARD USED ALUM. CAP IN SURVEY OCT. 1990

Description Of Ties:
 N 91.02 FEET AND 175.59 ON STRAIGHT LINE TO 3/4" X 36" REBARS
 SW 34.72 FEET TO SPIKE IN TOP RAILROAD TIE FENCE POST
 SE 24.96 FEET TO TOP CENTERLINE CULVERT

Plane X =
 Coordinates Y =

Modified X =
 Coordinates Y =

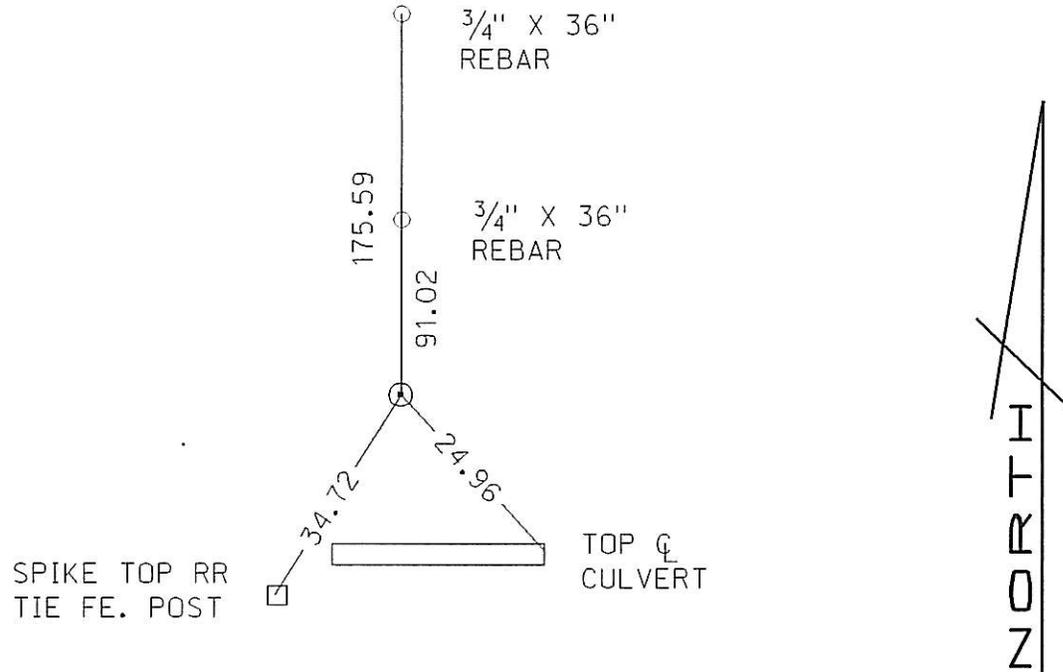

421-542 9/44

CORNER DESCRIPTION

A-10

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: NORTHEAST COR. SEC. 26
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

23	24
26	25



LICENSED LAND SURVEYOR


Glenn L. Hicks

Description Of Corner:
 FOUND 3/4" BAR IN LIME DEPOSIT. SET 1 1/4" X 36" PIPE TO SURFACE

History Of Corner:
 CORNER SET BY DAUGHERTY 1935 AS LIME CORE FROM PROP. MEASUREMENTS.

Description Of Ties:
 NW 37.98 FEET TO TOP ARTESIAN WELL
 NE 82.27 FEET TO 1" X 36" REBAR
 NE 48.31 FEET TO SPIKE TOP CORNER FENCE POST
 SE 61.14 FEET TO 1" X 36" REBAR
 SW 37.61 FEET TO "X" NAILS FENCE POST
 11.0' EAST TO CENTERLINE ROAD NORTH
 5.0' NORTH TO CENTERLINE EAST AND WEST ROAD

Plane Coordinates	X =	Modified Coordinates	X =
	Y =		Y =

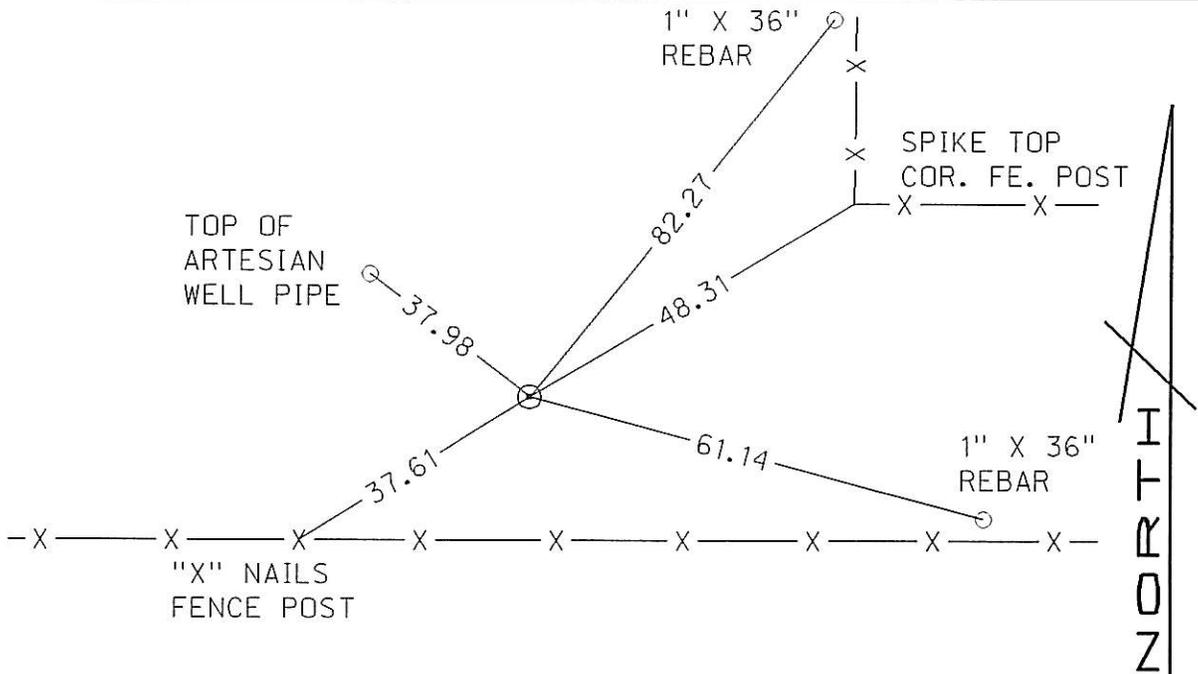

421-543 1/4

CORNER DESCRIPTION A-11

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: NORTH QTR. COR. SEC. 25
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

24

25



LICENSED LAND SURVEYOR

Glenn L. Hicks

Description Of Corner: SET 1 1/4" X 24" PIPE

History Of Corner:

SET BACK PER COUNTY SURVEYORS INSTRUCTION BY PROP. FROM NE TO NW OF 25.
 1934 DAUGHERTY DIDNT FIND A CORNER.


Description Of Ties:

NW 52.32 FEET TO "X" NAILS POWER POLE
 NE 26.35 FEET TO "X" NAILS FENCE POST
 SE 86.02 FEET TO 3/4" X 36" REBAR THEN ANOTHER 78.47 FEET TO 3/4" X 36" REBAR
 ALL ON LINE.

4' EAST OF TUBE
 5' EAST TO FENCE LINE SOUTH

Plane X =
 Coordinates Y =

Modified X =
 Coordinates Y =

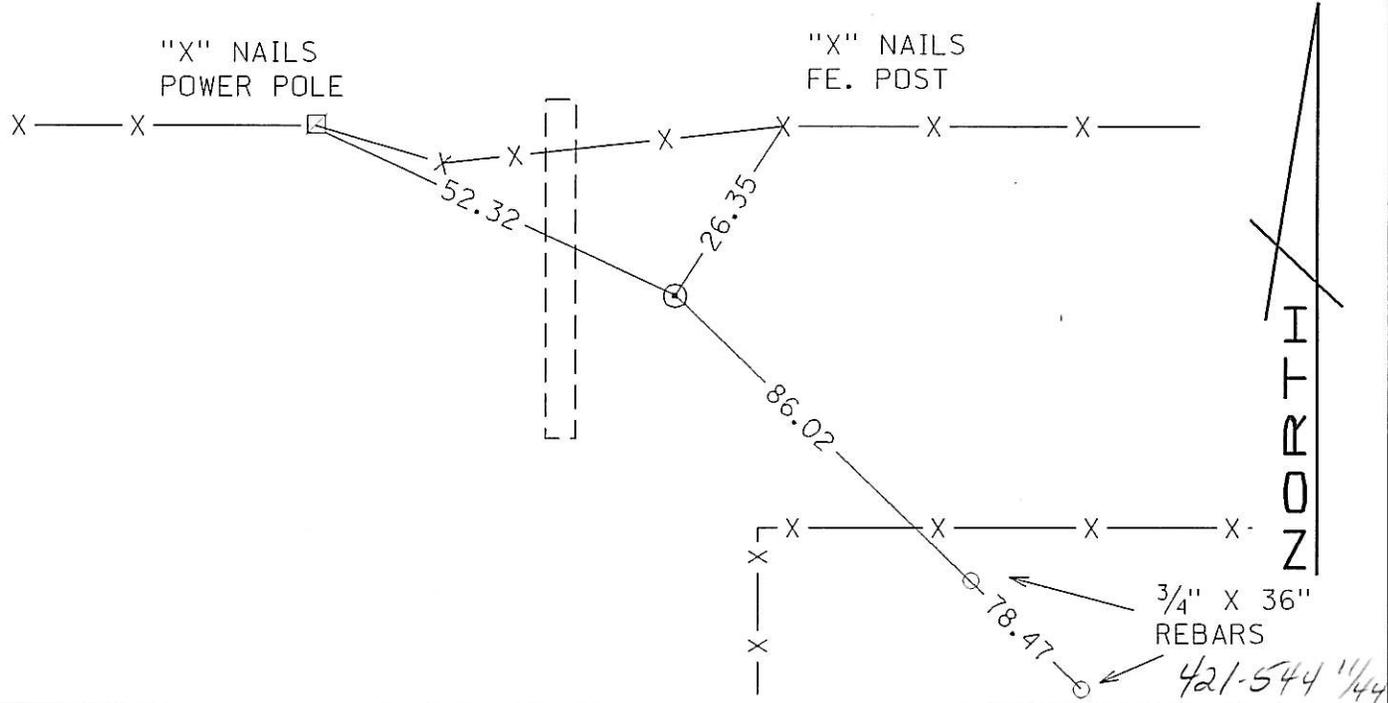

CORNER DESCRIPTION A-12

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: NORTHEAST COR. SEC. 25
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

24	19
25	30



LICENSED LAND SURVEYOR
Glenn L. Hicks


Description Of Corner:
 FOUND 1" PIPE WITH LIMESTONE AND LIME DEPOSIT

History Of Corner:
 FOUND AS DESCRIBED ON INDEX CARD IN COUNTY RECORDS 7/30/84
 DAUGHERTY SET LIME DEPOSIT, 1935, BEERLINE FOUND LIMESTONE AND ROD WITH
 LIME DEPOSIT

Description Of Ties:
 NW 46.71 FEET TO TOP NEAR COR TELE. BOX
 NE 44.64 FEET TO NAIL BOTTLE CAP POWER POLE
 SE 41.52 FEET TO 5/8" X 36" REBAR
 SW 65.45 FEET TO 1" X 36" REBAR

ON CENTERLINE COUNTY ROAD SOUTH
 7.0' EAST OF CENTERLINE COUNTY ROAD NORTH
 7.0' NORTH OF CENTERLINE COUNTY ROADS EAST-WEST

Plane X =	Modified X =
Coordinates Y =	Coordinates Y =

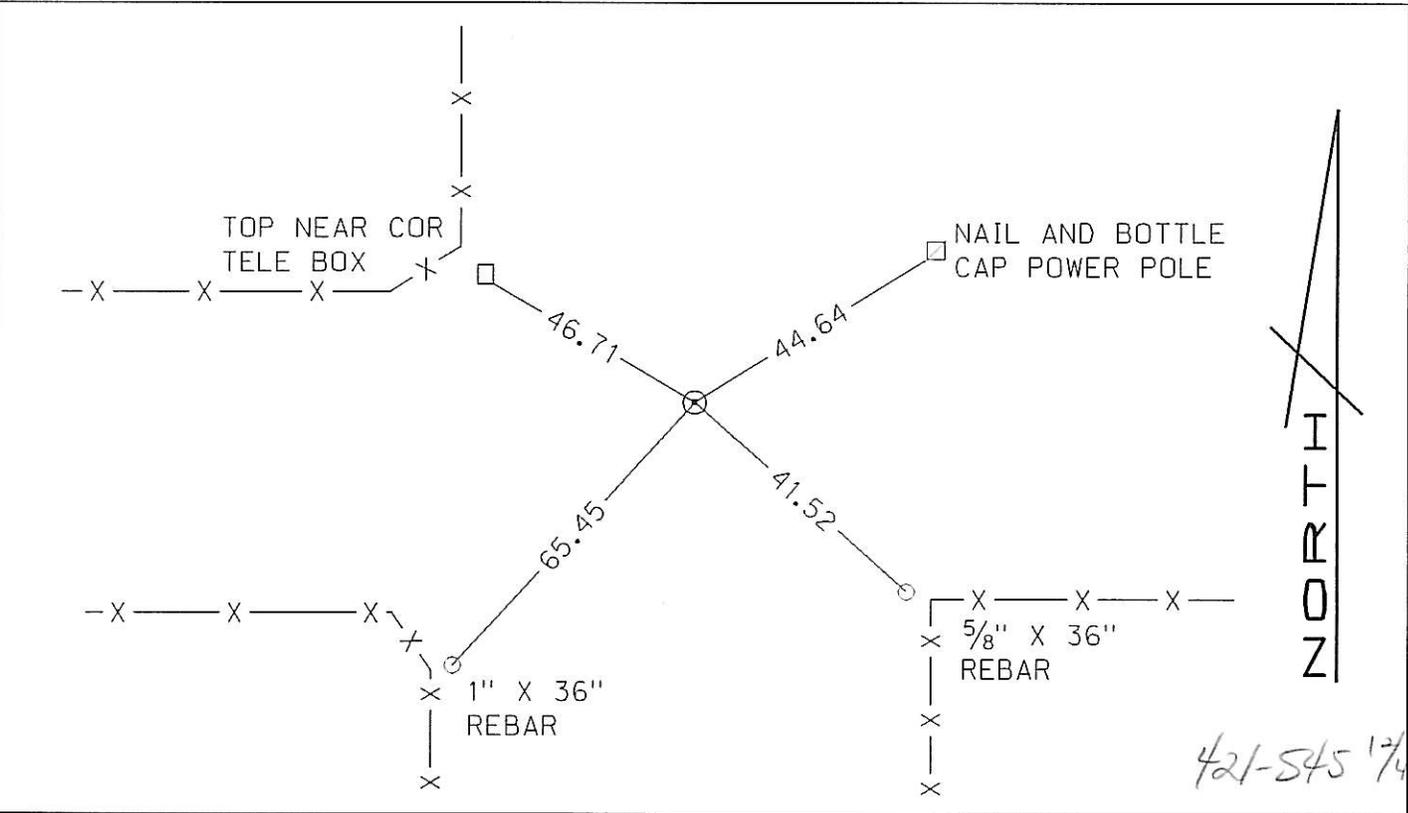

CORNER DESCRIPTION B-4

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: EAST QTR. COR. SEC. 29
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

29 28



LICENSED LAND SURVEYOR

Glenn L. Hicks


Description Of Corner:
 FOUND 5/8" REBAR. SET 3/4" X 8" PIPE TO SURFACE, PRODED
 BUT DIDNT FIND ANY STONE

History Of Corner:
 CORNER FOUND BY ROSS ENG. IN SURVEY DATED 5-96. CORNER IS ON STRAIGHT LINE
 AND ALMOST A SPLIT BETWEEN SEC. CORNERS NORTH AND SOUTH.

Description Of Ties:
 W 35.57 FEET TO SPIKE TOP CORNER FENCE POST
 SW 34.64 FEET TO 1" X 36" REBAR
 NE 34.69 FEET TO SPIKE TOP LONE POST
 ESE 29.72 FEET TO SPIKE SIDE CORNER FENCE POST
 SE 41.75 FEET TO 1" X 36" REBAR

2.0' NORTH OF FENCE LINE RUNNING EAST
 ON CENTERLINE ROAD NORTH-SOUTH

Plane	X =	Modified	X =
Coordinates	Y =	Coordinates	Y =

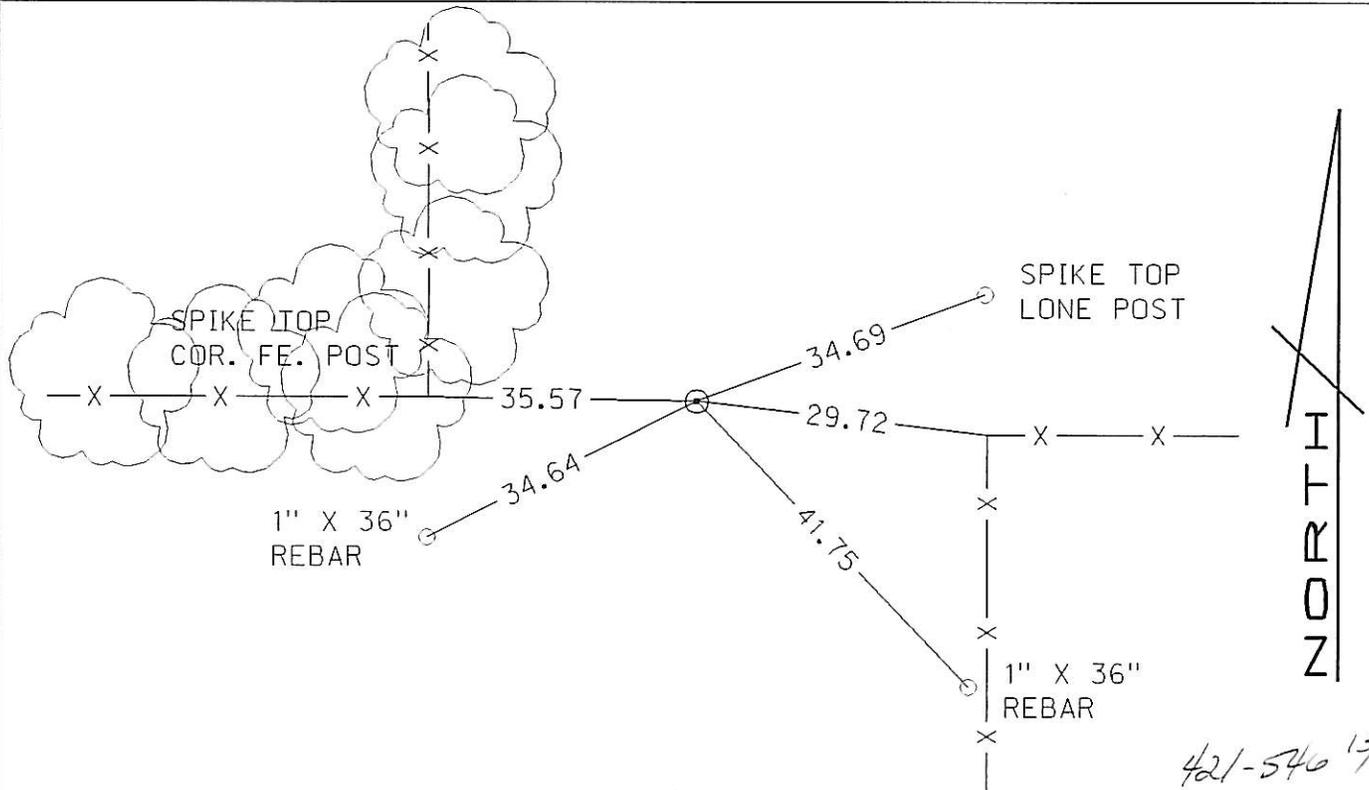

CORNER DESCRIPTION B-6

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: EAST QTR. COR. SEC. 28
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

28 27



LICENSED LAND SURVEYOR

Glenn L. Hicks

Description Of Corner: FOUND BRASS CAP ON 1" PIPE


History Of Corner: RECOVERED BY HAZARD TIES IN MAY 1994

Description Of Ties:

- NW 57.26 FEET TO SPIKE TOP FENCE POST
- W 39.82 FEET TO "X" NAILS FENCE POST
- SW 89.51 FEET TO SPIKE TOP FENCE POST
- E 38.03 FEET TO 1" X 36" REBAR
- S 366.50 FEET TO NORTH END OF BRIDGE AT CENTERLINE
- SE 56.12 FEET TO 1" X 36" REBAR

Plane X =
 Coordinates Y =

Modified X =
 Coordinates Y =

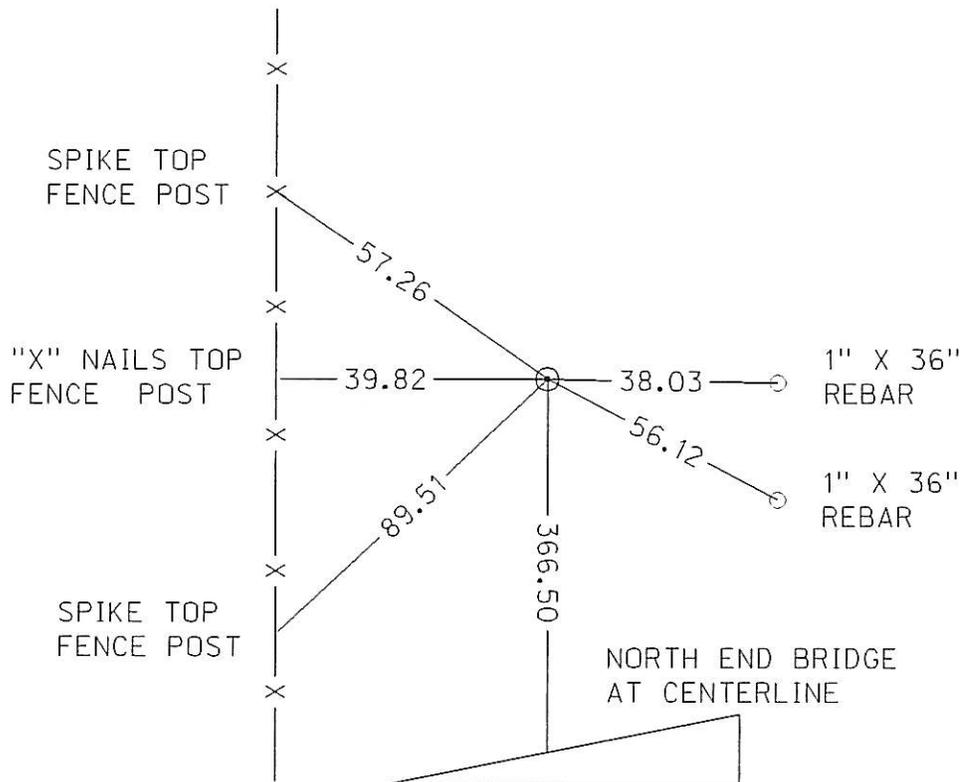

I
T
R
O
N

421-547 1/4

CORNER DESCRIPTION B-8

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: EAST OTR. COR. SEC. 27
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

27 26



LICENSED LAND SURVEYOR

Glenn L. Hicks


Description Of Corner:
 FOUND ALUM. CAP AND PRODED BUT DIDNT FIND A STONE

History Of Corner: HAZARD IN 1990 SURVEY SET ALUM. CAP

Description Of Ties:
 NW 30.37 FEET TO SET 1" X 36" REBAR
 NE 48.97 FEET TO SET 1" X 36" REBAR
 E 32.98 FEET TO 5/8" REBAR
 5.0' EAST TO CENTERLINE ROAD NORTH-SOUTH

Plane X =
 Coordinates Y =

Modified X =
 Coordinates Y =

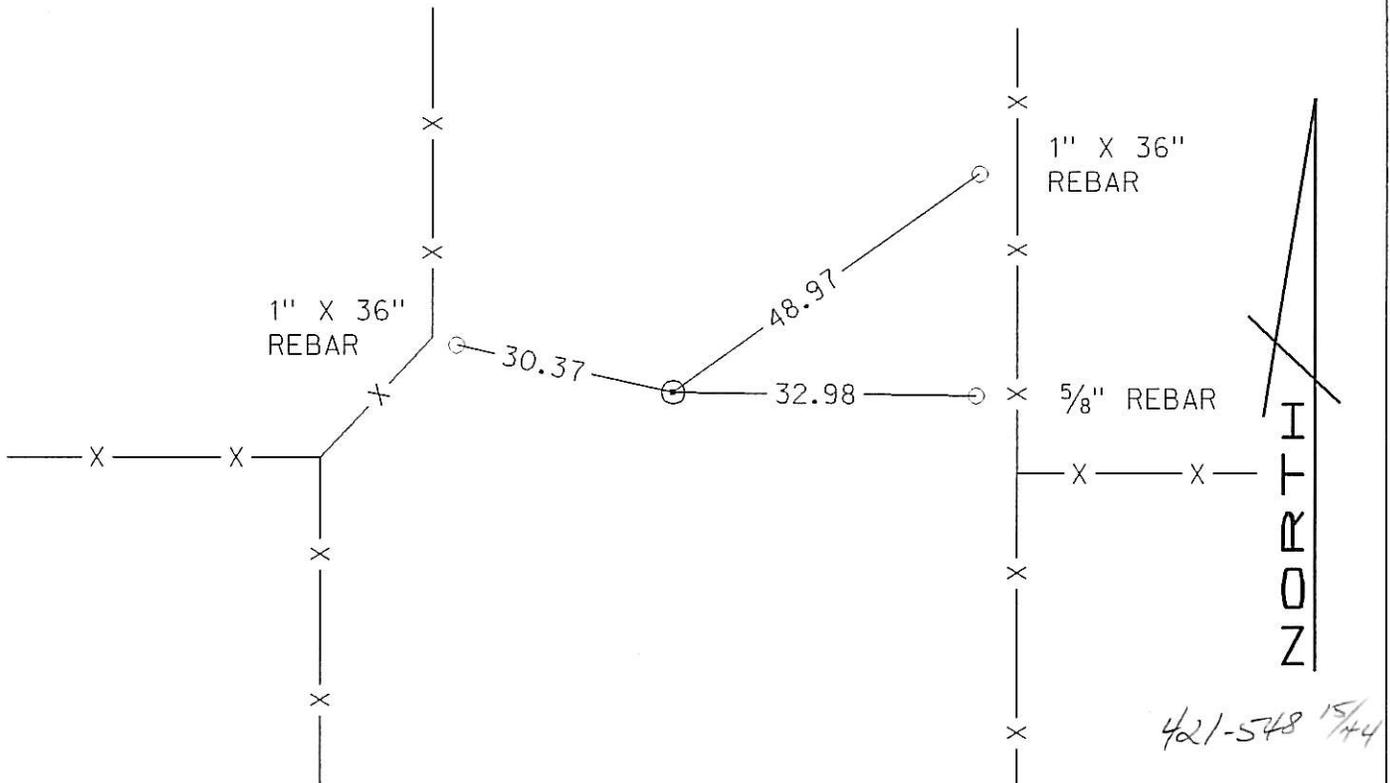

CORNER DESCRIPTION B-10

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: EAST QTR. COR. SEC. 26
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

26 25



LICENSED LAND SURVEYOR

Glenn L. Hicks

Description Of Corner: SET 1⁵/₈" X 36" PIPE THIS CORNER WAS SET OFF OF THE REMAINING TIES THAT BEERLINE USED.

History Of Corner:


BEERLINE HAD STONE IN 1944 AS DID DAUGHERTY IN 1935. MALONE SET CORNER ON SPLIT AND STRAIGHT LINE AS DID HAZARD. HAZARD POINT COULD BE A TRAVERSE POINT AS IT DOESNT FIT OTHER CORNERS.

Description Of Ties:

- WNW 30.37 FEET TO NAIL IN HEDGE TREE
- NW 41.46 FEET TO 3/4" X 36" REBAR
- NNE 6.16 FEET TO 3/4" REBAR SET BY J MALONE FOR ROSS ENG.
- NE 19.36 FEET TO HAZARDS ALUM CAP
- NE 41.46 FEET TO 1" X 36" REBAR
- E 33.80 FEET TO FENCE LINE RUNNING SOUTH

Plane X =
 Coordinates Y =

Modified X =
 Coordinates Y =

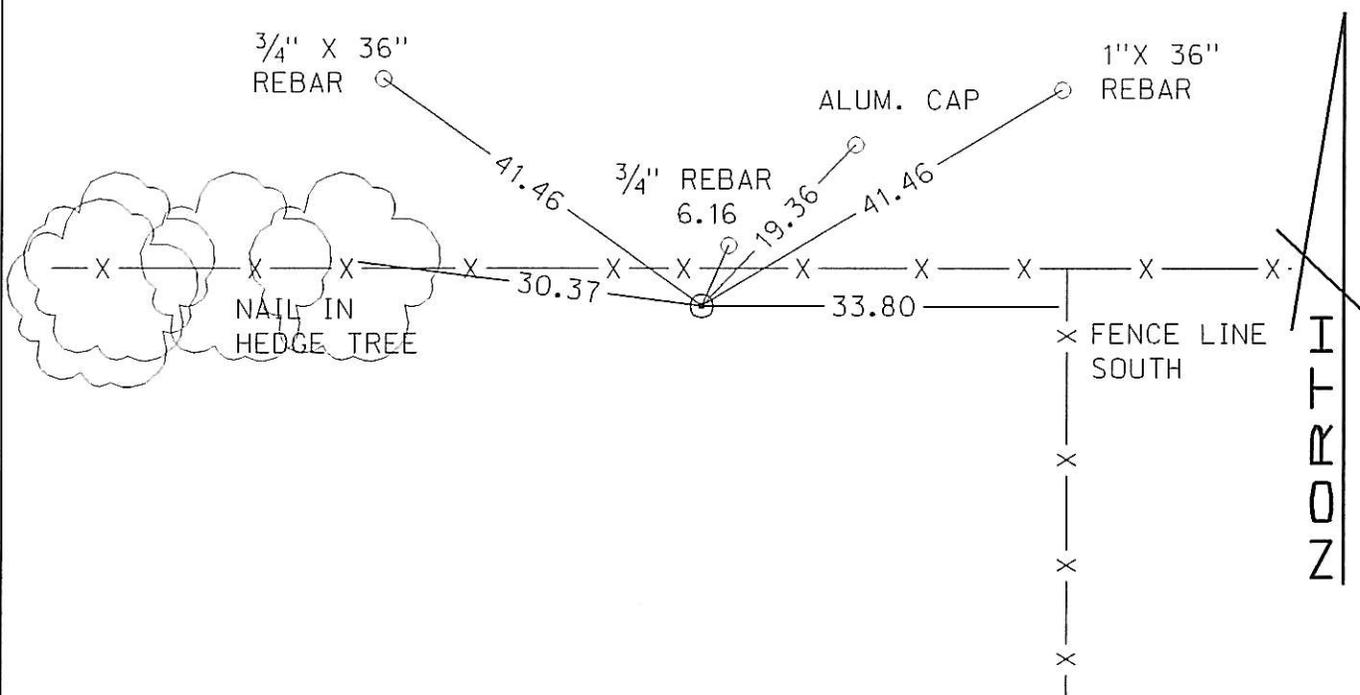

421-549 12/44

CORNER DESCRIPTION B-12

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: EAST QTR. COR. SEC. 25
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

25 ⊕ 30



LICENSED LAND SURVEYOR

Glenn L. Hicks


Description Of Corner: FOUND 1" PIPE

History Of Corner: FOUND TIE BY BEERLINE EAST BUT NO LIME CORE OR BRICK DAUGHERTY SET LIME DEPOSIT IN SURVEY AND SET CAM SHAFT EAST AND WEST 33.0' CORNER ALSO USED BY BEERLINE 1944 APP. 697

Description Of Ties:
 NW 64.68 TO SPIKE IN POWER POLE
 W 31.76 FEET TO NAIL TOP CORNER FENCE POST
 SW 51.24 FEET TO NAIL TOP FENCE POST
 E 32.48 FEET TO 2" CAM SHAFT

Plane X =
 Coordinates Y =

Modified X =
 Coordinates Y =

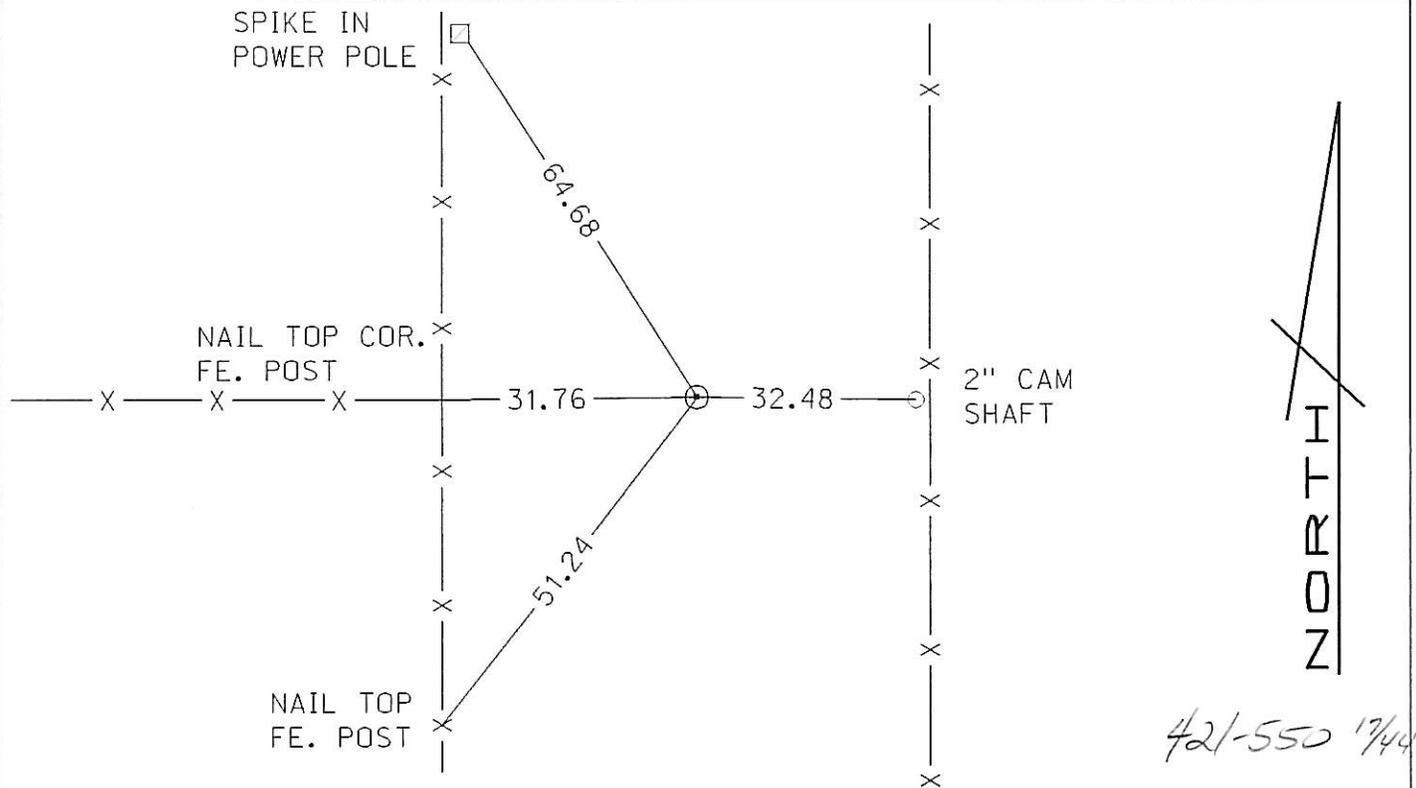

CORNER DESCRIPTION C-12

Township: 5 NORTH	Range: 10 EAST	6 P.M.
Cor. Location: WEST 1/16TH OF SW QTR. 30		
Date: 12-1-98	Proj. No: 136-7 (118)	
Described By: G. HICKS		
County: JOHNSON	State: NEBR.	
Name Of Proj. TECUMSEH WEST		
Description Of Corner: SET SURVEY SPIKE		

25 ● 30

○

1/16TH




LICENSED LAND SURVEYOR

Glenn L. Hicks

History Of Corner: BEERLINE SET CORNER IN 1944 SURVEY
 BEERLINES TIES DID NOT CROSS AT WHERE HIS PLAT DISTANCES SHOWED WHERE THE CORNER WOULD BE. ALSO THE BRASS CAP BEING PLACED OFF OF STATIONING IS INCORRECT AS THE PLANS HAVE A ERROR IN THEM AS TO THE PLACEMENT OF THE CORNER OFF OF THE TANGENT. WE SET THIS CORNER OFF OF BEELINES PLAT DISTANCES.

Description Of Ties:
 NW 72.55 FEET TO 1/2" X 36" REBAR
 NE 46.96 FEET TO TOP NEAR COR HDWL POST
 SE 1.98 FEET TO BRASS CAP
 SW 62.61 FEET TO NEAR COR HEADWALL
 S 46.94 FEET TO TO Q HWY 136

Plane Coordinates	X =	Modified Coordinates	X =
	Y =		Y =

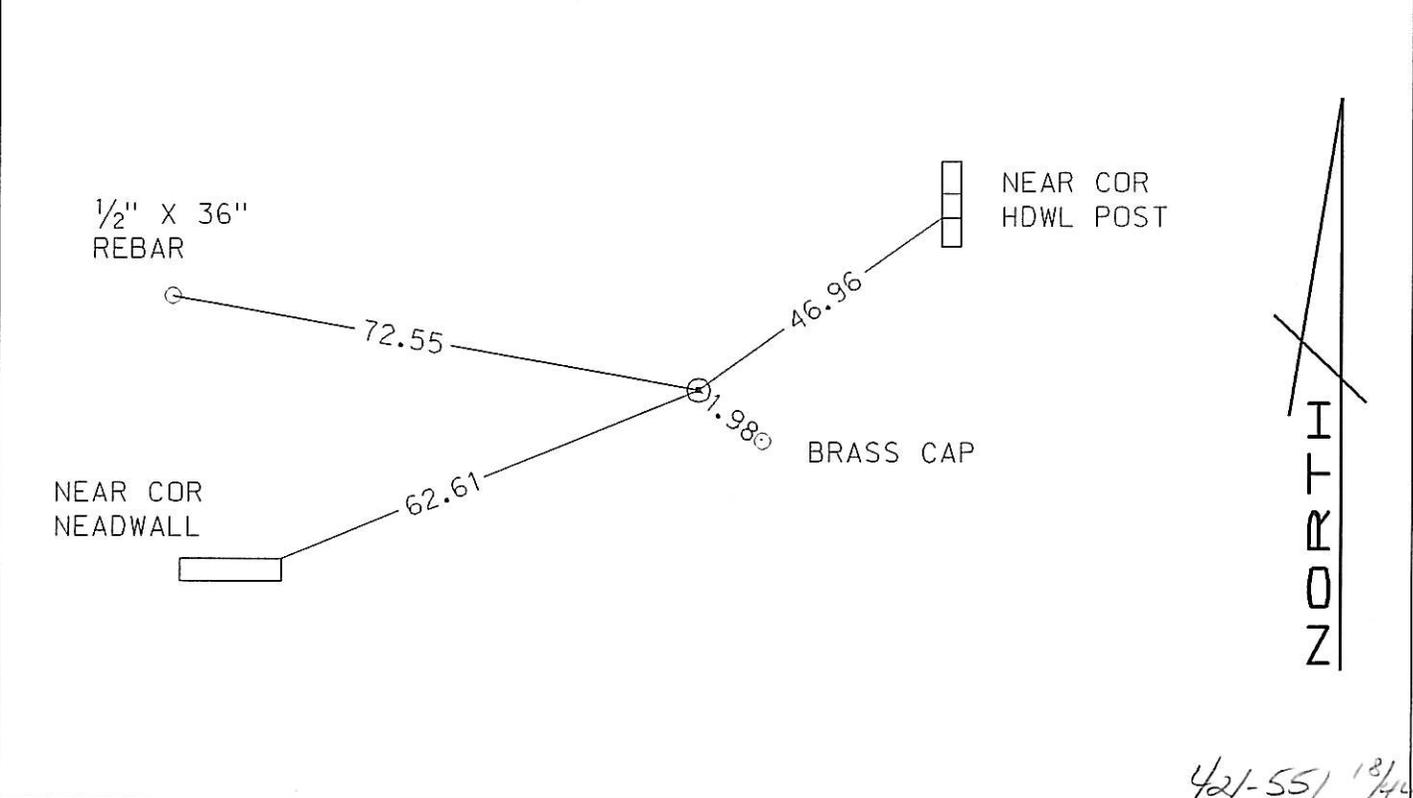

CORNER DESCRIPTION D-1

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: NORTHWEST COR. SEC. 31
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

25	30
⊕	
36	31




LICENSED LAND SURVEYOR
Glenn L. Hicks

Description Of Corner:
 FOUND 5/8" BAR AND SET 1" X 6" PIPE OVER TO SURFACE

History Of Corner:
 BEERLINE SET CORNER 1944 WITH BAR TIES EAST 33' AND 66', ONLY FOUND 33' BAR.

Description Of Ties:
 NW 59.88 FEET TO 5/8" X 36" REBAR (SET)
 W 31.74 FEET TO "X" NAILS LONE POST
 E 33.09 FEET TO 1/2" SQ. BAR (BEERLINES)
 SE 64.73 FEET TO SPIKE LOCUST TREE

Plane X =	Modified X =
Coordinates Y =	Coordinates Y =

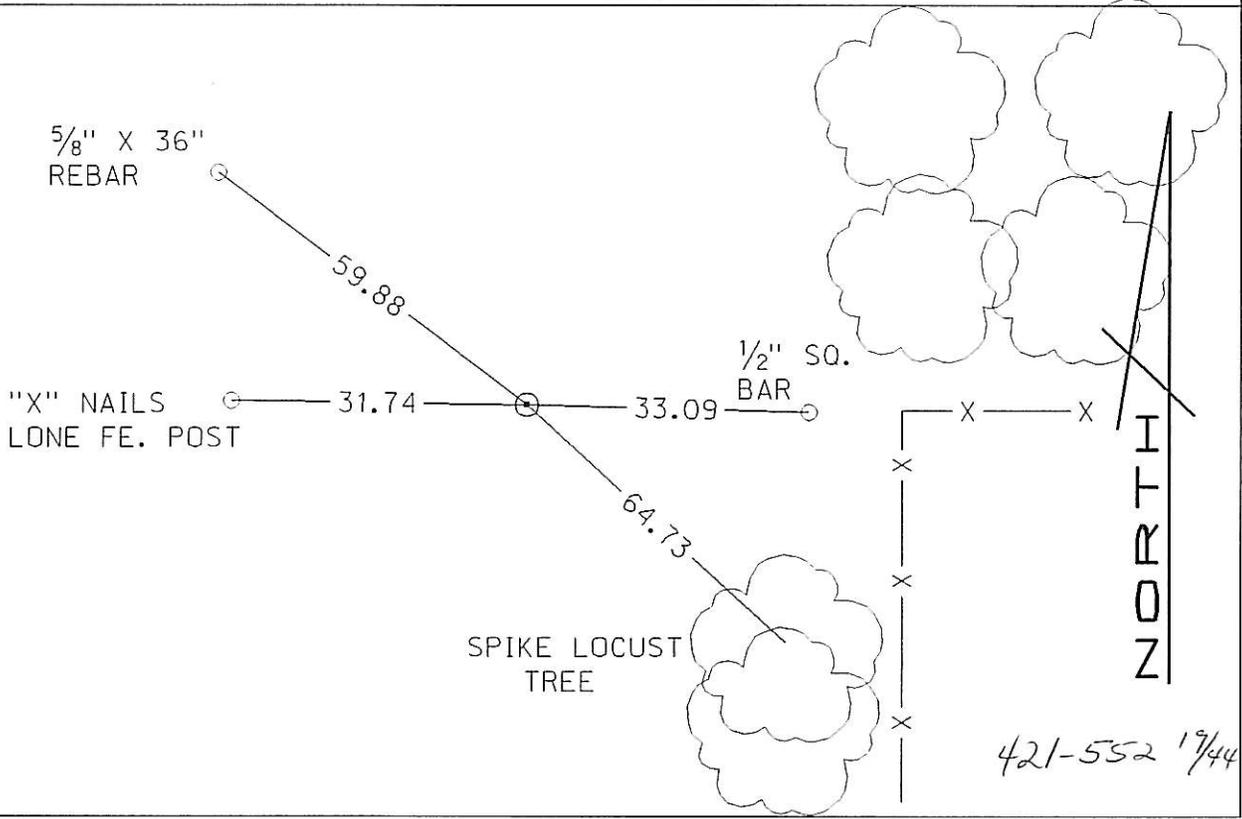

CORNER DESCRIPTION D-4

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: SOUTHWEST COR SEC. 28
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

29	28
32	33



LICENSED LAND SURVEYOR

Glenn L. Hicks

Description Of Corner: FOUND HEX HEAD BOLT IN ASPHALT

History Of Corner: FOUND AS RECORDED BY CATTLET IN COUNTY RECORDS

Description Of Ties:

NW 62.36 FEET TO SOUTHEAST CORNER HEADWALL
 NE 59.67 FEET TO SOUTHEAST CORNER HEADWALL
 S 57.08 FEET TO FENCE LINE EAST AND WEST


3.0' SOUTH OF CENTERLINE

Plane X =
 Coordinates Y =

Modified X =
 Coordinates Y =

SOUTHEAST COR.
HEADWALL

SOUTHEAST COR.
HEADWALL

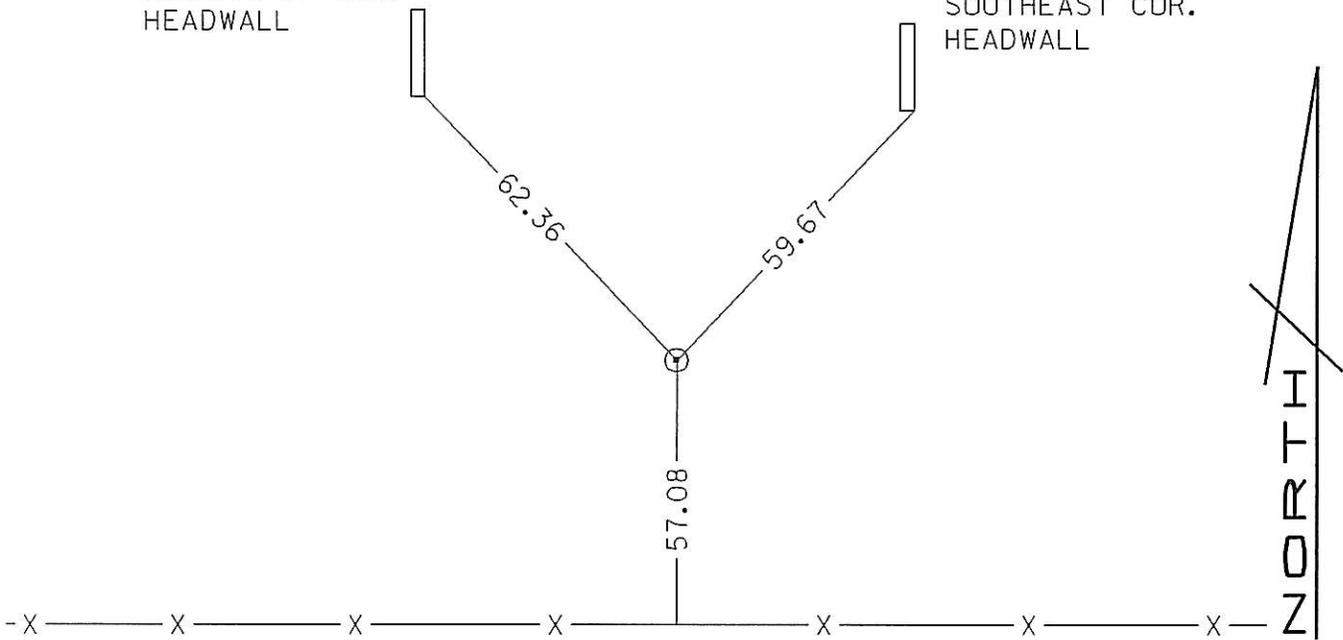

FENCE LINE
EAST AND WEST

421-553 20/44

CORNER DESCRIPTION *D-5*

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: NORTH QTR. COR. SEC. 33
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST
 Description Of Corner: FOUND HEX HEAD BOLT

28
 ●
 33




History Of Corner:
 BEERLINE IN APP. 697, 1944 SET CORNER, HE SET 1/2" BAR AND BRICK. HAZARD CALLS A HEX HEAD BOLT IN 6-1994, CATLETT CALLS HEX HEAD BOLT 9-1998.

Description Of Ties:
 WNW 89.35 FEET TO NEAR COR. BRIDGE CONC. RAILING
 WSW 87.67 FEET TO NEAR COR. BRIDGE CONC. RAILING
 NNE 19.95 FEET TO PK NAIL IN GAURD RAILPOST
 NE 30.18 FEET TO PK NAIL IN GAURD RAIL POST
 SSW 31.25 FEET TO PK NAIL IN GAURD RAIL POST

5.0 FEET NORTH OF CENTERLINE JOINT HWY 136

Plane X =	Modified X =
Coordinates Y =	Coordinates Y =

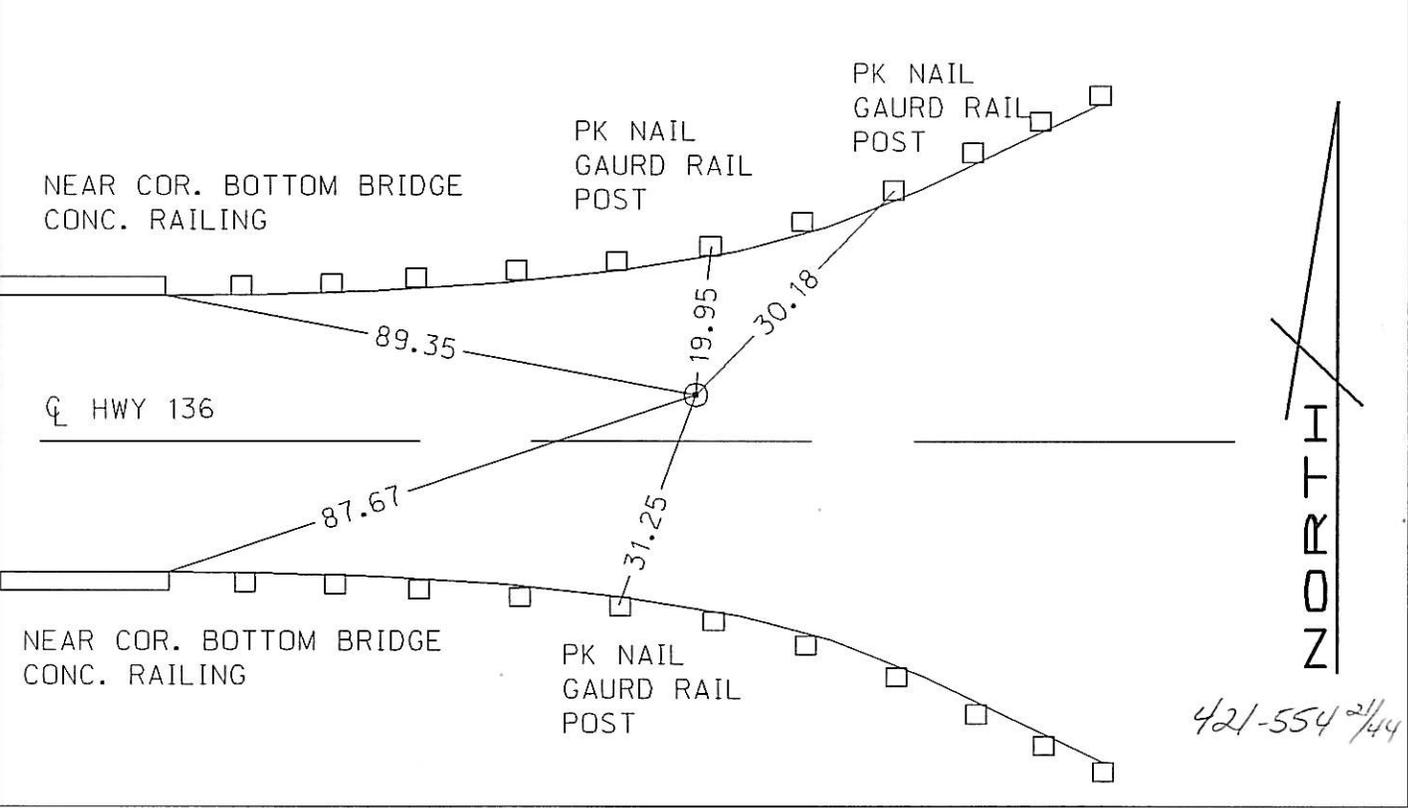

CORNER DESCRIPTION D-6

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: NORTHEAST COR. SEC. 33
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST
 Description Of Corner: SET SURVEY SPIKE

28	27
33	34




LICENSED LAND SURVEYOR
Glenn L. Hicks

History Of Corner:
 6-56 INDEX CARD CALLS THIS CORNER. HAZARD CALLS NDOR CAP IN MAY 1994.
 CATLETT CALLS BRASS CAP SEPT. 1, 1998. BEERLINE CALLS FOUND RED BOULDER, SET
 1/2" BAR AND BRICK.

Description Of Ties:
 NE 128.79 FEET TO 1" X 30" REBAR
 SW 88.50 FEET TO NEAR COR. ROW MARKER
 SE 167.06 FEET TO 1" X 36" REBAR
 NW 174.32 FEET TO 1" X 36" REBAR
 REBARS NW AND SE ARE ALL ON LINE WITH CORNER

10.0 FEET NORTH OF CENTERLINE JOINT

Plane X =	Modified X =
Coordinates Y =	Coordinates Y =

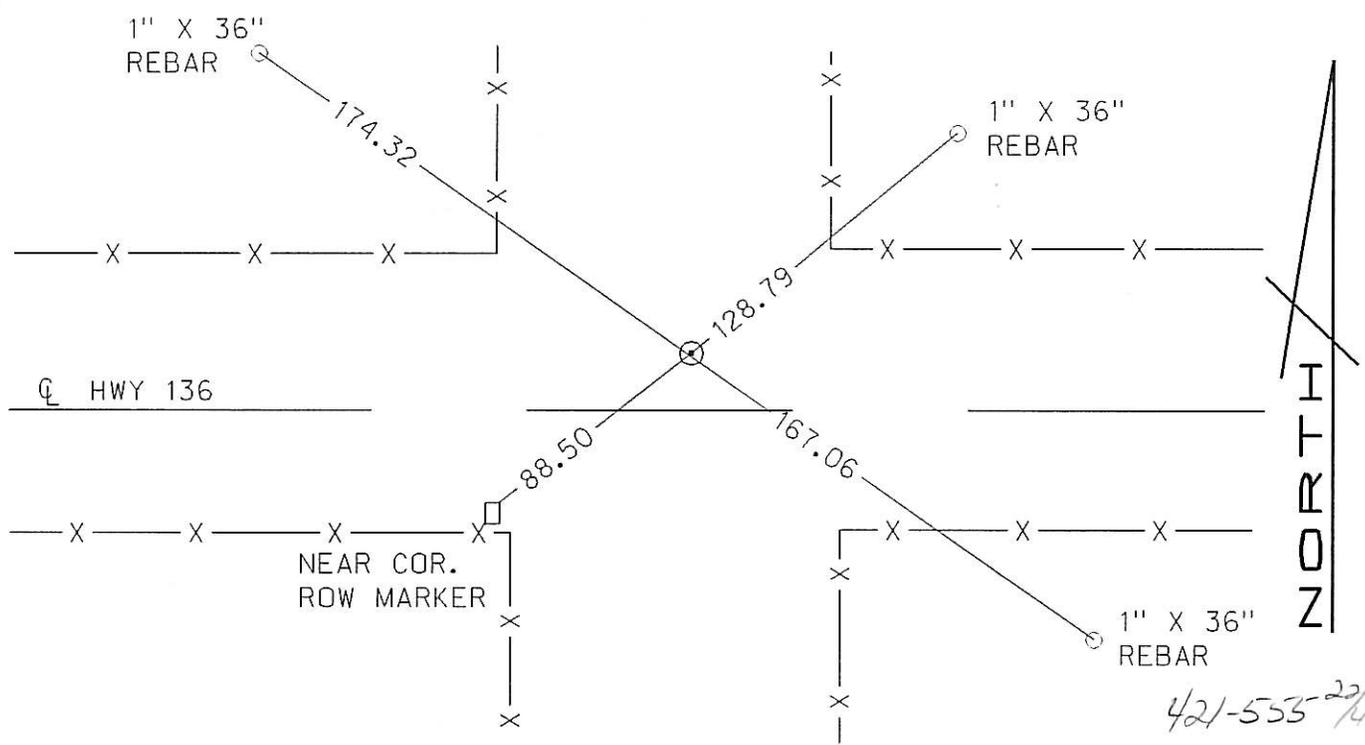


421-555-22/44

CORNER DESCRIPTION D-7

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: NORTH QTR. COR. SEC. 34
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

27

34



LICENSED LAND SURVEYOR

Glenn L. Hicks


Description Of Corner: SET PK NAIL BACK BY TIES

History Of Corner: SET BACK BY TIES IN COUNTY TIE RECORDS JUNE 1956
 CORNER FOUND BY BEERLINE IN 1944 APP. 697 HE FOUND A LIMESTONE CORNER NOW
 IN 20' OF FILL BELOW HWY WE USED TIES TO RESET CORNER.

Description Of Ties:
 NE 287.16 FEET TO 1" X 36" REBAR
 SW 188.81 FEET TO 1" X 36" REBAR
 REBARS ARE ON LINE OVER CORNER

4.3 FEET NORTH OF CENTERLINE JOINT HWY 136

Plane Coordinates	X =		Modified Coordinates	X =	
	Y =			Y =	

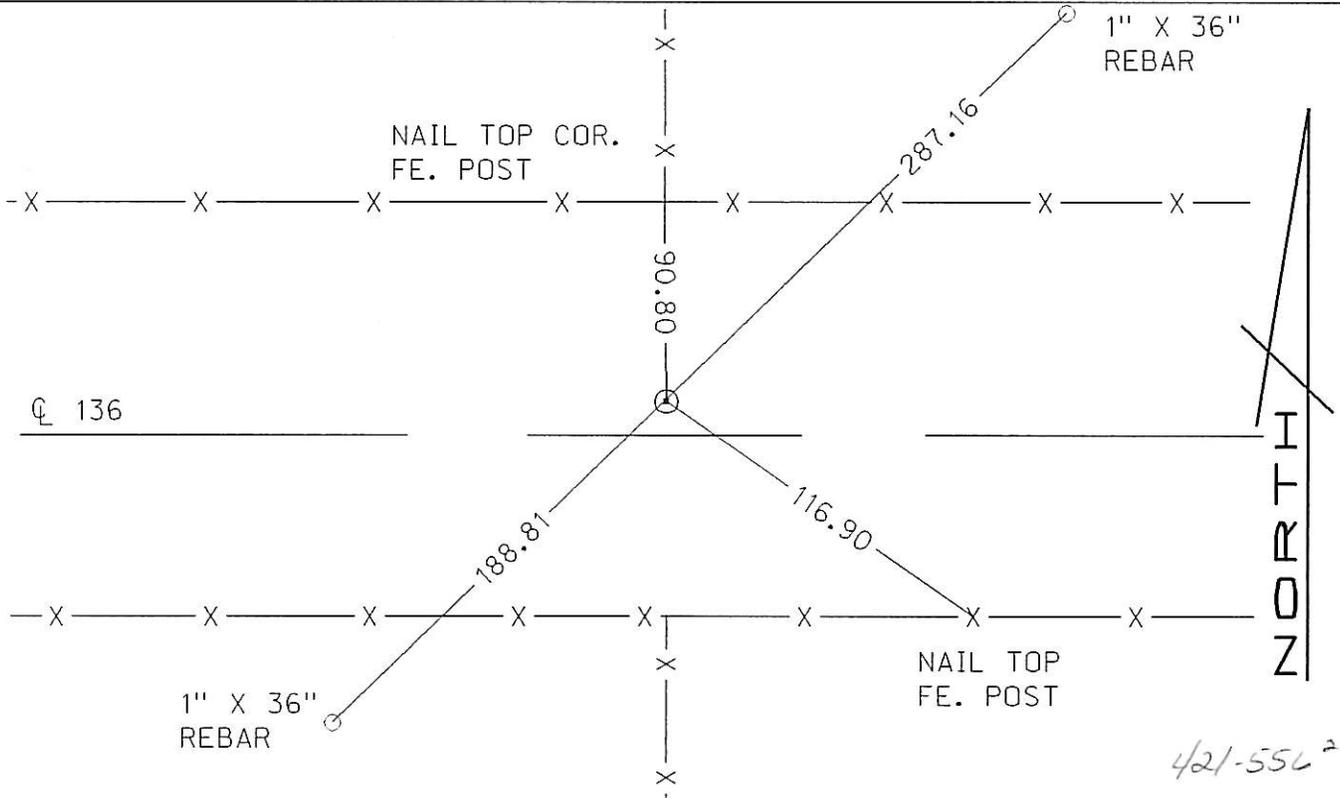

421-556 23/44

CORNER DESCRIPTION D-9

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: NORTH QTR. COR. SEC. 35
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

26

35



LICENSED LAND SURVEYOR

Glenn L. Hicks

Description Of Corner: FOUND 5/8" REBAR IN ASPHALT

History Of Corner:


BEERLINE SET CORNER IN 1944, APP. 697 FOUND ONE TIE SOUTH. THIS CORNER FITS HIS TIES TO FENCES AND SURROUNDING CORNERS

Description Of Ties:

- SE 106.44 FEET TO 1" X 36" REBAR
- NW 231.85 FEET TO 1" X 36" REBAR FROM SE REBAR TIE
- SW 80.30 FEET TO 1" X 36" REBAR
- NE 201.58 FEET TO 1" X 36" REBAR FROM SW REBAR TIE

REBAR NW AND SE ON STRAIGHT LINE
 REBAR NE AND SW ON STRAIGHT LINE
 12.0 FEET WEST OF FENCE LINE NORTH AND SOUTH
 7.5 FEET SOUTH OF CENTERLINE JOINT HWY 136

Plane	X =	Modified	X =
Coordinates	Y =	Coordinates	Y =

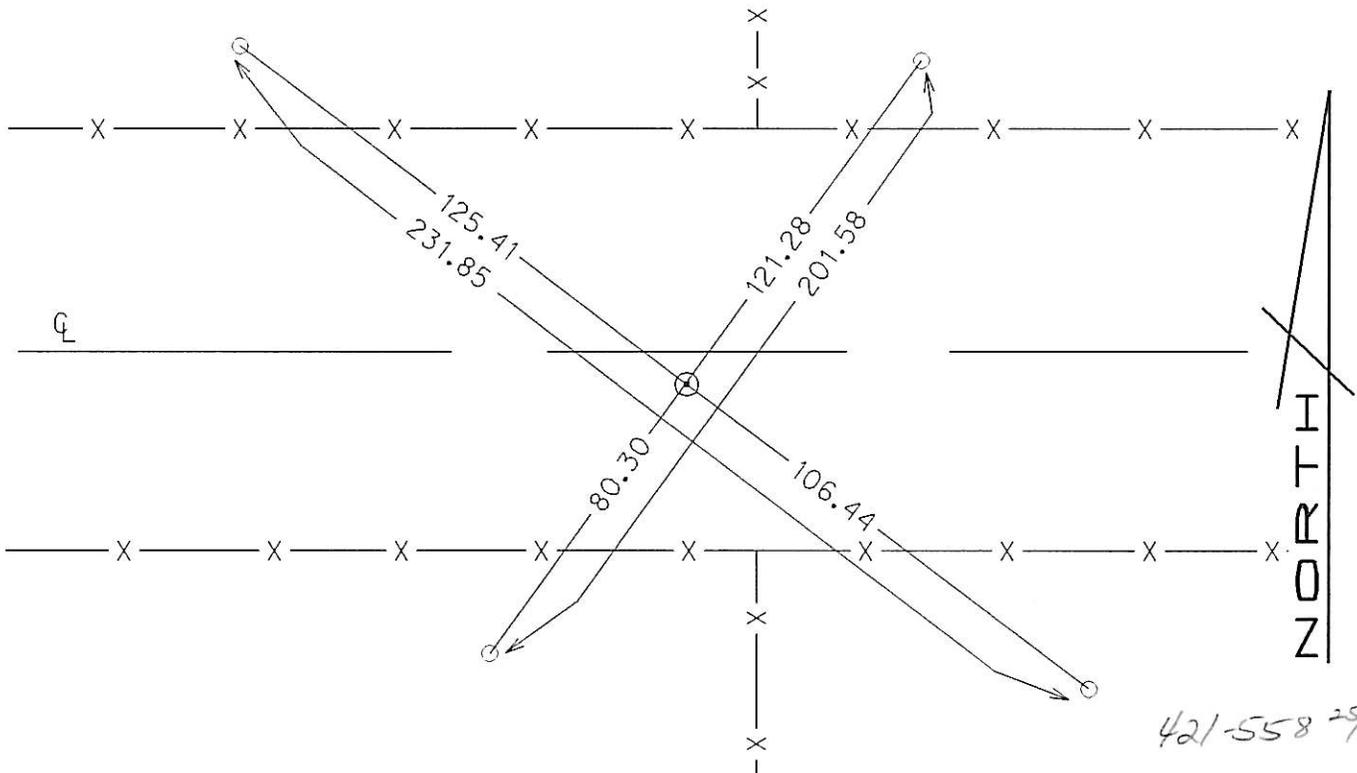

421-558 25/44

CORNER DESCRIPTION D-10

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: NORTHEAST COR. SEC. 35
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

26	25
35	36



LICENSED LAND SURVEYOR
Glenn L. Hicks

Description Of Corner: SET PK NAIL IN HOLE IN ASPHALT

History Of Corner:

CORNER SET BY BEERLINE 1944, APP. 697 CORNER FOUND BY COUNTY TIES. ALSO FITS SURROUNDING CORNERS IN BEERLINE SURVEY.


Description Of Ties:

- SE 128.24 FEET TO 3/4" X 36" REBAR
- NW 241.78 FEET TO 3/4" X 36" REBAR FROM SE REBAR TIE
- NE 120.52 FEET TO 3/4" X 36" REBAR
- SW 248.45 FEET TO 1" X 36" REBAR FROM NE REBAR TIE

SE REBAR TO NW REBAR ALL ON STRAIGHT LINE
 NE REBAR TO SW REBAR ALL ON STRAIGHT LINE

9.5 FEET SOUTH OF CENTERLINE JOINT HWY 136

Plane Coordinates	X =	Y =	Modified Coordinates	X =	Y =
-------------------	-----	-----	----------------------	-----	-----

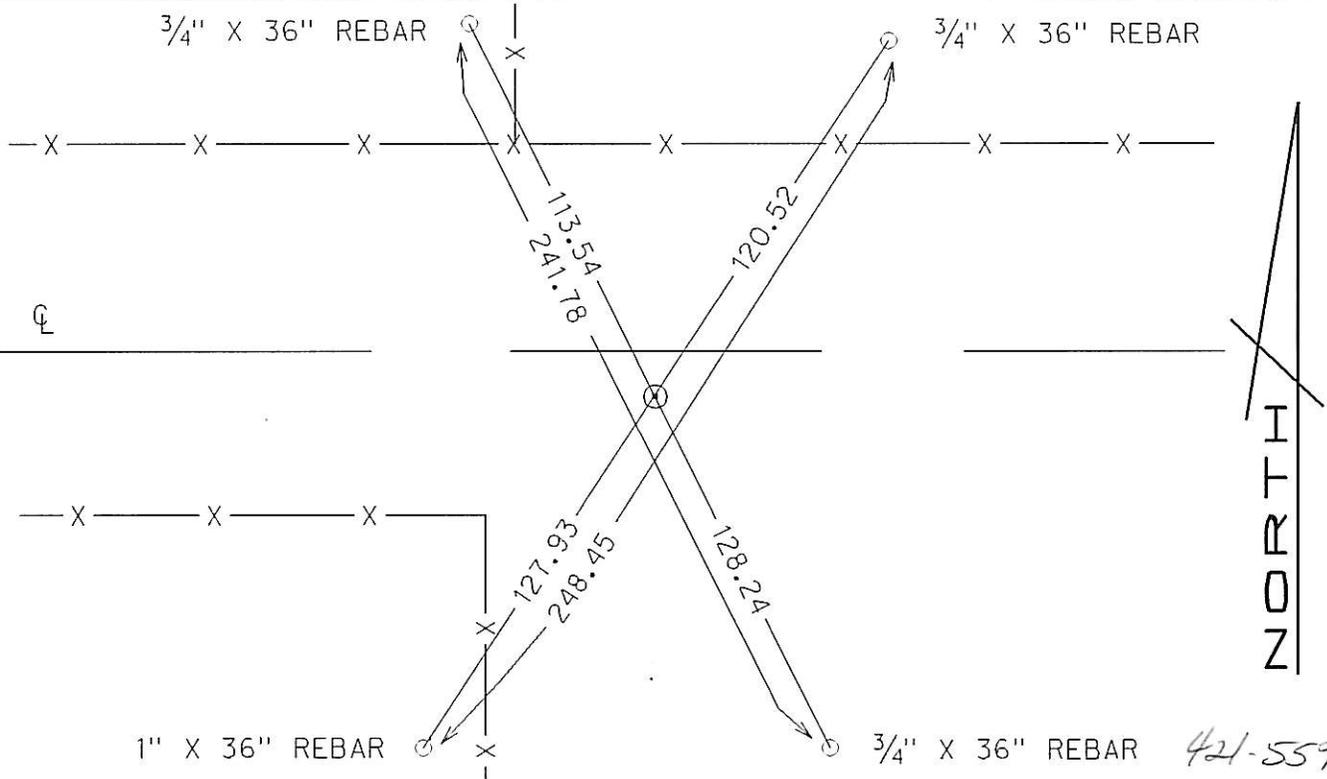

421-559 26/44

CORNER DESCRIPTION D-11

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: SOUTH QTR. COR. SEC. 25
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

25

36



LICENSED LAND SURVEYOR


Glenn L. Hicks

Description Of Corner: FOUND HEDGE POST 2.0' DEEP WITH BRICK ON NORTH SIDE ALSO STONE AT BOTTOM OF POST.
 SET 1 1/4" X 36" REBAR ON EAST SIDE OF STONE WITH 1" X 36" REBAR TO SURFACE BETWEEN BRICK AND POST

History Of Corner:
 CORNER AS FOUND BY BEERLINE, HE SET POST AND BRICK OVER STONE.

Description Of Ties:
 SE 111.24 FEET AND 50.78 FEET TO 3/4" X 36" REBARS ALL ON LINE
 SE 31.58 FEET TO "X" NAILS TOP GATE POST
 6.0 FEET WEST OF FENCE LINE NORTH
 11.0 FEET WEST OF FENCE LINE SOUTH
 21.00 FEET NORTH OF FENCE LINE EAST
 74.25 FEET SOUTH OF CENTERLINE OF HWY

Plane X =	Modified X =
Coordinates Y =	Coordinates Y =

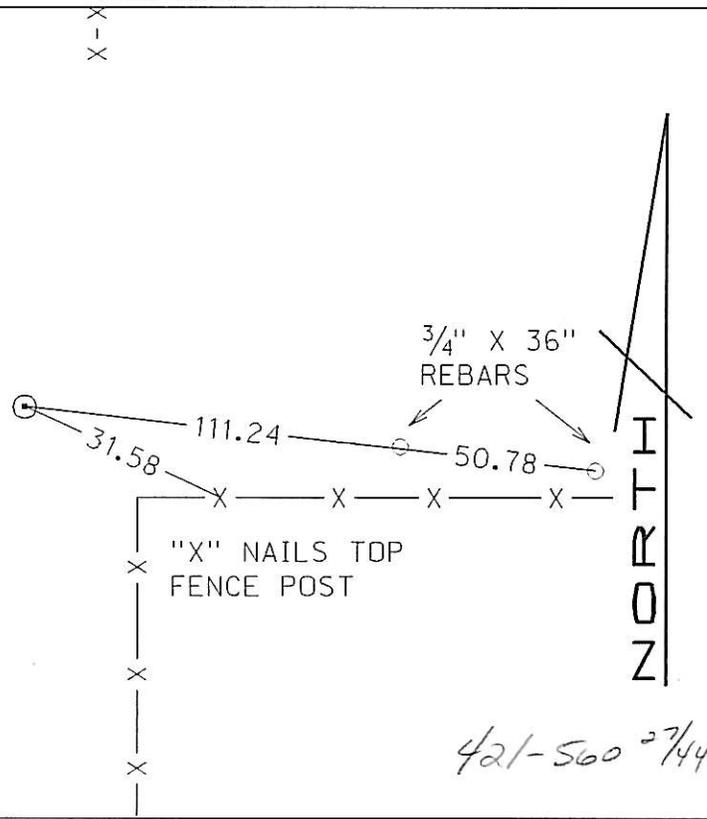

421-500 2/44

CORNER DESCRIPTION D-12

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: SOUTHEAST COR. SEC. 25
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

25	30
+	
36	31



LICENSED LAND SURVEYOR
Glenn L. Hicks

Description Of Corner: FOUND SPIKE AND BRICK WITH LIME CORE ON SOUTH SIDE. SET 1 1/8" X 36" PIPE IN CENTER OF LIME CORE WITH 3/8" X 36" REBAR IN CENTER OF PIPE WITH 1" X 12" PIPE OVER REBAR AND ON TOP OF 1 1/8" PIPE TO SURFACE.


History Of Corner:

EST. BY DAUGHERTY 1935 RETRACED BY BEERLINE 1944 IN APPL. 697, RETIED BY NORRIS / HIATT 1953

Description Of Ties:

NW 79.64 FEET TO "X" CHISLED IN CONCRETE HEADWALL
 E 32.48 FEET TO "X" NAILS CORNER FENCE POST
 SE 56.93 FEET TO 1" X 36" REBAR
 SW 27.19 FEET TO NEAR COR CONCRETE HEADWALL
 6.0' EAST TO CENTERLINE COUNTY ROAD NORTH-SOUTH

Plane Coordinates	X =	Y =	Modified Coordinates	X =	Y =
-------------------	-----	-----	----------------------	-----	-----

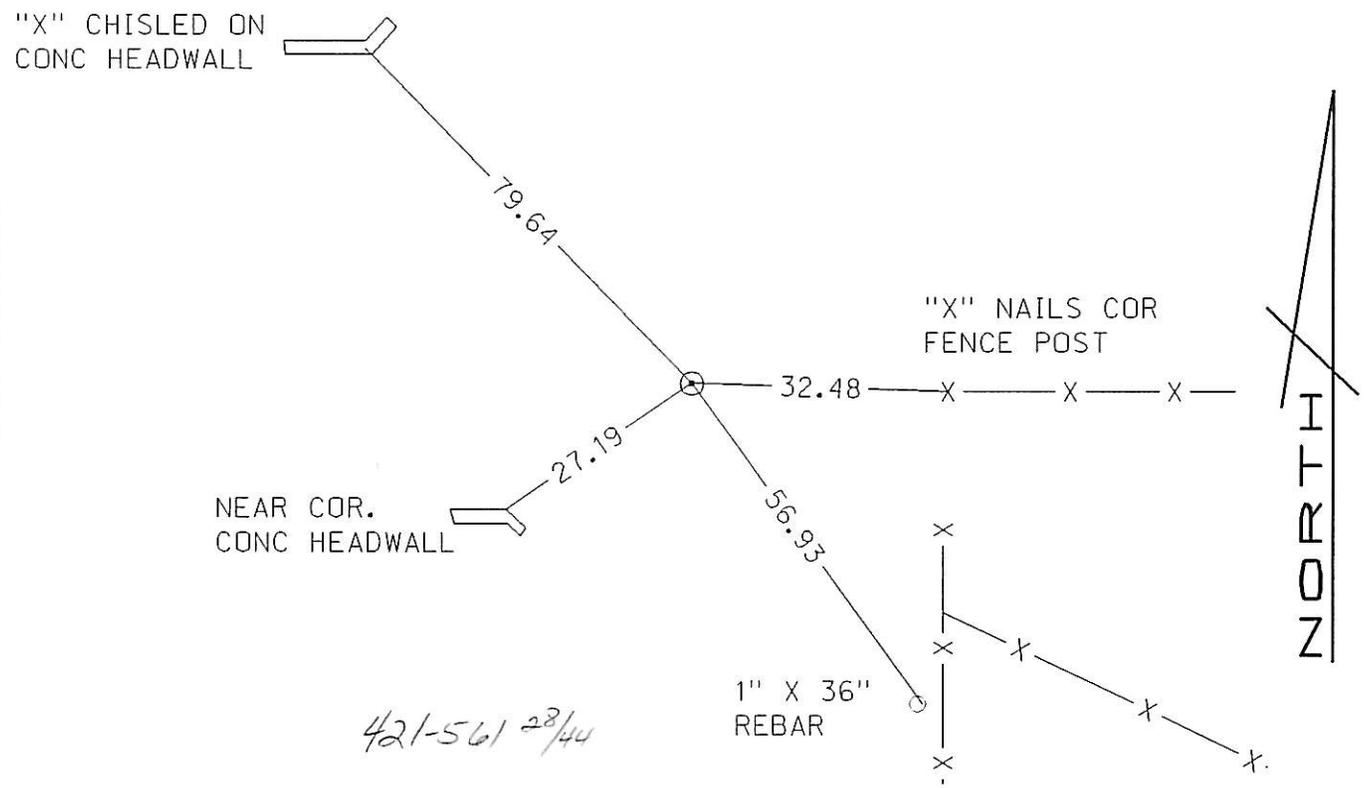

CORNER DESCRIPTION E-4

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: EAST QTR. COR 32
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

32 ⊕ 33



LICENSED LAND SURVEYOR
Glenn L. Hicks


Description Of Corner:
 FOUND 2 GRANITE STONES 7" X 7" X 14" EACH. SET 1" X 36"
 PIPE ALONG WEST SIDE

History Of Corner: GOVERNMENT CALLS 7" X 7" X 14" BOULDER STONE

Description Of Ties:
 NW 58.18 FEET TO SPIKE IN 12" ELM TREE
 E 27.18 FEET TO 1" X 36" REBAR
 SW 62.60 FEET TO 1" X 36" REBAR
 N 27.00 FEET TO TRAIL ⊕

Plane Coordinates X =
 Y =

Modified Coordinates X =
 Y =

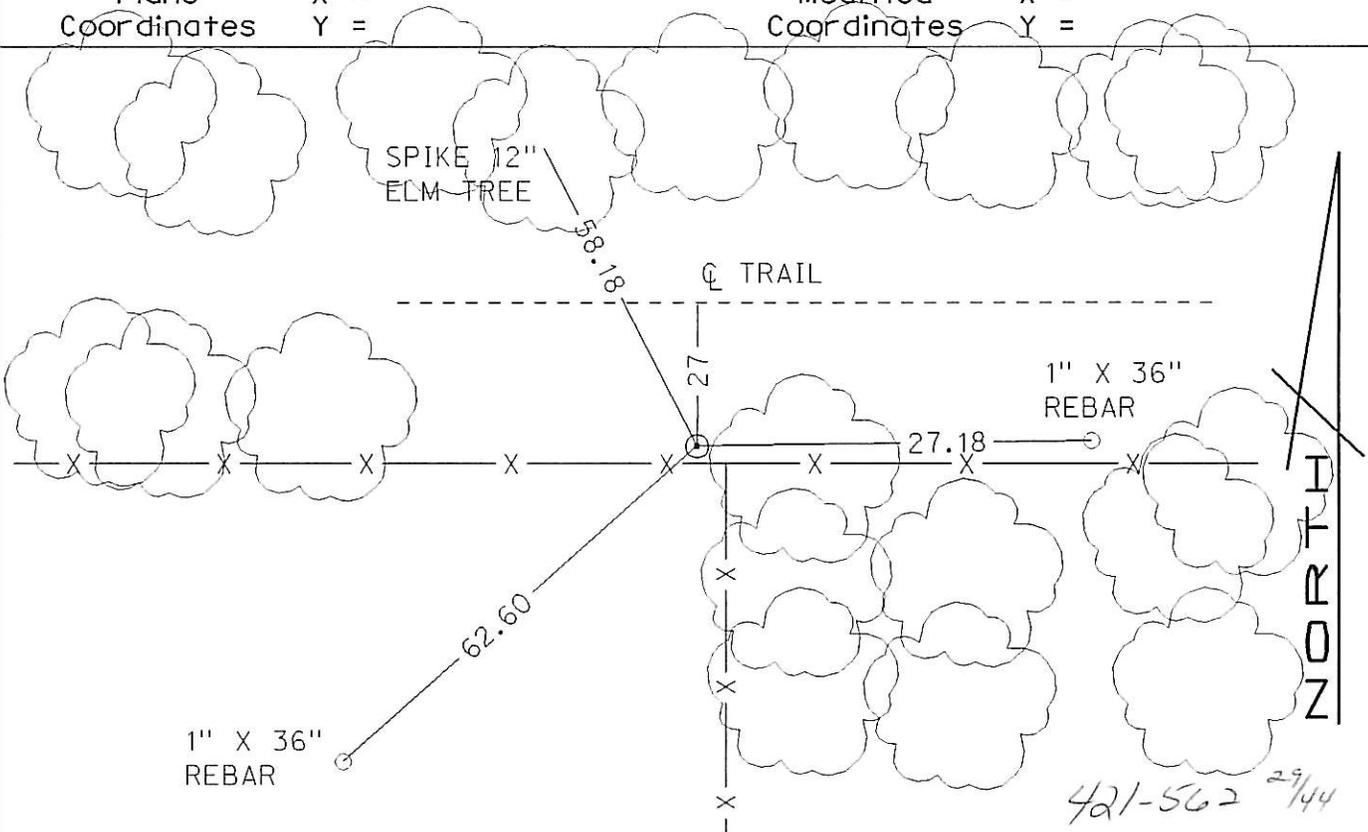

CORNER DESCRIPTION E-6

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: EAST QTR. COR. SEC. 33
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

33 ⊕ 34



LICENSED LAND SURVEYOR
Glenn L. Hicks


Description Of Corner:
 FOUND 1/2" SQ. REBAR AS SWENSON 7.0' DEEP IN OLD ROAD
 BED. SET 1 5/8" X 72" PIPE OVER BAR. SET 1" X 36" PIPE TO
 SURFACE

History Of Corner:
 NO RECORD EXCEPT SWENSON WHERE HE CALLED BAR AS CORNER DUG AROUND BAR
 FOUND NO OTHER EVIDENCE OF CORNER.

Description Of Ties:
 NW 35.85 FEET TO "X" NAILS POWER POLE
 NE 53.82 FEET TO "X" NAILS CORNER FENCE POST
 SE 50.25 FEET TO 3/4" X 36" REBAR
 SW 73.77 FEET TO 3/4" X 36" REBAR
 ON LINE WITH HEDGE ROW EAST AND WEST
 3.0' EAST TO CENTERLINE ROAD NOERTH AND SOUTH

Plane X =
 Coordinates Y =

Modified X =
 Coordinates Y =

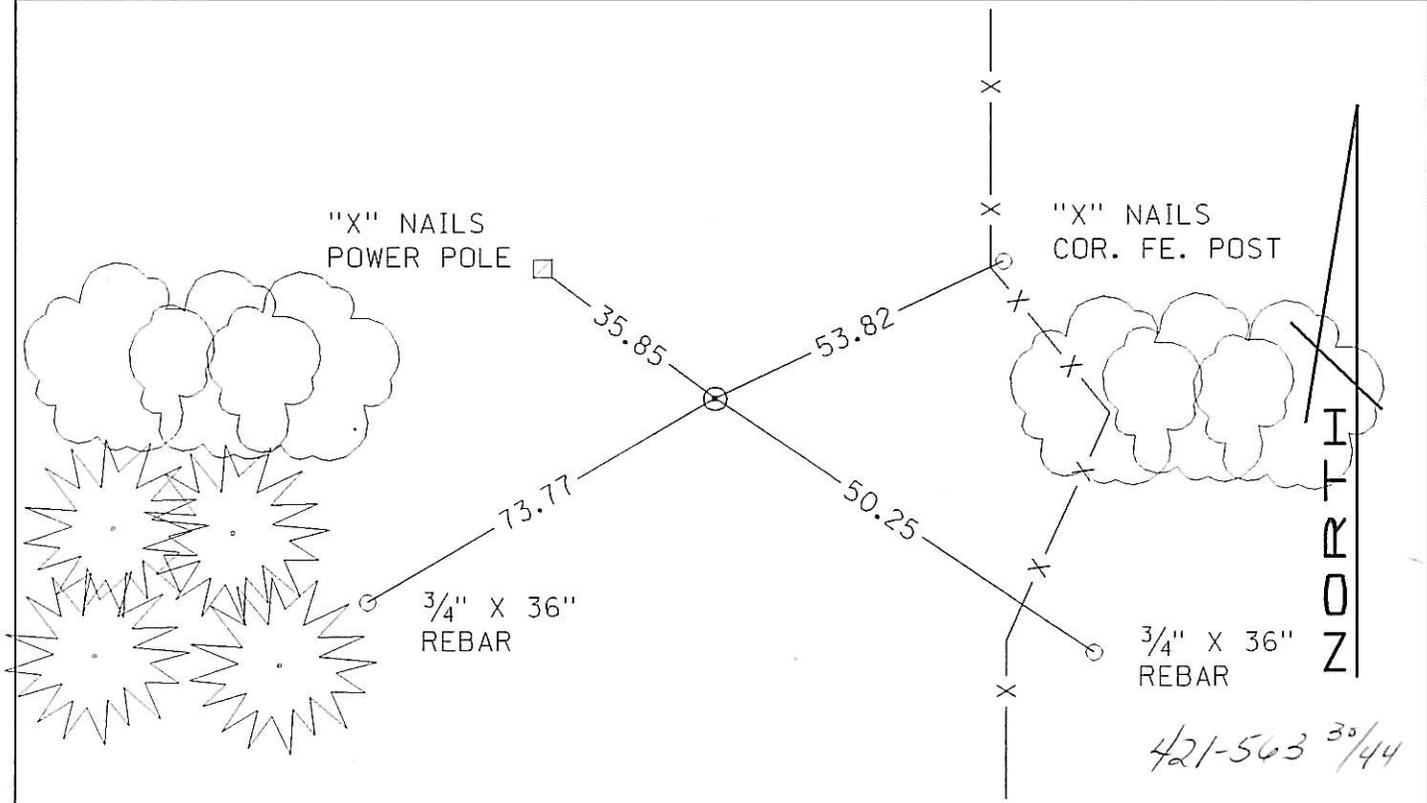

CORNER DESCRIPTION E-8

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: EAST QTR. CDR. SEC. 34
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.

34 ● 35



LICENSED LAND SURVEYOR

Glenn L. Hicks

Description Of Corner: SET 1 1/8" X 48" PIPE

History Of Corner:


SET AS PER COUNTY SURVEYORS INSTRUCTION STRAIGHT LINE SPLIT

Description Of Ties:

NW 49.50 FEET TO 3/4" X 36" REBAR
 WSW 50.50 FEET TO 3/4" X 36" REBAR
 E 27.08 FEET TO PK NAIL SIDE FENCE POST
 NE 60.15 FEET TO " X " NAILS CORAL POST

ON CENTERLINE ROAD NORTH AND SOUTH
 ON FENCE LINE EAST AND WEST

Plane Coordinates	X =	Y =	Modified Coordinates	X =	Y =
-------------------	-----	-----	----------------------	-----	-----

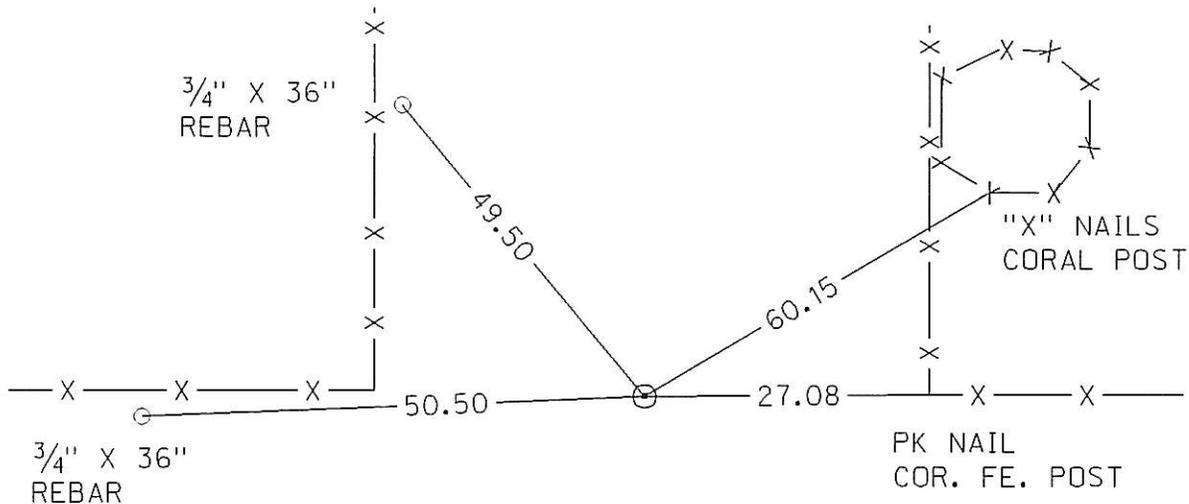

IRON

421-564 3/44


CORNER DESCRIPTION E-10

Township: 5 NORTH	Range: 10 EAST	6 P.M.
Cor. Location: EAST QTR. COR. SEC. 35		
Date: 12-1-98	Proj. No: 136-7 (118)	
Described By: G. HICKS		
County: JOHNSON	State: NEBR.	
Name Of Proj. TECUMSEH WEST		
Description Of Corner: FOUND 12" X 10" X 18" GRANITE STONE, SET 1" X 24" REBAR ON NORTH SIDE. BROUGHT TO SURFACE WITH 1 ⁵ / ₈ " X 36" PIPE TO SURFACE		
35 ● 36		
		LICENSED LAND SURVEYOR
<i>Glenn L. Hicks</i>		

History Of Corner:
 17" X 6" X 5" BOULDER STONE CALLED FOR IN GOVERNMENT NOTES. THIS STONE FITS WELL WITH OTHER CORNERS IN THE SECTION.

Description Of Ties:
 WSW 30.32 FEET TO PK NAIL CORNER FENCE POST
 NE 74.90 FEET TO 1" X 36" REBAR
 ENE 43.62 FEET TO 1" X 36" REBAR
 E 30.44 FEET TO "X" NAILS CORNER FENCE POST
 6.0' NORTH OF FENCE LINE WEST

Plane Coordinates	Modified Coordinates
X =	X =
Y =	Y =

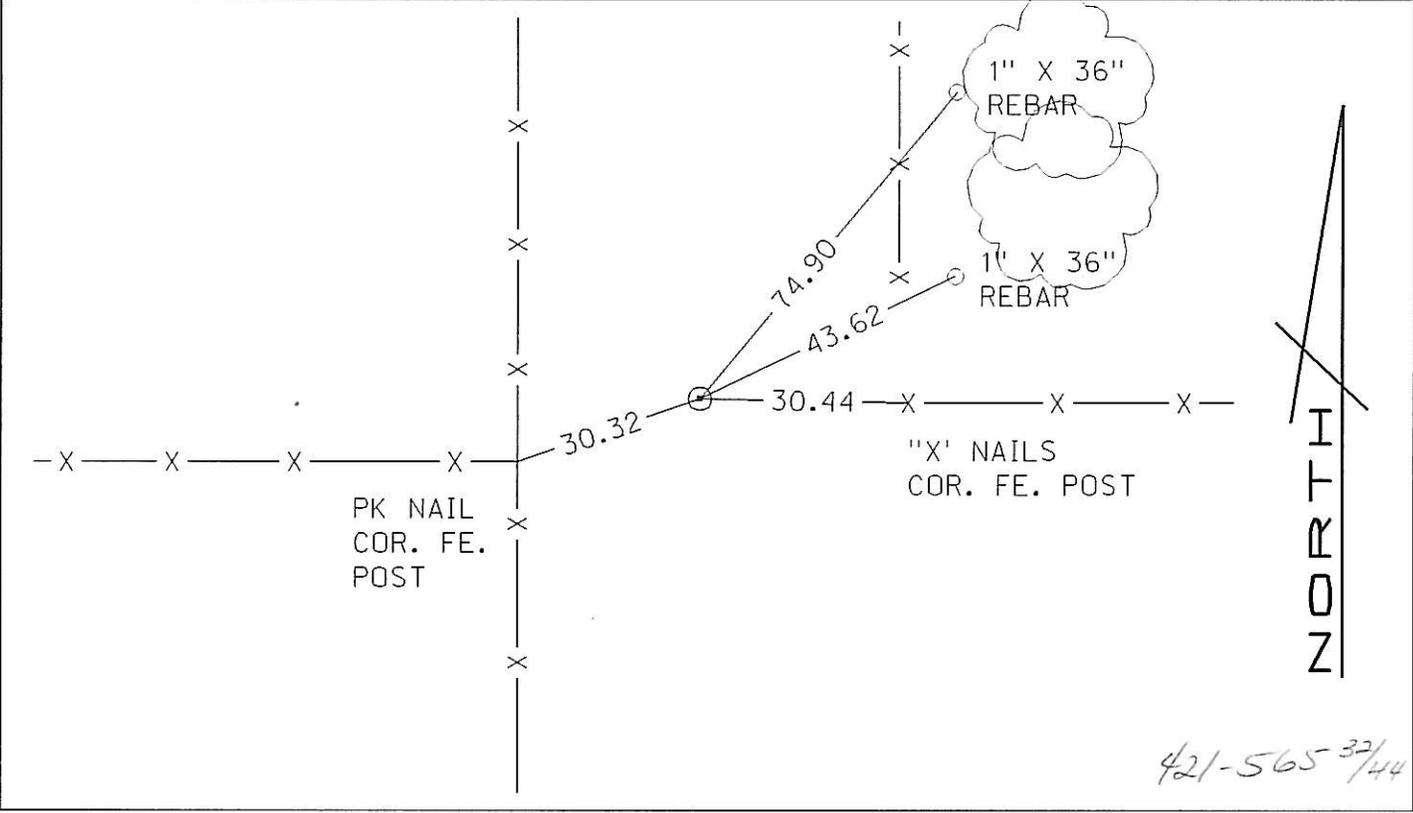

421-565³²/₄₄

CORNER DESCRIPTION F-1

Township: 5 NORTH Range: 10 EAST 6 P.M.

Cor. Location: SOUTHWEST COR. SEC. 31

Date: 12-1-98 Proj. No: 136-7 (118)

Described By: G. HICKS

County: JOHNSON State: NEBR.

Name Of Proj. TECUMSEH WEST

Description Of Corner: FOUND 1 1/2" PIPE AND BRICK

36

31

1

6



LICENSED LAND SURVEYOR

Glenn L. Hicks

History Of Corner:


CORNER FOUND BY BEERLINE 1944 APPL.. HE FOUND STONE AND SET BAR AND BRICK

Description Of Ties:

- NW 33.71 FEET TO PK NAIL WALNUT TREE
- NE 60.23 FEET TO 3/4" X 36" REBAR
- ESE 28.32 FEET TO 3/4" X 36" REBAR
- SE 37.57 FEET TO "X" NAILS POWER POLE
- 95.0' NW TO INTERSECTION OF ROADS
- 3.0' NORTH OF FENCE RUNNING EAST AND WEST

Plane X =
Coordinates Y =

Modified X =
Coordinates Y =

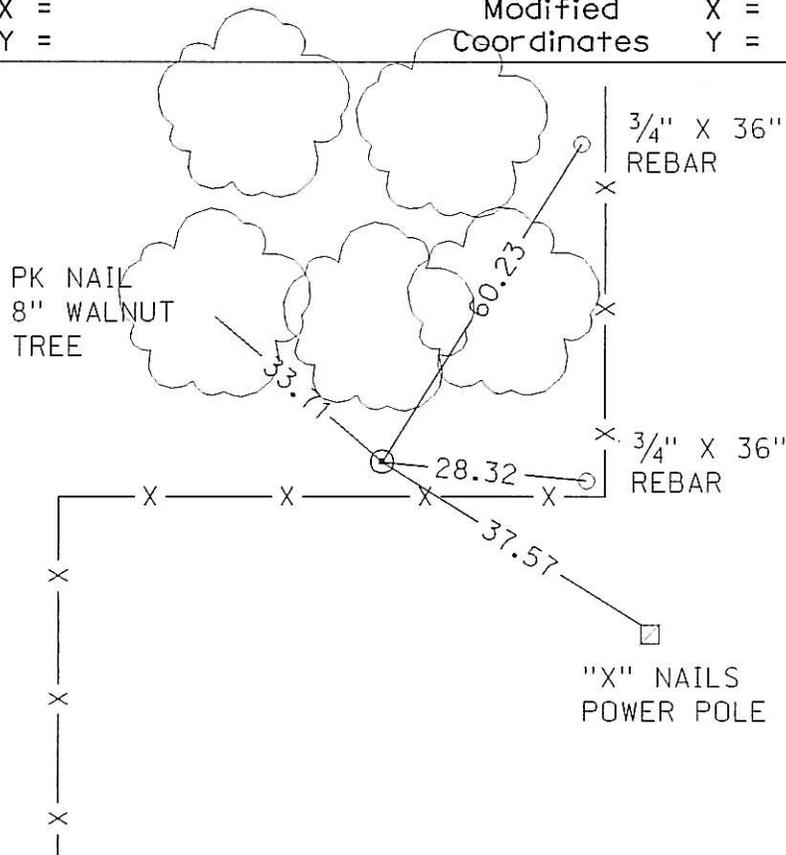

CORNER DESCRIPTION F-2

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: SOUTHWEST COR. SEC. 32
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST
 Description Of Corner: FOUND 1 1/2" PIPE , SMASHED AT TOP

31	32
6	5




LICENSED LAND SURVEYOR
Glenn L. Hicks

History Of Corner:
 FOUND NO RECORD OF CORNER IN COUNTY RECORDS, BUT FITS WITHIN 2' OF WHERE CORNER WOULD BE SET BY PROPORTION.

Description Of Ties:
 NE 88.42 FEET TO 3/4" X 36" REBAR
 ESE 91.54 FEET TO 3/4" X 36" REBAR
 SE 92.80 FEET TO "X" NAILS TELE. PED. POLE

IN CULTIVATED FIELD
 127.0' WEST OF CENTERLINE ROAD RUNNING SOUTH
 ON CENTERLINE ROAD RUNNING NORTH

Plane X =	Modified X =
Coordinates Y =	Coordinates Y =

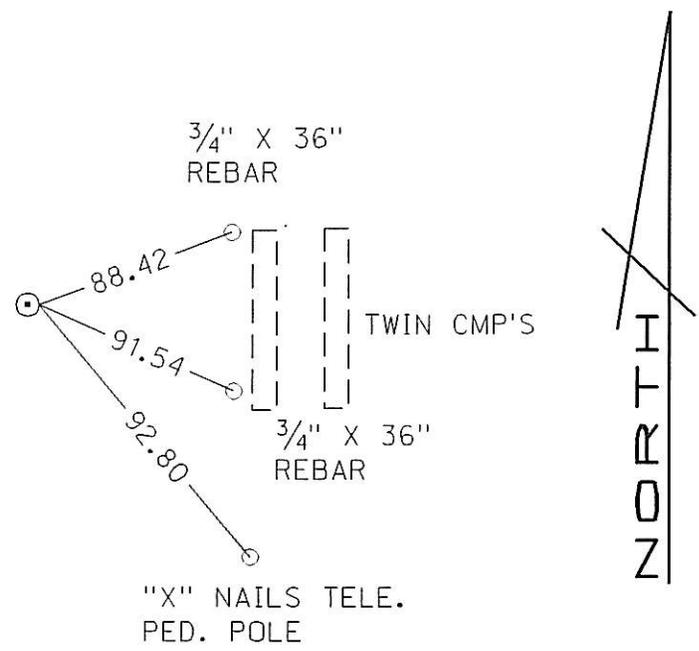

421-567 34/44

CORNER DESCRIPTION F-5


Township: 5 NORTH Range: 10 EAST 6 P.M.	33	
Cor. Location: SOUTH QTR. COR. SEC. 33	●	
Date: 12-1-98 Proj. No: 136-7 (118)	4	
Described By: G. HICKS		
County: JOHNSON State: NEBR.		
Name Of Proj. TECUMSEH WEST		LICENSED LAND SURVEYOR
Description Of Corner: SET 3/4" X 38" PIPE		<i>Glenn L. Hicks</i>

History Of Corner:
 SET BACK PER COUNTY SURVEYORS INSTRUCTION BY SINGLE PROPORTION

Description Of Ties:
 NW 38.27 FEET TO PK NAIL IN END HEDGE TREE
 NE 45.51 FEET TO 5/8" X 36" REBAR
 SE 126.84 FEET TO TOP CENTER WATER VALVE HOUSING
 SW 43.67 FEET TO 5/8" X 36" REBAR

4' NORTH TO Q ROAD EAST AND WEST
 7' WEST TO HEDGE ROW NORTH

Plane	X =	Modified	X =
Coordinates	Y =	Coordinates	Y =

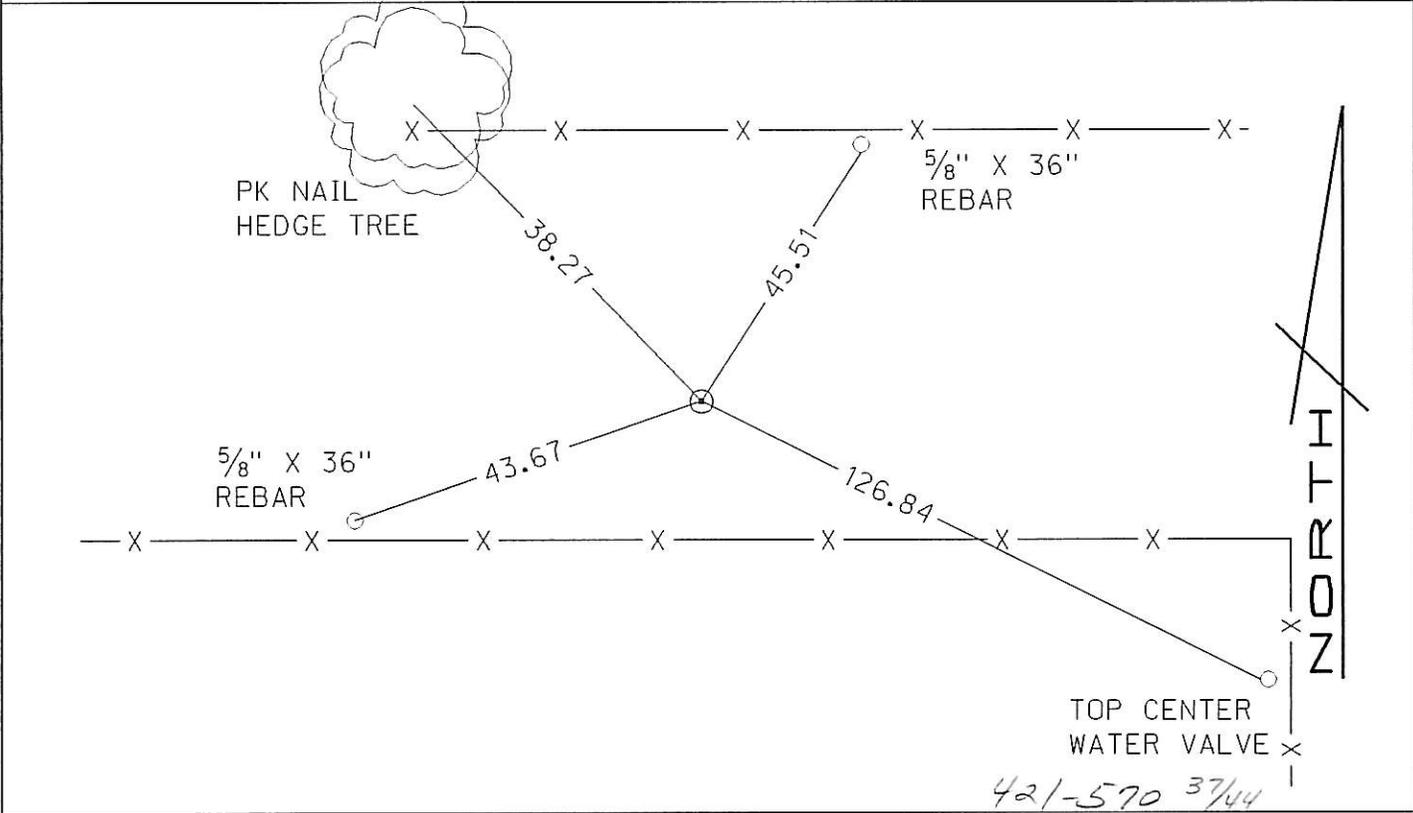

CORNER DESCRIPTION F-6

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: SOUTHEAST COR. SEC. 33
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST
 Description Of Corner: FOUND 1" PIPE

33	34
4	3




LICENSED LAND SURVEYOR
Glenn L. Hicks

History Of Corner: FOUND FROM INDEX CARD FILE IN COUNTY RECORDS
 DAUGHERTY FOUND STONE AT THIS CORNER IN 1935.

Description Of Ties:
 NW 44.69 FEET TO SPIKE IN POWER POLE
 NE 77.29 FEET TO SPIKE TOP CORNER FENCE POST
 SW 31.48 FEET TO 1" X 36" REBAR

5.0' SOUTH OF CENTERLINE EAST AND WEST ROAD
 36.0' WEST OF CENTERLINE COUNTY ROAD SOUTH

Plane X =	Modified X =
Coordinates Y =	Coordinates Y =

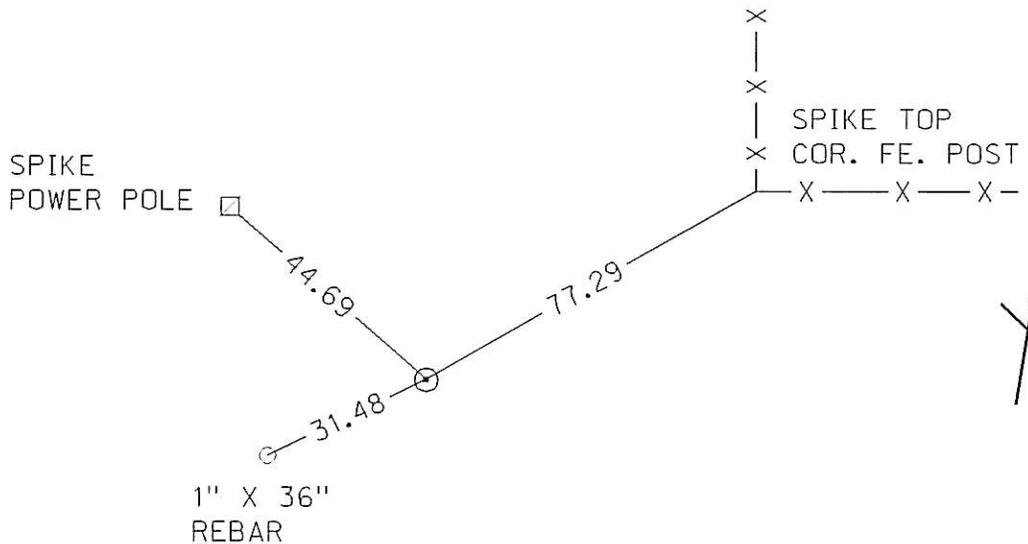

42-571 38/44

CORNER DESCRIPTION F-8

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: SOUTHEAST COR. SEC. 34
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

34	35
3	2



LICENSED LAND SURVEYOR

Glenn L. Hicks


Description Of Corner:
 FOUND 5/8" BAR AND SET 1" X 12" PIPE TO SURFACE.

History Of Corner: FOUND AS DESCRIBED IN COUNTY INDEX CARD FILES 5/83
 T.C. DAUGHERTY FOUND NO CORNER HERE IN 1935.

Description Of Ties:
 NW 28.25 FEET TO NOTCH IN TOP OF CMP
 NE 106.68 FEET TO GAS LINE WARNING POST # 60
 SE 78.69 FEET TO 5" STEEL GAS LINE WARNING POST
 SW 92.11 FEET THEN ANOTHER 50.49 FEET TO 3/4" X 36" REBAR ALL ON LINE


 3.0' SOUTH OF CENTERLINE ROAD EAST AND WEST
 3.5' WEST OF CENTERLINE ROAD NORTH

Plane Coordinates	X =		Modified Coordinates	X =	
	Y =			Y =	

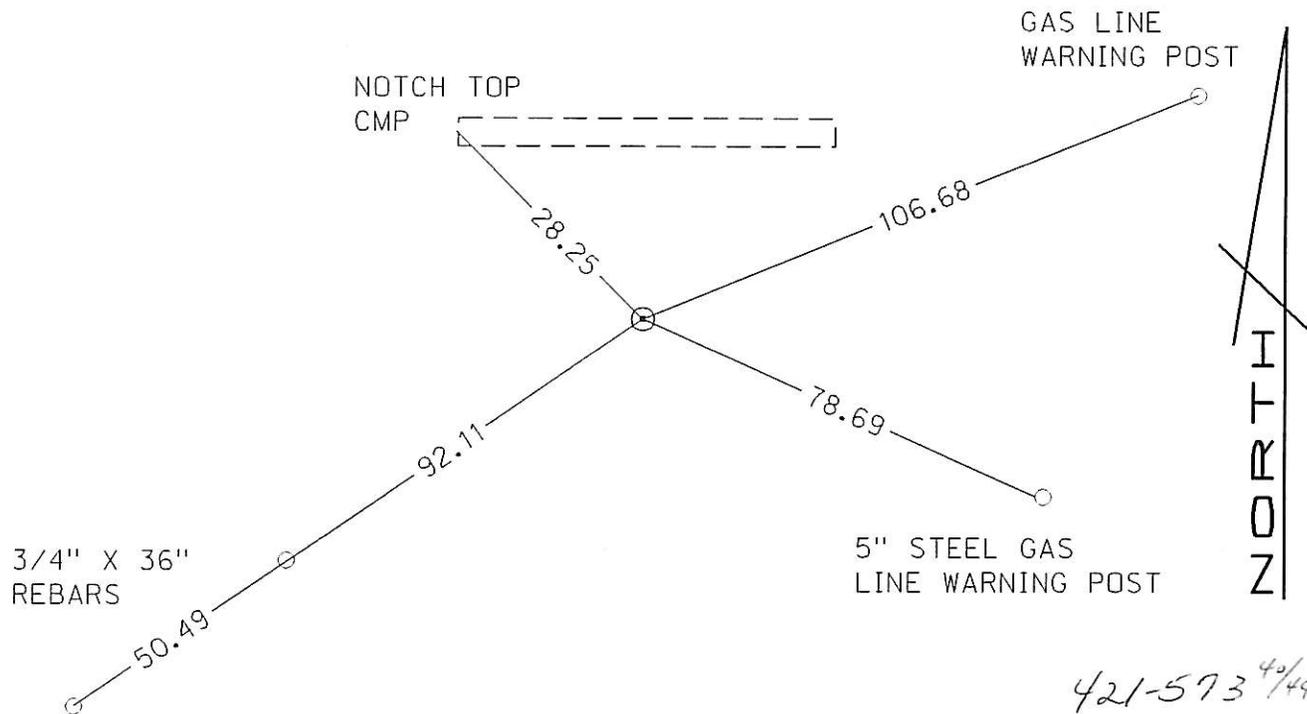

CORNER DESCRIPTION F-10

Township: 5 NORTH	Range: 10 EAST	6 P.M.
Cor. Location: SOUTHEAST COR. SEC. 35		
Date: 12-1-98	Proj. No: 136-7 (118)	
Described By: G. HICKS		
County: JOHNSON	State: NEBR.	
Name Of Proj. TECUMSEH WEST		



LICENSED LAND SURVEYOR
Glenn L. Hicks


Description Of Corner:
SET 1" X 24" PIPE WITH 1 1/4" X 10" PIPE ABOVE TO SURFACE

History Of Corner: SET BACK AS PER COUNTY SURVEYOR CATLETT INSTRUCTIONS.

Description Of Ties:
 NW 68.54 FEET TO 3/4" X 36" REBAR
 NW 49.87 FEET TO PK NAIL CORNER FENCE POST
 NE 89.35 FEET TO 3/4" X 36" REBAR
 SE 49.23 FEET TO RAIL ROAD SPIKE POWER POLE

Q OF ROAD RUNNING SOUTH 130' EAST
 5.0' EAST OF Q ROAD NORTH
 2.0' SOUTH OF Q EAST AND WEST ROAD

Plane Coordinates	X =	Y =	Modified Coordinates	X =	Y =
-------------------	-----	-----	----------------------	-----	-----

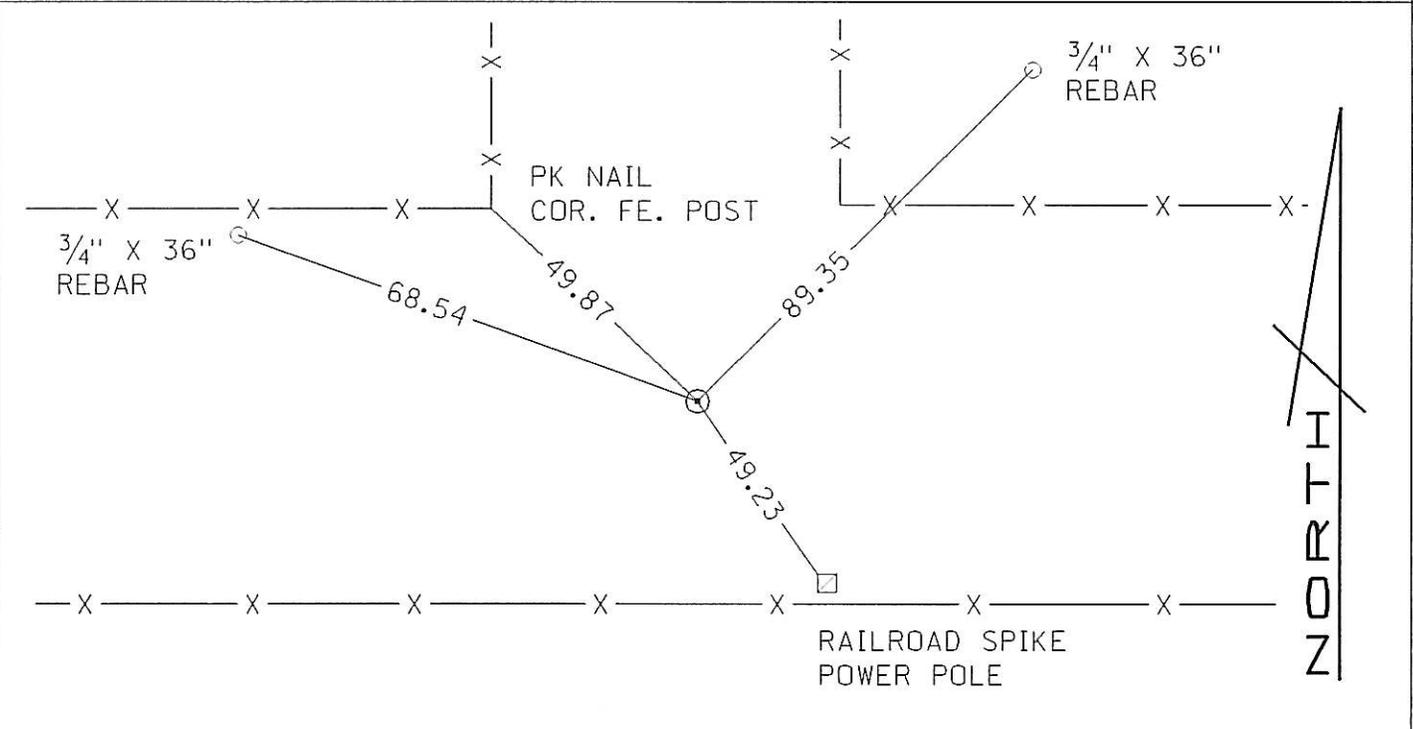

I
F
R
O
Z

421-575 4/2/44

CORNER DESCRIPTION F-11

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: SOUTH QTR. COR. SEC. 36
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

36

1



LICENSED LAND SURVEYOR


Glenn L. Hicks

Description Of Corner:
 SET 1 1/4" X 24" REBAR WITH 1 5/8" X 18" PIPE OVER TO SURFACE

History Of Corner: SET BACK AS PER COUNTY SURVEYOR CATLETT INSTRUCTIONS

Description Of Ties:
 NW 73.84 FEET AND ANOTHER 71.26 FEET TO 3/4" X 36" REBARS ALL ON LINE
 NE 39.74 FEET TO "X" NAILS POWER POLE
 SW 162.76 FEET TO "X" NAILS CORNER FENCE POST
 W 95.00 FEET TO SKEWED CONC. CULVERT
 .5' SOUTH OF CENTERLINE ROAD EAST AND WEST

Plane Coordinates	X =		Modified Coordinates	X =	
	Y =			Y =	

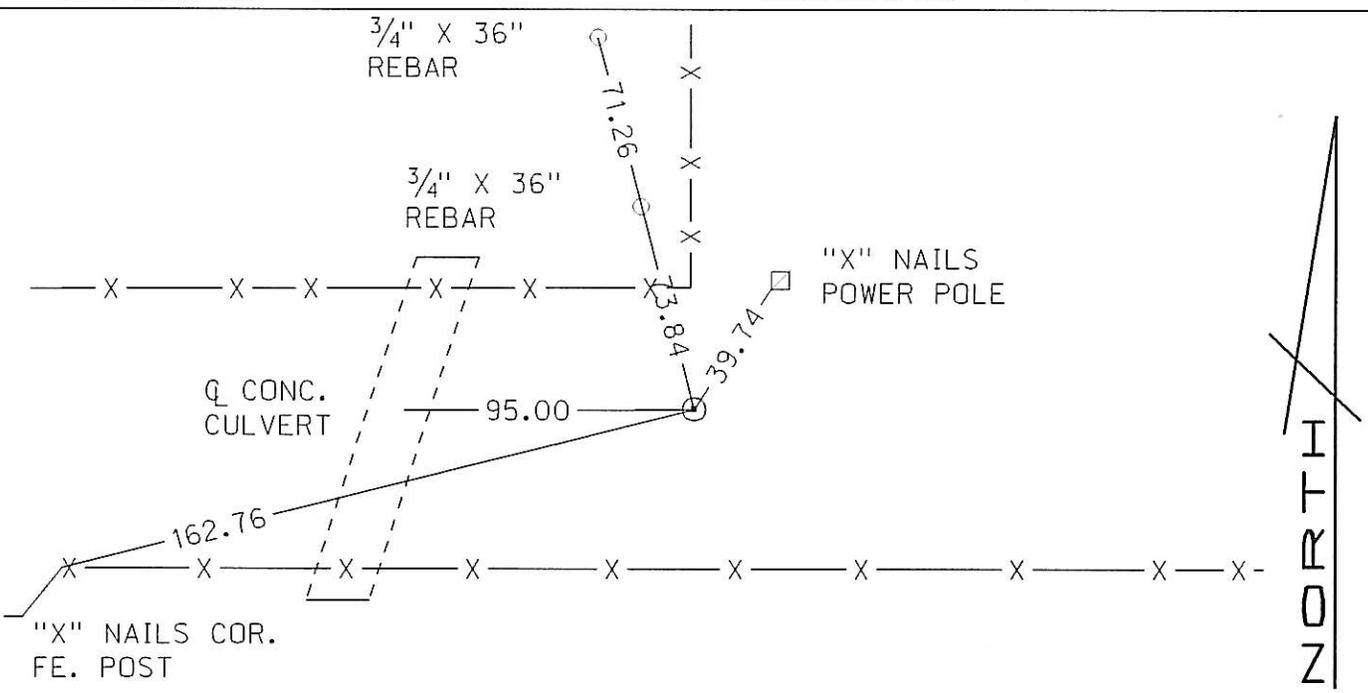

421-576 4/4

CORNER DESCRIPTION F-12

Township: 5 NORTH Range: 10 EAST 6 P.M.
 Cor. Location: SOUTHEAST COR. SEC. 36
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

36	31
1	6



LICENSED LAND SURVEYOR
Glenn L. Hicks


Description Of Corner:
 FOUND BICK AND LIME CORE AND SET 1 1/4" X 36" PIPE IN LIME CORE

History Of Corner:
 DAUGHERTY 1935 SET CORNER WITH FORD HOUSING SOUTH 33' AS TIES

Description Of Ties:
 NW 48.47 FEET TO "X" NAILS TOP CUTOFF POWER POLE
 NE 62.95 FEET TO "X" NAILS TELE. CABLE POST
 S 33.16 FEET TO 3" FORD HOSING AND ANOTHER 55.72 FEET TO 3/4" X 36" REBAR

Plane X =
 Coordinates Y =

Modified X =
 Coordinates Y =

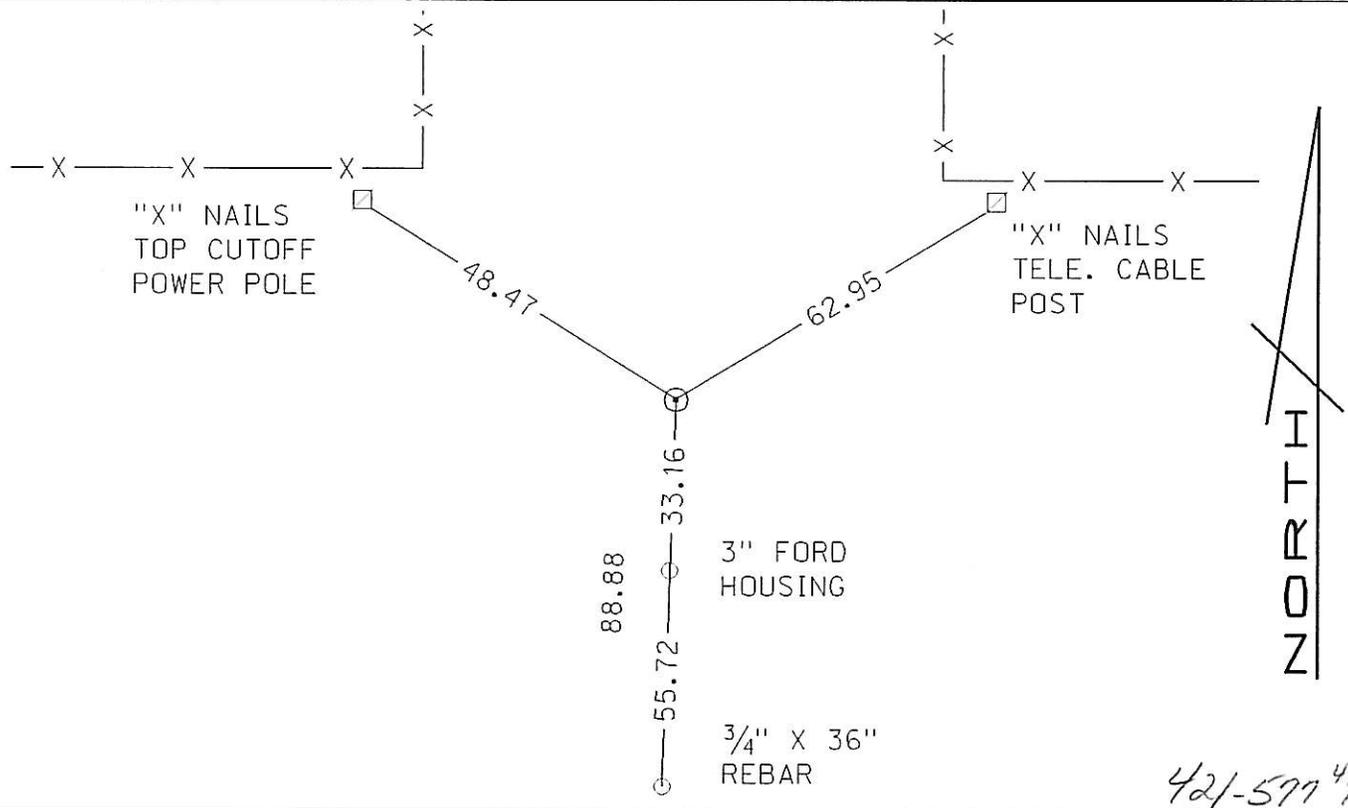

CORNER DESCRIPTION A-13

Township: 5 NORTH Range: 11 EAST 6 P.M.
 Cor. Location: NORTH QTR COR. SEC. 30
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST
 Description Of Corner: FOUND STONE

19
 ●
 30




LICENSED LAND SURVEYOR
Glenn L. Hicks

History Of Corner: FOUND STONE AS DESCRIBED BY BEERLINE 1943

Description Of Ties:
 NE 76.02 FEET TO PK NAIL IN 36" MULBERRY TREE
 SE 71.32 FEET TO NAIL IN 14" MULBERRY TREE
 S 32.20 FEET TO "X" NAILS FENCE POST
 SW 43.30 FEET TO "X" NAILS FENCE POST
 6.0' WEST TO TUBE
 2.0' WEST OF HEDGE ROW NORTH
 ON CENTERLINE ROAD EAST AND WEST

Plane Coordinates	X =		Modified Coordinates	X =	
	Y =			Y =	

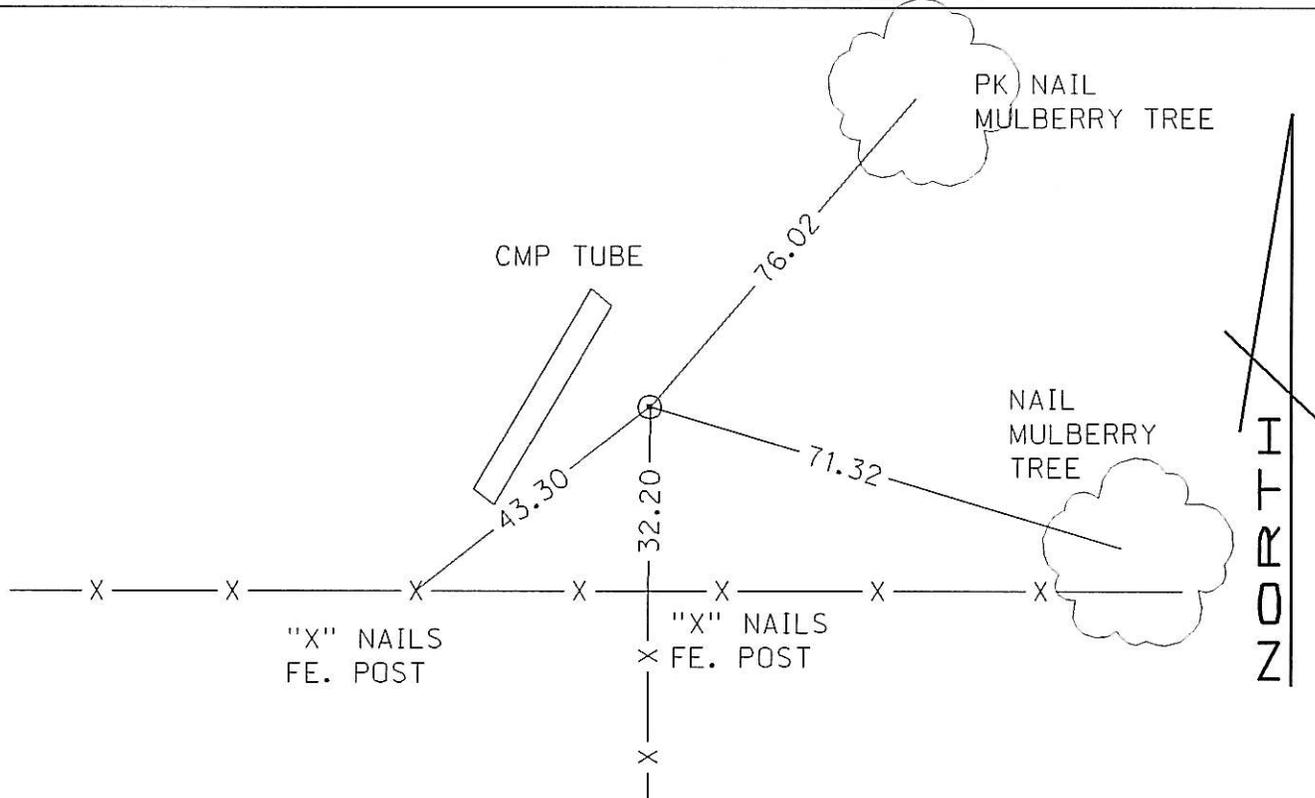

421-581 9/14

CORNER DESCRIPTION A-14

Township: 5 NORTH Range: 11 EAST 6 P.M.
 Cor. Location: NORTHEAST COR SEC. 30
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST
 Description Of Corner: FOUND $\frac{5}{8}$ " BAR

19	20
30	29




LICENSED LAND SURVEYOR
Glenn L. Hicks

History Of Corner: FOUND AS DESCRIBED ON INDEX CARD IN COUNTY RECORDS
 BEERLINE FOUND LIMESTONE AND SET MARKED BRICK APPL.

Description Of Ties:
 NE 131.43 FEET TO "X" NAILS POWER POLE
 SW 56.35 FEET TO "X" NAILS POWER POLE
 NW 44.62 FEET TO TOP NEAR CORNER TELE. BOX

Plane X =	Modified X =
Coordinates Y =	Coordinates Y =

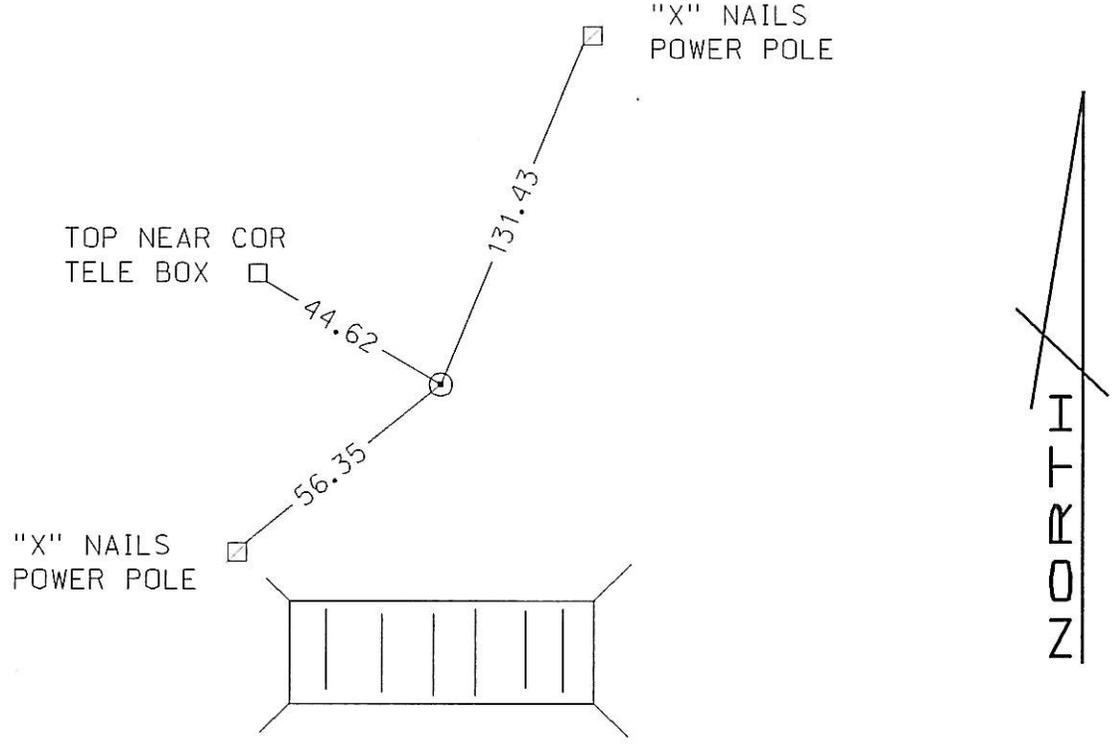

CORNER DESCRIPTION A-16

Township: 5 NORTH Range: 11 EAST 6 P.M.	20	21	
Cor. Location: NORTHEAST COR. SEC. 29			
Date: 12-1-98 Proj. No: 136-7 (118)			
Described By: G. HICKS			
County: JOHNSON State: NEBR.	29	28	

LICENSED LAND SURVEYOR
Glenn L. Hicks


Description Of Corner: FOUND BRASS CAP IN ASPHALT

History Of Corner:
HAVE NO CURRENT TIES FOR CORNER. POSITION OF BRASS CAP FITS WELL WITH SURROUNDING CORNERS AS COMPARED TO ITS POSITION IN BEERLINE SURVEY 1944.

Description Of Ties:
SW 160.67 FEET TO TOP CENTER CONC. POST OF FUEL STATION
SSW 71.09 FEET TO "X" NAILS POWER POLE
NE 107.68 FEET TO NAIL IN POWER POLE
SE 126.26 FEET TO NEAR COR. TELE. BOX

1.0' NORTH OF FENCE WEST

Plane	X =	Modified	X =
Coordinates	Y =	Coordinates	Y =

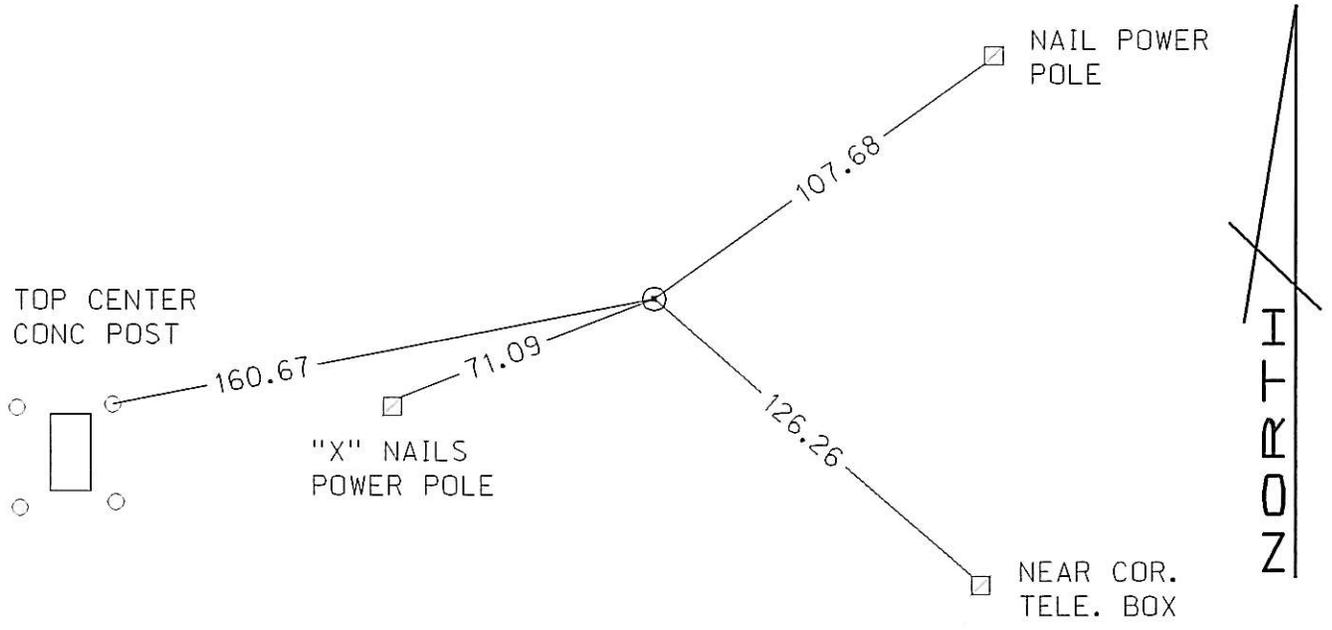

421-583 6/14

CORNER DESCRIPTION B-14

Township: 5 NORTH Range: 11 EAST 6 P.M.
 Cor. Location: EAST QTR. COR. SEC. 30
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

30 29



LICENSED LAND SURVEYOR

Glenn L. Hicks


Description Of Corner: SET 1" X 6" PIPE OVER CULVERT
 SET BACK ON PROP. DISTANCE

History Of Corner: BEERLINE 1943 SET CORNER

Description Of Ties:

NW 82.41 FEET TO "X" NAILS POWER POLE
 NW 109.15 FEET TO WELL PIPE EAST OF WELL FOUNDATION
 WNW 125.01 FEET TO NEAR CORNER FOUNDATION OF MACHINE SHED
 W 32.75 FEET TO "X" NAILS CORNER FENCE POST
 SW 95.06 FEET AND 177.51 FEET TO 1" X 36" REBARS ON LINE WITH CORNER
 CORNER IS 6.0' WEST OF CENTERLINE
 CORNER IS 12.0' EAST OF WEST END OF CMP
 CORNER SETS ON TOP OF CMP

Plane Coordinates	X =		Modified Coordinates	X =	
	Y =			Y =	

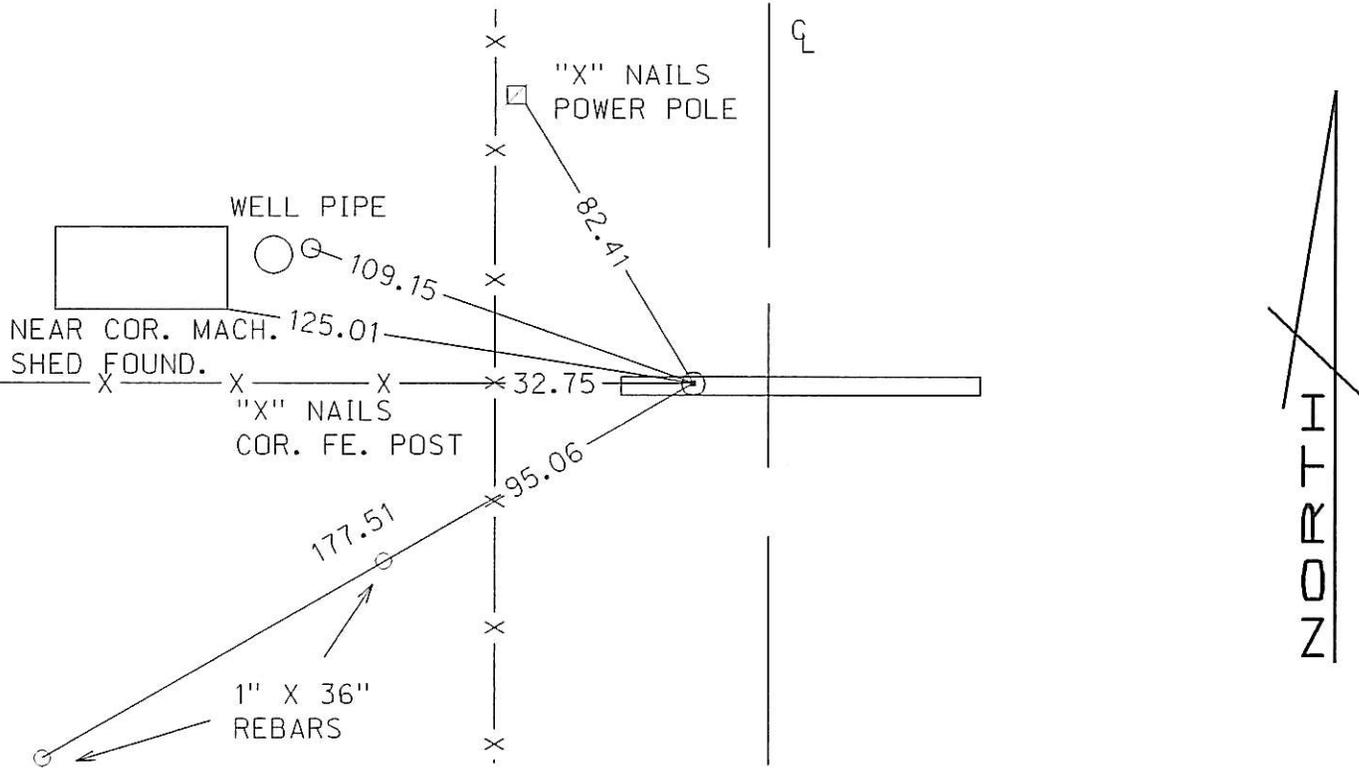

CORNER DESCRIPTION B-16

Township: 5 NORTH Range: 11 EAST 6 P.M.
 Cor. Location: EAST QTR. COR. SEC. 29
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

29 28



LICENSED LAND SURVEYOR

Glenn L. Hicks

Description Of Corner:
 FOUND LEAD PLUG WITH TACK ON CENTERLINE NORTH SOUTH ROAD


History Of Corner:
 FOUND FROM TIES BY DEAN CONNETT 3-93 POSITION AGAIN FITS BEERLINE SURVEY 1944.

Description Of Ties:
 NW 166.52 FEET TO "X" NAILS POWER POLE
 N 19.17 FEET TO 5/8" REBAR ON CENTERLINE
 NE 122.38 FEET TO SE COR. OF STEP TO HOUSE
 ENE 105.24 FEET TO "X" NAILS POWER POLE
 SE 132.00 FEET TO NEAR COR. STEP TO HOUSE

ON CENTERLINE NORTH AND SOUTH
 19.17' SOUTH OF CENTERLINE EAST

Plane X =
 Coordinates Y =

Modified X =
 Coordinates Y =

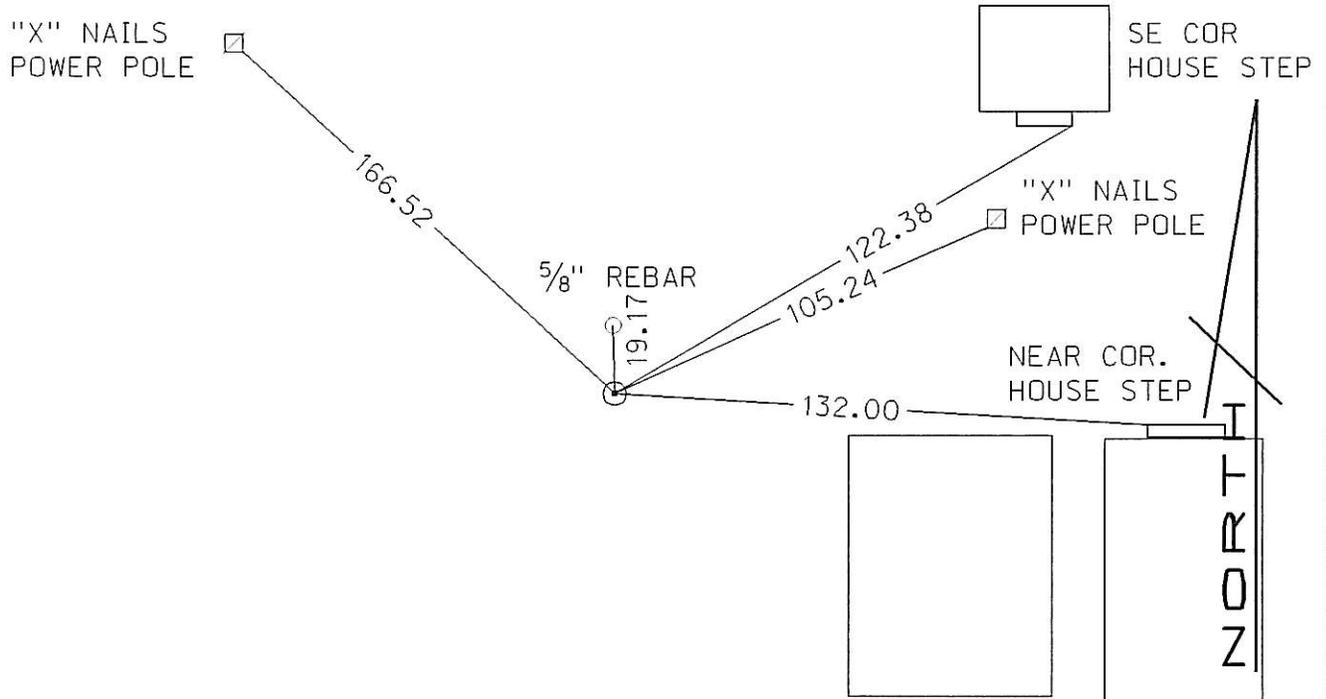

CORNER DESCRIPTION C-14

Township: 5 NORTH Range: 11 EAST 6 P.M.

Cor. Location: EAST QTR. OF THE SE QTR. 30

Date: 12-1-98 Proj. No: 136-7 (118)

Described By: G. HICKS

County: JOHNSON State: NEBR.

Name Of Proj. TECUMSEH WEST

Description Of Corner: SET SURVEY SPIKE

30 ⊕ 29



LICENSED LAND SURVEYOR

Glenn L. Hicks

History Of Corner:

CORNER SET BY BEERLINE IN 1944 APP. 697 RESET BY MEA. NORTH AND SOUTH

Description Of Ties:

NW 48.30 FEET TO NEAR COR. HEADWALL

NE 51.53 FEET TO NEAR COR. HEADWALL

SE 46.97 FEET TO NEAR COR. HEADWALL

SW 47.74 FEET TO NEAR COR HEADWALL



S 503.74 FEET TO 1" X 36" REBAR THEN NORTH OVER CORNER 444.16 FEET TO

1" X 36" REBAR ON STRAIGHT LINE (947.90 TOTAL DIST)

1.8' SOUTH OF CENTERLINE JOINT

Plane X =
Coordinates Y =

Modified X =
Coordinates Y =

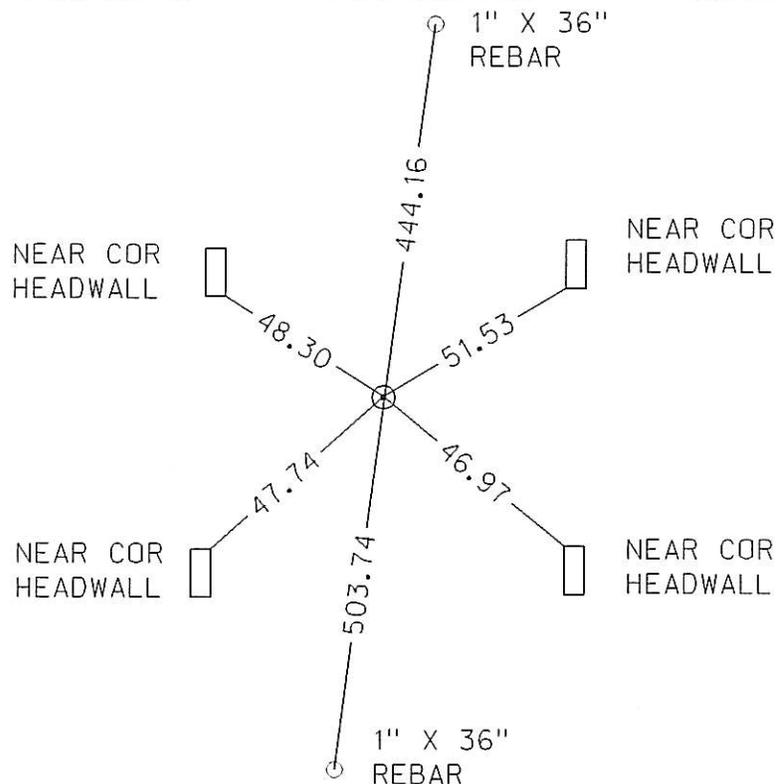

CORNER DESCRIPTION C-15

Township: 5 NORTH Range: 11 EAST 6 P.M.
 Cor. Location: SOUTH CENTER 1/16 TH SEC. 29
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

29
○



LICENSED LAND SURVEYOR
Glenn L. Hicks


Description Of Corner:
 FOUND 1/2" BAR SET 1" X 48" PIPE IN PLACE, SET BAR INSIDE PIPE

History Of Corner: CORNER SET BY BEERLINE 1944

Description Of Ties:
 SW 38.10 FEET TO 3/4" X 36" REBAR
 SSW 32.79 FEET TO 1/2" SQ. REBAR (BEERLINES)
 SE 100.25 FEET TO "X" NAILS POWER POLE
 CORNER IS 1.0' WEST OF FENCE LINE SOUTH
 31.0' NORTH OF FENCE LINE EAST AND WEST

Plane X =
 Coordinates Y =

Modified X =
 Coordinates Y =

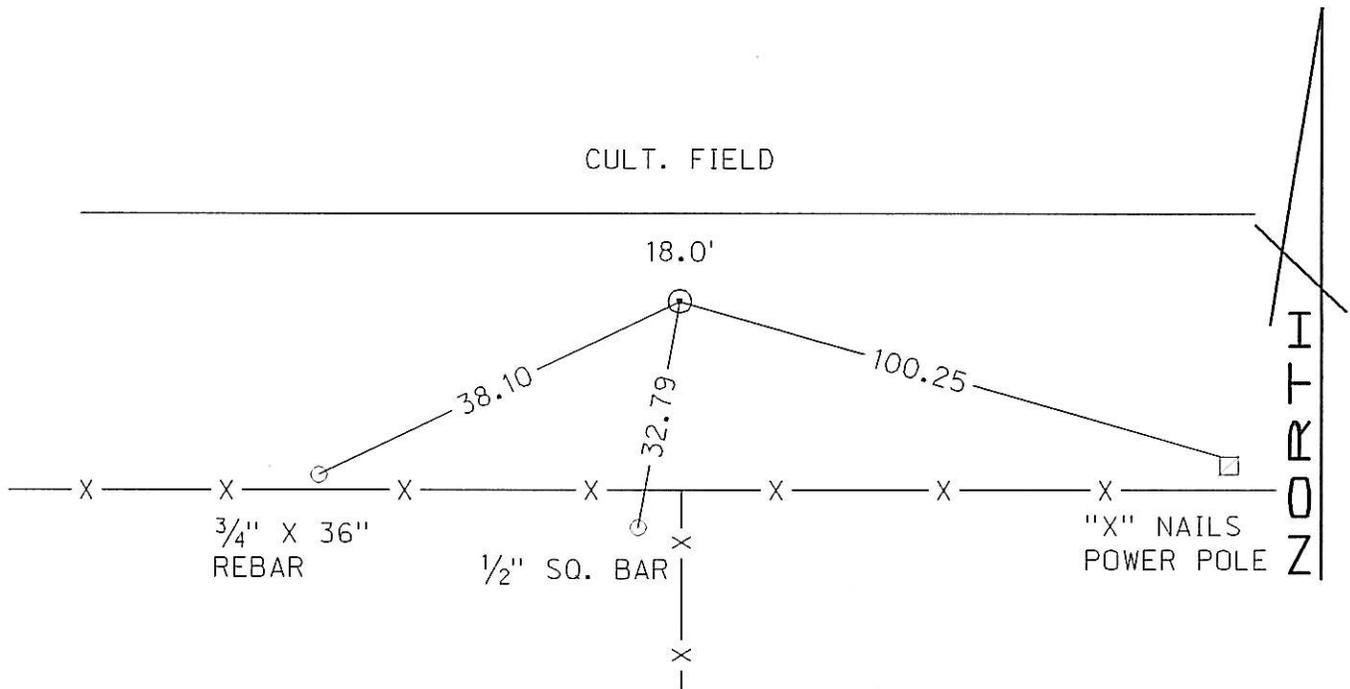

421-587 12/14

CORNER DESCRIPTION D-13

Township: 5 NORTH Range: 11 EAST 6 P.M.
 Cor. Location: SOUTH QTR. COR. SEC. 30
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

30

31



LICENSED LAND SURVEYOR


Glenn L. Hicks

Description Of Corner:
 FOUND 1/2" BAR WITH BRICK ON NORTH SIDE WITH 1 1/4" PIPE OVER BAR. SET 1/2" X 24" PIPE INSIDE 1 1/4" PIPE

History Of Corner:
 BEERLINE SET CORNER 1944 NORRIS AND HIATT REFERANCE CORNER 1953

Description Of Ties:
 NW 100.93 FEET TO 1/2" REBAR RESET 1.0' SOUTH OF FENCE.
 N 4.98 FEET TO BOTTLE CAP ON BRACE POST
 NE 9.07 FEET TO BOTTLE CAP IN FACE OF CORNER FENCE POST
 SE 17.78 FEET TO 2" PIPE 2.5' HIGH FOR BALL CLEANER

Plane X =	Modified X =
Coordinates Y =	Coordinates Y =

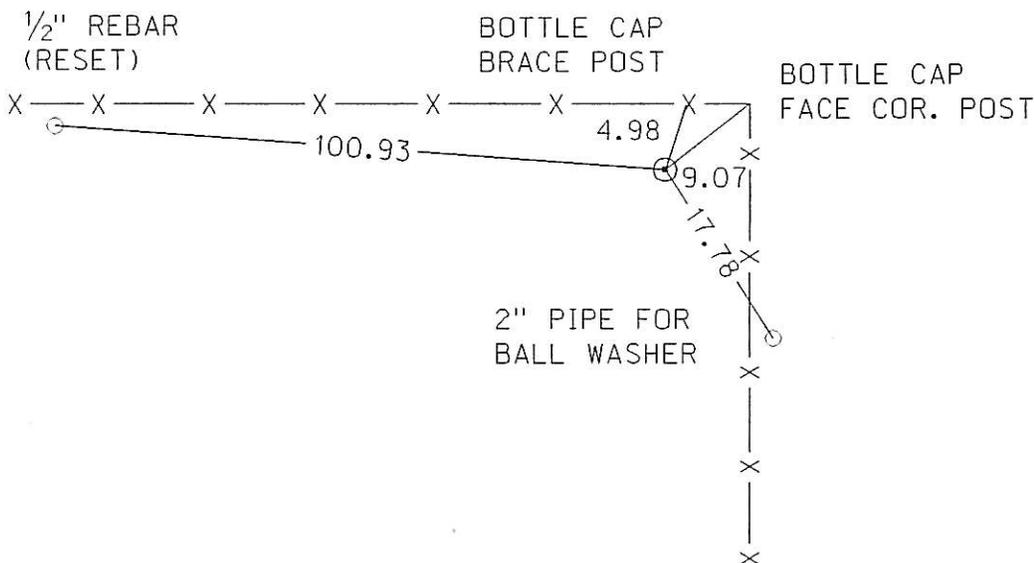

421-588 1/4

CORNER DESCRIPTION D-14

Township: 5 NORTH	Range: 11 EAST	6 P.M.
Cor. Location: SOUTHEAST COR SEC 30		
Date: 12-1-98	Proj. No: 136-7 (118)	
Described By: G. HICKS		
County: JOHNSON	State: NEBR.	
Name Of Proj. TECUMSEH WEST		
Description Of Corner: FOUND $\frac{3}{4}$ " PIPE OVER BAR AND BRICK		

30	29
31	32



LICENSED LAND SURVEYOR
Glenn L. Hicks


History Of Corner: BEERLINE SET CORNER IN 1944 IN APP. #697

Description Of Ties:

NNW 60.83 FEET TO NEAR CORNER RAILROAD T-RAIL BARRICADE
 NE 79.93 FEET TO "X" NAILS TOP FENCE POST
 ENE 34.93 FEET TO SPIKE TOP FENCE POST
 SE 35.37 FEET TO SPIKE TOP FENCE POST
 SE 70.23 FEET TO SPIKE TOP CORNER FENCE POST
 S 61.30 FEET TO FENCE LINE RUNNING EAST

Plane X =
Coordinates Y =

Modified X =
Coordinates Y =

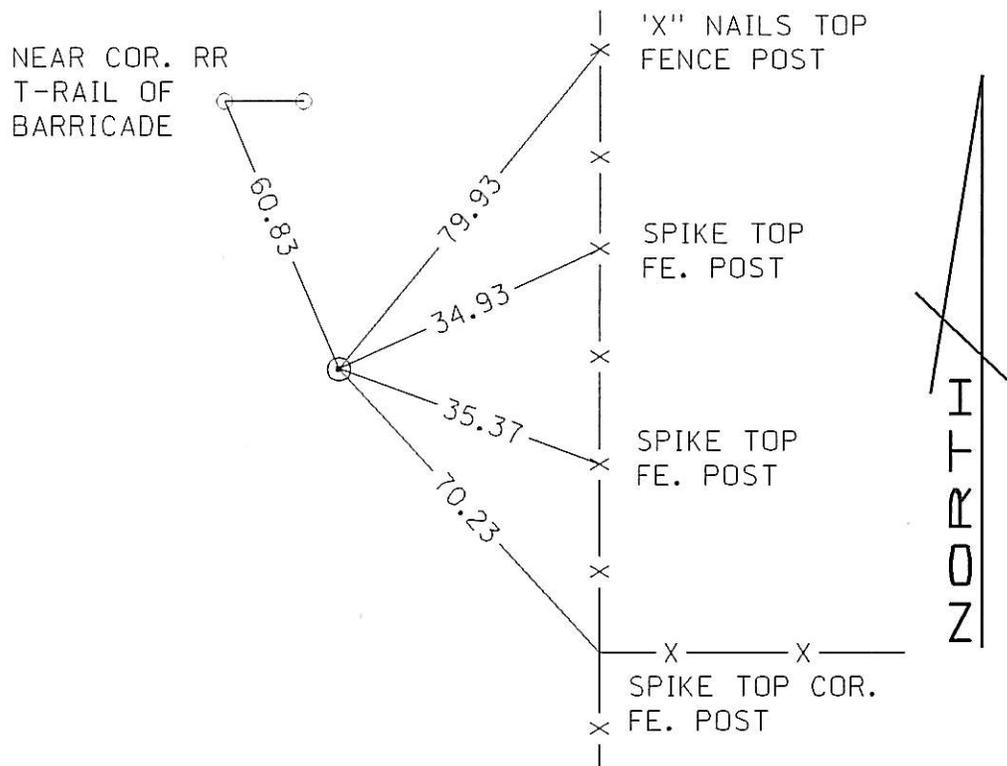

421-529 12/14

CORNER DESCRIPTION D-15

Township: 5 NORTH Range: 11 EAST 6 P.M.
 Cor. Location: SOUTH QTR. COR. SEC. 29
 Date: 12-1-98 Proj. No: 136-7 (118)
 Described By: G. HICKS
 County: JOHNSON State: NEBR.
 Name Of Proj. TECUMSEH WEST

29

32



LICENSED LAND SURVEYOR

Glenn L. Hicks

Description Of Corner:
 FOUND 1/2" REBAR SET A 1" X 36" PIPE OVER TO SURFACE

History Of Corner: FOUND FROM TIES BY BEERLINE IN 1944 SURVEYS

Description Of Ties:

NE 1/2" REBAR BESIDE FE. POST WAS TIE OF BEERLINES NORTH BUT LAYED OVER AND WE MOVED HERE.
 NE 17.32 FEET TO CONC. NAIL FENCE POST
 ESE 15.84 FEET TO "X" NAILS SOUTH SIDE WALNUT TREE
 ESE 98.35 FEET TO SPIKE IN 40" COTTONWOOD TREE
 150' NORTH OF CREEK RUNNING EAST AND WEST

Plane X =
 Coordinates Y =

Modified X =
 Coordinates Y =

