General Land Office • Original Field Notes

Book Number

47

The images in this file are photographs of the notes of the original surveys of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The original surveys in Nebraska began in the mid 1850's and were completed in the mid 1880's. The Nebraska office of the Surveyor General was closed June 30, 1886.

By Sherwood

a

The field notes of the Sectio-
division lines and corners of
Township No nine North, of
the Base line, of Range No.
3. East of the 6th Principal
Meridian, in the Territory of
Nebraska,
Surveyed by George W. Foster,
Deputy Surveyor, Under his cor.
No. 209 Dated June 8th Aug 1857
Commenced the 26th and
completed August the 30th 185

1

Vol. 3 Sept R. 3 E.

A list of names,

A list of the names of the individuals employed to assist in running, measuring, or marking, the lines and corners, described in the following field notes of Township number nine, north of the Baseline of Range no three, East of the 6th Principal Meridian, showing the respective capacities in which they acted:

Quintus A, Colvin, Chainman,
Edward Stephens, Chainman,
Demetrius T. Colvin, Flagbearer,
Columbus C. Colvin, Axeman,
William Stephens, Axeman,

Township 9 N. Range 3 East

6	46	5	33	4	25	3	18	2	10	1
45		44		32		25		17		9
7	43	8	32	9	24	10	17	11	8	12
43		42		31		23		16		7
18	41	17	30	16	23	15	15	14	7	13
41		40		29		22		14		6
19	39	20	29	21	21	22	14	23	5	24
38		37		28		21		13		4
30	37	29	28	28	20	27	13	26	4	25
35		34		27		19		12		3
31	34	32	26	33	19	34	11	35	3	36

Field Notes of the Subdivision lines and corners of Township No 9 N. of Range No 3, East, of the 6th principal Meridian,

Chains

To determine the proper adjustment of my compass for subdividing this Township.

I commence at the corner to Township 8 and 9, North Ranges 3 ~~East~~ and 4 East of the 6th pre Meridian.

and run,

North, on a blank line along the East Boundary of Section 36.

Variation 11° 00' East,

40 05 To a point 15 links East of the quarter Section corner,

80 10 To a point 35 links East of the corner to Sections 25 and 36.

To retrace this line, or run parallel thereto, my compass must be adjusted to a variation of 11° 15' East,

Township 9 N. R. 3. East,

Subdivision commenced August the 26th 1857.

From the corner to Sections 1. 2. 35 & 36, on the South Boundary of the Township I run

North, between Sections 35 and 36,

Variation 11° 15' East,

40.00 Set a Quartz Rock 12 in long, 10 in wide and 6 in thick for quarter Section corner,

80.00 Set a Limestone Rock 24 in long, 8 in wide and 6 in thick for corner to Sections 25. 26. 35 and 36.

Land broken 3d rate Soil,

East, on a random line, between Sections 25. and 36,

Variation 10° 15' East,

40.00 Set a Rock for temporary quarter Section corner

79.40 Intersected the East Boundary of the Township ~~North and South line~~ 5 links South of Rock corner to

Township 9. N. R. 3. East,

Sections 25. 36 from which corner I run West on a true line between Sections 25 and 36,

Variation 10° 15' East,

39.70 Set a Quartz Rock 11 in long 10 in wide and 6 in thick for quarter Section corner,

79.40 The corner to Sections 25. 26. 35 & 36,

Land gently rolling 2d rate Soil,

North, between Sections 25 and 36,

Variation 11° 30' East,

40.00 Set a Granite Rock 12 in long 9 in wide and 8 in thick for quarter Section corner,

80.00 Set a Flint Rock 18 in long 10 in wide and 4 in thick for corner, to Sections 23. 24. 25 and 26,

Land gently rolling 2d rate Soil

East, on a random line between Sections 24 and 25.

Township 9. N. R. 3. East,

Variation 10° 15' East,

39.00 A Ravine 8 links wide runs S. E.

40.00 Set a Rock for temporary quarter Section corner,

79.30 Intersected the East Boundary of the Township 14 links South of Rock corner to Sections 24 and 25 from which corner I run West, on a true line between Sections 24 and 25;

Variation 10° 21' East,

39.65 Set a Quart Rock 10 in long 10 in wide and 6 in thick for quarter Section corner,

79.30 The corner to Sections 23, 24, 25 & 26, Land rather broken 3d rate Soil,

North, between Sections 23 and 24.

Variation 12° 00' East,

40.00 Set a Red Rock, 11 in long 9 in wide and 8 in thick for quarter Section corner,

Township 9. N. R. 3. East,

Chains.

80.00 Set a Grit Rock 12 in long 9 in wide and 7 in thick for corner to Sections 13, 14, 23 and 24, Land rolling 2d rate Soil,

East, on a random line between Sections 13 and 24.

Variation 10° 20' East,

39.00 Left up land and entire Bottom bears South East & N. W.

40.00 Set Rock for temporary quarter Section corner,

55.00 Big Blue River, 100 links wide runs S. E. (4 or 5 maple Trees on left Bank) Rock Bottom,

79.35 Intersected the East Boundary of the Township at Rock corner for Sections 13 and 24 from which corner I run West, on a true line between Sections 13 and 24,

Variation 10° 20' East.

Township 9. N.R. 3. East.

39.68 Set a Granite Rock 10 in long 9 in wide and 7 in thick for quarter Section corner,

79.35 The corner to Sections 13. 14. 23 and 24, Upland Sandy and broken 3d rate, Bottom Level rather Sandy, 2d rate soil,

North, between Sections 13 and 14,
Variation 12°. 00' East,

40.00 Set a Quartz Rock 10 in long, 9 in wide, and 8 in thick for quarter Section corner,

80.00 Set a Granite Rock 12 in long, 10 in wide and 8 in thick for corner, to Sections 11. 12. 13 and 14, Land broken and Sandy 3d rate soil,

East, on a random line between Sections 12 and 13.
Variation 10°. 20' East.

40.00 Set a Rock for temporary quarter Section corner.

Township 9. N.R. 3. East.

69.00 Big Blue River, 105 links wide runs S. E. and entered Bottom bears N. W. and S. East,

80.29 Intersected the East Boundary of the Township 29 links North of Rock corner to Sections 12 and 13, from which corner I run West, on a true line between Sections 12 and 13.
Variation 10°. ~~14~~ 08' East,

40.15 Set a quartz Rock 10 in long, 9 in wide, and 7 in thick for quarter Section corner,

80.25 The corner to Sections 11. 12. 13 and 14. Upland broken 3d rate Soil, Bottom 2d rate Soil.

North, between Sections 11 and 12
Variation 11°. 15' East,

40.00 Set a Red Rock 10 in long 8 in wide and 7 in thick for quarter Section corner,

Township 9. N. R. 3. East.

Chs
63.00 A Branch 10 links wide runs E. (a few scattering Trees on it.)
80.00 Set a Granite Rock 12 in long 10 in wide and 7 in thick for corner to Sections 1, 2, 11 and 12. Land rolling 2d rate soil,

East, ~~on~~ on a random line between Sections 1 and 12,

Variation 10°.15' East,

7.00 Big Blue River 95 links wide, runs S. E. (Swift current and entire Bottom Rock Bottom) A Limestone Ledge (in the Bluff) both N & S of the line,
40.00 Set a Rock for temporary quarter Section corner,
45.00 A Bayou, 60 links wide bears N & S.
60.00 Left Bottom and entered upland bears N & S.
80.30 Intersected the East Boundary of the Township. 10 links South of Rock corner to Sections 1 and 12, from which corner from

Township 9. N. R. 3. East

Chs

West, on a true line between Sections 1 and 12,

Variation 10°.15' East,

40.15 Set a Flint Rock 15 in long, 6 in wide and 6 in thick for quarter Sec corner,
80.30 The corner to Sections 1, 2, 11 and 12, Land good Rich Soil,
A few Cotton Wood and Maple Trees S of line at the crossing of the River,

North, on a random line between Sections 1 and 2,

Variation 11°.15' East,

10.00 A Spring run 5 links wide runs E. and comes from the West,
28.00 Left upland, and entered Bottom
33.00 bears East and West,
Big Blue River, 80 links wide runs S. E.
40.00 Set a Rock for temporary quarter Section corner,
75.00 Left Bottom and entered upland bears N. W. and East.
80.60 Intersected the North Boundary

Township 9. N. R. 3. East.

Chs of the Township 4 links East of Rock corner to Sections 1 and 2. from which corner Run South, on a true line between Sections 1 and 2,

Variation 11°. 17' East.

40.60 Set a Flint Rock 10 in long 9 in wide and 6 in thick for quarter Section corner,

80.60 The corner to Sections 1. 2. 11 and 12. Land good rich Soil,

August the 26th A.D. 1857.

North, between Sections 34 and 35.

Variation 11°. 45' East,

5.00 left Bottom, and entered upland, bears E & W.

40.00 Set a Limestone Rock 19 in long 10 in wide and 3 in thick for quarter Section corner,

80.00 Set a Limestone Rock 22 in long 12 in wide and 2 in thick for corner.

Township 9. N. R. 3. East.

Chs to Sections 26. 27. 34 and 35. Land rolling 2d rate soil,

East, on a random line between Sections 26 and 35,

Variation 10°. 00' East.

40 00 Set a Rock for temporary quarter Section corner,

80 00 Intersected North and South line 30 links South of Rock corner to Sections 25. 26. 35 and 36. from which corner Run

West, on a true line between Sections 26 and 35,

Variation 10°. 13' East,

40 00 Set a Limestone Rock 19 in long 11 in wide and 3 in thick for quarter Section corner.

80 00 The corner to Sections 26. 27. 34 and 35. Land rolling 2d rate soil,

Township 9. N. R. 3. East.

Chs North, between Sections 26 and 27,
Variation 11° 31' East,
40.00 Set a Limestone Rock 20 in long, 9 in wide and 3 in thick for quarter Section corner,
80.00 Set a Limestone Rock 21 in long, 12 in wide and 2½ in thick for corner to Sections 22, 23, 26 and 27,
Land level 2d rate soil,

East, on a random line between Sections 23 and 26,
Variation 10° 15' East,
40.00 Set a Rock for temporary quarter Section corner,
79.63 Intersected North and South line 2 links South of Rock corner to Sections 23, 24, 25 and 26, from which corner Drew North, on a true line between Sections 23 & 26,
Variation 10° 15' East,
39.82 Set a Limestone Rock 17 in long, 12 in wide and 2½ in thick for quarter

Township 9. N. R. 3. East.

Chs Section corner,
79.63 Thy corner to Sections 22, 23, 26 and 27,
Land rolling 2d rate soil,

North, between Sections 22 and 23,
Variation 11° 45' East,
40.00 Set a Limestone Rock 18 in long 10 in wide, and 3 in thick for quarter Section corner,
80.00 Set a Limestone Rock 17 in long 12 in wide and 4 in thick for corner to Sections 14, 15, 22 and 23,
Land rolling 2d rate soil,

East, on a random line between Sections 14 and 23,
Variation 10° 15' East,
40.00 Set a Rock for temporary quarter Section corner,
79.85 Intersected North and South line at Rock corner for Sections 13, 14, 23 and 24, from which corner Drew

Chs West, on a true line between Sections 14 and 23.
Variation 10°. 15' East.
35.93 Set a Limestone Rock, 18 in long, 11 in wide, and 3 in thick for quarter Section corner,
75.85 The corner to Sections 14, 15, 22, + 23. Land gently rolling 2d rate soil.

North, between Sections 14 and 15.
Variation 11°. 30' East.
40.00 Set a Limestone Rock 16 in long 12 in wide, and 3 in thick for quarter Section corner,
65.00 Prairie Branch 8 links wide runs North East,
80.00 Set a Limestone Rock 15 in long 14 in wide and 3 in thick for corner to Sections 10, 11, 14 and 15, Land broken 3d rate soil.

East, on a random line between

Chs Sections 11 and 14.
Variation 10°. 15' East.
9.00 Prairie Branch 10 links wide runs N. E.
40.00 Set a Rock for temporary quarter Section corner
79.25 Intersected North and South line 28 links North of Rock corner to Sections 11, 12, 13, and 14. from which corner Drum
West, on a true line between Sections 11 and 14.
Variation 10°. 03' East,
35.62 Set a Limestone Rock 16 in long 12 in wide and 3 in thick for quarter Section corner,
75.25 The corner to Sections 10, 11, 14 and 15,
West 1p Land broken 3d rate soil,
East 1p rolling 2d rate soil.

Chs North, between Sections 10 and 11,
Variation 12°.00' East,
40.00 Set a Limestone Rock 16 in long 13 in wide, and 3 in thick for quarter Section corner,
60.00 Prairie Draw, course East, (Some Pools of Water in it.)
80.00 Set a Limestone Rock 20 in long 11 in wide, and 3 in thick for corner to Sections 2, 3, 10 and 11.
Sand broken 3d rate Soil,

East, on a random line between Sections ~~10~~ 2 and 11,
Variation 10°.15' East,
40.00 Set a Rock for temporary quarter Section corner,
79.65 Intersected North and South line 15 links North of Rock corner to Sections 1, 2, 11 and 12 from which corner I run
West, on a true line between

Sections 2 and 11,
Variation 10°.09' East,
39.83 Set a Limestone Rock 17 in long 11 in wide and 3 in thick for quarter Section corner,
79.65 The corner to Sections 2, 3, 10 and 11.
Sand rolling 2d rate Soil,

North, on a random line between Sections 2 and 3.
Variation 11°.30' E.
40.00 Set a Rock for temporary quarter Section corner,
80.38 Intersected the North Boundary of the Township 20 links East of Mound corner to Sections 2 and 3, from which corner I run
South, on a true line between Sections 2 and 3.
Variation 11°.39' East,
40.38 Set a Limestone Rock 20 in long 10 in wide and 3 in thick for quarter Section corner,

Township 9. N. R. 3. East.

Chains

80.38 The corner to Sections 2. 3. 10. and 11.
Land rolling 2d rate Soil.

North, between Sections 33. and 34.
Variation 11°. 30' East.

40.00 Set a Limestone Rock 20 in long, 9 in wide and 3 in thick for quarter Section corner.

41.00 Left Bottom, and entered up Land bears E. & W.

80.00 Set a Blue Rock 24 in long 12 in wide and 3 in thick for corner to Sections 27. 28. 33. and 34.
Bottom land 1st rate Soil. upland broken and 3d rate Soil.

East, on a random line between Sections 27 and 34.
Variation 10°. 15' East.

40.00 Set a Rock for temporary quarter Section corner.

80.90 Intersected North and South line

Township 9. N. R. 3. East.

30 links South of Rock corner to Sections 26. 27. 34 and 35. from which corner I run
West, on a true line between Sections 27 and 34.
Variation 10°-28' East.

40.45 Set a Limestone Rock 17 in long 9 in wide and 3 in thick for quarter Section corner.

80.90 The corner to Sections 27. 28. 33 and 34.
Land rolling 2d rate Soil.

North, between Sections 27 & 28.
Variation 11°. 00' East.

40.00 Set a Limestone Rock 16 in long 12 in wide and 3 in thick for quarter Section corner

80.00 Set Blue Rock 25 in long 12 in wide and 3 in thick for corner to Sections 21. 22. 27. and 28.
Land rolling 2d rate Soil.

Township 9 N. R. 3. East,

Chs East, on a random line between Sections 22 and 27.
Variation 10°.15' East,
40.00 Set a Rock for temporary quarter Section corner,
80.00 Intersected North and South line 34 links South of Rock corner to Sections 22, 23, 26 and 27 from which corner I run
West, on a true line between Sections 22 and 27,
Variation 10°.30' East,
40.00 Set a Limestone Rock 20 in long 9 in wide and 3 in thick for quarter Section corner,
80.00 The corner to Sections 21, 22, 27 & 28,
Land gently rolling 2d rate Soil,

August the 27th A.D. 1857.

North, between Sections 21 and 22,
Variation 11°.15' East,

Township 9 N. R. 3. East,

Chains 40.00 Set a Limestone Rock 17 in long 10 in wide and 3 in thick for quarter Section corner,
80.00 Set a Blue Rock 25 in long 15 in wide and 3 in thick for corner, to Sections 15, 16, 21 and 22,
Land level 2d rate Soil,

East, on a random line between Sections 15 and 22.
Variation 10°.15' East,
40.00 Set a Rock for temporary quarter Section corner,
79.65 Intersected North and South line 70 links North of Rock corner to Sections 14, 15, 22 and 23. from which corner I run
West, on a true line between Sections 15 and 22.
Variation 9°.45' East,
39.82 Set a Limestone Rock 20 in long, 8 in wide and 3 in thick for quarter Section corner.

Township 9 N. R. 3. East,

79.65 The corner to Sections 15. 16. 21 and 22,
Land rolling 2d rate Soil,

North, between Sections 15 and 16.
Variation 11° 30' East,

40.00 Set a Limestone Rock 18 in long 9 in wide and 3 in thick for quarter Section corner,

50.00 A Prairie Branch 8 links wide runs South East,

80.00 Set a Blue Rock 23 in long 13 in wide and 3 in thick for corner to Sections 9. 10. 15 and 16,
Land broken 3d rate Soil,

East on a random line between Sections 10 and 15,
Variation 10° 15' East,

40.00 Set a Rock for temporary quarter Section corner

79.50 Intersected North and South line 30 links South of Rock corner to

Township 9 N. R. 3. E.

Sections 10. 11. 14 and 15 from which corner I run
West, on a true line between Sections 10 and 15,
Variation 10° 28' East,

39.75 Set a Limestone Rock 16 in long 13 in wide and 3 in thick for quarter Section corner,

79.50 The corner to Sections 9. 10. 15 & 16
Land broken 3d rate Soil,

North, between Sections 9 and 10.
Variation 11° 45' East,

40.00 Set a Limestone Rock 21 in long 9 in wide and 3 in thick for quarter Section corner,

80.00 Set a Blue Rock 26 in long 9 in wide and 3 in thick for corner to Sections 3. 4. 9 and 10.
Land broken 3d rate Soil,

Township 9 N. R. 3. East.

Chains East, on a random line between Sections 3 and 10.

Variation 10° 15' East.

40.00 Set a Rock for temporary quarter Section corner,

79.58 Intersected North and South line 16 links North of Rock corner to Sections 2. 3. 10. and 11. from which corner I run

West, on a true line between Sections 3 and 10.

Variation 10° 08' East.

39.78 Set a Limestone Rock 17 in long 11 in wide and 3 in thick for quarter Section corner,

79.58 The corner to Sections 3. 4. 9 and 10. Land broken 3d rate Soil.

North, on a random line between Sections 3 and 4.

Variation 11° 30' East.

40.00 Set a Rock for temporary quarter

Township 9 N. R. 3. East.

Chs

Section corner,

80.40 Intersected the North Boundary of the Township 24 links East, of mound corner to Sections 3 & 4, from which corner I run.

South, on a true line between Sections 3 and 4.

Variation 11° 40' East.

40.40 Set a Limestone Rock 2 in long 11 in wide and 3 in thick for quarter Section corner,

80.40 The corner to Sections 3. 4. 9 and 10. Land rolling 2d rate Soil.

North, between Sections 3 & 4 and 33.

Variation 11° 30' East.

4.00 A Branch 15 links wide runs S. W. (General course South)

40.00 Set a Limestone Rock 17 in long 9 in wide and 7 in thick for quarter Section corner.

45.00 ~~[illegible]~~ Same Branch 8 links wide runs S. E.

Township 9. N. R. 3. East.

Chains

50.00 Left Bottom, and entered upland bears E & W.

80.00 Set a Limestone Rock 24 in long, 12 in wide and 3 in thick for corner to Sections 28, 29, 32 and 33.

Land level, and gently rolling 1st rate Soil.

East, on a random line between Sections 28 and 33.

Variation 10°. 15' East.

40.00 Set a Rock for temporary quarter Sec corner.

79.70 Intersected North and South line 35 links North of Rock corner to Sections 27, 28, 33 and 34 from which corner I run West, on a true line between Sections 28 and 33.

Variation 10°. 00' East.

39.85 Set a Limestone Rock 20 in long, 12 in wide and 3 in thick for quarter Section corner.

79.70 The corner to Sections 28, 29, 32 and 33.

Land rolling 2d rate Soil.

Township 9. N. R. 3. East.

Chains

North, between Sections 28 and 29.

Variation 11°. 30' East.

40.00 Set a Limestone Rock 16 in long 12 in wide and 3 in thick for quarter Section corner.

80.00 Set a Limestone Rock 21 in long 10 in wide and 3 in thick for corner to Sections 20, 21, 28 and 29.

Land rolling 2d rate Soil.

East, on a random line between Sections 21 and 28.

Variation 10°. 15' East.

40.00 Set a Rock for temporary quarter Section Section corner.

80.75 Intersected North and South line 34 links South of Rock corner to Sections 21, 22, 27 and 28, from which corner I run West, on a true line between Sections 21 and 28.

Variation 10°. 30' East.

Township 2. N. R. 3. East.

Chains

20.38 Set a Limestone Rock 18 in long 10 in wide and 2½ in thick for quarter Section corner,

80.75 The corner for Sections 20, 21, 28 and 29,

Land level 2d rate Soil.

August the 28th A.D. 1857.

North, between Section 20 and 21,

Variation 11°. 00' East,

40.00 Set a Limestone Rock 16 in long 12 in wide and 2½ in thick for quarter Section corner,

80.00 Set a Limestone Rock 20 in long 11 in wide and 3 in thick for corner to Sections 16, 17, 20, and 21,

Land rolling 2d rate Soil.

East, on a random line between Sections 16 and 21,

Variation 10°. 15' East.

Township 2. N. R. 3. East.

Chs

40.00 Set a Rock for temporary quarter Section corner,

80.00 Intersected North and South line 35 links North of Rock corner to Sections 15, 16, 21 and 22, from which corner I run

West, on a true line between Sections 16 and 21,

Variation 10°. 00' East

40.00 Set a Limestone Rock 16 in long 12 in wide and 2½ in thick for quarter Section corner,

80.00 The corner to Sections, 16, 17, 20 and 21,

Land level 2d rate Soil,

North, between Sections 16 and 17,

Variation 11°. 15' East,

40.00 Set a Limestone Rock 16 in long 12 in wide and 2½ in thick for quarter Section corner,

60.00 A Prairie Branch 3 links wide runs South East,

Township 9. N. R. 3. E

Chains

80,00 Set a Limestone Rock 22 in long, 11 in wide and 3 in thick for corner to Sections 8, 9, 16 and 17.
Land broken 3d rate soil.

East, on a random line between Sections 9 and 16.
Variation 10°. 15' East.

40,00 Set a Rock for temporary quarter Section corner,

79.31 Intersected North and South line 4 links North of Rock corner to Sections 9, 10, 15 and 16, from which corner I run
West, On a true line between Sections 9 and 16.
Variation 10°. 15'. East,

39.65 Set a Limestone Rock 17 in long, 9 in wide and 4 in thick for quarter Section corner

79.31 The corner for Sections 8, 9, 16 & 17.

Township 9. N. R. 3. East,

Chs Land rolling 2d rate soil.

North, between Sections 8 and 9.
Variation 11°. 30' East,

40 00 Set a Limestone Rock 19 in long 15 in wide and 3 in thick for quarter Section corner.

80 00 Set a Limestone Rock 20 in long, 12 in wide and 3 in thick for corner to Sections 4, 5, 8 and 9.
Land level 2d rate soil.

East, on a random line between Sections 4 and 9.
Variation 10°. 15' East,

40 00 Set a Rock for temporary quarter Section corner,

79 13 Intersected North and South line 48 links South of Rock corner to Sections 3, 4, 9 and 10. from which corner I run
West on a true line between

Township 9. N. R. 3. E.

Chs Sections 4 and 9.

Variation ~~9.54~~ 10°.36' East,

39.56 Set a Limestone Rock 19 in long 11 in wide and 3 in thick for quarter Section corner,

79.15 The corner to Sections 4.5.8 & 9.

Land level 2d rate soil,

North, between Sections 4 and 5, (The mound, corner to Sections 4 and 5 being in plain view) I adjust my compass to a Variation of 11°.50' East,

40.00 Set a Limestone Rock 20 in long 9 in wide and 3 in thick for quarter Section corner,

80.33 Intersected the North Boundary of the Township at mound corner for Sections 4 and 5.

Land level 2d rate soil.

Township 9. N. R. 3. East.

Chs

North, between Sections 31 & 32.

Variation 11°.30' East,

40.00. Set a Post in mound with trench as per instructions for quarter Section corner,

65.00 A Stream 75 links wide nuss S. E.

70.00 Left Bottom and enter upland bears East and West,

80.00 Set a Limestone Rock 20 in long 11 in wide and 3 in thick for corner to Sections 29.30.31 & 32.

Land level 1st rate soil,

East, on a random line between Sections 29 and 32,

Variation 10°.15' East,

40.00 Set a Rock for temporary quarter Section corner,

60.00 A Prairie Branch, 5 links wide nuss South.

80.00 Intersected North and South 30 links South of Rock corner

Township 9. N. R. 3. East.

Chs to Sections 29. 30. 31 and 32.
from which corner I run
West, on a true line between
Sections 29 and 32.
Variation 10°.28' East,
40.00 Set a Limestone Rock 19 in long
10 in wide and 3 in thick for
quarter Section corner,
80.00 The corner to Sections 29. 30. 31 & 32.
Land rolling 2d rate soil,

West. On a random line between
Sections 30 and 31.
Variation 10°.15' East,
20.00 Left cup land, and entire Bottom
bears. East, and West,
27.00 A Stream 75 links wide runs S.E.
35.00 Left Prairie, and entire Timber,
bears N and South,
39.50 A Stream 100 links wide
runs N.W.
40.00 Set a Rock for temporary quarter

Township 9. N. R. 3. East.

Section ~~Section~~ corner,
47.00 ~~Thirt~~ Same Stream 78 links
wide runs South,
48.00 Left Timber, and entire Prairie
bears North and South,
79.80 Intersected the West Boundary
40/39.80 of the Township 50 links South
of Mound corner for Sections
30 and 31. from which corner
I run
East, on a true line between
Sections 30 and 31.
Variation 9°.~~25~~ 54' East,
38.80 I set a Limestone Rock (the true
point for the quarter Section corner
being in the Creek,) 16 in long
12 in wide and 3 in thick for
~~quarter~~ Sixtness corner, from
which an Ash 10 in dia,
bears S. 65½ E. 21 links dist,
no other Tree convenient to
mark.

Township 9. N. R. 3. East,

Chains

79.80 The corner to Sections 29. 30. 31 and 32.
Land ~~Land~~ level 1st rate Soil, Timber, Cotton Wood, Maple, Ash, and Elm, undergrowth, Same, and Plum, and Willow,

North, between Sections 29 and 30.
Variation 11°. 45' East,

40.00 Set a Limestone Rock 17 in long, 11 in wide and 3 in thick for quarter Section corner,

80.00 Set a Flint Rock 20 in long 10 in wide and 4 in thick for corner to Sections 19. 20. 29 and 30.
Land rolling 2d rate Soil,

East, on a random line between Sections 20 and 29.
Variation 10°. 15' East,

40.00 Set a Rock for temporary quarter

Township 9. N. R. 3. East,

Chs Section corner,

80.02 Intersected North and South line 50 links north of Rock corner to Sections 20, 21, 28 and 29, from which corner I run West, on a true line between Sections 20 and 29.
Variation 9°. 45' East,

40.01 Set a Red Rock 12 in long 9 in wide and 7 in thick, for quarter Section corner,

80.02 The corner to Sections 19. 20. 29 and 30.
Land rolling 2d rate Soil,

August the 29th 1857.

West, on a random line between Sections 19 and 30.
Variation 10°. 00' E.

40.00 Set a Rock, for temporary quarter Section corner.

Township 9. N. R. 3. East,

Chains

79.95 Intersected the West Boundary of the Township at mound corner for Sections 19 and 30, from which corner I run East, on a true line between Sections 19 and 30.

Variation 10°.00' East,

39.95 Set a Blue Rock 10 in long 9 in wide and 7 in thick for quarter Section corner,

79.95 The corner to Sections 19, 20, 29 and 30,

Land broken 3d rate soil,

North, between Sections 19 and 20,

Variation 12°.00' East,

40.00 Set a Limestone Rock 20 in long 10 in wide and 3 in thick for quarter Section corner,

80.00 Set a Limestone Rock 19 in long 11 in wide and 4 in thick for

Township 9. N. R. 3. East,

Chs

Corner to Sections 17, 18, 19 and 20,

Land rolling 2d rate soil.

East, on a random line between Sections 17 and 20,

Variation 10°.15' East,

40.00 Set a Rock for temporary quarter Section corner,

80.50 Intersected North and South line 40 links north, of Rock corner to Sections 16, 17, 20 and 21, from which corner I run West, on a true line between Sections 17 and 20,

Variation 9°.58' East,

40.25 Set a Limestone Rock 17 in long 9 in wide and 4 in thick for quarter Section corner,

80.50 The corner to Sections 17, 18, 19 and 20,

Land rolling 2d rate soil,

Towush 9. n. R. 3. East.

Chs West, on a random line between Sections 18 and 20 19.
Variation 10°.00' East,
40.00 Set a Rock for temporary quarter Section corner,
79.90 Intersected the West Boundary of the Township at mound corner to Sections 18 and 19, from which corner I run East, on a true line between Sections 18 and 19,
Variation 10°.00' East,
39.90 Set a Granite Rock 11 in long 8 in wide and 6 in thick for quarter Section corner,
79.90 The corner to Sections 17.18.19 and 20, Land gently rolling 2d rate soil,

North, between Sections 17 and 18,
Variation 11°.40' E,
40.00 Set a Limestone Rock 18 in long 11 in wide and 3 in thick for quarter Sec corner,

Township 9. n. R. 3. East.

8000 Set a Limestone Rock 20 in long 10 in wide and 4 in thick for corner to Sections 7.8.17 and 18, Land gently rolling 2 rate soil,

East, on a random line between Sections 8 and 17,
Variation 10°.15' East,
4000 Set a Rock for temporary quarter Section corner,
66.00 A Prairie Branch 6 links wide runs S. East,
8005 Intersected N. and S. line 9 links South of Rock corner to Sections 8.9.16 and 17, from which corner I run West, on a true line between Sections 8 and 17,
Variation 10°.19' East,
4002 Set a Limestone Rock 18 in long 9 in wide and 4 in thick for quarter Section corner,
8005 The corner to Sections 7.8.17 and 18.

Township 9. N. R. 3. East.

Chs Land rolling 2d rate soil,

West, on a random line between Sections 7 and 18,
Variation 10°.15' East,

40.00 Set a Rock for temporary quarter Section corner,

80.20 Intersected the West Boundary of the Township 35 links S of mound corner to Sections 7 and 18 from which corner run

East, on a true line between Sections 7 and 18,
Variation 10°.00' East,

40.20 Set a Limestone Rock 16 in long 12 in wide and 2½ in thick for quarter Section corner,

80.20 the corner to Sections 7, 8, 17 and 18.
Land gently rolling 2d rate soil.

North, between Sections 7 and 8,
Variation 12°.00' E.

Township 9. N. R. 3. East.

Chs

40.00 Set a Quartz Rock 12 in long 10 in wide and 8 in thick for quarter Section corner,

80.00 Set a Granite Rock 11 in long 10 in wide and 8 in thick for corner to Sections 5, 6, 7 and 8,
Land rolling 2d rate soil.

192
2
554

East, on a random line between Sections 5 and 8,
Variation 10°.15' East,

40.00 Set a Rock for temporary quarter Section corner

80.10 Intersected North and South line at Rock corner for Sections 4, 5, 8 and 9. from which corner run

West, on a true line between Sections 5 and 8
Variation 10°.15' East,

Township 2. N. R. 3. East.

Chs	
40.05	Set a Limestone Post 18 in long 11 in long & wide and 2½ in thick for quarter section corner,
80.10	The corner to Sections 5, 6, 7 & 8, land gently rolling & rich soil.
	West, on a random line between Sections 6 and 7.
	Variation 10° 00' East,
40.00	Set a Post for temporary quarter Section corner,
80.11	Intersected the West Boundary of the Township 20 links north of mound corner to Sections 6 and 7. from which corner I run East, on a true line between Sections 6 and 7.
	Variation 10° 09' East,
40.11	Set a Granite Post 12 in long 9 in wide and 6 in thick for quarter Section corner,

Township 2. N. R. 3. East.

Chs	
80.11	The corner to Sections 5, 6, 7 & 8, land gently rolling & rich soil.
	North, on a random line between Sections 5 and 6.
	Variation 10° 00' East
40.00	Set a Post for temporary quarter Section corner,
80.45	Intersected the North Boundary of the Township 75 links E of mound corner to Sections 5 and 6. from which corner I run South, on a true line between Sections 5 and 6.
	Variation 12° 32' East,
40.45	Set a Quartz Rock 10 in long 8 in wide and 7 in thick for quarter Section corner,
80.45	The corner to Sections 5, 6, 7 and 8, land rolling & rich soil,

August the 30th 1857.

General Description.

The quality of the land in this Township is generally good 2d rate soil.
No Timber of consequence, either On the Big Blue River, in the north East of the Township, nor the Stream that runs through the S W. corner. —
4 or 5 of the Rocks set for quarter Sections corners on the W side of this Township are smaller, than the size required but I am of opinion that a small Rock, in a region of country where Rock is scarce, makes a better corner, than a large Rock does in a region where Rock is plenty.

A list of names.

A list of the names of the individuals employed to assist in running, marking or measuring, the lines and corners described in the foregoing field notes of Township no 9. north of the Base line, of Range no 3 East of the 6th principal Mdn, Showing the respective capacities in which they acted;

Demetrius T. Colvin, Flagbearer,
Quintus A. Colvin, Chainman,
Edward Stephens, Chainman,
Columbus C. Colvin, Axeman,
William Stephens, Axeman,

The field notes of the Sectionalisation lines and corners of Township noten, north of the Base line of Range No 3 East of the 6th Principal Meridian, in the Territory of Nebraska.

Surveyed by George W. Ferton, Deputy Surveyor, —

Under his Contract No. 209, Dated 8th June 1857

Commenced August the 31 1857 and completed September the 5th 1857

Ex Gpl Jm
All ok

A list of names.

A list of the names of the individuals employed to assist in running, meandering, or marking, the lines and corners described in the following field notes of Township No ten, north of the Base line of Range No 3. East of the 6th Principal Meridian,

showing the respective capacities in which they acted:

Dumeus A. Colvin, Chainman,
Edward Stephens, Chainman,
Demetrius S. Colvin, Flagman,
Columbus L. Colvin, Axeman,
William Stephens, Axeman,

Township 10 N. Range 3 East

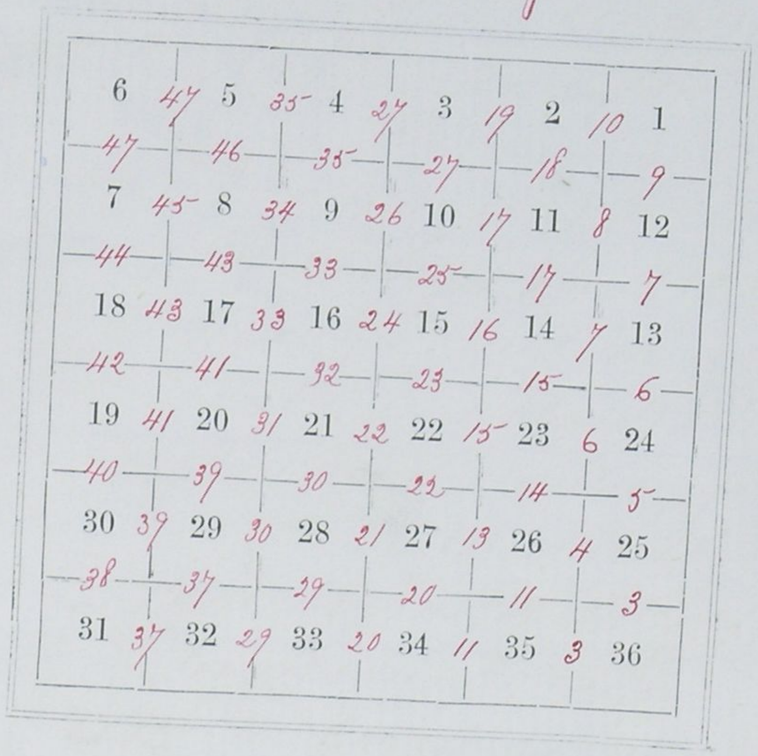

Field notes of the Subdivision lines and corners of Township 10. N. R. 3. East,

Chs To determine the proper adjustment of my compass for Subdividing this Township

I commence at the corner to Townships 9 and 10 North of Ranges 3 and 4. E. and run North, on a blank line along the East Boundary of Section 36.

Variation 11°. 15' East,

39 95 To a point, 18 links, West of the quarter Section corner,

79 93 To a point, 35 links West of the corner to Sections 25 & 36,

To retrace this line or, run parallel thereto, my compass must be adjusted to a variation of 11°. 00' East.

Township 10. N. R. 3. East.

Subdivision commenced August the 31st AD 1857.

From the corner to Sections 1. 2. 35 and 36, on the South Boundary of the Township I run north, between Sections 35 and 36.

Variation 11° 00' East.

17.00 left up land and entered Bottom, bears N W, and S E.

21.00 A Ravine 14 links wide runs W.

40.00 Set a Limestone Rock 18 in long 12 in wide and 3 in thick for quarter Section corner.

80.00 Set a Limestone Rock 22 in long 14 in wide and 3 in thick for corner to 25, 26, 35 and 36.

Land level 2d rate Soil.

East, on a random line between Sections 25 and 36.

Variation 10° 15' East.

Township 10. N. R. 3 East.

Chs 36.00 A Ravine 10 links wide runs S W.

40.00 Set a Rock for temporary quarter Section corner.

80.40 Intersected the East Boundary of the Township 70 links north of Rock corner to Sections 25 and 36, from which corner I run West, on a true line between Sections 25 and 36.

Variation 9° 45' East.

40.20 Set a Limestone Rock 18 in long 12 in wide and 4 in thick for quarter Section corner.

80.40 The corner to Sections 25, 26, 35 + 36.

Land broken 3d rate Soil.

North, between Sections 25 and 26.

Variation 11° 00' East.

35.00 left Bottom and entered up land bears N W, and S E.

40.00 Set a Limestone Rock 19 in long 11 in wide and 3 in thick for quarter Sec corner.

Chs.	
80,00	Set a limestone Post 24 in long 12 in wide and 4 in thick for corner to Sections 23, 24, 25 and 26, Bottom level, upland rolling & rate soil.
	East, on a random line between Sections 24 and 25, Variation 10°. 00 East,
40,00	Set a Post for temporary quarter Section corner,
50,00	A Branch 6 links wide runs S.
80,38	Intersected the East Boundary of the Township 30 links South of Post corner to Sections 24 and 25, from which corner I run West, on a true line between Sections 24 and 25, Variation 10°. 15' East,
40,19	Set a Limestone Post 18 in long 11 in wide and 3 in thick for quarter Section corner,
80,38	The corner to Sections 23, 24, 25.

Chs.	
	and 26, Land broken 3rd rate soil
	North, between Sections 23 and 24, Variation 11°. 00' East,
40,00	Set a limestone Post 20 in long 10 in wide and 3 in thick for quarter Section corner,
80,00	Set a limestone Post 20 in long 11 in wide and 3 in thick for corner to Sections 13, 14, 23 & 24, Land rolling 2nd rate soil.
	East, on a random line between Sections 13 and 24, Variation 10°. 15' East,
40,00	Set a Post for temporary quarter Section corner,
80,46	Intersected the East Boundary of the Township 70 links North of Post corner to Sections 13 and 24,

Township 10 N. R. 3. E.

Chs. From which corner I run West, on a true line between Sections 13 and 24.

Variation 9° 45' East.

40.23 Set a Limestone Rock 18 in long 14 in wide and 3 in the ground for quarter section corner.

80.46 The corner to Sections 13, 14, 23 & 24. Land rolling & rate soil.

North, between Sections 13 and 14.

Variation 11° 00' East.

10.00 Set a Limestone Rock 16 in long 10 in wide and 4 in the ground for quarter section corner.

20.00 Set a Limestone Rock 18 in long 12 in wide and 4 in the ground for corner to Sections 11, 12, 13 and 14. Land rolling & rate soil.

East, on a random line between Sections 12 and 13.

Chs. Variation 10° 15' East.

40.00 Set a Rock for temporary quarter section corner.

80.42 Intersected the East Boundary of the Township 60 links North of Rock corner to Sections 12 and 13. From which corner I run West, on a true line between Sections 12 and 13.

Variation 9° 47' East.

40.21 Set a Limestone Rock 18 in long 10 in wide and 3 in the ground for quarter section corner.

80.42 The corner to Sections 11, 12, 13 and 14. Land rolling & rate soil.

North, between Sections 11 and 12.

Variation 11° 00' East.

40.00 Set a Limestone Rock 16 in long 10 in wide and 4 in the ground for quarter section corner.

80,00 Set a limestone Rock 24 in long 15 in wide and 3 in thick for Corner to Sections 1, 2, 11 and 12. Land rolling 2d rate soil.

East, on a random line between Sections 1 and 12.

Variation 9° 45' East.

40,00 Set a Rock for temporary quarter Section corner,

80,20 Intersected the East Boundary of the Township 35 links South of Rock corner to Sections 1 & 12, from which corner I run West, on a true line between Sections 1 and 12.

Variation 10° 00' East.

40,10 Set a limestone Rock 18 in long 12 in wide and 5 in thick for quarter Section corner,

80,20 The corner to Sections 1, 2, 11 and 12. Land rolling 2d rate soil.

40,15 North, on a random line between Sections 1 and 2,

40,00 Set a Rock for temporary quarter Section corner, Variation 10° E

79,95 Intersected the North Boundary of the Township 39 links West, of Rock corner to Sections 1 and 2 from which corner I run South, on a true line between Sections 1 and 2.

Variation 10° 45' East,

39,95 Set a limestone Rock 18 in long 11 in wide and 4 in thick for quarter Section corner,

79,95 The corner to Sections 1, 2, 11 and 12. Land rolling 2d rate soil.

August the 31st 1859.

Township 10. N. R. 3. East.

Chs. North, between Sections 34 & 35.
Variation 11°.00' East.
25.00 left up land and enter Bottom bears N.W. and S. East,
40.00 Set a Limestone 17 in long, 12 in wide and 4 in thick for quarter Section corner,
80.00 Set a Limestone Rock 20 in long 12 in wide and 4 in thick for corner to Sections 26. 27. 34 and 35.
Land level 1st rate Soil.

East, on a random line between Sections 26 and 35.
Variation 9°.45' East.
27.00 Big Blue River 100 links wide runs S. E.
29.50 ~~That~~ Same River. 90 links runs N. E.
39.00 ~~That~~ Same River 75 links wide runs South West.
40.50 Set a Rock for temporary quarter Section corner.

Township 10. N. R. 3. East

Chs.
79.42 Intersected north and South line 29 links South of Rock corner to Sections 25. 26. 35 and 36, from which corner I run West, on a true line between Sections 26 and 35.
Variation 9°.57' East.
38.92 Set a Limestone Rock 16 in long, 12 in wide and 4 in thick for witness corner. (A Pit 18 in & from said corner on north side) (This corner is set 79 links E of true point, the true point being in the River)
79.42 The corner to Sections 26. 27. 34 & 35.
Land level 1st rate Soil.
Some Timber in the bends of this River near the line.
Maple, Bur Oak, Walnut, and Ash, of an inferior quality)

Township 10. N. R. 3. East.

Chs North, between Sections 26 and 27,
Variation 11°. 16'. East.
15,00 Big Blue River 75 links wide runs East, and enters timber,
32.50 ~~West~~ Same River, 100 links wide runs West, and left timber,
40,00 Set a Limestone Rock 17 in long 12 in wide and 3 in thick for quarter Section corner,
68,00 ~~West~~ Same River 80 links wide runs East, and enters timber,
75,00 ~~West~~ Same River 75 links wide runs South W, and enters Prairie, bears E, and S. W,
80,00 Set a Limestone Rock 24 in long 12 in wide and 3 in thick for corner to Sections 22, 23, 26 and 27,
Land level 1st rate soil,
Timber, Walnut, Burr oak, Black Berry, and Maple,

Chs East, on a random line between Sections 23 and 26,
Variation 10°. East,
16.50 Big Blue River 40 links wide runs S East,
40.00 Set a Rock for temporary quarter Section corner,
65.00 Left Bottom and entered timber bears North & South,
80.40 Intersected North and South line 12 links North of Rock corner to Sections 23, 24, 25, and 26, from which corner Drum West, on a true line between Sections 23 and 26,
Variation 9°. 55' East,
40.20 Set a Limestone Rock 18 in long 12 in wide and 3 in thick for quarter Section corner,
80.40. The corner to Sections 22, 23, 26 & 27,
Land level 1st rate soil.

Township 10. N. R. 3. E

Chs

North, between Sections 22 + 23.
Variation 10°. 40' East,

35.00 Big Blue River 65 links wide
minus East,

40.00 Set a limestone Rock 18 in long 10
in wide and 3 in thick for quarter
Section corner,

80.00 Set a limestone Rock 20 in long 12
in wide and 4 in thick for corner
to Sections 14, 15, 22 and 23.
Land level 1st rate soil.

East, on a random line between
Sections 14 and 23.
Variation 10°. 00'. East,

20.00 Left Bottom and entered up land,
bears North and South.

40.00 Set a Rock for temporary quarter
Section corner,

79.94 Intersected North and South line
at Rock corner to Sections 13, 14,
23 and 24, from which corner I run

Chs West, on a true line between Sections
14 and 23.
Variation 10°. 00' East,

39.97 Set a limestone Rock 20 in long,
10 in wide and 2½ in thick for
quarter Section corner,

79.94 The corner to Sections 14, 15, 22 + 23.
Land rolling 2nd rate soil.

North, between Sections 14 and 15.
Variation 10°. 45' East,

40.00 Set a limestone Rock 18 in long 10
in wide and 3 in thick for quarter
Section corner,

75.00 Left Bottom and entered up land
bears N. W. and S. E.

80.00 Set a limestone Rock 24 in long
15 in wide and 3 in thick
for corner to Sections
10, 11, 14 and 15.
Land level 1st rate soil.

Township 10. N. R. 3. East,

Chs. East, on a random line between Sections 11 and 14.

Variation 10°. 00' East,

40.00 Set a Rock for temporary quarter Section corner

77.89 Intersected north and south line 5 links South of Rock corner to Sections 11, 12, 13 and 14. from which corner I saw

West, on a true line between Sections 11 and 14,

Variation 10° 02' East,

39.95 Set a Limestone Rock 20 in long 10 in wide and 4 in thick for quarter Section corner,

79.85 The corner to Sections 10, 11, 14 & 15, Land rolling & Prairie soil,

North, between Sections 10 and 11,

Variation 11°. 00' East,

40.00 Set a Limestone Rock 18 in long 10 wide and 5 thick for quarter Section corner,

Township 10. N. R. 3. East,

Chs.

80.00 Set a Limestone Rock 20 in long 14 in wide and 5 in thick for corner to Sections 2, 3, 10 and 11, Land broken & Prairie soil

East, on a random line between Sections 2 and 11.

Variation 10°. 00' East,

40.00 Set a Rock for temporary quarter Section corner,

80.45 Intersected north and South line 3 links South of Rock corner to Sections 1, 2, 11 and 12, from which corner I saw

West, on a true line between Sections 2 and 11,

Variation 10°. 01' East,

40.23 Set a Limestone Rock 30 in long 12 in wide and 4 in thick for quarter Sec. corner,

80.45 The corner to Sections 2, 3, 10 and 11, Land rolling & Prairie soil,

Chs North, on a random line between Sections 2 and 3.

Variation 10°. 30' East,

12.00 A Ravine 10 links wide nine West,

40.00 Set a Rock for temporary quarter Section corner,

80.40 Intersected the north Boundary of the Township 20 links East of Rock corner to Sections 2 and 3; from which corner I run

South, on a true line between Sections 2 and 3.

Variation 10°. 39' East,

40.40 Set a Limestone Rock 18 in long 12 in wide and 3 in thick for quarter Sec corner,

80.40 the corner to Sections 2, 3, 10 and 11.

Land broken 3d rate Soil.

September the 1st A.D. 1857.

Chs North, between Sections 33. and 34,

Variation 11°. 15' East,

40.00 Set a Limestone Rock 18 in long 15 in wide and 2½ in thick for quarter Section corner,

80.00 Set a Limestone Rock 20 in long 12 in wide and 3 in thick for corner to Sections 27, 28, 33. and 34.

Land rolling 2d rate Soil.

East, on a random line between Sections 27 and 34.

Variation 9°. 45' East,

40.00 Set a Rock for temporary quarter Section corner,

50.00 Left up land and entire Bottom, bears N.W. and S. East,

80.50 Intersected north and South line 35 links South of Rock corner for Sections 26, 27, 34 & 35, from which corner I run West, on a true line between,

Township 10. N. R. 3. East,

Chs. Sections 27. and 34.

Variation 10°. 00' East,

40.25 Set a Limestone Rock, 18 in long, 11 in wide and 3 in thick for quarter Section corner,

80.50 The corner to Sections 27. 28. 33 & 34, Rep land broken 3rd rate, Bottom level 1st rate soil.

North, between Sections 27 and 28.

Variation 11°. 00'. East,

40.00 Set a Limestone Rock 18 in long 10 in wide and 4 in thick for quarter Section corner,

41.00 A Draw, bears East, and left up land and crossed Bottom, bears N.W. and S.E.

80.00 Set a Limestone Rock 22 in long 12 in wide and 3 in thick for corner to Sections 21. 22. 27 and 28. Rep land broken 3rd rate soil, Bottom 1st rate soil,

Chs. East, on a random line between Sections 22 and 27,

Variation 10°. 00' East,

40.00 Set a Rock for temporary quarter Section corner,

79.50 Intersected north and South line 35 links north of Rock corner to Sections 22. 23. 26 and 27. from which corner I run West, on a true line between Sections 22 and 27.

Variation 9°. 45' East,

39.75 Set a Limestone Rock 17 in long 10 in wide and 4 in thick for quarter Section corner,

79.50 The corner to Sections 21. 22. 27 and 28. Land level 1st rate soil.

North, between Sections 21 and 22.

Variation 11°. 00' East,

40.00 Set a Limestone Rock 18 in long

Chs

11 in wide and 3 in thick for quarter Section corner,

80.00 Set a Limestone Rock 15 in long 14 in wide and 3 in thick for Corner to Sections 15. 16. 21 and 22, Land gently sloping S. & W. side.

East, on random line between Sections 15 and 22.

Variation 9° 45' East,

40.00 Set a Rock for temporary quarter Section corner,

58.00 Left Prairie and entered Timber, bears north and south,

63.50 Big Blue River, 50 links wide runs south,

75.00 A Slough 100 links wide, bears N. and S. and left Timber, and entered Prairie,

78.44 Intersected north and south line 5 links South of Rock corner to Sections 14, 15, 22 and 23. from which Corner I run

Chs

West, on a true line between Sections 15 and 22,

Variation 9° 45' East,

39.72 Set a Limestone Rock 16 in long 10 in wide and 4 in thick for quarter Section corner,

79.44 The corner to Sections 15. 16. 21. and 22, Land level 1st rate soil. Timber, Walnut, Hack Berry and Elm,

North, between Sections 15 and 16

Variation 11. 15 East,

40.00 Set a Limestone Rock 15 in long 14 in wide and 3 in thick for quarter Section corner,

66.00 A Branch 10 links wide runs East,

80.00 Set a Limestone Rock 22 in long 12 in wide and 4 in thick Rock for corner to Sections 9. 10. 15 and 16. Land gently sloping 2d rate soil.

Township 10 N. R. 3. East,

Chs East, on a random line between Sections 10 and 15,
variation 9° 45' East,

13.00 Big Blue River 60 links wide, runs S. E. and enters Timber,

19.50 ~~That~~ Same River, 65 links wide runs north East,

29.00 ~~That~~ Same River 75 links wide runs South East and left Timber, and entered Prairie, bears N.W. and S.E.

40.00 Set a Rock for temporary quarter Section corner,

41.00 ~~That~~ Same River 100 links wide runs N.E. and entered Timber.

48.00 ~~That~~ Same River 100 links wide runs S.E. and entered Prairie, bears N.W. and S. East,

80.21 Intersected north and South line 35 links South of Rock corner to Sections 10.11.14 and 15 from which corner I run West on a true line, between Sections 10 and 15.

variation 10° 00' East,

Township 10 N. R. 3. East

Chs 10 10 Set a Limestone Rock 16 in long 12 in wide and 4 in thick for quarter Section corner, from which a Walnut, 10 in dia bears N. 5½° East, 26 links dist, no other Tree, convenient to mark.

80.21 The corner to Sections 9.10.15 and 16,
Land level 1st rate Soil,
Timber, Maple, Elm, and Walnut,

North, between Sections 9 and 10,
variation 11° 00' East,

40.00 Set a Limestone Rock 20 in long 10 in wide and 5 in thick for quarter Section corner,

80.00 Set a Limestone Rock 20 in long, 10 in wide and 4 in thick for corner to Sections 3.4. 9 and 10.
Land level 1st rate Soil,

Township 10. N. R. 3. East.

Chains East, On a random line between Sections 3 and 10.

Variation 9° 45' East,

36.00 Big Blue River 60 links wide bears South West,

40.00 Set a Post for temporary quarter Section corner,

80.10 Intersected north and south line 29 links South of Post corner for Sections 2, 3, 10 and 11, from which corner 8 trees

West, on a true line between Sections 3 and 10,

Variation 9° 57' East,

40.05 Set a Limestone Post 16 in long 12 in wide and 3 in thick for quarter sec corner,

80.10 The corner to Sections 3, 4, 9 and 10 Land level 1st Rate Soil,

North, on a random line between Sections 3 and 4,

Variation 10° 30' East,

40.00 Set a Post for temporary quarter Section corner,

80.34 Intersected the north Boundary of the Township 35 links W. of mound corner to Sections 3 and 4. from which corner 9 trees South, on a true line between Sections 3 and 4.

Variation 10° 15' East,

40.34 Set a Limestone Post 18 in long 14 in wide and 3 in thick for quarter Section corner,

80.34 The corner to Sections 3, 4, 9 and 10. Land level 1st Rate Soil,

Surveyed this 2. A. D. 1857.

Township 10. N. R. 3. East.

Chs. North, between Sections 32-33.
Variation 11° 00' East,
40.00 Set a Limestone Rock 17 in long 12 in wide and 3 in thick for quarter Section corner.
80.00 Set a Limestone Rock 21 in long 15 in wide and 3 in thick for corner to Sections 28. 29. 32 and 33.
Land rolling 2d rate Soil.

East, on a random line between Sections 28 and 33.
Variation 10° 00' East,
40.00 Set a Rock for temporary quarter Section corner,
79.50 Intersected North and South line 40 links North of Rock corner to Sections 27. 28. 33 and 34, from which corner I now West, on a true line between Sections 28 and 33.
Variation 9° 45' East,

Township 10. N. R. 3. East

39.75 Set a Limestone Rock 16 in long 12 in wide and 3 in thick for quarter Section corner,
79.50 The corner to Sections, 28. 29. 32 and 33.
Land broken 3d rate Soil.

North, between Sections 28 and 29.
Variation 11° 00' East,
40.00 Set a Limestone Rock 16 in long 13 in wide and 3 in thick for quarter Section corner,
80.00 Set a Limestone Rock 18 in long 15 in wide and 4 in thick for corner, to Sections 20. 21. 28 and 29,
Land rolling 2d rate Soil,

East, on a random line between Sections 21 and 28,
Variation 9° 45' East,
32.00 Lift up land, and entered Bottom, bears N. and S. E.

Township 10. N. R. 3. East,

40.00 Set a Rock for temporary quarter Section corner,

79.76 Intersected north and South line 35 links north of Rock corner to Sections 21. 22. 27 and 28, from which corner I run West, on a true line between Sections 21 and 28,

Variation 9° 30' East,

39.88 Set a Limestone Rock 17 in long 10 in wide and 3 in thick for quarter Section corner,

79.76 The corner to Sections 20. 21, 28 & 29, Land rolling 2d rate soil,

North, between Sections 20 and 21,

Variation 11° 00' East,

40.00 Set a Limestone Rock 17 in long 12 in wide and 3 in thick for quarter Section corner,

80.00 Set a Limestone Rock 18 in long 10 in wide and 8 in thick for corner

Township 10. N. R. 3. East

Chs to Sections 16. 17. 20 and 21, Land rolling 2d rate Soil,

East, on a random line between Sections 16 and 21,

Variation 9° 45' East,

32.00 Left up Land, and entered Bottom, bears N, and S. East,

40.00 Set a Rock for temporary quarter Section corner,

80.00 Intersected north and South line 5 links S. of Rock corner to Sections 15. 16. 21 and 22, from which corner I run West, on a true line between Sections 16. and 21,

Variation 9° 47' East,

40.00 Set a Limestone Rock 14 in long 13 in wide and 8 in thick for quarter Section corner,

80.00 The corner to Sections 16. 17. 20 and 21, Land rolling 2d rate Soil,

Township 10. N. R. 3. East.

Chs	
	North, between Sections 16 and 17,
	variation 11.00 East,
40.00	Set a Limestone Rock 17 in long 10 in wide and 3 in thick for quarter section corner,
41.00	A Branch 15 links wide runs N. E,
80.00	Set a White Flint Rock 16 in long 12 in wide and 10 in thick for corner to Sections 8, 9, 16 and 17,
	Land rolling 2nd rate soil.

	East, on a random line between Sections 9 and 16,
	variation 9.45 East,
20.00	Left cultivated and entered Bottom, bearing N. E. and South,
34.50	Touched a Bend in a Branch,
40.00	Set a Rock for temporary quarter section corner,
45.00	Touched a Bend of the same Branch,
79.66	Intersected a north and south line 3 links S of Rock corner to

Township 10. N. R. 3. East.

Chs	
	Sections 9, 10, 15 and 16 from which corner 8 runs West, on a true line between Sections 9 and 16,
	variation 9.46 E.
39.83	Set a Limestone Rock 18 in long 10 in wide and 3 in thick for quarter section corner,
79.66	The corner to Sections 8, 9, 16 and 17,
	Land level 1st rate soil.

	North, between Sections 8 and 9,
	variation 11.00 East,
40.00	Set a Greyish Flint Rock 12 in long 10 in wide and 8 in thick for quarter section corner
80.00	Set a White Flint Rock 15 in long 10 in wide and 7 in thick for corner to Sections 4, 5, 8 and 9,
	Land broken 3rd rate soil.

Township 10. N. R. 3. East,

Chs East, on a random line between Sections 4 and 9.
Variation 9°.45 East,

40.00 Set a Rock for temporary quarter Section corner,

52.00 Left up land and entered Bottom bears N. E. and S. W.

79.62 Intersected north and South line 12 links north of Rock corner to Sections 3. 4. 9 and 10. from which corner I run West, between Sections 4 and 9,
Variation 9°.40' East,

39.81 Set a Grey flint Rock 13 in long 10 in wide and 8 in thick for quarter Section corner,

79.62 The corner to Sections 4. 5. 8 and 9. Up land rolling 2d rate Soil, Bottom 1st rate Soil.

North on a random line between Sections 4 and 5.

Township 10. N. R. 3. East

Chs. Variation 10°.45' East,

40.00 Set a Rock for temporary quarter Section corner,

80.12 Intersected the north Boundary of the Township 7 links West, of mound corner to Sections 4 and 5. from which corner I run South, on a true line between Sections 4 and 5,
Variation 10°.42' East,

40.12 Set a Grey flint Rock 12 in long 10 in wide and 8 in thick for quarter Section corner,

80.12 The corner to Sections 4. 5. 8 & 9. Land rolling 2d rate Soil,

September the 3d A.D. 1857.

Township 10. N. R. 3. East,

Chs. North, between Sections 31 and 32,
Variation 11°.00' East,

40.00 Set a Red Rock 16 in long 10 in wide and 8 in thick for quarter Section corner,

80.00 Set a Limestone Rock 20 in long 10 in wide and 3 in thick for corner to Sections 29, 30, 31 and 32.
Land rolling 2d rate Soil.

East, on a random line between Sections 29 and 32.
Variation 9°.45' East,

40.00 Set a Rock for temporary quarter Section corner

79.78 Intersected north and South line 20 links South of Rock corner to Sections 28, 29, 32 and 33, from which corner I run,
West, on a true line between Sections 29 and 32,
Variation 9°.54' East,

Township 10. N. R. 3. East

Chs.

39.89 Set a Granite Rock 12 in long 8 in wide and 6 in thick for quarter Section corner,

79.78 The corner to Sections 29, 30, 31 and 32.
Land rolling 2d rate Soil.

West, on a random line between Sections 30 and 31,
Variation 9°.45' East,

40.00 Set a Rock for temporary quarter Section corner,

78.20 Intersected the West Boundary of the Township 20 links S of Mound corner to Sections 30 and 31, from which corner I run
East, on a true line between Sections 30 and 31,
Variation 9°.36' East,

38.20 Set a Limestone Rock 18 in long 10 in wide and 3 in thick for quarter Sec corner,

78.20 The corner to Sections 29, 30, 31 + 32, Land rolling 2d rate Soil,

North, between Sections 29 and 30.
Variation 11° 00' East.

40.00 Set a limestone Rock 18 in long, 12 in wide and 3 in thick for quarter Section corner,

80.00 Set a limestone Rock 26 in long 12 in wide and 2½ in thick for corner to Sections 19, 20, 29 and 30, Land rolling 2d rate Soil,

East, on a random line between Sections 20 and 29.
Variation 9° 45' East,

40.00 Set a Rock for temporary quarter Section corner,

80.00 Intersected North and South line 15 links South of Rock corner to Sections 20, 21, 28 and 29 from which corner I run

West, on a true line between Sections 20 and 29.
Variation 9° 51' East,

40.00 Set a limestone Rock 12 in long 10 in and 9 in thick for quarter Section corner,

80.00 The corner to Sections 19, 20, 29 + 30, Land rolling 2d rate Soil,

West, on a random line between Sections 19 and 30.
Variation 9° 45' East,

40.00 Set a Rock for temporary quarter Section corner,

78.10 Intersected the West Boundary of the Township 35 links north of mound corner to Sections 19 and 30, from which corner I run East, on a true line between Sections 19 and 30.
Variation 10° 00' East,

38.10 Set a limestone Rock 12 in long

10 in wide and 3 in thick for
quarter section corner,
78.10 The corner to Sections 17, 20,
29, and 30,
Land rolling 2d rate soil.

North, between Sections 17 and 20.
Variation 11° 00' East.
40.00 Set a Limestone Rock 18 in long 13 in
wide and 3 in thick for
quarter Section corner,
80.00 Set a Limestone Rock 20 in long
14 in wide and 2½ in thick for
corner to Sections 17, 18, 19 and 20,
Land rolling 2d rate soil,

East, on a random line between
Sections 17 and 20.
Variation 9° 45' East,
40.00 Set a Rock for temporary quarter
Section corner,
79.96 Intersected North and South line

36 links South of Rock corner
to Sections 16, 17, 20, and 21, from
which corner I run
West, on a true line, between
Sections 17 and 20.
Variation 10° 00' East,
39.98 Set a Granite Rock 12 in long
10 in wide and 6 in thick for
quarter Section corner,
79.96 The corner to Sections 17, 18, 19 & 20,
Land broken 3d rate soil.

West, on a random line between
Sections 18 and 19.
Variation 9° 30' East,
40.00 Set a Rock for temporary quarter
Section corner,
56.00 A Ravine 10 links wide runs N.E.
78.28 Intersected the West Boundary of
the Township at mound corner
for Sections 18 and 19. from
~~Land broken 3d rate soil~~
which corner I run

East, on a true line between
Sections 18 and 19.
Variation 9° 50' East.
38.28 Set a limestone Rock 18 in long
12 in wide and 3 in thick for
quarter Section corner,
78.28 The corner to Sections 17, 18, 19 and 20,
Land broken & rate soil.

North, between Sections 17 and 18.
Variation 11°. 00'. East,
40.00 Set a Quart Rock 10 in long 9 in
wide and 8 in thick for quarter
Section corner,
48.00 A Ravine 14 links wide runs East,
80.00 Set a Grey flint Rock 18 in long
12 in wide and 10 in thick for
corner to Sections 7, 8, 17, and 18,
Land broken & rate soil,

East, on a random line between
Sections 8 and 17.

Variation 9° 45' East,
40.00 Set a Rock for temporary quarter
Section corner,
78.80 Intersected north and south line
12 links North of Rock corner to
Sections 8, 9, 16 and 17, from which
corner I run
West, on a true line between
Sections 8 and 17.
Variation 9° 40' East,
39.90 Set a Quart Rock 10 in long 8 in
wide and 8 in thick for quarter
Section corner.
79.80 The corner to Sections 7, 8, 17 and 18,
Land rolling & rate soil.

West, on a random line between
Sections 7 and 18.
Variation 9° 45' East,
40.00 Set a Rock for temporary quarter
Section corner.
78.18 Intersected the West Boundary

of the Township 10 links South of mound corner to Sections 7 and 18, from which corner I run East, on a true line between Sections 7 and 18.

Variation 9° 41' East,

38.18 Set a Limestone Rock 18 in long 10 in wide and 3 in thick for quarter Section corner,

78.18 The corner to Sections 7, 8, 17 and 18, Land broken 3d rate soil,

September the 4th A.D. 1857.

North, between Sections 7 and 8,

Variation 11° 00' East,

40.00 Set a Quart Rock 12 in long 10 in wide and 8 in thick for quarter Section corner,

80.00 Set a Limestone Rock 22 in long 12 in wide and 3 in thick for corner to Sections 5, 6, 7 and 8.

Land gently rolling 2d rate soil,

East, on a random line between Sections 5 and 8.

Variation 9° 45' East,

40.00 Set a Rock for temporary quarter Section corner,

79.50 Intersected north and south line 60 links south of Rock corner to Sections 4, 5, 8 and 9, from which corner I run West, on a true line between Sections 5 and 8.

Variation 10° 11' East,

39.75 Set a Quart Rock 11 in long 10 in ~~long~~ wide and 9 in thick for quarter Section corner,

79.50 The corner to Sections 5, 6, 7 and 8, Land gently rolling 2d rate soil.

West, on a random line between Sections 6 and 7,

Variation 9° 45' East,

40.00 Set a Post for temporary quarter Section Section corner,

78.12 Intersected the West Boundary of the Township 64 links North of Mound corner to Sections 6 & 7. from which corner I run East, on a true line between Sections 6 and 7,

Variation 10°. 12' East,

38.12 Set a Sandstone Post 10 in long 9 in wide and 7 in thick for quarter Section corner,

78.12 The corner to Sections 5, 6, 7 and 8, Land pretty rolling 2d rate soil.

North, between Sections 5 and 6,

Variation 11°. 02' East,

(Adjusted my compass on mound from Station)

40.00 Set a Limestone Post 18 in long 11 in wide and 3 in thick for quarter Section corner,

79.96 Intersected the North Boundary of the Township at mound corner for Sections 5 and 6, Land level 2d rate soil,

September the 5th A.D. 1857,

General description

The geality of the land in this Township, is considerably above the common average, Especially the Bottom, or valey lands, which is very rich, very little of them subject to over flow, except in times of very high Water,

Big Blue River runs through this Township. It has a remarkably swift current. Rock Bottom in many places. Several ledges of Limestone Stone Rock on said River, near the S. E. portion of the Township.

Timber is scarce, the River is entirely bare in many places. Although there are a few Groves of tolerably good Timber, one of the best, is in Section 27. Kinds of Timber, Walnut, Burr Oak, Hackberry, Elm, cotton Wood and Maple,

List of names

A list of the names of the individuals employed to assist in running, measuring, & marking the lines and Corners described in the foregoing field Notes of the Township No 10. North of the Base line & Range 3. East of the 6th Principal meridian, in the Territory of Nebraska, Showing the respective capacities in which they acted;

Demetrius T. Calvin, Surveyor,
Quintus A. Calvin, Chainman,
Edward Stephens, Chainman,
Columbus C. Calvin, Axeman,
Milian Stephens, Axeman,

Books

The field Notes of the Subdivision lines and corners of Township No 11. North of the Base line of Range No 3. East, of the 6th Principle Meridian, in the Territory of Nebraska, Surveyed by George W. Foster, Deputy Surveyor, Under his Contract, No 209 dated 8th June 1857.

Commenced September the 5th and completed September the 10th 1857.

A list of names.

A list of the names of the individuals employed to assist in running, measuring or marking the lines and corners described in the following field notes of Township No 11. North of the Base line of Range No 3. East of the 6th Principal Meridian. in the Territory of Nebraska. Showing the respective capacities in which they acted:

Quintus A. Colvin, Chainman,
Edward Stephens, Chainman,
Demetrius T. Colvin, Flagbearer,
Columbus C. Colvin, Axeman,
William Stephens, Axeman,

Township 11 N. Range 3 East

6	49	5	35	4	27	3	17	2	10	1
48		48		34		26		17		9
7	47	8	34	9	25	10	16	11	8	12
46		45		33		24		15		7
18	43	17	33	16	24	15	15	14	7	13
42		41		32		23		14		6
19	41	20	31	21	21	22	13	23	6	24
40		40		30		20		12		5
30	38	29	29	28	20	27	12	26	4	25
37		37		28		19		11		3
31	36	32	28	33	18	34	11	35	3	36

Obs. Township 11. N. R. 3. East, 105

To determine the proper adjustment of my compass for subdividing this Township I commence at the corner to Townships 10 and 11 North, of Ranges 3 and 4. East, and run

North, on a bearing line along the East Boundary of Sec. 36.

Variation 11° 00' East,

40.02 To a Point 16 links West of the quarter Section corner,

79.95 To a Point, 36 links West of the corner to Sections 25 and 36.

To set out this line or, run parallel thereto, my compass must be adjusted to a Variation of 10°.45' East.

Subdivision commenced September the 5th 1857.

Township 11. N. R. 3. East.

From the corner to Sections 1, 2, 35 and 36. On the South Boundary of the Township I run

North, between Sections 35 & 36,
Variation 10°. 45' East.

30.00 A Branch 5 links wide runs South West.

40.00 Set a flint Rock 12 in long 10 in wide and 8 in thick for quarter Section corner,

80.00 Set a Post in mound with trench, as per instructions for corner to Sections 25, 26, 35 and 36.
Land broken 3rd rate soil.

East, on a random line between Sections 25 and 36.
Variation 10°. 00' East,

17.00 A Branch 6 links wide runs South West.

40.00 Set a Rock for temporary quarter Section corner,

80.00 Intersected East Boundary of the Township ~~Found Stone~~ 40 Links South of Rock corner to Sections 25 and 36, from which corner I run West, on a true line between Sections 25 and 36,
Variation 10°. 15' East,

40.00 Set a Quartz Rock 11 in long 9 in wide and 7 in thick for quarter Section corner,

80.00 The corner to Sections 25, 26, 35 and 36,
Land broken 3rd rate soil.

North, between Sections 25 & 26,
Variation 10°. 45' East,

40.00 Set a Flint Rock 20 in long, 12 in wide and 5 in thick for quarter Section corner,

80.00 Set a Post in mound with trench,

Chs Township 11. N. R. 3. East,
5/108

as per instructions, for corner to Sections 23, 24, 25 and 26, Land rolling 2d rate Soil,

East, on a random line between Sections 24 and 25.
Variation 10°.15' East,
40,00, Set a Post for temporary quarter Section corner,
79.78 Intersected the East Boundary of the Township 41 links North of Rock corner for Sections 24 and 25 from which corner I run
West, on a true line between Sections 24 and 25,
Variation 9°.58' East,
39.89 Set a Post in mound with trench, as per instructions for quarter Section corner,
79.78 The corner to Sections 23, 24, 25 & 26, Land broken 3d rate Soil,

North, between Sections 23 & 24,
Variation 10°.50' East,
40.00 Set a Quart Rock 15 in long 12 in wide and 10 in thick for quarter Section corner,
80.00 Set a Post in mound with trench, as per instructions for corner to Sections 13, 14 23 and 24,
Land rolling 2d rate Soil,

East, on a random line between Sections 13 and 24,
Variation 10°.00' East,
40.00 Set a Post for temporary quarter Section corner,
80.04 Intersected the East Boundary of the Township at Rock corner to Sections 13 and 24, from which corner I run
West, on a true line between Sections 13 and 24.

Chs Township 11. N. R. 3. East,

7/110

Variation 10° 00' East,

40.02 Set a Post in mound with trench, as per instructions for quarter Section corner,

80.04 The corner to Sections 13. 14. 23. and 24,

Land rolling 2d rate soil,

September the 5th 1857,

North, between Sections 13 & 14,

Variation 10° 45' East,

40.00 Set a Post in mound with trench, as per instructions for quarter section corner,

80.00 Set a Post in mound with trench as per instructions for corner to Sections 11. 12. 13 & 14,

Land broken 3d rate soil,

East, on a random line between Sections 12 and 13.

Chs Township 11. N. R. 3. East,

8/111

Variation 9° 45' East

40.00 Set a Post for temporary quarter Section corner,

80.34 Intersected the East Boundary of the Township 5 links North of Rock corner to Sections 12 and 13. from which corner I run

West, on a true line between Sections 12 and 13.

Variation 9° 43' East,

40.17 Set a Post in mound with trench, as per instructions for quarter Section corner,

80.34 The corner to Sections 11. 12. 13 and 14.

Land broken 3d rate soil.

North, between Sections 11 and 12.

Variation 10° 30' E.

40.00 Set a Post in mound with trench, as per instructions

Chs Township 11. N. R. 3. East.

For quarter Section corner,

80,00 Set a Post in mound with trench, as per instructions for corner to Sections 1, 2, 11 and 12.
Land rolling 2d rate Soil,

East, on a random line between Sections 1 and 12,
Variation 9°45' East,

40,00 Set a Post for temporary quarter Section corner,

80,36 Intersected the East Boundary of the Township 25 links North of Rock corner to Sections 1 and 12 from which corner I run West, on a true line between Sections 1 and 12.
Variation 9°34' East,

40,18 Set a Post in mound with trench, as per instructions for quarter Section corner,

80,36 The corner to Sections 1, 2, 11 and 12.

Chs Township 11. N. R. 3. East.

Land broken 3d rate Soil,

North, on a random line between Sections 1 and 2,
Variation 10°30' East,

33 00 A Branch 6 links wide runs West,

40 00 Set a Rock for temporary quarter Section corner,

79 89 Intersected the North Boundary of the Township 70 links West, of Rock corner to Sections 1 and 2. from which corner I run South, on a true line between Sections 1 and 2,
Variation 10°00' East,

39 89 Set a Granite Rock 12 in long 8 in wide and 7 in thick for quarter Section corner,

79 89 The corner to Sections 1, 2, 11 and 12,
Land rolling 2d rate Soil,

Chs Township 11. N. R. 3. East,

North, between Sections 34 and 35,
Variation 10° 45' East,

40.00 Set a Post in mound with trench, as per instructions for quarter Section corner,

80.00 Set a Post in mound with trench, as per instructions for corner to Sections 26, 27, 34 and 35,
Land rolling 2d rate soil.

East, on a random line between Sections 26 and 35,
Variation 9° 45' East,

40.00 Set a Post for temporary quarter Section corner,

79.30 Intersected Naud South line 10 links South of mound corner to Sections 25, 26, 35 and 36, from which corner I run
West, on a true line between Sections 26 and 35,
Variation 10° 15' East,

Chs Township 11. N. R. 3. East,

39.65 Set Post in mound with trench, as per instructions for quarter Section corner,

79.30 The corner to Sections 26, 27, 34 and 35,
Land rolling 2d rate soil,

North, between Sections 26 & 27,
Variation 11° 00' East,

30.00 A Prairie run 8 links wide mus S. E.

40.00 Set Post in mound with trench, as per instructions for quarter Section corner,

80.00 Set a Post in mound with trench, as per instructions for corner to Sections 22, 23, 26 and 27,
Land broken 3d rate soil,

East, on a random line between Sections 23 and 26,
Variation 10° 00' East,

Chs Township 11 N. R. 3 East.

34.00 A Prairie run 6 links wide
runs South West,
40.00 Set a Post for temporary quarter
Section corner,
19.86 Intersected North and South line
at mound corner for Sections
23, 24, 25 and 26 from which
corner I run
West, on a true line between Sections
23 and 26,
Variation 10° 00' East,
39.93 Set Post in mound with trench,
as per instructions for quarter
Section corner,
19.86 The corner to Sections 22, 23, 26 & 27,
Sand rolling 2d rate soil,

North, between Sections 22 and 23,
Variation 10° 45' East,
40.00 Set a Post in mound with
trench, as per instructions
for quarter Section corner,

Chs Township 11 N. R. 3 East,

80.00 Set a Post in mound with
trench, as per instructions
for corner to Sections 14, 15, 22 & 23
Sand rolling 2d rate soil,

East, on a random line between
Sections 14 and 23.
Variation 10° 00' East,
40.00 Set a Post for temporary quarter
Section corner,
73.00 A Prairie run 7 links wide
runs South West,
19.76 Intersected North and South line
70 links North of mound corner
to Sections 13, 14, 23 and 24, from
which corner I run
West, on a true line between Sections
14 and 23.
Variation 9° 30' East,
39.88 Set a Post in mound with
trench, as per instructions for
quarter Section corner,

Chs Township 11 N. R. 3 East,

79.76 The corner to Sections 14, 15, 22 and 23.
Land rolling 2d rate Soil,

September the 6th A.D. 1857,

North, between Sections 14 and 15,
Variation 10°45' East,

40.00 Set a Post in mound with trench,
as per instructions for quarter
Section corner,

80.00 Set a Post in mound with trench,
as per instructions for corner to
Sections 10, 11, 14 and 15.
Land rolling 2d rate Soil.

East, on a random line between
Sections 11 and 14.
Variation 9°45' East,

40.00 Set a Post ~~in mound~~ for temporary
quarter Section corner,

79.77 Intersected North and South line
17 links North of mound corner

Chs Township 11 N. R. 3 East,

to Sections 11, 12, 13 and 14, from
which corner I run
West, on a true line between
Sections 11 and 14. ~~from which~~
~~corner I run~~
~~West, on a~~ Variation 9°38' East

39.87 Set a Post in mound with
trench, as per instructions
for quarter Section corner,

79.77 The corner to Sections 10, 11,
14 and 15,
Land rolling 2d rate Soil,

North, between Sections 10 and 11,
Variation 10°45' East,

40.00 Set a Post in mound with trench,
as per instructions for quarter
Section corner,

80.00 Set a Granite Rock 20 in long
8 in wide and 7 in thick for
corner to Sections 2, 3, 10 and 11,
Land rolling 2d rate Soil.

15/179

N.T.

Chs Township 11. N. R. 3. East,

17/120

East, On a random line between Sections 2 and 11,
variation 9° 45' East,

40.00 Set a Rock for temporary quarter Section corner,

80.20 Intersected North and South line 5 links North of Mound corner to Sections 1. 2. 11 and 12. from which corner I run West, on a true line between Sections 2 and 11,
Variation 9° 43' East,

40.10 Set a Quart ~~Rock~~ Rock 12 in long 8 in wide and 6 in thick for quarter Section corner,

80.20 The corner to Sections 2. 3. 10 and 11.
Land broken 3d rate Soil

North, on a random line between Sections 2 and 3,
Variation 10° 00' East,

39.00 A Branch 10 links wide runs West,

Chs Township 11. N. R. 3. East,

18/121

40.00 Set a Rock for temporary quarter Section corner,

79.85 Intersected the north Boundary of the Township 12 links East, of Rock corner for Sections 2 and 3. from which corner I run South, on a true line between Sections 2 and 3,
Variation 10° 05' East,

39.85 Set a Granite Rock 11 in long 9 in wide and 8 in thick for quarter Section corner,

79.85 The corner to Sections 2. 3. 10. and 11,
Land rolling 2d rate soil,

North, between Sections 33. & 34,
Variation 10° 45' East,

40.00 Set a Post in Mound with trench, as per instructions for quarter Section corner,

43.00 Big Blue River 60 links wide

15/179

N.T.

Chs 19/122 Township 11. N. R. 3. East,

Mus East, General course S. E.

80.00 Set a Post in mound with trench, as per instructions for corner to Sections 27, 28, 33 and 34. Land level 1st rate Soil.

East, on a random line between Sections 27 and 34.

Variation 10°.05' East.

(Settle on mound ~~mound~~ from 1st Station)

25.00 Left Bottom and entered upland bears N and S. ~~East~~,

38.50 A Branch 8 links wide mus S. E.

40.00 Set a Post for temporary quarter Section corner,

79.87 Intersected North and South line at mound corner for Sections 26, 27, 34 and 35, from which corner I run West, on a true line between Sections 27 and 34.

Variation 10°.05' East.

Chs 20/123 Township 11. N. R. 3. East,

39.93 Set a Post in mound with trench as per instructions for quarter Section Section corner,

79.87 The corner to Sections 27, 28, 33 and 34.

Bottom level 1st rate; upland broken 3d rate Soil.

North, between Sections 27 and 28,

Variation 11°.00' East,

40.00 Set a Post in mound with trench as per instructions for quarter Section corner,

49.00 A Slough 8.00 Chains wide bears N.W. and S. East,

80.00 Set a Post in mound with trench, as per instructions for corner to Sections 21, 22, 27 and 28, Land level 1st rate Soil.

East, on random line between Sections 22 and 27.

15/179 V.T.

Chs 21/124 Township 11. N. R. 3. East,

Variation 10°.00' East,

7.00 Left Bottom and entered upland bears W. W. and S. E.

40.00 Set a Post, for temporary quarter Section corner,

80.16 Intersected N and S line 35 links South of mound corner to Sections 22, 23, 26 and 27, from which corner I run

West, on a true line between Sections 22 and 27,

Variation 10°.15' East,

40.08 Set a Post in mound with trench, as per instructions for quarter Section corner,

80.16 The corner to Sections 21, 22, 27, and 28, Land rolling 2d rate Soil,

North, between Sections 21 and 22,

Variation 10°.45' East,

40.00 Set a Blue Rock 12 in long 8 in wide and 5 in thick for

quarter Section corner,

45.00 Plum Creek 20 links wide, runs S. W.

46.50 Same Creek 25 links wide, runs S. E.

52.00 Touched a bend of the same Creek,

63.00 Same Creek 18 links wide runs S. W.

64.50 Same Creek 20 links wide runs S. East,

70.00 Same Creek 19 links wide runs South West,

77.00 Same Creek (fringed with Timber) 15 links wide runs S. East,

80.00 Set a Post in mound with trench, as per instructions for corner to Sections 15, 16, 21, and 22,

Land level 1st rate Soil,

15
179
N.T.

East, on a random line between Sections 15 and 22,
Variation 10° 15' East,
11.00 Left Bottom, and entered upland bears north and South.
40.00 Set a Post for temporary quarter Section corner,
80.46 Intersected N. and S. line 13 links north of mound corner to Sections 14, 15, 22 and 23, from which corner I run
West, on a true line between Sections 15 and 22,
Variation 10° 09' East,
40.23 Set a Post in mound with trench, as per instructions for quarter Section corner,
80.46 The corner to Sections 15, 16, 21 and 22,
Land rolling 2d rate Soil.

September the 7th 1857.

North, between Sections 15 and 16,
Variation 10° 30' East,
4.00 Plum Creek 20 links wide, runs S.W. (fringed with Timber)
30.00 Left Bottom, and entered upland bears N.E. and S.W.
40.00 Set a Grey Rock 12 in long 10 in wide and 6 in thick for quarter Section corner,
80.00 Set a Post in mound, with trench, as per instructions for corner to Sections 9, 10, 15 and 16,
Land rolling 2d rate Soil.

East, on a random line between Sections 10 and 15,
Variation 10° 15' East,
4.00 Left upland and entered Bottom bears N. and S.
27.00 Plum Creek 20 links wide runs S.W. (fringed with Timber)

Chs Township 11. N. R. 3. East,

40.00 Set a Rock for temporary quarter Section corner,

80.20 Intersected N and S line at Mound corner for Sections 10, 11, 14 and 15, from which corner I run

West, on a true line between Sections 10, and 15,

Variation 10° 15' East,

40.10 Set a Flint Rock 12 in long 10 in wide and 6 in thick for quarter Section corner,

80.20 The corner to Sections 9, 10, 15 & 16, Land 6½ rolling 2d rate, 10½ level 1st rate soil,

North, between Sections 9 and 10,

Variation 10° 30' East,

40.00 Set a Flint Rock 12 in long 8 in wide and 6 in thick for quarter Sec. corner,

80.00 Set a Post in mound with trench, as per instructions for corner,

Chs Township 11. N. R. 3. East,

to Sections 3, 4, 9 and 10, Land rolling 2d rate soil,

East, on a random line between Sections 3 and 10,

Variation 10° 15' East,

39.75 Set a Post for temporary quarter Section corner,

40.00 Plum Creek (fringed with timber) 25 links wide, runs S. E.

80.04 Intersected North and South line, 35 links South of Rock corner to Sections 2, 3, 10 and 11, from which corner I run

West, on a true line between Sections 3 and 10,

Variation 10° 30' East,

40.29 Set a Post, (27 links West of the true point for corner, the true point being in the Creek) in mound with trench, as per instructions.

15/179

N.T.

Chs 27/130 Township 11. N. R. 3. East,

for quarter Section corner,

from which an Elm 6 in dia. bears N. 14° E. 16 links distant, no Tree, on the South convenient to mark,

80.04 The corner to Sections 3.4.9 & 10, Land rolling 2d rate Soil,

North, On a random line between Sections 3 and 4.

Variation 10° 45' East,

40.00 Set a Post for temporary quarter Section corner,

79.86 Intersected the North Boundary of the Township 60 links West of Post corner to Sections 3 and 4, from which corner Run South, on a true line between Sections 3 and 4.

Variation 10° 19' East,

39.86 Set a Post in mound with trench, as per instructions for quarter Section corner,

Chs Township 11. N. R. 3. East,

79.86 The corner to Sections 3.4.9 and 10, Land rolling 2d rate Soil,

North, between Sections 32 & 33.

Variation 11° 00' East,

40.00 Set a Quart Rock 12 in long 9 in wide and 8 in thick for quarter Section corner,

65.00 left Upland and entered Bottom bears N.E. and S.W.

80.00 Set a Post in mound with trench, as per instructions for corner to Sections 28.29.32 and 33. Upland rolling 2d rate, Bottom level 1st rate Soil,

East, On a random line between Sections 28 and 33.

Variation 10° 00' East,

25.00 Big Blue River 75 links wide runs S.E. to general course S.E.

40.00 Set a Post for temporary quarter Section corner,

15/179 N.T.

Chs 29/132 Township 11. N. R. 3. East,

80.00 Intersected N and S. line at mound corner for Sections 27, 28, 33 & 34, from which corner I run West, on a true line between Sections 28 and 33.

40.00 Set a Post in mound with trench, as per instructions for quarter Section corner, (Variation 10° East)

80.00 The corner to Sections 28, 29, 32 & 33. Land level 1st rate Soil.

North, between Sections 28 and 29.
Variation 10° 45' East,

5.00 A Ravine 6 links wide runs N. E.

40.00 Set a Flint Rock 10 in long 9 in wide and 8 in thick for quarter Sec corner,

80.00 Set a Post in mound with trench, as per instructions for corner to Sections 20, 21, 28 and 29, Land level 1st rate Soil.

East, on a random line between

Chs 30/133 Township 11. N. R. 3. East,

Sections 21 and 28,
Variation 10° 00' East,

25.00 Big Blue River 70 links wide, runs S. E.

40.00 Set a Post for temporary quarter Section corner,

50.00 Left Prairie, and entered Timber, bears North South,

51.00 Plum Creek 19 links wide, runs South,

54.00 Same Creek 18 links wide runs N. E.

60.50 Same Creek 22 links wide runs S.

61.00 Left Timber, and entered Prairie, bears N. W. and S. W.

79.50 Intersected N and S. line 28 links South of mound corner to Sections 21, 22, 27 and 28, from which corner I run West, on a true line between Sections 21 and 28,
Variation 10° 12' East,

15/179 N. T.

Chs 31/134 Township 11. N. R. 3. East.

39.75 Set a Post in mound with trench, as per instructions for quarter Section corner,

77.50 The corner for Sections 20, 21, 28 & 29, Land level 1st rate Soil, Timber, Burr oak, Walnut, Hack Berry and Elm,

North, between Sections 20 and 21,
Variation 11°.15' East,

3.00 Big Blue River (fringed with Timber) 60 links wide mus N. E.

16.00 Left Bottom and entered upland bears ~~North~~ East and ~~South~~ West,

40.00 Set a Flint Rock 12 in long 8 in wide and 6 in thick for quarter Section corner,

80.00 Set Post in mound with trench, as per instructions for corner to Sections 16, 17, 20 and 21, Land rolling good 2d rate Soil,

Chs 32/135 Township 11. N. R. 3. East;

East, on a random line between Sections 16 and 21,
Variation 10°.00' East,

40.00 Set a Post for temporary quarter Section corner,

76.50 Plum Creek, 20 links wide mus South,

79.80 Intersected N and South line 10 links North of mound corner to Sections 15, 16, 21 and 22, from which corner I run West, on a true line between Sections 16 and 21,
Variation 9°.54' East,

39.90 Set a Post in mound with trench, as per instructions for quarter Section corner,

79.80 The corner to Sections 16, 17, 20 and 21, Land rolling 2d rate Soil,

September the 8th A.D. 1857,

15/179 N.T.

Chs Township 11. N. R. 3. East.

33/136

North, between Sections 16 & 17.
Variation 10°45' East.

40.00 Set a Flint Rock 12 in long 8 in wide and 7 in thick for quarter Section corner,

80.00 Set a Post in mound with trench, as per instructions for corner to Sections 8, 9, 16 and 17.
Land gently rolling 2d rate Soil.

East, on a random line between Sections 9 and 16.
Variation 10°00' East.

40.00 Set Post for temporary quarter Section corner,

80.00 Intersected N and S line 20 links North of mound corner to Sections 9, 10, 15 and 16. from which corner I run

West, on a true line between Sections 9 and 16.
Variation 9°51' East.

Chs Township 11. N. R. 3. East.

40.00 Set a Post in mound with trench, as per instructions for quarter Section corner,

80.00 The corner to Sections 8, 9, 16 and 17.
Land gently rolling 2d rate Soil.

North, between Sections 8 and 9.
Variation 10°45' East.

40.00 Set a Flint Rock 12 in long 9 in wide and 7 in thick for quarter Section corner,

80.00 Set a Post in mound with trench, as per instructions for corner to Sections 4, 5, 8 and 9.
Land gently rolling 2d rate Soil.

East, on a random line between Sections 4 and 9.
Variation 10°00' East.

40.00 Set a Post for temporary quarter Section corner,

79.32 Intersected North and S line

15/179

N.T.

Chs Township 11. N. R. 3. East.

35/138

70 links north of mound corner to Sections 3, 4, 9 and 10. from which corner I run West, on a true line between Sections 4 and 9.

variation 9° 30' East.

39.65 Set a Post in mound with trench, as per instructions for quarter Section corner,

79.30 The corner to Sections 4, 5, 8, and 9, Land gently rolling 2d rate soil.

North, on a random line between Sections 4 and 5,

Variation 10° 45' East,

40.00 Set a Post for temporary quarter Section corner

79.80 Intersected the North Boundary of the Township at mound corner to Sections 4 and 5, from which corner I run

South, on a true line between

Chs Township 11. N. R. 3. East.

36/139

Sections 4 and 5.

variation 10° 45' East,

39.80 Set a Post in mound with trench as per instructions for quarter Section corner,

79.80 The corner to Sections 4, 5, 8 and 9, Land rolling 2d rate soil,

North, between Sections 31 and 32,

Variation ~~10.00~~ 11.00 East,

20.00 A Draw 8 links wide runs N. E.

40.00 Set a Post in mound with trench, as per instructions for quarter Section corner,

60.00 Left upland and entered bottom bears E and W.

80.00 Set a Post in mound with trench as per instructions for corner to Sections 29, 30, 31 and 32, Land tolerably level 1st rate soil.

15/179

N. T.

Chs ~~37~~ 140 Township 11. N. R. 3. East.

East, on a random line between Sections 29 and 32.
Variation 10°00' East,

40.00 Set a Rock for temporary quarter Section corner

41.00 A Ravine 4 links wide runs N. E.

80.70 Intersected N and S. line 30 links South, of Mound corner for Sections 28, 29, 32 and 33. from which corner I run

West, on a true line between Sections 29 and 32,
Variation ~~9°47'~~ 10°13' East,

40.35 Set a Limestone Rock 12 in long 11 in wide and 8 in thick for quarter Section corner,

80.70 The corner to Sections 29 30. 31 and 32. Land level 1st rate soil.

West, on a random line between Sections 30 and 31,
Variation 10°00' East,

40.00 Set a Post for temporary quarter

38 141 ~~141~~ ~~138~~

Chs Township 11. N. R. 3. East,

41.00 Left Bottom and entered upland

78.19 Intersected the West Boundary of the Township 15 links North of Mound corner to Sections 30 and 31. from which corner I run

East, on a true line between Sections 30 and 31.
Variation 10°06' East,

38.19 Set a Post in mound with trench as per instructions for quarter Section corner,

78.19 The corner to Sections 29, 30, 31 and 32.
Bottom 1st rate soil, upland 2d rate soil.

North, between Sections 29 & 30.
Variation 10°45' East.

40.00 Set a Quart Rock 11 in long 10 in wide and 6 in thick for quarter Section Section corner,

Chs Township 11. N. R. 3. East.

~~39~~ 39
~~139~~ 142

80.00 Set a Post in mound with trench, as per instructions for corner to Sections 19, 20, 29 and 30. Land level 1st rate Soil.

See next page

*40.00 Set a Post for temporary quarter Section corner,

43.00 Big Blue ~~Blue~~ River, 60 links wide runs S. E.

63.00 Big Blue River (4 or 5 Maple Trees) 65 links wide runs N. E.

80.50 Intersected north and South line 20 links South of mound corner to Sections 20, 21, 28 and 29. from which corner I run West, on a true line between Sections 20 and 29.

Variation 10° 09' East.

40.25 Set a Post in mound with trench, as per instructions for quarter Section corner,

80.50 The corner to Sections 19, 20, 29 and 30. Land level 1st rate Soil.

Chs Township 11. N. R. 3. East.

40
143

*East, on a random line between Sections 20 and 29.

Variation 10° 00' East.

(In copying you will place in the commencement of the notes of the preceding line the above introduction to said line)

West, on a random line between Sections 19 and 30.

Variation 10° 00' East.

40.00 Set a Post for temporary quarter Section corner

78.40 Intersected the West Boundary of the Township 19 links North of mound corner to Sections 19 and 30 from which corner I run East, on a true line between Sections 19 and 30.

Variation 10° 08' East.

38.40 Set a Post in mound with trench as per instructions for quarter Section corner.

Chs Township 11. N. R. 3. East,

78.40 The corner to Sections 19. 20. 29 & 30.
Land level 1st rate Soil.

September the 9th A.D. 1857.

North, between Sections 19 and 20.
Variation 11° 00' East.

25.00 A Creek 40 links wide, runs S. E.
40.00 Set a Post in mound with trench, as per instructions for quarter S. E. corner.
77.00 Big Bleu River, 40 links wide, runs E. (general course S. E.) a few maple trees at crossing.
80.00 Set a Post in mound with trench, as per instructions for corner to Sections 17. 18. 19. and 20.
Land level 1st rate Soil.

East, on a random line between Sections 17. and 20.
Variation 10° 15' East,

40.00 Set a Post for temporary quarter

Chs Township 11. N. R. 3. East,

Section corner,

65.00 Left Bottom and entered upland bears North and South.
80.00 Intersected North and S. line 20 links North of mound corner to Sections 16. 17. 20 and 21, from which corner true West, on a true line between Sections 17 and 20.
Variation 10° 06 East,

40.00 Set a Post in mound with trench, as per instructions for quarter Section corner,
80.00 The corner to Sections 17. 18. 19. and 20,
Land principally level 1st rate Soil.

West, on a random line between Sections 18 and 19.
Variation 10° 00' East,

4.50 Big Bleu River 45 links wide runs S (3 or 4 maple trees)
20.00 Left Bottom and entered upland bears N.W. and South

Chs Township 11. N. R. 3. East,

40.00 Set a Post for temporary quarter Section corner,

65.00 Left upland and entered Bottom bears north and South,

78.25 Intersected the West Boundary of the Township 58 links South of mound corner to Sections 18 and 19. from which corner I run East

East, on a true line between Sections 18 and 19,

Variation 9°.35' East,

38.25 Set a Post in mound with trench, as per instructions for quarter Sec corner,

78.25 The corner to Sections 17.18.19 and 20,

Land principally level 1st rate Soil,

North, between Sections 17 and 18,

Variation 11°00' East,

3.00 Big Blue River (3 Elm Trees) 50 links wide, runs S. W.

10.00 Same River 45 links wide runs S. E. (Some Willows)

Chs Township 11. N. R. 3. East,

40.00 Set a Post in mound with trench, as per instructions for quarter Section corner,

55.00 ~~[illegible]~~ Same River 40 links wide runs S. W. (5 or 6 Maple and Ashes)

79.75 Same River runs East (40 links wide).

The true Point for corner to Sections 7.8.17 and 18.

Being in Said River I set Post in mound with trench as per instructions. 110 links.

South of Said true point for witness corner to Sections 7.8.17 & 18, from which I Walnut, 12 in dia bears N 30° W. 53 links dist, marked B. T. to W. C. for bearing tree to witness corner, no other Tree convenient to mark,

Land level 1st rate Soil.

Chs 45/148 Township 11. N. R. 3. East.

From the true point (in River) for corner to Sections 7. 8. 17 and 18, true East, on a random line between 8 and 17,

Variation 10° 00' East,

2.00 Left River and enter Timber, bears N.E. & W.,

13.00 Big Blue River 50 links wide runs South,

14.00 Left Timber, and enter Prairie bears

40.00 Set a Rock for temporary quarter section corner,

North and South,

60.00 Left Bottom and entered upland bears North and South,

80.30 Intersected North and South line 40 links north of mound corner to Sections 8. 9. 16 and 17. From which corner true West, on a true line between Sections 8 and 17,

Variation 9° 45' East,

40.15 Set a Flint Rock 12 in long 10 in wide and 8 in thick for quarter section corner,

80.30 The corner to Sections 7. 8. 17 and 18,

Land Principally level 1st rate Soil.

46/149 Chs Township 11. N. R. 3. East.

Timber, Maple, Elm, and Ash,

I adjust my compass on mound corner to Sections 7 and 18, (on the West Boundary of the Township) from true point in River, for corner to Sections 7. 8. 17 and 18, to a variation of 10° 14' East,

,50 Left River,

40.00 Set a Post for temporary quarter section corner,

45.00 Left Bottom and entered upland bears North and South,

78.15 Intersected the West Boundary of the Township at mound corner for Sections 7 and 18, from which corner true East, on a true line between Sections 7 and 18,

Variation 10° 14' East,

38.15 Set a Post in mound with trench, as per instructions for quarter sec. corner,

78.15 The corner to Sections 7. 8. 17 and 18,

Land principally level 1st rate Soil.

15/179 N.T.

Chs Township 11. N. R. 3. East,

47/150

From the true point (in River) for corner to Sections 7. 8. 17 + 18. I run North, between Sections 7 and 8,
variation 11°00' East,

.25 ~~Links~~ left the River, and entered Timber, bears East and West,

6.50 ~~Thus~~ Same River 40 links wide runs South, West,

16.00 Same River, 45 links wide runs S. E.

22.00 Same River, 40 links wide runs S. W.

27.00 Same River, 50 links wide runs S. E.

35.00 Touched a bend in ~~the~~ Same River,

36.00 Left Timber and entered Prairie bears N. E. and S. W.

40.00 Set a Post in mound with trench, as per instructions for quarter section corner,

81.00 Set a Post in mound with trench, as per instructions for corner to Sections 5. 6. 7 and 8

Land level 1st rate Soil.

Timber, Bur oak, walnut, Elm and maple.

48/151

Chs Township 11. N. R. 3. East,

East, on a random line between Sections 5 and 8,
variation 10°00' East,

40.00 Set a Rock for temporary quarter Section corner,

80.10 Intersected north and South line 35 links South, of mound corner to Sections 4. 5. 8 and 9, from which corner I run

West, on a true line between Sections 5 and 8,
variation 10°15' East,

40.05 Set a Flint Rock 12 in long 8 in wide and 6 in thick for quarter Section corner,

80.10 The corner to Sections 5. 6. 7 and 8,
Land gently rolling 2d rate soil

West, on a random line between Sections 6 and 7,
variation 10°20' East,

20.00 Left upland, and entered Bottom, bears N. W. and S. E.

Chs Township 11 N. R. 3 East.

49/152

40.00 Set a Rock for temporary quarter section corner,

45.00 Big Blue River, 50 links wide, runs S. E. (fringed with timber,

78.30 Intersected West Boundary of the Township at mound corner to Sections 6 and 7, from which corner I run

East, on a true line between Sections 6 and 7,

Variation 10°.20' East,

38.30 Set a Flint Rock 14 in long, 8 in wide and 6 in thick for quarter section corner,

78.30 The corner to Sections 5, 6, 7 and 8, Land Principally level 1st rate soil.

North, on a random line between Sections 5 and 6,

Variation 11°.15' East,

40.00 Set a Rock for temporary quarter section corner,

79.75 Intersected the Boundary of the Township 20 links West of mound

---

50/153

Chs Township 11 N. R. 3 East,

Corner to secs 5 & 6, from which cor. I run South, on a true line between ~~Corner~~ to Sections 5 and 6,

Variation 11°.06' East,

39.75 Set a Flint Rock 12 in long, 8 in wide, and 6 in thick for quarter section corner,

79.75 The corner to Sections 5, 6, 7 and 8, Land broken 3d rate soil,

---

September the 10th A.D. 1857,

General Description,

The quality of the Land in this Township is generally 1st rate in the Bottoms, which are usually of good size, Much of the upland is quite gently rolling,

The land which is reported as 3d rate, is so reported, not so much from its inferiority in quality of soil, as from its being rather broken,

A list of names.

A list of the names of the individuals employed to assist in running, measuring, or marking the lines and corners described in the foregoing field notes of Township No 11, North of the Base line of Range No 3, East of the 6th Principal Meridian, showing the respective capacities in which they acted:

Demetrius T. Colvin, Flagbearer,
Quintus A. Colvin, Chainman,
Edward Stephens, Chainman,
Columbus C. Colvin, Axeman,
William Stephens, Axeman,

We hereby certify that we assisted George W. Foster, deputy surveyor, in subdividing Townships numbers Six, Seven, Eight, Nine, Ten, and Eleven, North of the Base line of Range Three East of the 6th Principal Meridian, in the Territory of Nebraska, and that said Townships have been in all respects, to the best of our knowledge, and belief, true and faithfully surveyed, and the boundary monuments planted according to the instructions furnished by the Surveyor General.

Demetrius T. Colvin Flagbearer
Quintus A Colvin Chainman
Edward Stephens Chainman
Clinton C Colvin Axeman.
William his mark Stephens Axeman.

Sworn to and subscribed before me, Thomas McCarty Clerk of the County Court within and for the County of Clay at

in the State of Missouri on this the 19th day of September A.D. 1857.

Given under my hand and the seal of said Court at office on this the day and year above written.

Thomas McCarty Clerk

I, George W. Foster, Deputy Surveyor, do solemnly swear that in pursuance of a contract with John Calhoun, Surveyor of the public lands of the United States in the Territories of Kansas and Nebraska, bearing date the 3d day of June 1857, and in strict conformity to the laws of the United States and the instructions furnished by the said Surveyor General I have faithfully surveyed the subdivision lines of Townships number six, seven, eight, nine, ten and eleven North of the base line of Range number three East of the Sixth Principal Meridian in the Territory of Nebraska, and do further solemnly swear that the foregoing are the true and original field notes of said survey.

Geo W Foster Deputy Surveyor

Subscribed by said George W. Foster Deputy Surveyor, and sworn to before me,

Clerk of the County Court within ~~and~~
And for the County of Clay in the
State of Missouri on this day of
January 1858. In testimony whereof
I hereto set my hand and
affix the seal of said Court
at office in the town of Liberty
on the day and year last
above written

Thomas McCarty Clerk

Mr. Foster

Either you failed to
return your affidavit to your work
with your notes or it has been mislaid.
You will therefore make oath to the
accompanying one before McCarty
Clerk, and return the same to this
office as soon as practicable. Your
work is not delayed by the omission

Leave date of oath blank

Surveyor Generals Office
Lecompton K.T. 28 Jan 1858

The forgoing field notes of the Survey of the sub division lines of Township six seven eight nine ten eleven North of Range Three East of the Sixth Principal Meridian in the Territory of Nebraska executed by George W Foster DS under his contract No 209 dated 8th June 1857. during the months of August and September 1857 - having been critically examined the necessary corrections and alterations being made the said field notes and the surveys they describe are hereby approved

J Calhoun
Surveyor General

59/162

Compared by S.H. Calhoun & C.T, +

1/163

15/179

N.T.

4

Field Notes
of the Subdivision Lines
of Township No. 12 North
of Range No. 3, East of
the 6th Principal Me-
idian, Nebraska Ter-
ritory, Surveyed by John
M. Bradford, Deputy
Surveyor under his Con-
tract No. 205, bearing
date the 20th day of May
1857.

Commenced Nov. 1st 1857.
Completed Nov. 5th 1857.
Wanzandt

List of Assistants.

Edward Arntzen Chainman,
Fredrick Hibb Chainman,
Jno. W. Furrow, Axeman on Marker,
Enoch Bowers, Flagman.

Township 12 N. Range 3 East

6	57	5	43	4	34	3	21	2	12	1
56		55		42		32		20		11
7	55	8	41	9	32	10	19	11	10	12
54		53		40		31		18		9
18	52	17	40	16	30	15	17	14	8	13
51		50		38		28		17		8
19	49	20	38	21	26	22	16	23	7	24
48		47		37		25		15		6
30	47	29	36	28	24	27	14	26	5	25
46		45		35		23		13		4
31	44	32	34	33	22	34	13	35	4	36

To determine the proper adjustment of my compass for subdividing this township, I commence at the corner to Townships 11 & 12 N. Rs. 3 & 4 East, & run North, on a blank line along the East Boundary of Section 36,

Variation 10° 30' East,

39.97 to a point 5 lks. East of the quarter section corner,

80.02 To a point 10 lks. East of the corner to Secs. 25 & 36.

To retrace this line or run parallel thereto, my compass must be adjusted to a variation of 10° 34' East.

Subdivision commenced Nov. 14th. 1857

59/162

Township 12 North of Range 3 Ea

From the Corner to Secs. 1, 2, 35 &
36 on the South Boundary of the
Township, I run,
North, between Sections 35 & 3
Variation 10° 34' East,
40 00 Set a red flint stone 12 in. long
10 in. wide & 6 in. thick, for quar-
ter Section Corner,
80 00 Set a greyboulder stone 14 in.
long, 12 in. wide & 8 in. thick
for Corner to Sections 25, 26,
35 & 36. Land on 1st half of
this mile gently rolling -
Last half level. Soil 1st rate
All being prairie.

East, on a random line be-
tween Sections 25 & 36,
Variation 10° 34' East,
40 00 Set a stone for temporary

of the 6th Principal Meridian N. T.

quarter Section Corner,
80 00 Intersected East Boundary
10 lks. North of the Corner to Secs.
25 & 36, from which Corner
I run.
West, on a true line between
Sections 25 & 36,
Variation 10° 30' East,
40 02 Set a blue lime stone 30 in.
long, 15 in. wide & 2 in. thick,
for quarter Section Corner,
80 04 The Corner to Sections 25, 26,
35 & 36, Land on this mile
level, Soil 1st rate.

North, between Sections 25 & 26,
Variation 10° 58' East
40 00 Set a red flint stone 12 in.
long, 12 in. wide & 8 in. thick
for quarter Section Corner,

59/162

6/170

Township 12 North of Range 3 East

80	00	Set a red flint stone 16 in. long, 12 in. thick & 16 in. wide for corner to sections 23, 24, 25 & 26. Land gently rolling. Soil 1st rate
		East, on a random line between sections 24 & 25, Variation 10° 58' East,
40	00	Set a stone for temporary quarter section corner,
79	96	Intersected East Boundary 21 lks. North of the corner to sections 24 & 25, from which corner I run, West, on a true line between sections 24 & 25. Variation 10° 49' East,
39	98	Set a red flint stone 12 in. long, 8 in. thick, & 6 in. wide for quarter section corner,

7/171

15/179

of the 6th. Principal Meridian N.T. V.T.

79	96	The corner to sections 23, 24, 25 & 26, Land level; Soil 1st rate prairie.
		North, between sections 23, & 24, Variation 10° 47' East,
5	00	A large ravine bearing East & West, 7 chs. wide,
12	00	Left ravine,
40	00	Set a grey boulder stone 15 in. long, 12 in. wide & 6 in. thick for quarter section corner,
80	00	Set a red flint stone 16 in. long, 10 in. wide & 8 in. thick for corner to sections 13, 14, 23 & 24, First 12 chs. of this mile broken; remainder level; Soil 1st rate.

Township 12 North of Range 3 East

East, on a random line between Sections 13 & 24,
Variation 18° 47' East,

40 00 Set a stone for temporary quarter section corner,

80 00 Intersected East Boundary of the Township, 5 8 lks. South of the corner to Sections 13 & 24, from which corner 2 rods West, on a true line between Sections 13 & 24.
Variation 11° 12' East,

40 00 Set a red flint stone 18 in. long, 12 in. wide & 8 in. thick, for quarter section corner,

80 00 The corner to Sections 13, 14, 23 & 24, Land level; Soil 1st rate.

North, between Sections 13 & 14,
Variation 11° 20' East,

of the 6th Principal Meridian N. T. V. T.

40 00 Set a greyboulder stone 12 in. long 10 in. wide & 6 in. thick, for quarter section corner,

80 00 Set a red flint stone 15 in. long, 10 in. wide & 10 in. thick, for corner to Sections 11, 12, 13 & 14, Land quite level. Soil 1st rate.

East, on a random line between Sections 12 & 13,
Variation 11° 20' East,

40 00 Set a stone for temporary quarter section corner,

80 08 Intersected East Boundary 16 lks. North of the corner to Sections 12 & 13, from which corner 2 rods West, on a true line be-

Township 12 North of Range 3 East

		tween sections 12 & 13,
		Variation 11° 13' East,
40	04	Set a grey boulder stone 12 in. long, 8 in. wide & 7 in. thick, for quarter section corner,
80	08	The corner to sections 11, 12, 13 & 14, Land on West part of this mile level & soil 1st rate; East part rolling; soil 2nd rate.
		North, between sections 1 & 12,
		Variation 11° 04' East,
40	00	Set a grey sand stone 16 in. long, 12 in. wide, & 7 in. thick, for quarter section corner,
80	00	Set a red flint stone 18 in. long, 13 in. wide & 8 in. thick,

of the 6th Principal Meridian N. D.

		for corner to sections 1, 2, 11 & 12, Land on this mile level; soil 1st rate.
		East, on a random line between sections 1 & 12,
		Variation 11° 04' East,
40	00	Set a stone for temporary quarter section corner,
79	94	Intersected East Boundary 3 lks. South of the corner to sections 1 & 12, from which corner 2 chs. West, on a true line between sections 1 & 12,
		Variation 11° 05' East,
39	97	Set a red flint stone 12 in. long, 8 in. wide & 6 in. thick for quarter section corner,
79	94	The corner to sections 1, 2, 11 & 12.

Township 12 North, Range 3 East of the 6th. Principal Meridian N.T. N.T.

			Land on West part of this mile level; Soil 1st rate.
40			East half rolling & Soil poor 2nd rate.
			North, on a true line between sections 1 & 2,
			Variation 10° East,
	40	00	Set a red flint stone 12 in. long, 8 in. thick & 10 in wide for quarter section corner,
	80	70	Intersected 3d Standard Parallel North, 5.74 Chs. West of the corner to sections 35 & 36,
40			at which point I set a red flint stone 12 in. long, 7 in. wide & 6 in. thick, for closing corner to sections 1 & 2. Land on
80			1st half level, on 2nd half rolling. Soil 1st rate. Nov. 1st. 1857

			North, between sections 34 & 35,
			Variation 11° East,
	40	00	Set a red flint stone 14 in. long, 12 in. wide, & 8 in. thick, for quarter section corner,
	80	00	Set a red flint stone 12 in. long, 12 in. wide & 10 in. thick, for corner to sections 26, 27, 34 & 35, Land on this mile rolling; Soil 1st rate.
			East, on a random line between sections 26 & 35,
			Variation 11° East,
	40	00	Set a stone in a ravine bearing North & South for temporary quarter section corner,
	80	00	Intersected N. & S. line at the stone corner to

Township 12 North Range 3 East

Sections 25, 26, 35 & 36, from which corner I run West, on a true line between Sections 26 & 35,
Variation 11° East,

40 00 Set a grey boulder stone 15 in. long, 13 in. wide & 7 in. thick, for quarter section corner,

80 00 The corner to Sections 26, 27, 34 & 35. Land rather rolling & Soil 1st rate.

North, between sections 26 & 27,
Variation 11° 13' East,

40 00 Set a red flint stone 18 in. long, 12 in. wide & 8 in. thick, for quarter section corner,

80 00 Set a red flint stone 18 in. long, 12 in. wide, 10 in. thick, for corner to Sections 22, 23, 26 & 27.

of the 6th. Principal Meridian N.T.

Land on this mile rolling prairie. Soil 1st rate.

East, on a random line between Sections 23 & 26,
Variation 11° 13' East,

18 00 A wide ravine bearing N. & S.

30 00 Leave ravine

40 00 Set a stone for temporary quarter section corner,

45 00 A ravine bearing N. & S.

70 00 Leave some to rolling prairie,

80 08 Intersected N. & S. line 70 lks. North of stone corner to Sections 23, 24, 25 & 26. from which corner I run West, on a true line between Sections 23 & 26,
Variation 10° 43' East,

40 04 Set a grey boulder stone

Township 12 North Range 3 East

		10 in. long, 8 in. wide & 8 in. thick, for quarter section corner,
80	08	The corner to sections 22, 23, 26, & 27. Land on West quarter of this mile level. - East three quarters rolling - Soil 1st rate.
		North, between sections 22 & 23, Variation 11° 02' East,
30	00	A ravine, 6 chs. wide, bearing South West & North East,
40	00	Set a grey sand stone 14 in. long, 12 in. wide & 9 in. thick, for quarter section corner,
80	00	Set a grey boulder stone 13 in. long, 10 in. wide & 8 in. thick, for corner to sections 14, 15, 22, & 23. Land on this mile first half gently rolling; last half level; Soil 1st rate.

of the 6th Principal Meridian N. T.

		East, on a random line between sections 14 & 23, Variation 11° 02' East,
40	00	Set a stone for temporary quarter section corner,
70	00	A ravine bearing N. & S.
80	04	Intersected N. & S. line 35 lks. North of the corner to sections 13, 14, 23 & 24, from which corner 2 run West, on a true line between sections 14 & 23, Variation 10° 47' East,
40	02	Set a grey boulder stone 11 in. long 10 in. wide & 8 in. thick for quarter section corner,
80	04	The corner to sections 14, 15, 22, & 23. Land level. Soil 1st rate.
		North, between sections 14 & 15,

Township 12 North of Range 3 East

Variation 11° 21' East,

20 00 A circular depression of about 10 acres 2nd rate land

40 00 Set a grey sand stone 15 in. long, 12 in. wide, & 6 in. thick for quarter section corner in the depression above mentioned,

61 00 Leave depression about 6 ft deep to level prairie,

80 00 Set a yellow sand stone, 14 in. long, 12 in. wide & 8 in. thick, for corner to sections 10, 11, 14 & 15. Land level. Soil 1st rate.

East, on a random line between sections 11 & 14,

Variation 11° 21' East,

40 00 Set a stone for temporary quarter section corner,

79 90 Intersected N. & S. line 70 lks.

of the 6th. Principal Meridian N. & T.

North of the corner to sections 11, 12, 13 & 14, from which corner 2 mm

West, on a true line between sections 11 & 14,

Variation 10° 51' East,

39 95 Set a red flint stone 12 in long, 10 in. wide & 8 in. thick, for quarter section corner,

79 90 The corner to sections 10, 11, 14 & 15. Land gently rolling prairie. Soil 1st rate.

North, between sections 10 & 11,

Variation 11° East,

39 00 A marine bears E. & W., from thence South,

40 00 Set a grey boulder stone 12 in. long, 10 in. wide & 6 in. thick, for quarter section corner,

Township 13 North of Range 3 East

55 00 A ravine, 2 chs. wide, bears E. & W.
80 00 Set a grey boulder stone 17 in. long, 13 in. wide & 8 in. thick for Corner to Sections 2, 3, 10 & 11. Land rolling; Soil 1st rate.

East, on a random line between Sections 2 & 11,
Variation 11° East,
40 00 Set a stone for temporary quarter section corner,
45 00 A ravine, 12 chs wide bearing East & West,
80 06 Intersected N. & S. line 68 lks. North of stone corner to sections 2, 1, 10 & 12, from which corner I run,
West, on a true line between Sections 2 & 11,
Variation 10° 31' East,

of the 6th. Principal Meridian N. D.

40 03 Set a red flint stone 13 in. long, 8 in. wide, & 6 in. thick for quarter section corner.
80 06 The corner to sections 2, 3, 10 & 11. Land rolling, soil 1st rate prairie.

North, on a true line between Sections 2 & 3,
Variation 11° East,
40 00 Set a red flint stone 14 in. long, 9 in. wide & 7 in. thick, for quarter section corner,
81 00 Intersected 3d Standard Parallel North, 5.64 chs. West of the corner to sections 34 & 35, at which point I set a red flint stone 14 in. long, 10 in. wide & 7 in. thick, for closing corner to sec =

Township 12 North of Range 3 East

tions 2 & 3. Land rolling.
Soil 1st rate.

November 2nd 1857

North, between sections 33 & 34,
Variation 11° 20' East,

1 50 A pretty spring branch,
bold current, pebbly bottom,
8 lks. wide, running S. W.

2 50 Another spring branch 6 lks.
wide, bearing South East,

6 00 Another spring branch, 5 lks.
wide, bearing South East,

8 00 Leave timber to open prairie
bearing N. W. & S. E.

35 00 Timber of a ravine bearing S. E.
& N. W.

38 00 Leave timber to open prairie
bearing South East & North
West,

of the 6th Principal Meridian N. T.

4 00 Set a red flint stone 12 in.
long, 8 in. wide & 7 in. thick,
for quarter section corner,

8 00 Set a grey boulder stone
12 in. long, 12 in. wide & 8 in.
thick for corner to sections
27, 28, 33 & 34. Land on
this mile gently rolling;
nearly level; Soil 1st rate.
The timber noted on 1st half
is chiefly bur-oak & wal-
nut. Undergrowth the
same with vines &c.

East, on a random line between
sections 27 & 34,
Variation 11° 20' East,

12 00 A brook, 20 lks. wide, low
banks, rapid current, runs S. E.

18 00 A brook, 12 lks. wide, runs S.

Township 12 North, of Range 3 East of the 6th Principal Meridian N.T.

40	00	Set a stone for temporary quarter section corner,
79	92	Intersected N. & S. line 46 lks. North of the stone corner to sections 26, 27, 34 & 35, from which corner I run, West, on a true line between sections 27 & 34, Variation 11° East,
2	39	96 Set a blue lime stone 10 in. long, 8 in. wide & 4 in. thick, for quarter section corner,
4	79	92 The corner to sections 27, 28, 33 & 34. Land rolling; Soil 1st rate. Some little ly alder & willow on 2nd brook.
6		
8		
0		

North, between sections 27 & 28, Variation 11° 41' East,

40	00	Set a red flint stone 12 in. long, 12 in. wide & 4 in. thick, for quarter section corner,
80	00	Set a red flint stone 14 in. long, 10 in. wide, 9 in. thick, for corner to sections 21, 22, 27 & 28; Land on this mile rolling; Soil 1st rate.

East, on a random line between sections 22 & 27, Variation 11° 41' East,

12	50	A brook, bold clear current, 20 lks. wide, runs South, low banks,
13	50	leave bottom to high prairie bearing North & South,
40	00	Set a stone for temporary quarter section corner.
48	00	A ravine, 5 chs. wide, bearing North & South,

Township 12 North, Range 3 East

79 94 Intersected N. & S. line 21 lks. North of the stone corner to sections 22, 23, 26 & 27, from which corner I run West, on a true line between sections 22 & 27, Variation 11° 33' East,

39 97 Set a blue lime stone 11 in. long, 7 in. wide & 5 in. thick, for quarter section corner. The corner to sections 21, 22, 27 & 28. Land rolling; soil 1st rate. West quarter level brook bottom.

North, between sections 21 & 22, Variation 11° 17' East,

2 00 A brook, 20 lks. wide, low banks, 12 in. deep, bold current

of the 6th. Principal Meridian N. J.

& runs South East,

12 50 Same brook, runs S. W.,

15 00 Same brook, runs S.S.E.,

26 40 Same brook, 30 lks. wide, running South West,

30 50 Same brook, runs S. E.,

36 00 Same brook, runs S.S. W.,

40 00 Set a grey sand stone 12 in. long, 8 in. wide, & 6 in. thick, for quarter section corner,

42 00 Same brook, runs S. East,

45 50 Same brook, runs S. W.,

49 00 Same brook, runs East,

53 50 Same brook, runs, S. W.,

57 00 Same brook, runs S.S.E.

59 00 Same brook, runs S. West,

63 50 Same brook, runs East,

67 00 Same brook, runs South W.,

69 50 Same brook, runs East,

70 75 Same brook, 40 lks. wide.

Township 12 North of Range 3 East

		2 ft. deep, slow current, runs S. W.
79	00	Same brook, 25 lks. wide, slow current, 18 in. deep, high banks, running South South East,
80	00	Set a red flint stone 19 in. long, 12 in. wide, & 8 in. thick, for corner to sections 15, 16, 21 & 22, in level brook bottom. Land on this mile all level brook bottom; Soil 1st rate. No timber whatever on the brook.

East, on a random line between sections 15 & 22.
Variation 11° 17' East.

5	00	A small brook, 10 lks. wide, shallow & runs South,
7	50	Same brook, runs North,
30	00	A ravine 8 chs. wide, bears South West & N. East,

of the 6th Principal Meridian N.D.

40	00	Set a stone for temporary quarter section corner,
79	90	Intersected N. & S. line 35 lks. South of stone corner to sections 14, 15, 22 & 23, from which corner 2 runs West on a true line between sections 15 & 22, Variation 11° 32' East,
39	95	Set a grey sewed stone 12 in. long, 10 in. wide & 8 in. thick for quarter section corner,
79	90	The corner to sections 15, 16, 21 & 22. Land on East part level. On West part rolling. Soil 1st rate prairie.

Township 12 North, Range 3 East

North, between sections 15 & 16,
Variation 11° 26' East,

40 00 Set a grey sand stone 18 in. long, 10 in. wide & 8 in. thick, for quarter section corner, on left bank of brook,

44 50 A brook, 20 lks. wide, runs South West,

51 50 Same brook, runs S.S.E.

58 00 Same brook, 25 lks. wide, high banks, 18 in. deep, slow current, runs South West,

62 00 Leave brook bottom, bearing N.E. & S.W. to rolling prairie,

80 00 Set a grey boulder stone 18 in. long, 15 in. wide & 12 in. thick for corner to sections 9, 10, 15 & 16. Land on 1st three quarters level brook bottom - Last quarter rolling. Soil 1st rate.

of the 6th Principal Meridian N.T.

East, on a random line between sections 10 & 15,
Variation 11° 26' East,

15 00 A brook, 12 lks. wide & shallow, runs South West,

18 00 Leave bottom to rolling prairie bearing N.E. & S.W.

40 00 Set a stone for temporary quarter section corner,

80 00 Intersected N. & S. line 33 lks. North of the corner to sections 10, 11, 14 & 15, from which corner I run, West, on a true line between sections 10 & 15,
Variation 11° 12' East,

40 00 Set a grey boulder stone 18 in. long, 10 in. wide & 8 in. thick for quarter section corner,

Township 12 North, Range 3 East,

80	00	The corner to sections 9, 10, 15 & 16. Land rolling. Soil 1st rate.

North, between sections 9 & 10,
Variation 10° 56' East,

40	00	Set a grey boulder stone 12 in. long, 10 in. wide & 4 in. thick, for quarter section corner,
80	00	Set a grey boulder stone 14 in. long, 11 in. wide & 8 in. thick, for corner to sections 3, 4, 9 & 10. Land rolling. Soil 1st rate prairie.

East, on a random line between sections 3 & 10,
Variation 10° 56' East,

40	00	Set a stone for temporary quarter section corner,

of the 6th. Principal Meridian N.T.

55	00	A brook, 20 lks. wide & shallow, running South-
60	00	A ravine, 5 chs. wide, bears W.S.W. & N.N.E.
80	10	Intersected N. & S. line 10 lks. South of the stone corner to sections 2, 3, 10 & 11, from which corner 2 run

West, on a true line between sections 3 & 10,
Variation 11° East,

40	05	Set a red flint stone 11 in. long, 10 in. wide & 8 in. thick for quarter section corner,
80	10	The corner to sections 3, 4, 9 & 10. Land rolling. Soil 1st rate prairie

Township 12 North, Range 3 East

North, on a true line between sections 3 & 4.
Variation 11° East.

40 00 Set a slate stone 15 in. long, 10 in. wide & 8 in. thick, for quarter section corner.

80 00 Intersected 3d Standard Parallel North 5.66 chs. West of the corner to sections 33 & 34, at which point I set a red flint stone 14 in. long, 9 in. thick, & 11 in. wide, for closing corner to sections 3 & 4. Land on this mile rolling. Soil & strata prairie. November 3 1857.

North, between sections 32 & 33,
Variation 11° 47' East.

of the 6th. Principal Meridian N. T.

40 00 Set a grey boulder stone 12 in. long, 10 in. wide & 4 in. thick for quarter section corner.

80 00 Set a red flint stone 12 in. long, 12 in. wide & 4 in. thick, for corner to sections 28, 29, 32 & 33. Land on 1st half level. On 2nd half rolling. Soil & strata.

East, on a random line between sections 28 & 33,
Variation 11° 47' East.

40 00 Set a stone for temporary quarter section corner,

80 08 Intersected N. & S. line 109 lks. North of the corner to sections 27, 28, 33 & 34, from which corner,

Township 12 North, Rang 3 East of the 6th. Principal Meridian N. T.

		Drum
		West, on a true line between sections 28 & 33,
		Variation 11° East,
40	04	Set a blue lime stone 10 in. long, 9 in. wide & 8 in. thick for quarter section corner,
80	08	The corner to sections 28, 29, 32 & 33. Land high level prairie. Soil 1st rate.
		North, between sections 28, & 29,
		Variation 11°15' East,
40	00	Set a blue lime stone 12 in. long, 10 in. wide & 8 in. thick for quarter section corner,
80	00	Set a blue lime stone 13 in. long, 10 in. wide & 10 in. thick for corner to sections 20

		21, 28 & 29. Land high level prairie. Soil 1st rate.
		East, on a random line between sections 21 & 28,
		Variation 11°15' East,
40	00	Set a stone for temporary quarter section corner,
80	10	Intersected N. & S. line 9 lks. North of the corner to sections 21, 22, 27 & 28, from which corner Drum
		West, on a true line between sections 21 & 28,
		Variation 11°11' East,
40	05	Set a red flint stone 12 in. long, 8 in. wide & 8 in. thick for quarter section corner,

Township 12 North, Range 3 East

80 10 The corner to sections 20, 21, 28 & 29. Land on West half of this mile level, on East half rolling. Soil 1st rate.

North, between sections 20 & 21,

Variation 11° 33' East,

40 00 Set a grey boulder stone 12 in. long, 10 in. wide & 8 in. thick, for quarter section corner,

80 00 Set a red flint stone 15 in. long, 10 in. wide & 6 in. thick, for corner to sections 16, 17, 20 & 21. Land high level prairie. Soil 1st rate.

East, on a random line between sections 16 & 21,

of the 6th Principal Meridian N. T.

Variation 10° 58' East,

40 00 Set a stone for temporary quarter section corner,

65 00 A brook bottom, bearing South South East by A. N. M.

77 50 A brook, 15 lks. wide, 12 in. deep, sluggish current, low banks, runs South,

80 06 Intersected N. & S. line 6 lks. North of the corner to sections 15, 16, 21 & 22, from which corner 2 rods West, on a true line between sections 16 & 21,

Variation 10° 24' East,

40 03 Set a grey sand stone 12 in. long, 10 in. wide & 8 in. thick for quarter section corner,

80 06 The corner to sections 16, 17,

Township 12 North Range 3 East,

20 & 21. Land on West three quarters high level prairie, East qr. brook bottom.
Soil 1st rate.

North, between sections 16 & 17,
Variation 11° 41' East

40 00 Set a grey boulder stone 14 in. long, 12 in. wide & 8 in. thick for quarter section corner,

80 00 Set a grey boulder stone 18 in. long, 18 in. wide & 8 in. thick for corner to sections 8, 9, 16 & 17. Land level, & Soil 1st rate.

East, on a random line between sections 9 & 16,
Variation 10° 40' East,

of the 6th. Principal Meridian N. T.

40 00 Set a stone for temporary quarter section corner,

79 98 Intersected N. & S. line 50 lks. North of the corner to sections 9, 10, 15 & 16, from which corner I run West, on a true line between sections 9 & 16,
Variation 10° 19' East,

39 99 Set a grey boulder stone 12 in. long, 10 in. wide & 4 in. thick for quarter section corner,

79 98 The corner to sections 8, 9, 16 & 17. Land gently rolling. Soil 1st rate.

North, between sections 8 & 9,
Variation 11° 15' East,

Township 13 North, Range 3 East

40 00 Set a red flint stone 14 in. long, 12 in. wide & 6 in. thick for quarter section corner,

80 00 Set a grey boulder stone 15 in. long, 12 in. wide & 8 in. thick for corner to sections 4, 5, 8 & 9. Land gently rolling. Soil 1st rate.

East, on a random line between sections 4 & 9,
Variation 11° East,

40 00 Set a stone for temporary quarter section corner

79 94 Intersected North & South line 60 lks. North of the corner to sections 3, 4, 9 & 10, from which corner 2 chs. West, on a true line be-

of the 6th. Principal Meridian M.T.

tween sections 4 & 9,
Variation 10° 34' East,

39 97 Set a red flint stone 14 in. long, 8 in. wide & 6 in. thick for quarter section corner,

79 94 The corner to sections 5, 4, 9 & 8. Land on West half of this mile very level. On East half gently rolling. Soil 1st rate.

North, on a true line between sections 4 & 5,
Variation 11° East,

40 00 Set a red flint stone 14 in. long, 9 in. wide & 7 in. thick, for quarter section corner,

78 80 Intersected the 3d Stand-

Township 12 North, Range 3 East

and Parallel North, 5.65 Chs.
West of the Corner to Sections
32 & 33, at which point
I set a red flint stone
14 in. long, 9 in. wide & 7 in.
thick for closing corner to
Sections 4 & 5. Land on
1st half rolling. On 2nd half
level. Soil 1st rate.

November 4th. 1857.

North, between sections
31 & 32,
Variation 12° 06' East,
40 00 Set a grey boulder stone
12 in. long, 8 in. wide & 6 in.
thick for quarter section
corner,
80 00 Set a grey boulder stone
14 in. long, 12 in. wide & 8 in.

of the 6th. Principal Meridian N.T.

thick for corner to Sections
29, 30, 31 & 32. Land
gently rolling. Soil 1st rate.

East, on a random line be-
tween Sections 29 & 32,
Variation 12° 06' East,
40 00 Set a stone for temporary
quarter section corner,
80 10 Intersected N. & S. line
63 lks. North of the cor-
ner to Sections 28, 29, 32 & 33,
from which corner I run,
West, on a true line be-
tween Sections 29 & 32,
Variation 11° 39' East,
40 05 Set a red flint stone 16 in.
long, 12 in. wide & 10 in. thick,
for quarter section corner,
80 10 The corner to Secs. 29, 30, 31 & 32.

Township 12 North Range 3 East

Land gently rolling Soil 1st rate.

West, on a random line between Sections 30 & 31,
Variation 12° 15' East,
40 00 Set a stone for temporary quarter section corner,
78 80 Intersected West Boundary 11 lks. South of the corner to Sections 30 & 31, from which corner I run,
East, on a true line between Sections 30 & 31,
Variation 12° 10' East,
38 80 Set a red flint stone 14 in. long, 12 in. wide & 10 in. thick, for quarter section corner,
78 80 The corner to Sections 29, 30, 31 & 32. Land rolling Soil 1st rate.

of the 6th Principal Meridian N.T.

North between Sections 29 & 30,
Variation 12° 52' East,
40 00 Set a red flint stone 18 in. long, 12 in. wide & 6 in. thick for quarter section corner,
80 00 Set a grey boulder stone 17 in. long, 10 in. wide & 8 in. thick, for corner to Sections 19, 20, 29 & 30, Land level. Soil 1st rate.

East, on a random line between Sections 20 & 29,
Variation 11° 53' East,
40 00 Set a stone for temporary quarter section corner,
79 96 Intersected N. & S. line 50 lks. North of the

corner to sections 20, 21, 28 & 29
from which corner 2 run
West, on a true line between
sections 20 & 29,
Variation 11°32' East,
39 98 Set a red flint stone 16 in.
long, 13 in. wide & 9 in. thick,
for quarter section corner,
79 96 The corner to sections 19,
20, 29 & 30. Land on this
mile, East & West parts
rolling; middle part low
level bottom. Soil 1st rate.

West, on a random line
between sections 19 & 30,
Variation 12°15' East,
40 00 Set a stone for temporary
quarter section corner,
77 82 Intersected West Boundary

of the 6th. Principal Meridian N.T.

9 lks. South of the corner
to sections 19 & 30, from
which corner 0 run,
East, on a true line be-
tween sections 19 & 30,
Variation 12°11' East,
37 82 Set a red flint stone 13
in. long, 10 in. wide & 8 in.
thick for quarter section
corner,
77 82 The corner to sections 19,
20, 29 & 30. Land gently
rolling. Soil 1st rate.

North, between sections
19 & 20,
Variation 11°48' East,
40 00 Set a grey boulder stone
12 in. long, 10 in. wide &
8 in thick, for quarter

Township 12 North, Range 3 East

section corner,

80 00 Set a red flint stone 18 in. long, 13 in. wide & 12 in. thick, for corner to sections 17, 18, 19 & 20. Land rolling. Soil 1st rate.

East, on a random line between sections 17 & 20,

Variation 11° 48' East.

40 00 Set a stone for temporary quarter section corner.

80 00 Intersected N. & S. line 23 lks. North of the corner to sections 16, 17, 20 & 21, from which corner 2 rem

West, on a true line between sections 17 & 20,

Variation 11° 38' East.

40 00 Set a red flint stone

of the 6th. Principal Meridian, N. T.

12 in. long, 9 in. wide & 7 in. thick for quarter section corner,

80 00 The corner to sections 17, 18, 19 & 20. London West half of this mile level. On East half gently rolling. Soil 1st rate.

West, on a random line between sections 18 & 19

Variation 12° 15' East,

40 00 Set a stone for temporary quarter section corner,

78 78 Intersected West Boundary of township 29 lks. South of the corner to sections 18 & 19, from which corner 2 rem,

East, on a true line

Township 12 North, Range 3 East

between sections 18 & 19,
Variation 12° 04' East,
38 78 Set a red flint stone 12 in. long, 10 in. wide & 9 in. thick for quarter section corner,
78 78 The corner to sections 17, 18, 19 & 20. Land level. Soil 1st rate.

North, between sections 17 & 18,
Variation 11° 45' East,
40 00 Set a red flint stone 16 in. long, 12 in. wide & 10 in. thick, for quarter section corner,
80 00 Set a red flint stone 16 in. long, 12 in. wide & 9 in. thick for corner to sections 7, 8, 17 & 18. Land rolling. Soil 1st rate.

of the 6th Principal Meridian N. T.

East, on a random line between sections 8 & 17,
Variation 11° 45' East,
40 00 Set a stone for temporary quarter section corner,
80 08 Intersected N. & S. line 42 lks. North of the corner to sections 8, 9, 16 & 17, from which corner 2 trees,
West, on a true line between sections 8 & 17,
Variation 11° 27' East,
40 04 Set a red flint stone 12 in. long, 8 in. wide & 4 in. thick for quarter section corner,
80 08 The corner to sections 7, 8, 17 & 18. Land high rolling prairie. Soil 1st rate.

Township 12 North Range 3 East

West, on a random line between sections 7 & 18,
Variation 11° 30' East,
40 00 Set a stone for temporary quarter section corner,
77 94 Intersected West Boundary 33 lks. North of the corner to sections 7 & 18, from which corner 2 rods East, on a true line between sections 7 & 18,
Variation 11° 44' East,
37 94 Set a grey boulder stone 13 in. long, 8 in. wide & 7 in. thick, for quarter section corner,
77 94 The corner to sections 7, 8, 17 & 18. Land rolling. Soil 1st rate.

North, between sections

of the 6th. Principal Meridian N.T.

7 & 8,
Variation 12° 30' East,
40 00 Set a grey boulder stone 14 in. long, 12 in. wide & 8 in. thick for quarter section corner,
80 00 Set a grey boulder stone 14 in. long, 8 in. wide & 6 in. thick for corner to sections 5, 6, 7 & 8. Land level. Soil 1st rate.

East, on a random line between sections 5 & 8,
Variation 11° 45' East,
40 00 Set a stone for temporary quarter section corner.
80 02 Intersected N. & S. line 8 2 lks. North of corner to 4, 5, 8 & 9, from which corner 2 rods =

Township 12 North, Range 3 East of the 6th. Principal Meridian N.T.

West, on a true line between Sections 5 & 8.
Variation 11°10' East.

40 01 Set a grey boulder stone 14 in. long, 8 in. wide & 6 in. thick for quarter Section Corner,

80 02 The corner to Sections 5, 6, 7 & 8. Land gently rolling. Soil 1st rate.

West, on a random line between Sections 6 & 7,
Variation 11°45' East,

40 00 Set a stone for temporary quarter Section corner,

78 10 Intersected Mot Boundary 60 lks. North of the corner to Sections 6 & 7, from which corner 2 rem

East, on a true line between Sections 6 & 7,
Variation 12°11' East,

38 10 Set a grey boulder stone 14 in. long, 10 in. wide & 6 in. thick for quarter Section Corner,

78 10 The corner to Sections 5, 6, 7 & 8. Land gently rolling. Soil 1st rate.

North, on a true line between Sections 5 & 6,
Variation 11°10' East,

40 00 Set a grey boulder stone 14 in. long, 14 in. wide & 6 in. thick for quarter Section Corner,

78 40 Intersected 3d Standard Parallel North, 5.62 Chs.

West of the corner to sections 31 & 32, at which point I set a greyhound stone 12 in. long, 10 in. wide & 9 in. thick for closing corner to sections 5 & 6. Land level & soil 1st rate.

November 5th. 1857.

General Description.

The quality of the land in this township, is mostly very good. The Township is nearly all upland & has but few brooks in it. There is very little timber on the brooks, & that mostly of a stunted character. The lands however, being rolling & fertile are admirably adapted to cultivation. There are no roads or settlements in this Township & it is untraversed save by the uncivilized Indian.

58/22 60/224

A List of the names of the individuals employed to assist in running, measuring, or marking the lines & corners described in the foregoing field notes of Township 12 North, of Range 3 East of the 6th. Principal Meridian, Nebraska Territory, showing the respective capacities in which they acted—

Edward Arntzen — Chainman,
Fredrick Hebb — Chainman, Axeman on
Jno. W. Furrow — Flagman,
Enoch Bowers — Axeman.

We hereby certify that we assisted John M. Bradford, Deputy Surveyor in subdividing Townships Numbers nine to twelve North inclusive of Range number four East, and Township number twelve North of Range number Three East of the Sixth Principal Meridian, Nebraska Territory, and that said townships have been in all respects, to the best of our knowledge & belief, well & faithfully surveyed, & the subdivision corners established according to Instructions furnished by the Surveyor General.

Edward Arntzen. Chainman,
Frederick Hölzle Chainman,
John W. Furrow Axeman & Stone-setter,
Enoch K Bowers Flagman

Subscribed & sworn to by the above named persons before me (a) Justice of the Peace for the County of Riley in the Territory of Kansas this 30 day January 1858.

John S Badger J P

58/22

62/226

Oath of Bradford Hands

We hereby certify that we assisted Jno. M. Bradford Deputy Surveyor in Surveying the Subdivision Lines of Townships Numbers 9, 10, 11 & 12 North of Range Number 4 East, & Township Number 12 North of Range Number 3 East of the 6th Principal Meridian, Nebraska Territory, & that said Townships have been in all respects, & to the best of our knowledge & belief, well & faithfully surveyed according to the Instructions furnished by the Surveyor General.

Edward Arntzen Chainman,
Siwerrit Hölyle Chainman,
John W. Furrow Stonestiller,
Knock K. Bowers Flagman.

Subscribed & sworn to by the above named persons, before me, a Justice of the Peace for the County of Riley in the Territory of Kansas this day of , 1855.

John S. Badger Justice of the Peace.

I, Jno. M. Bradford, Deputy Surveyor, do solemnly swear, that in pursuance of a Contract with John Calhoun Surveyor of the Public Lands of the United States in the Territories of Kansas & Nebraska, bearing date the 20th day of May, 1857, I did strict conformity to the Laws of the United States & the Instructions of the said Surveyor General, I have faithfully surveyed the Subdivision Lines of Townships Numbers 9, 10, 11 & 12 North of Range Number 4 East, & Township Number 12 North of Range Number 3 East of the 6th

principal Meridian in the Territory of Nebraska aforesaid, I do further solemnly swear that the foregoing are the true & original field notes of such Survey.

Jno. M. Bradford,
Deputy Surveyor.

Subscribed by said Jno. M. Bradford, Deputy Surveyor, & sworn to before me, a Notary Public for Douglas County in the Territory of Kansas this 5th day of April, 1858

Geo B Brown
Notary Public

58/22

66/230

Surveyor Generals Office
Nebraska City N.T. June
1858

The foregoing field notes of the survey of the sub division lines of Townships No Nine Ten Eleven and Twelve North of Range Four East and Township No Twelve North of Range Three East of the sixth Principal Meridian in the Territory of Nebraska executed by John M. Bradford DS under his Contract No 205 dated the 20th day of May 1857 during the Months of Oct. & November 1857. having been critically Examined: the necessary Correction & explanations being made the said field Notes and the Surveys they describe are hereby approved

T. Cathcart Sur Gl

General Land Office • Original Field Notes

Book Number

47

The images in this file are photographs of the notes of the original surveys of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The original surveys in Nebraska began in the mid 1850's and were completed in the mid 1880's. The Nebraska office of the Surveyor General was closed June 30, 1886.