General Land Office • Original Field Notes

Book Number

775

W.W. Alt - East boundary T 23 & 24 N, R 37 W

The images in this file are microfilm images of the notes of W.W. Alt resurveys of portions of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The W.W. Alt resurveys began in the mid 1890's and were completed in the early 1900's.

175

51.

Duplicate X

Ex 9-14-1897 R.H.C.

52

(4—679.)

Received with Letter from W. W. Hill U.S. Surveyor, dated Sept 13. 1896 98725 '96

FIELD NOTES

OF THE SURVEY OF

East Boundaries

of

Townships 23 and 24 N., Range 37 W.

Of the 6th Principal Meridian,

State of Nebraska

AS SURVEYED BY

Willard W. Hill, United States Deputy Surveyor,

Under his Contract ~~No.~~ ——, *dated* December 26, 189 4

Survey commenced June 10, 1897.

Survey completed June 12, 1897.

(1319—2,500.)

775

Names and Duties of Assistants.

Clarence P. Haggard, Chainman
Sidney Dezort, Chainman
James G. Power, Flagman
James C. Rosignon, Mound man
Theodore Needland, Mound man.

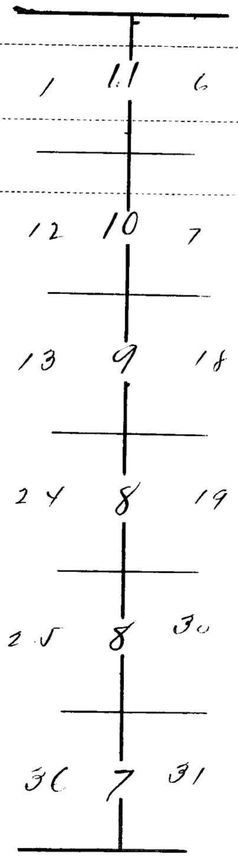

INDEX DIAGRAM.

East boundary

Township 23 N. Range 37 W

6	5	4	3	2	1	6
7	8	9	10	11	12	5
18	17	16	15	14	13	4
19	20	21	22	23	24	3
30	29	28	27	26	25	2
31	32	33	34	35	36	1

Meanders Page.....

Preliminary Oaths of Assistants.

We, ... and .....
do solemnly swear that we will well and faithfully execute the duties of chainmen; that we will level the chain upon even and uneven ground, and plumb the tally pins either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true lengths of all lines that we assist in measuring, to the best of our skill and ability, and in accordance with instructions given us in the survey of

.....

....., *Chainman.*

....., *Chainman.*

Subscribed and sworn to before me this .....
day of ....., 189 .

SEAL

.....

.....

We, ... and .....
do solemnly swear that we will well and truly perform the duties of moundmen in the establishment of corners, according to the instructions given us, to the best of our skill and ability, in the survey of .....

.....

....., *Moundman.*

....., *Moundman.*

Subscribed and sworn to before me this .....
day of ....., 189 .

SEAL

.....

.....

We, ... and .....
do solemnly swear that we will well and truly perform the duties of axmen in the establishment of corners and other duties, according to instructions given us, to the best of our skill and ability, in the survey of

.....

....., *Axman.*

....., *Axman.*

Subscribed and sworn to before me this .....
day of ....., 189 .

SEAL

.....

.....

I, ..., do solemnly swear that I will well and truly perform the duties of flagman according to instructions given me, to the best of my skill and ability in the survey of .....

....., *Flagman.*

Subscribed and sworn to before me this .....
day of ....., 189 .

SEAL

.....

.....

East boundary T. 23 N., R. 37 W.

Chains

I commence at the cor of Ts. 22 & 23 N.
Rs. 36 & 37 W., which is an Oak Post 4 ins sq. 12 ins above ground, marked
T 23 N S 31, on NE.
R 36 W S 6. on SE.
T 22 N S 1. on SW. and
R 37 W S 36. on NW. faces with 6 notches on each edge — with pits 24 x 24 x 12 ins dug on each line N. E. & W. 4 ft. and South of Post 8 ft dist. with a mound 5 ft base 2½ ft high raised S. of Cor.

From a tack driven in corner post, at 2h 02m local mean time, or 2h 47m by my watch which is Central standard time: June 10, 1895
I observe Polaris at Eastern elongation, in accordance with instructions in the Manual, and mark the line thus determined by a tack in stake driven in the ground 5 chains North of the corner.

June 10 1895.

June 11, at 7 AM. I lay off the azimuth of Polaris 1°41' to the West and mark the true meridian thus determined by a tack in stake firmly driven in the ground 5 chains N. of corner.

The magnetic bearing of the true meridian is N. 12°47' W., which reduced by the table on page 100 of the Manual, gives the mean mag. decl. 12°41' E.

Chains	
	From the Tp. Cor. I run
	North, bet secs 31 & 36.
	Over rolling ground
1.00	Begin descent along N. slope.
32.10	Trail to Whitman; NW & SE.
37.00	Enter rolling valley "Wild Horse Flats."
40.00	Deposit a chained stake 12 ins in the ground for ¼ sec cor. dug pits 18x18x12 ins N & S of cor 4 ft dist and raised a mound of earth 3½ ft base 1½ ft high over deposit. In S. pit drove an oak stake 2 ft long 2 ins square 12 ins in the ground marked ¼ S., on W. face.
	Over nearly level ground.
80.00	Deposit a chained stake 12 ins in the ground for cor of secs 25. 30. 31. & 36. dug pits 18x18x12 ins in each sec 4 ft dist and raised a mound of earth 4 ft base 2 ft high, over deposit. In S.E. pit drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground marked T 23 N S 30. on NE. R 36 W S 31. on SE. S 36. on SW. and R 37 W S 25. on NW faces with 1 notch on S. and 5 notches on N. edges
	Land, rolling valley and sand hills.
	Soil, sandy; 3rd rate.
	Thin sand, and bunch grass.
	North, bet secs 25 & 30.
	Over rolling land.
32.00	Trail to Whitman - course N. 80° E., S. 80° W.
40.00	Deposit a chained stake 12 ins in the ground for ¼ sec cor. dug pits 18x18x12 ins N & S of cor 4 ft dist and raised a mound of earth 3½ ft base 1½ ft high over deposit. In S. pit drive an oak stake 2 ft long 2 ins square 12 ins in the ground, marked

Chains	
	¼ S. on N. face.
45.00	Foot of bluff. course N 40° E., S. 40° W. Ascend along SE. slope.
58.00	Top of ascent. 75 ft. on E face bluff, descend along N.E. slope.
70.00	Bottom of abrupt descent, thence over rolling foot hills.
80.00	Set an oak post 3 ft long 4 ins sq. with chained stake 24 ins in the ground. for cor of secs 19. 24. 25. & 30, marked T 23 N S 19. on NE. R 36 W. S 30. on SE. S 25. on SW. and R 37 W S 24. on NW faces, with 2 notches on S. and 4 notches on N. edges. dug pits 18x18x12 ins in each sec. 5½ ft dist and raised a mound of earth 4 ft base 2 ft high N. of cor.
	Land, rolling valley and sand hills.
	Soil, sandy, 3rd rate.
	Sand and bunch grass.
	North. bet. secs 19 & 24.
	Descend over rolling ground.
13.00	Trail, course N. 60° W., S. 60° E.
20.00	Bottom of descent, in neck of valley extending to East. ascend gently along S. slope
40.00	Deposit a chained stake 12 ins in the ground, for ¼ sec cor. dug pits 18x18x12 ins N & S of cor 4 ft dist. and raised a mound of earth 3½ ft base 1½ ft high over deposit. In S. pit drove an oak stake 2 ft long 2 ins. sq. 12 ins in the ground, marked ¼ S., on W. face.
49.00	Top of ascent 75 ft. high, on range. Course NE. and SW.
56.00	Begin gentle descent along N. slope over rolling ground.

E. boundary T. 23 N., R. 37 W., continued.

Chains	
80.00	Deposit a chained stake 12 ins in the ground for cor of secs 13. 18. 19 & 24. dug pits 18 x 18 x 12 ins in each sec 4 ft dist and raised a mound of earth 4 ft base 2 ft high over deposit. In S.E pit drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground. marked T 23 N S 18. on NE. R 36 W S 19. on SE. 24. on SW. and R 37 W S 13, on NW. faces with 3 notches on N. and S. edges.
	Land, rolling sand hills.
	Soil, sandy: 3rd rate.
	Sand, and bunch grass.
	North, bet. secs 13 and 18.
	Descend along N. slope.
16.00	Bottom descend in neck of valley, extends to the east.
24.00	Foot of range, Course N. 75° E., S. 75° W. ascend abruptly over broken ground.
40.00	Deposit a chained stake 12 ins in the ground for ¼ sec cor. dug pits 18 x 18 x 12 ins N. and S. of cor 4 ft dist, and raised a mound of earth 3½ ft base 1½ ft high over deposit. In S. pit drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground marked ¼ S., on N. face.
	Ascend over broken sand bluffs.
44.00	Top of ascent 150 ft. above valley, on sand peak. - on E. face of range, thence over broken ground.
56.00	Begin descent over ridges, along N.E. slope.
80.00	Set an oak post 3 ft long 4 ins sq. with chained stake 24 ins in the ground for Cor of secs 7. 12. 13. and 18. marked T 23 N S 7. on NE. R 36 W S 18. on SE.

E. boundary T. 23 N., R. 37 W.

Chains	
	S 13 on SW. and R 37 W S 12. on NW. faces with 4 notches on S. and 2 notches on N. edges. dug pits 18 x 18 x 12 ins in each sec 5½ ft dist and raised a mound of earth 4 ft base 2 ft high, W. of Cor.
	Land, rolling and broken sand hills.
	Soil, sandy; 3rd rate on hills, 1st rate in valleys.
	Prairie and Bunch grass.
	North, bet. secs 7 and 12.
	Over rolling ground, ascending along SW. slope.
0.50	Trail to Whitman, Course N. 70° W., S. 70° E..
19.00	Top of ascent 75 ft high. on W. face of range, descend over rolling ground.
23.70	Wire fence; Course E & W.
40.00	Deposit a chained stake 12 ins in the ground for ¼ sec cor. dug pits 18 x 18 x 12 ins N. and S. of cor. 4 ft dist. and raised a mound of earth 3½ ft base 1½ ft high, over deposit. In S. pit drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked ¼ S., on N. face.
	Descend gently along N. Slope.
50.00	Enter wet valley, Course E & W.
66.70	Trail; Course E and W.
69.00	Foot of range, Course N. 80° E.. S. 80° W. ascend over broken ground.
80.00	Deposit a chained stake 12 ins in the ground for Cor of secs 1. 6. 7. and 12. dug pits 18 x 18 x 12 ins in each sec 4 ft dist. and raised a mound of earth 4 ft base 2 ft high over deposit. In S.E. pit drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked T 23 N S 6. on NE. R 36 W S 7. on SE. 12. on SW. and

E. boundary T. 23 N., R. 37 W. concluded.

Chains	
	R 37 W S 1. on nw faces. with 5 notches on S. and 1 notch on N. edges.
	Land, rolling sand hills, and level valleys.
	Soil, sandy; 1st and 3rd rates.
	Prairie and bunch grass.
1	
	North, bet secs 1 and 6.
	Ascend over broken ground.
6.00	Top of range. Course E and W.
10.00	Begin descent along N. slope over rolling ground.
16.58	Wire fence. Course E. and W.
40.00	Deposit a chained stake 12 ins. in the ground for 1/4 sec cor. dug pits 18x18x12 ins. N. and S. of cor. 4 ft. dist. and raised a mound of earth 3½ ft base 1½ ft high, over deposit. In S. pit drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked ¼ S., on W. face.
47.00	S. edge of Alkali Flat. Course E and W.
50.00	N. edge of Alkali Flat. Course E and W.
	Ascend gently over rolling foot hills sloping to Sw.
80.00	Set an oak post 3 ft long 4 ins sq. with chained stake 24 ins in the ground for cor of Tps. 23 and 24 N., Rs. 36 and 37 W. marked T 24 N S 31. on NE. R 36 W S 6. on SE. T 23 N S 1. on SW. and R 37 W S 36. on NW faces, with 6 notches on each edge. dug pits 24x24x12 ins., on each line, N. E. and W., 4 ft and S. of post 8 ft dist, and raised a mound of earth 5 ft base 2½ ft high S. of cor.
	Land, rolling and broken.
	Soil, sandy and alkali. - 3rd rate.
	Sand. and bunch grass.

East boundary T. 24 N., R. 37 W.

Chains	
	At 5 o'clock P. M. June 11. 1895, at cor. of Tps 23 and 24 N., Rs. 36 and 37 W, the magnetic bearing of the range line is N. 12° 53' W. which reduced by the table on page 100 of the Manual gives the mean mag. decl. 12° 54' E
	T, 24 N
	North, bet secs. 31 and 36.
	Ascend slightly over rolling foot hills. sloping to Sw.
11.00	Begin ascent along Sw. slope of range.
39.00	Top of ascent 75 ft.; on W. face of range.
40.00	Deposit a chained stake 12 ins in the ground for ¼ sec cor.; dug pits 18x18x12 ins. N. and S. of cor. 4 ft. dist. and raised a mound of earth 3½ ft base 1½ ft high. over deposit. In S. pit, drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked ¼ S., on W. face.
	Ascend along S. W. face of range.
56.00	Top of ascent 100 ft above valley; descend along N. slope over rolling ground.
80.00	Deposit a chained stake 12 ins in the ground for cor of secs. 25. 30. 31. and 36.; dug pits 18x18x12 ins in each sec 4 ft dist. and raised a mound of earth 4 ft base 2 ft high. over deposit. In SE. pit drove an oak stake 2 ft long 2 ins sq 12 ins in the ground, marked T 24 N S 30. on NE. R 36 W S 31. on SE. S 36. on SW. and R 37 W S 25. on NW. faces. with 1 notch on S. and 3 notches on W. edges.
	Land, rolling sand hills.
	Soil, sandy; 3rd rate.
	Bunch, and sand grass.
	June 11, 1895

E. boundary T. 24 N., R. 37 W., continued.

Chains.	
	North, bet. secs. 25 and 30.
	Descend gently.
4.10	Trail to Whitman, course E. and N.; at foot of descent.
8.00	Foot of range, course E & W. ascend abruptly over broken ground.
17.00	Top of ascent, 75 ft above valley; thence over broken ground.
30.27	Wire fence: Course E. and N.
35.00	Begin descent along N. slope.
40.00	Deposit a chained stake 12 ins in the ground for ¼ sec cor.; dug pits 18x18x12 ins. N & S. of cor. 4 ft dist. and raised a mound of earth 3½ ft base 1½ ft high over deposit. In S. pit, drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked ¼ S., on W. face.
51.00	Bottom descent; enter level ground; E & W.
57.30	Trail to Whitman; Course E. and W.
61.00	Enter dry bed marsh; Course E. and W.
80.00	Set an oak post 3 ft long 4 ins sq. with chained stake 24 ins in the ground for cor of secs 19. 24. 25. and 30. marked T 24 N S 19. on NE. R 36 W S 30. on SE. S 25. on SW. and R 37 W S 24. on NW. faces, with 2 notches on S. and 4 on N. edges: dug pits 18x18x12 ins. in each sec 5 ft dist, and raised a mound of earth 4 ft base 2 ft high West of corner. Land, level marsh and rolling sand hills. Soil, sandy; 1st and 3rd rates. Slough grass and Bunch grass.

	North, bet. secs. 19 and 24.
	Over level ground, through marsh.
20.18	Center of track of Burlington and Missouri River railroad: Course N. 64° 09' E.
20.85	Telegraph line parallel to railroad.
25.60	Trail to Whitman. Parallel to railroad.

E. boundary T. 24 N., R. 37 W., continued.

Chains	
27.00	Foot of bluffs: Course N. 40° E.: S. 40° W. ascend abruptly along S.E. slope.
37.00	Top of abrupt ascent, 75 ft. thence over rolling ground along S. face of range, ascending.
40.00	Deposit a chained stake 12 ins in the ground for ¼ sec cor.; dug pits 18x18x12 ins N. & S. of cor 4 ft dist, and raised a mound of earth 3½ ft base 1½ ft high, over deposit. In S. pit drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked ¼ S, on W. face. Ascend over rolling ground.
46.00	Top of range 150 ft high: Course NE. and SW. descend over rolling ground along N. slope.
63.00	Begin gentle descent.
80.00	Deposit a chained stake 12 ins in the ground for Cor of secs 13. 18. 19. and 24.; dug pits 18x18x12 ins in each sec 4 ft dist. and raised a mound of earth 4 ft base 2 ft high over deposit. In SE. pit, drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground. marked T 24 N S 18. on NE. R 36 W S 19. on SE. S 24. on SW. and R 37 W S 13. on NW. faces. with 3 notches on N. and S. edges. Land, level valley and broken sand hills. Soil, sandy, 1st and 3rd rates Slough grass and bunchgrass.

	North, bet. secs 13 and 18.
	Descend over rolling ground along N. slope.
16.00	Enter W. end of valley: Course E. and W.
18.50	Trail to Whitman: Course E. and W.
26.00	Begin gentle ascent along S. slope.
27.80	Wire fence, Course E. and W. thence over rolling foot hills.
40.00	Deposit a chained stake 12 ins in the ground for ¼ sec cor., dug pits 18x18x12 ins N & S of cor 4 ft dist and raised a mound of earth 3½ ft base

E. boundary T. 24 N. R. 37 W. continued.

Chains	
	1½ ft high, over deposit.
	In S. pit, drove an oak stake 2 ft long 2 ins sq
	12 ins in the ground. marked
	¼ S, on W. face
	Thence over rolling ground.
59.00	Descend gently.
71.00	Enter east end basin-like valley.
80.00	Set an oak post 3 ft long 4 ins sq. with chamfered
	stake 24 ins in the ground for cor of secs 7. 12.
	13. and 18. marked
	T 24 N S 7. on NE.
	R 36 W S 18. on SE.
	S 13. on SW. and
	R 37 W. S 12. on NW faces. with 4 notches on S. and
	2 on N. edges.; dug pits 18 x 18 x 12 ins. in each
	sec 5½ ft dist. and raised a mound of earth
	4 ft base 2 ft high W. of cor.
	Land. level and rolling.
	Soil. sandy; 3rd rate.
	Sand. and bunch grass.

	North bet. secs. 7 and 12.
	Over rolling ground.
9.00	Trail to Whitman; course N. 70° W.; S. 70° E.
11.00	Begin gentle ascent over low foot-hills.
37.00	Enter rolling ground.
40.00	Deposit a channel stake 12 ins in the ground
	for ¼ sec cor.; dug pits 18 x 18 x 12 ins. N & S of cor
	4 ft dist and raised a mound of earth 3½ ft base
	1½ ft high over deposit.
	In S. pit, drove an oak stake 2 ft long 2 ins
	sq. 12 ins in the ground. marked
	¼ S, on W. face
	Sod house bears N. 74° 30' E. 4 chs.
53.00	Enter dry bed slough; N 70° E. and W.
69.00	Leave slough; E. and W.
73.00	Foot of range. Course N 40° E. & S 40° W.
	ascend abruptly.
80.00	Deposit a channel stake 12 ins in the ground
	for cor of secs 1. 6. 7. and 12.; dug pits 18 x 18 x 12 ins

E. boundary T. 24 N. R. 37 W. continued.

Chains	
	in each sec 4 ft dist, and raised a mound
	of earth 4 ft base 2 ft high over deposit.
	In S.E. pit, drove an oak stake 2 ft long
	2 ins sq. 12 ins in the ground. marked
	T 24 N S 6. on NE.
	R 36 W S 7. on SE.
	S 12. on SW. and
	R 37 W S 1. on NW faces. with 5 notches on S.
	and 1 notch on N. edges.
	Land. rolling and broken.
	Soil. sandy. 2nd and 3rd rates.
	Sand grass. slough and bunch grass.

	North. bet. secs. 1 and 6.
	Ascend over broken ground.
14.00	Top of ascent on range 150 ft high. Course E. and
	N. descend.
30.00	Bottom descent; enter level land; Course E & W.
30.95	Trail; E. and W.
36.00	S. edge impassable swamp; Course E. and W.
	Deposit a channel stake 12 ins in the ground
	for witness cor to ¼ sec cor. dug pits 18 x 18 x 12
	ins N. and S. of cor. 4 ft dist. and raised a mound
	of earth. 3½ ft base 1½ ft high over deposit.
	In S. pit drove an oak stake 2 ft long 2 ins sq.
	12 ins in the ground. marked
	WC ¼ S, on W. face.
	To pass the swamp. I offset as follows.
	East 18 chains.
	North 4 Chains
40.00	Point for ¼ cor. falls in swamp.
	North 12.39 chains.
	West 18 chains to Range line.
52.39	N. edge impassable swamp.
	Deposit a channel stake 12 ins in the ground
	for witness cor to ¼ sec cor.; dug pits 18 x 18 x 12
	ins N. and S. of cor. 4 ft dist. and raised a mound
	of earth 3½ ft base 1½ ft high, over deposit.
	In S. pit drove an oak stake 2 ft long 2 ins sq.
	12 ins in the ground. marked

12
67

E. boundary T. 24 N. R. 37 W.; concluded.

chains.	
	WC ¼ S., on W. face.
	ascend slightly over rolling ground.
56.00	Top of ascent 30 ft above swamp. thence
	over rolling foot-hills.
73.00	Begin gentle descent.
96.00	Enter basin-like valley.
97.31	Intersect 6th Standard Parallel. at a point
	N. 89°30' W. 18.66. chs dist from the Stand and
	¼ cor. on S. bdy. of sec 32. T 25 N., R. 36 W.
	Set an oak post 3 ft long 4 ins sq. with chased
	stake 24 ins in the ground for closing cor. T. 24
	N., Rs. 36. and 37 W., marked
	C C T 24 N, on S.
	R 36 W S 6. on E. and
	R 37 W S 1. on W. faces. with 6 grooves on
	S. E. and W. faces.; dug pits 30 x 24 x 12 ins
	crosswise on each line. E and W. 4 ft, and S. of post
	8 ft. dist. and raised a mound of earth 5 ft.
	base 2½ ft high. S. of cor.
	Land level and rolling.
	Soil. sandy 2nd and 3rd rates.
	Sand and bunch grass.

June 12 1895.

General Description.

This line runs over a very broken country. being a series of rolling and broken ranges of sand hills, with a general course of E. and W. the valleys in T. 23 N, are narrow and rolling producing a sand grass.
The valleys in T 24 N., are level and wet, producing a heavy slough grass. The land is unfit for cultivation. but very good for grazing purposes.
The vegetation on the hills is a bunch grass.
No timber of any description on any part of the line.

Willard W. Alt.
U. S. Deputy Surveyor.

Final Oaths of Deputy Surveyors and their Assistants.

LIST OF NAMES.

A list of the names of the individuals employed by .....

....., United States Deputy Surveyor, to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of .....

.....

showing the respective capacities in which they acted:

....., *Chainman.*
....., *Chainman.*
....., *Moundman.*
....., *Moundman.*
....., *Axman.*
....., *Axman.*
....., *Flagman.*

FINAL OATH OF ASSISTANTS.

We hereby certify that we assisted .....

....., United States Deputy Surveyor, in surveying all those parts or portions of the .....

.....

.....

..... of the ..... base and ..... meridian, ... of ....., which are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the United States Surveyor General for .....

....., *Chainman.*
....., *Chainman.*
....., *Moundman.*
....., *Moundman.*
....., *Axman.*
....., *Axman.*
....., *Flagman.*

Subscribed and sworn to before me this .....
day of ....., 189 .

.....

SEAL

.....

Final Oath of United States Deputy Surveyor.

I, ..., United States Deputy Surveyor, do solemnly swear that, in pursuance of instructions received from ....., United States Surveyor General for ....., bearing date of the ..... day of ....., 189 , I have well, faithfully, and truly, in my own proper person, and in strict conformity with the instructions furnished by the United States Surveyor General for ....., the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of .....

..... of the ..... base and ..... meridian, in the ..... of ....., which are represented in the foregoing field notes as having been surveyed by me, and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the United States Surveyor General for ..... and in the specific manner described in the field notes, and that the foregoing are the *true* field notes of such survey; and should any fraud be detected, I will suffer the penalty of perjury under the provisions of an Act of Congress approved August 8, 1846.

.....
United States Deputy Surveyor.

Subscribed by said ....., United States Deputy Surveyor, and sworn to before me this ..... day of ....., 189 .

SEAL

.....

.....

APPROVAL.

Examiner of the General Land Office

Office of the ~~United States Surveyor-General~~,

Washington D.C. April 30, 1897.

The foregoing field notes of the survey of the East boundary of Township 23 and 24 North Range No. 37 West of the 6th principal Meridian State of Nebraska

..... executed by

Willard W. Alt. U.S. Surveyor.

under his Contract No. ....., dated December 26, 1894, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Binger Hermann

~~United States Surveyor-General.~~

Commissioner and ex officio Surveyor General for Nebraska

I certify that the foregoing transcript of the field notes of the above-described surveys in the East boundary of Townships 23 & 24 N, R 37 W, has been correctly copied from the original notes on file in this office.

Binger Hermann

~~United States Surveyor-General.~~

Commissioner and ex officio Surveyor General for Nebraska.

General Land Office • Original Field Notes

Book Number

775

W.W. Alt - East boundary T 23 & 24 N, R 37 W

The images in this file are microfilm images of the notes of W.W. Alt resurveys of portions of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The W.W. Alt resurveys began in the mid 1890's and were completed in the early 1900's.