General Land Office • Original Field Notes

Book Number

46

The images in this file are photographs of the notes of the original surveys of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The original surveys in Nebraska began in the mid 1850's and were completed in the mid 1880's. The Nebraska office of the Surveyor General was closed June 30, 1886.

Compared by Terry [illegible]

1

Vol 2 R 3, E

2

Field notes of the subdivision lines of Township 5 North of Range 3 East of the 6th. Principal Meridian, Nebraska Territory, Surveyed by Dixonia Furrow, Deputy Surveyor, under his contract No 174 bearing date the 21 day of May, 1857.

Cont 174

Commenced Augt. 29th 1857.
Completed Sept. 7th 1857.

Exd April 8th 1858
Ward

Township 5 North, Range 3 East

List of Assistants.

Edward Arntzen, Chainman,
Fredrick Webb Chainman,
Jno. M. Furrow, Marker & Axeman,
Enoch K. Bowns, Flagman

Township 5 N. Range 3 East

6	63	5	47	4	36	3	25	2	14	1
62		60		46		35		24		13
7	60	8	45	9	34	10	24	11	12	12
59		58		44		33		23		11
18	57	17	43	16	32	15	21	14	10	13
56		55		42		31		20		8
19	54	20	41	21	31	22	19	23	18	24
53		52		40		30		18		6
30	50	29	39	28	28	27	17	26	5	25
49		48		38		27		16		4
31	48	32	37	33	26	34	15	35	4	36

of 6th Principal Meridian N. T.

To determine the proper adjustment of my compass for subdividing this Township, I commence at the Corner to Township 5 North, Ranges 3 & 4 East, on the 1st Standard Parallel North, & run North along the East Boundary of Section 36,

Variation 12° 20' East,

40	06	To a point 40 lks. East of the quarter section corner,
80	10	To a point 67 lks. East of the Corner to Sections 25 & 36. To retrace this line or run parallel thereto my Compass must be adjusted to a variation of 12° 48' East.

201

Subdivision Commenced August 29th. 1857.

From the corner to Sections 1, 2, 35 & 36, on the South Boundary of the Township North, between Secs. 35 & 36, Variation 12° 22' East.

40	00	Set a red flint stone 11 in. long, 6 in. wide & 5 in. thick for quarter section corner,
80	00	Set a grey boulder 13 in. long, 9 in. wide & 8 in. thick for corner to Sections 25, 26, 35 & 36. Land rolling, prairie. Soil 1st rate.

East, on a random line between Sections 25 & 36, Variation 12° 22' East,

40	00	Set a red flint stone

of 6th. Principal Meridian N.T.

		for ten for any quarter section corner,
80	12	Intersected East Boundary 12 lks. North of the corner to Secs. 25 & 36, from which corner I am West, one true line between Sections 25 & 36, Variation 12° 17' East,
40	06	Set a red flint stone 10 in. long, 8 in. wide & 6 in. thick, for quarter section corner,
80	12	The corner to Secs. 25, 26, 35 & 36. Land on this mile rolling. Soil 1st rate prairie.

North between Secs. 25 & 26, Variation 11° 45' East,

Township 5 N. Range 3 East of

40 00 Set a red flint stone 11 in. long, 7 in. wide & 7 in. thick, for quarter section corner,

70 00 Low level bottom bears North East & South West,

80 00 Set a grey boulder 14 in. long, 11 in. wide & 8 in. thick, for corner to Secs. 23, 24, 25 & 26. Land rolling. Soil 1st rate.

\+ East, on a random line between Sections 24 & 25,

Variation 11° 45' East,

15 00 Rolling prairie, bears N.E. & South West, (Some bottom + water)

40 00 Set a stone for temporary quarter section corner,

80 10 Intersected East Boundary

6th. Principal Meridian N. T.

32 lks. North of the corner to Sections 24 & 25, from which corner I run West, on a true line between Sections 24 & 25,

Variation 11° 31' East,

40 05 Set a grey boulder 13 in. long, 10 in. wide, & 6 in. thick, for quarter section corner,

80 10 The corner to Sections 23, 24, 25 & 26. Land on West 1/4 level bottom, Soil 1st rate, remainder broken, soil good 2nd rate.

North, between Sect. 23 & 24,

Variation 11° 24' East,

40 00 Set a grey boulder 11 in. long, 9 in. wide & 7 in. thick

			for quarter section corner,
40	51	50	Turkey Creek, runs East, 30 lks. wide, 18 in. deep, low banks,
	55	00	Left undergrowth of bottom to low prairie
70			
	80	00	Set a red flint stone 12 in. long, 10 in. wide & 9 in. thick for corner to Sec.
80			13, 14, 23 & 24. Land on this mile level bottom. Soil 1st rate. Some scattering cottonwood, ash & Elm, on creek.
			East, on a random line between sections 13 & 24. Variation 11° 24' East,
15			
40	28	00	Enter woods of Turkey creek bearing N. & South,
80			

31	00	Turkey Creek, runs North, 50 lks. wide, 18 in. deep,
35	00	Leave undergrowth to open bottom bearing N. & South,
40	00	Set a stone for temporary quarter section corner,
41	50	Enter timber bearing N. & S.
43	50	Turkey Creek, 30 lks. wide, low banks, runs S.E.
46	00	Leave timber & bottom bearing N. & South,
68	00	Turkey Creek again, 50 lks. wide, runs N.
72	00	Leave woods bearing N. & S. to level bottom,
80	22	Intersection East Boundary 8 lks. South of the corner to sections 13 & 24, from which corner a true West, on a true line

Township 5 N. Range 3 East of

between Sections 13 & 24,
Variation 11° 27' East,

40 00 Set a greyboulder 11 in. long, 8 in. wide & 6 in. thick for quarter section corner,

80 22 The corner to Secs. 13, 14, 23 & 24. Land level bottom. Soil 1st rate. Timber on creek bur-oak - cottonwood, elm, ash, with undergrowth of sumac, & plum bushes.

Augt. 29th 1857.

North, between Secs. 13 & 14,
Variation 11° 30' East,

20 00 Leave bottom of Turkey Creek, bearing East & West, & ascend gently rolling prairie,

40 00 Set a red flint stone 12 in. long, 10 in. wide & 8 in. thick for quarter section corner,

the 6th. Principal Meridian N. T.

79 00 A small ravine, 3 chs. wide bearing East & West,

80 00 Set a red flint stone 10 in. long, 10 in. wide & 8 in. thick for corner to Secs. 11, 12, 13 & 14. Land on 1st 1/4 level bottom & soil 1st rate. Last 1/4 rolling, soil 2nd rate. In middle qr. rolling soil good 2nd rate.

East, on a random line between Secs. 12 & 13,
Variation 11° 30' East,

40 00 Set a stone for temporary quarter sec. corner,

80 00 Intersected East Boundary 5 lks. North of the corner to Secs. 12 & 13, from which corner I found

Township 5 North, Range 3 East of the 6th. Principal Meridian N.T.

			West, on a true line between Sections 12 & 13, Variation 11° 32' East,
4	40	00	Set a red flint stone [illegible] in. long, 8 in. wide & 6 in. thick for quarter section corner,
4	80	00	The corner to Sections 11, 12, 13 & 14; Land gently rolling, Soil 1st Rate.

			North, between Secs. 11 & 12, Variation 11° 24' East,
2	40	00	Set a red flint stone 12 in. long, 10 in. wide & 8 in. thick for quarter section corner,
4	42	00	Leave high hills, ranging East & West, to level high prairie,
4	80	00	Set a red flint stone 12 in. long, 10 in. wide & 8 in. thick for corner to Secs. 1, 2, 11 & 12. Land on 1st 1/2 mile broken, on last 1/2 level. Soil 1st rate.

			East, on a random line between Secs. 1 & 12, Variation 11° 24' East,
	40	00	Set a stone for temporary quarter section corner,
	80	16	Intersected East Boundary 20 chs. South of the corner to Sections 1 & 12, from which corner I run West, on a true line between Sections 1 & 12, Variation 11° 33' East,
	40	08	Set a red flint stone 14 in. long, 8 in. wide & 5 in. thick for quarter section corner,

Township 5 N. Range 3 East of

80	16	The corner to sections 1, 2, 11 & 12. Land gently rolling mostly; Soil 1st rate.
		North, on a random line between secs. 1 & 2, Variation 11° 30' East,
40	00	Set a stone for temporary quarter section corner,
79	83	Intersected North Boundary 11 lks. West of the corner to secs. 1 & 2, from which corner 2 run,
		South, on a true line between secs. 1 & 2, Variation 11° 25' East,
39	83	Set a [illegible] boulder 18 in. long, 8 in. wide & 6 in. thick for quarter section corner,
79	83	The corner to secs. 1, 2, 11 & 12. Land level. Soil 1st rate.

Aug. 31st 1857

the 6th. Principal Meridian N.T.

		North, between secs. 34 & 35, Variation 11° 30' East,
40	00	Set a red flint stone 13 in. long, 8 in. wide & 4 in. thick, for quarter section corner,
+ 50	00	Bottom of Turkey creek, bearing East & West,
71	00	A ravine, bearing S. E. & North West,
+ 79	00	A brook, 20 lks. wide, runs North West,
80	00	Set a red flint stone 18 in. long, 7 in. wide & 4 in. thick for corner to sections 27, 26, 34 & 35. Land on 1st 1/2 undulating. Soil 2nd rate. Last 1/2 level bottom, Soil 1st rate. Some scattering cottonwood, elm & ash on creek.

Township 5 N. Range 3 East of

8			East, on a random line between sections 26 & 35, Variation 11° 30' East,
	40	00	Set a stone for temporary quarter section corner,
	80	30	Leave bottom bearing N. E. & S. W. Intersected N. & S. line 62 lks. North of the corner to secs. 25, 26, 35 & 36, from which corner I run West, on a true line between secs. 26 & 35, Variation 11° 03' East,
	40	15	Set a red flint stone 14 in. long, 10 in. wide & 6 in. thick for quarter section corner,
39	80	30	The corner to secs. 26, 27, 34 & 35. Land on East 1/2 rolling, on West 1/2 level bottom. Soil 1st rate.
79			

The 6th. Principal Meridian N. T.

			North, between secs. 26 & 27, Variation 11° 15' East,
6	00		A brook, 20 lks. wide, low banks & shallow, runs North East,
40	00		Set a grey boulder 13 in. long, 10 in. wide & 8 in. thick for quarter section corner,
57	00		Enter woods of Turkey creek, bearing E. & W.
52	00		Turkey creek, 50 lks. wide, low banks, 12 in. deep, runs East,
55	00		Leave woods bearing E. & W. to open level prairie,
80	00		Set a grey boulder 14 in. long, 11 in. thick & 12 in. wide for corner to secs. 22, 23, 26 & 27. Land level bottom. Soil 1st rate.

Township 5 N. Range 3 East of

		East, on a random line between Secs. 23 & 26. Variation 11° 15' East,
11	00	Enter timber bearing N.E. & South West
13	00	Jorkey Creek, 60 lks. wide, 12 in. deep, runs N.N.E.
18	00	Leave woods, bearing N. & S.
40	00	Set a Stone for temporary quarter section corner,
80	22	Intersected N. & S. line 3 lks. South of the corner to Secs. 23, 24, 25 & 26, from which corner I run, West, on a true line between Sections 23 & 26, Variation 11° 16' East,
40	11	Set a gray sand stone, 12 in. long, 8 in. wide & 7 in. thick for quarter section corner,

6th. Principal Meridian N. T.

80	22	The corner to sections 22, 23, 26 & 27. Land level bottom; Soil not rate. Timber hickory, cottonwood ash & elm on creek.

North, between Secs. 22 & 23, Variation 11° 43' East,

20	00	Leave creek bottom bearing East & West, & ascend to gently rolling prairie,
40	00	Set a black sand stone 12 in. long, 10 in. wide & 6 in. thick, for quarter section corner,
64	00	Leave gently rolling to broken prairie bottom, N.E. & S.E.
80	00	Set a red flint stone, 16 in. long, 8 in. wide & 7 in. thick for corner to Secs.

Township 5 N. Range 3 East of

14, 15, 22 & 23. Land mostly 1/2 gently rolling; on East 1/2 broken: Soil 1st rate.

East, on a random line between sections 14 & 23,
Variation 11° 43' East,

12	00	A shallow brook, 20 lks wide, runs South East,
19	00	Same brook, runs N. E.
22	00	Same brook, 20 lks. wide, 18 in. deep, low banks, runs South East,
40	00	Set a stone for temporary quarter section corner,
50	00	Leave bottom to high rolling prairie, bearing N. W. & S. E.
80	16	Intersected North & S. line 28 lks. North of the corner to sections 13, 14, 23 & 24,

6th. Principal Meridian N. T.

from which corner I run West, on a true line between sections 14 & 23,
Variation 11° 31' East,

40	08	Set a red flint stone 12, in. long, 8 in. wide & 6 in. thick for quarter section corner,
80	16	The corner to sections 14, 15, 22 & 23; Land on East 30 chs. broken prairie. Remainder level bottom. Soil 1st rate. Some scattering cottonwood ash & willow on creek, with undergrowth.

North, between Secs. 14 & 15,
Variation 11° 45' East,

1	00	A brook, 18 lks. wide runs East,

Township 5 N. Range 3 East of

2	50	Same brook, running S.W.
8	00	Same brook, 18 lks. wide, low banks & shallow, runs S.E.
40	00	Set a red flint stone 14 in. long, 8 in. wide & 6 in. thick for quarter section corner,
50	00	Leave bottom bearing N.W. & South East to broken thin prairie,
58	00	Enter high gently rolling prairie,
80	00	Set a red flint stone 16 in. long, 12 in. wide & 18 in. thick, for corner to sections 10, 11, 14 & 15. Land on this mile on 1st 1/2 level brook bottom & soil 1st rate. On last 1/2 rolling, soil 2nd rate.

6th Principal Meridian N. T.

		East, on a random line between Secs. 11 & 14 Variation 11° 45' East,
40	00	Set a stone for temporary quarter section corner,
80	24	Intersected N. & S. line 18 lks. North of the corner to Secs. 11, 12, 13 & 14, from which corner I run West, on a true line between Secs. 11 & 14, Variation 11° 37' East,
40	12	Set a red a red flint stone 11 in. long, 8 in. wide & 6 in. thick for quarter section corner,
80	24	The corner to sections 10, 11, 14 & 15. Land rolling on this mile. Soil 1st rate.

Township 5 N. Range 3 East of 6th. Principal Meridian N. J.

2 8			North, between Secs. 10 & 11, Variation 11° 30' East,
40	40	00	Set a red flint stone 14 in. long, 11 in. wide & 10 in. thick, for quarter sec. corner,
12	50	80	00 Set a red flint stone 16 in. long, 12 in. wide & 10 in. thick for corner to Sections 2, 3, 10 & 11. Land on this mile undulating Soil 1st rate.
19	58		
20	80		
			East, on a random line between Secs. 2 & 11, Variation 11° 30' East,
	40	00	Set a stone for temporary quarter section corner,
	80	10	Intersected N. & S. line 35 chs. South of the corner to Secs. 1, 2, 11 & 12, from which Corner I run West, on a true line between Secs. 2 & 11, Variation 11° 41' East,
	40	05	Set a red flint stone 13 in. long, 10 in. wide, 6 in. thick for quarter section corner,
	80	10	The corner to Secs. 2, 3, 10 & 11. Land on this mile level. Soil 1st rate.
			North, between Secs. 2 & 3, on a random line, Variation 11° 30' East,
	40	00	Set a stone for temporary quarter sec. corner,
	72	00	A small brook, 10 lks. wide & shallow, runs East,

Township 5 N. Range 3 East of

	80	10	Intersected North Boundary at the corner to Secs. 2 & 3, from which corner I run South, on a true line between Sections 2 & 3, Variation 11° 30' East,
12	40	10	Set a greyband stone 12 in. long, 10 in. wide & 7 in. thick for quarter section corner,
19 20	80	10	The corner to Sections 2, 3, 10 & 11. Land gently rolling. Soil 1st Rate.

September 1st 1857.

			North, between Secs. 33 & 34, Variation 12° 08' East,
5	12	00	Enter, high gently rolling prairie bearing E. & W.
8	38	00	Ravine, 4 chs. wide, bearing S. E. & North West,
	40	00	Set a red flint stone

6th. Principal Meridian N. T.

			13 in. long, 12 in. wide & 6 in. thick for quarter section corner,
	80	00	Set a red flint stone 16 in. long, 12 in. wide & 8 in. thick for corner to Sections 27, 28, 33 & 34. Land rolling prairie. Soil 1st Rate.

East, on a random line between Secs. 27 & 34, Variation 11° 08' East,

	30	00	Enter brook bottom, bearing N. W. & South East,
	40	00	Set a stone for temporary quarter Sec. Corner,
	79	00	Small shallow brook, 10 lks. wide running N. W.
	80	00	Intersected N. & S. line

Township 5 N. Range 3 East of 6th. Principal Meridian N. 57.

80			39 lks. North of the corner to sections 26, 27, 34 & 35, from which corner I run, West, on a true line between sections 27 & 34. Variation 10° 51' East,
40	40	00	Set a red flint stone 13 in. long, 9 in. wide & 6 in. thick for quarter sec. corner,
80	80	00	The corner to secs. 27, 28, 33 & 34. Land on this mile level bottom. Soil 1st rate West. 30 chs. rolling prairie: Soil 1st rate
			North, between secs. 27 & 28. Variation 12° East,
	20	00	Level bottom, bears E. & West,
38	40	00	Set a red flint stone 14 in. long, 12 in. wide & 6 in. thick for quarter sec. corner
40			

49	00	Center timber, scattering, bearing East & West,
50	00	A brook, 15 lks. wide, runs East,
52	00	Leave timber, bearing E. & W. to level bottom,
69	00	Center timber of turkey creek, bears West & N. East,
70	00	Turkey creek, 50 lks. wide, 2 ft. deep, low banks, runs East,
73	00	Leave undergrowth to open bottom, level & smooth,
80	00	Set a red flint stone 18 in. long, 9 in. wide & 7 in. thick for corner to sections 21, 22, 27 & 28. Land on 1st gr. broken, on remainder level bottom. Soil 1st rate. Timber on creeks elm, maple cottonwood & ash.

Township 5 N Range 3 East of the 6th. Principal Meridian N. T.

		East, on a random line between Sections 22 & 27, Variation 12° East,
5.	00	A small brook, 10 lks. wide, shallow, runs South
19	00	Leave bottom, rolling prairie, bearing N. & S.
40	00	Set a stone for temporary quarter Section corner,
12	45	00	Enter creek bottom, bearing N. East & West.
17	80	50	Intersected N. & S. line
2.			49 lks. North of the corner to Sections 22, 23, 26 & 27, from which corner I found
			West, on a true line between Sections 22 & 27, Variation 11° 39' East,
5			
8	40	25	Set a red flint stone 14 in. long, 12 in. wide & 6 in. thick, for quarter sec. corner,
	80	50	The corner to Sections 21,

		22, 27 & 28. Land in bottom level, on prairie rolling; Soil 1st rate.
		North, between Secs. 21 & 22, Variation 11° 30' East,
15	00	Leave bottom, bearing E. & W. & ascend rolling prairie,
40	00	Set a red flint stone 12 in. long, 8 in. wide & 6 in. thick for quarter sec. corner,
80	00	Set a red flint stone 13 in. long, 12 in. wide & 8 in. thick for corner to Secs. 15, 16, 21 & 22. Land on this mile gently rolling. Soil 1st rate.
		East, on a random line between Secs. 15 & 22,

Township 5 N. Range 3 East of the 6th. Principal Meridian N. T.

		Variation 11° 30' East,
40	00	Set a stone for temporary quarter section corner,
60	00	Level brook bottom, bears N. W. & S. E.
80	39	Intersected N. & S. line 12 lks. South of the corner to sections 14, 15, 22 & 23, from which corner I run West, on a true line between secs. 15 & 22,
		Variation 11° 35' East,
40	20	Set a red flint stone 12 in. long, 8 in. wide & 5 in. thick for quarter section corner,
80	39	The corner to sections 15, 16, 21 & 22. Land gently undulating. Soil 1st rate. East qr. level brook bottom.
		September 2d. 1857.
		North, between secs. 15 & 16,
		Variation 11° 30' East,

40	00	Set a red flint stone 12 in. long, 9 in. wide & 8 in. thick for quarter sec. corner,
50	00	Enter brook bottom, bearing South East & N. W.
80	00	Set a red flint stone 10 in. long, 9 in. wide & 6 in. thick for corner to secs. 9, 10, 15 & 16. Land on bottom level; remainder rolling; Soil 1st rate.
		East, on a random line between secs. 10 & 15,
		Variation 11° 30' East,
5	50	A brook, 12 lks. wide, shallow, runs South East,
27	00	Lean brook bottom bearing S. E. & N. W. to rolling prairie,
40	00	Set a stone for temporary

Township 5 N. Range 3 East of

		quarter section corner,
80	06	Intersected N. & S. line 20 chs. South of the corner to Secs. 10, 11, 14 & 15, from which corner I run West, on a true line between sections 10 & 15, Variation 11° 30' East,
40	03	Set a red flint stone 14 in. long, 12 in. wide & 10 in. thick for quarter section corner
80	06	on the corner to Secs. 9, 10, 15 & 16. Land on west 30 chs. level bottom, remainder undulating. Soil all 1st rate. Timber thin oak, cottonwood & ash on brook.

North, between Secs. 9 & 10, Variation 11° 30' East,

6th. Principal Meridian N. T.

8	00	A brook, 10 lks. wide, shallow, runs South East,
20	00	Learn bottom bearing N. W. & S. E. to rolling prairie,
40	00	Set a red flint stone 13 in. long, 10 in. wide & 8 in. thick, for quarter section corner,
80	00	Set a gray boulder 22 in. long 12 in. wide & 8 in. thick for corner to Secs. 3, 4, 9 & 10. Land on 1st quarter level bottom; remainder rolling. Soil 1st Rate

East, on a random line between sections 3 & 10, Variation 11° 30' East,

40	00	Set a stone for temporary quar=

Township 5 N. Range 3 East of

ter section corner,

0 80 00 Intersected N. & S. line 49 lks. South of the corner to sections 2, 3, 10 & 11 from which corner I run West, on a true line between sections 3 & 10,

Variation 11° 51' East,

40 00 Set a red flint stone 12 in. long, 10 in. wide & 8 in. thick for quarter sec. corner,

80 00 The corner to sections 3, 4, 9 & 10. Land gently rolling: Soil 1st rate.

North, on a random line between sections 3 & 4,

Variation 11° East,

40 00 Set a stone for temporary quarter section corner,

+ 80 00 Intersected the North

6th. Principal Meridian N. T.

Boundary 5 lks. East of the corner to secs. 3, 4, 33 & 34, from which corner I run South, on a true line between sections 3 & 4,

Variation 11° 02' East

40 00 Set a red flint stone 13 in. long, 11 in. wide & 8 in. thick for quarter section corner,

80 00 The corner to sections 3, 4, 9 & 10. Land gently rolling. Soil 1st rate.

Sept. 3d. 1857.

North, between sections 32 & 33,

Variation 12° 08' East,

40 00 Set a red flint stone 18 in. long, 12 in. wide & 6 in. thick for quarter section corner,

47 00 A small & shallow brook

Township 5 N. Range 3 East of

80	00	10 lks. wide, runs N. East, Set a red flint Stone 15 in. long, 12 in. wide & 10 in. thick for corner to Sections 28, 29, 32 & 33. Land undulating & Soil 1st rate.
		East, on a random line between Sections 28 & 33, Variation 12° 08' East,
40	00	Set a Stone for temporary quarter Section Corner,
79	90	Intersected N. & S. line 53 lks. North of the corner to Sections 27, 28, 33 & 34, from which Corner I run West, on a true line between Secs. 28 & 33, Variation 11° 45' East,
39	95	Set a red flint Stone

6th. Principal Meridian N. L.

		13 in. long, 9 in. wide & 6 in. thick for quarter Sec. corner,
79	90	The corner to Secs. 28, 29, 32 & 33. Land on this mile rolling. Soil Stony & 2nd rate.
		North, between Secs. 28 & 29, Variation 11° 15' East,
40	00	Set a red flint Stone 13 in. long, 10 in. wide & 8 in. thick for quarter Section corner, & Centre brook bottom, bearing East & West,
54	50	Centre timber bearing E. & W.
55	50	Turkey Creek, 56 lks. wide, low Shrubs, 12 in. deep, runs East,
60	00	Leave undergrowth & timber & enter low level bottom.

Township 5 N. Range 3 East of

			bearing East & West,
80	80	00	Set a red flint stone 14 in. long, 12 in. wide & 6 in. thick for corner to secs. 20, 21, 28 & 29. Land on 1st ½ broken, soil 2nd rate. On last ½ level bottom & soil 1st rate.
			East, on a random line between sections 21 & 28. Variation 11° 15' East,
	36	00	A small brook, 10 lks. wide & shallow, runs N. E.
	40	00	Set a stone for temporary quarter section corner,
	41	50	Turkey Creek, 50 lks. wide, 12 in. deep, runs North East.
	57	00	Senne Creek, 45 lks wide, 2 ft. deep, runs South East,
	59	00	Leave woods bearing N. W. & S. E.

6th. Principal Meridian N. T.

		to level bottom,
80	18	Intersected N. & S. line, 35 lks. South of the corner to sections 21, 22, 27 & 28, from which corner 2 run West, on a true line between sections 21 & 28, Variation 11° 30' East,
40	09	Set a red flint stone 16 in. long, 14 in. wide & 10 in. thick for quarter section corner,
80	18	The corner to secs. 20, 21, 28 & 29. Land on this mile level. Soil 1st rate.
		North between secs. 20 & 21. Variation 10° 12' East,
27	00	Leave bottom bearing East & West to high, rolling prairie,

Township 5 N. Range 3 East of

40 00 Set a red flint stone 14 in. long, 10 in. wide & 8 in. thick for quarter section corner,

80 00 Set a red flint stone 17 in. long, 15 in. wide & 12 in. thick for corner to sections 16, 17, 20 & 21. Land on this 27 chs. level bottom & soil 1st rate. Balance rolling & soil 2nd rate.

East, on a random line between sections 16 & 21.
Variation 11° East.

40 00 Set a stone for temporary quarter section corner,

80 12 Intersected N. & S. line 4 chs. South of the corner to sections 15, 16, 21 & 22, from which corner I saw

6th Principal Meridian, N. T.

West, on a true line between sections 16 & 21.
Variation 11° 20' East.

40 06 Set a red flint stone 12 in. long 8 in. wide & 6 in. thick for quarter section corner,

80 12 The corner to sections 16, 17, 20 & 21. Land on this mile undulating, soil good 2nd rate.
Sep. 4th 1857.

North, between secs. 16 & 17.
Variation 11° 25' East.

40 00 Set a red flint stone 16 in. long, 6 in. wide & 6 in. thick for quarter section corner,

80 00 Set a red flint stone 14 in. long, 12 in. wide & 10 in.

Township 5 N. Range 3 East of the

		thick for corner to sections 8, 9, 16 & 17. Land on this mile gently undulating. Soil 1st rate.
		East, on a random line between sections 9 & 16. Variation 11° 25' East,
40	00	Set a stone for temporary quarter section corner,
74	00	brook bottom being North West & South
80	36	Intersected N. & S. line 63 lks. South of the corner to sections 9, 10, 15 & 16, from which corner I run
		West, on a true line between sections 9 & 16, Variation 11° 52' East,
40	18	Set a red flint stone 12 in. long, 8 in. wide & 6 in. thick, for quarter sec. corner,

6th Principal Meridian N. T.

80	36	The corner to sections 8, 9, 16 & 17. Land on Eastern part level, on Western part broken. Soil 1st rate.
		North, between secs. 8 & 9, Variation 11° 30' East,
40	00	Set a red flint stone 13 in. long, 11 in. wide & 6 in. thick for quarter sec. corner,
70	00	A brook, 25 lks. wide & shallow, runs East,
80	00	Set a red flint stone 15 in. long, 12 in. wide & 8 in. thick for corner to secs. 4, 5, 8 & 9. Land broken. Soil 1st rate. Some scattering elm, ash & cottonwood on creek with undergrowth of same.

Township 5 N. Range 3 East of the 6th. Principal Meridian N. T.

East, on a random line between sections 4 & 9,
Variation 11° 30' East,
40 00 Set a stone for temporary quarter section corner,
80 00 Intersected N. & S. line 56 lks. South of the corner to sections 3, 4, 9 & 10, from which corner I run
West, on a true line between sections 4 & 9,
Variation 11° 54' East,
40 00 Set a red flint stone 12 in. long, 10 in. wide & 8 in. thick for quarter sec. corner,
80 00 The corner to sec. 4, 5, 8 & 9. Land on this mile rolling. Soil 1st rate.

North, on a random line between sections 4 & 5,
Variation 11° 30' East,
40 00 Set a stone for temporary quarter section corner,
80 80 Intersected North boundary of Township 19 lks. East of the corner to secs. 4 & 5, from which corner I run
South, on a true line between sections 4 & 5,
Variation 11° 38' East,
40 80 Set a red flint stone 14 in. long, 10 in. wide & 6 in. thick for quarter section corner,
80 80 The corner to sections 4, 5, 8 & 9. Land on this mile rolling. Soil 1st rate.

Township 5 N Range 3 East of 6th. Principal Meridian N. T.

North, between Secs. 31 & 32.
Variation 12° East,
40 00 Set a red flint stone 12 in. long, 6 in. wide & 6 in. thick for quarter section corner,
80 00 Set a red flint stone 15 in. long, 12 in. wide & 8 in. thick for corner to sections 29, 30, 31 & 32. Land gently rolling; Soil on South part 1st rate, on East, or north 1/2 2nd rate.

East, on a random between sections 29 & 32,
Variation 10° 30' East,
40 00 Set a stone for temporary quarter section corner,
79 84 Intersected N. & S. line 55 lks. South of the corner to Secs. 28, 29, 32 & 33, from which corner I run

West, on a true line between Sections 29 & 32,
Variation 10° 54' East,
39 92 Set a red flint stone 10 in. long, 8 in. wide & 6 in. thick for quarter section corner,
79 84 The corner to Secs. 29, 30, 31 & 32. Land on this mile broken. Soil stony & good 3d rate.

West, on a random line between Sections 30 & 31,
Variation 12° East,
30 00 Centre level bottom, bearing N. East & S. West,
40 00 Set a stone for temporary quarter section corner,

Township 5 North, Range 3 East of

79	34		Intersected the West Boundary 32 lks South of the Corner to Sections 30 & 31, from which Corner I run, East on a true line between Sections 30 & 31. Variation 11° 46' East
39	34		Set a red flint Stone 12 in. long, 8 in. wide & 6 in. thick for quarter Section Corner,
79	34		The Corner to Sections 29, 30, 31 & 32. Land on East 30 chs rolling & soil 2nd rate. Remainder level bottom. Soil 1st rate.
			North between Secs. 29 & 30. Variation 11° 34' East.
25	00		Enter bottom of Turkey Creek, bearing N. E. & S. W.

the 6th Principal Meridian N. T.

40	00	Set a red flint Stone 14 in. long, 8 in. wide & 6 in. thick for quarter Section Corner,
59	00	Turkey Creek, 30 lks. wide & shallow, running East & soon turns North,
65	00	Turkey Creek, running North, continuing in same at
71	00	Leave it, 30 lks. wide, 18 in. deep, running East,
78	30	A brook 25 lks. wide, & shallow, running East,
80	00	Set a red flint Stone 12 in. long, 10 in. wide & 8 in. thick for corner to Sections 19, 20, 29 & 30. Land on 1st & 4th undulating; remainder level bottom. Soil 1st rate. Timber on creek, bur-oak, cottonwood, elm, hackberry & ash.

Township 5 North Range 3 East of the 6th Principal Meridian N. T.

	†	East, on a random line between sections 20 & 29
		Variation 10° 34' East,
7	00	Leave timber bearing S.E. & North West to open level bottom.
40	00	Set a stone for temporary quarter section corner,
79	90	Intersected N. & S. line 24 lks. South of the corner to secs. 20, 21, 28 & 29, from which corner I run West, on a true line between sections 20 & 29,
		Variation 10° 45' East,
39	95	Set a yellow sand stone 12 in. long, 10 in. wide & 8 in. thick for quarter sec. corner
79	90	The corner to secs. 19, 20, 29 & 30. Land level bottom. Soil 1st rate Timber bur-oak, cotton wood elm & ash

		West, on a random line between sections 19 & 30,
		Variation 11° 30' East,
4	50	A brook, 50 lks. wide, runs South East,
6	50	Leave woods bearing N. W. & S. E. to level bottom,
24	00	Enter woods, bearing N. W. & South East,
29	50	A brook, 30 lks. wide & shallow, runs S. East,
31	00	Leave woods bearing N. W. & S. E. & ascend high rolling prairie,
40	00	Set a stone for temporary quarter section corner,
79	90	Intersected the West Boundary 7 lks. South of the corner to secs. 19 & 30, from which corner I run East, on a true line be=

Township 5 N. Range 3 East of the 6th. Principal Meridian N. T.

tween sections 19 & 30.
Variation 11° 27' East,
39 90 Set a red flint stone 12 in. long, 8 in. wide & 6 in. thick for quarter section corner
79 90 The corner to sections 19, 20, 29 & 30. Land on this east 50 chs. level bottom, rest rolling prairie. Soil 1st rate. Timber, Cottonwood, elm, ash, lin, hackberry & ash, with undergrowth of hazel & vines.
Sep. 5th 1857.

North, between sec. 19 & 20.
Variation 11° 15' East,
40 00 Set a red flint stone 13 in. long, 10 in. wide & 6 in. thick for quarter section corner,
80 00 Set a red flint stone 24 in. long, 12 in. wide & 12 in. thick

for corner to sections 17, 18, 19 & 20. Land on this mile level. Soil 1st rate.

East, on a random line between sections 17 & 20.
Variation 10° 45' East,
40 00 Set a stone for temporary quarter section corner,
80 00 Intersected the N. & S. line 7 chs. North of the corner to sections 16, 17, 20 & 21, from which corner I run
West, on a true line between sections 17 & 20.
Variation 10° 42' East
40 00 Set a red flint stone 13 in. long, 8 in. wide & 6 in. thick for quarter sec. corner,
80 00 The corner to sec. 17, 18, 19 & 20.

Township 5 N. Range 3 East of the 6th. Principal Meridian N.T.

Land on West part broken & soil 1st rate; East part rolling & soil good 2nd rate.

West, on a random line between Sections 18 & 19,
Variation 11°45' East,
2 00 Enter level bottom, bearing N. & S.
20 00 A brook, 20 lks. wide, 12 in. deep, runs South West
33 50 Same brook, 30 lks. wide, runs North,
35 00 Leave bottom, bearing N. & S. & ascend rolling prairie,
40 00 Set a stone for temporary quarter section corner,
80 40 Intersected West Boundary 5 lks. North of the corner to sections 18 & 19, from which corner I run,
East, on a true line between

Sections 18 & 19,
Variation 11°47' East,
40 40 Set a red flint stone 14 in. long, 8 in. wide & 6 in. thick for quarter sec. corner,
80 40 The corner to secs. 17, 18, 19 & 20. Land on East 1/2 level bottom & soil 1st rate, West 1/2 rolling & soil 2nd rate.

North, between secs. 17 & 18,
Variation 12°10' East,
40 00 Set a red flint stone 12 in. 10 in. wide & 8 in. thick for quarter section corner,
80 00 Set a red flint stone 16 in. long, 13 in. wide & 6 in. thick for corner to secs. 7, 8, 17 & 18. Land very broken. Soil 1st rate.

Township 5 N. Range 3 East of

East, on random line between sections 8 & 17,
Variation 10° 30' East,
40 00 Set a stone for temporary quarter section corner,
80 00 Intersected N. & S. line 70 lks. South of the corner to sections 8, 9, 16 & 17, from which corner I run,
West, on a true line between sections 8 & 17,
Variation 11° East,
40 00 Set a red flint stone 14 in. long, 10 in. wide & 6 in. thick for quarter section corner,
80 00 The corner to sections 7, 8, 17 & 18. East half of this mile land broken & soil 2nd rate. West 1/2 level & soil 2nd rate.

6th. Principal Meridian N. T.

West, on a random line between sections 7 & 18.
Variation 12° East,
40 00 Set a stone for temporary quarter section corner,
81 10 Intersected the West Boundary 7 lks. South of the corner to secs. 7 & 18, from which corner I run
East, on a true line between sections 7 & 18,
Variation 11° 57' East,
41 10 Set a red flint stone 12 in. long, 10 in. wide & 5 in. thick for quarter section corner,
81 10 The corner to sections 7, 8, 17 & 18.
Land on this mile broken, Soil 2nd rate.

Township 5 N. Range 3 East of 6th Principal Meridian N. T.

		North, between Secs. 7 & 8.
		Variation 11° 57' East,
20	00	Prairie becomes gently rolling, bearing East & West,
40	00	Set a red flint stone 14 in. long, 12 in. wide & 8 in. thick for quarter section corner,
80	00	Set a red flint stone 12 in. wide, 10 in. long & 6 in. thick for corner to sections 5, 6, 7 & 8. Land on 1st quarter broken, remainder undulating or gently rolling. Soil 1st rate.
		East, on a random line between sections 5 & 8,
		Variation 11° East,
40	00	Set a stone for temporary quarter section corner,
66	50	A brook, 10 lks. wide & shallow, runs South East,
79	96	Intersected the N. & S. line 14 lks. North of the corner to sections 4, 5, 8 & 9, from which corner I run West, on a true line between sections 5 & 8.
		Variation 10° 54' East
39	98	Set a grey boulder 13 in. long, 10 in. wide & 5 in. thick for quarter section corner,
79	96	The corner to sections 5, 6, 7 & 8. Land on this mile rolling; Soil 1st rate. Timber on creek principally cottonwood, ash, elm & hackberry with undergrowth of same.

Township 5 N. Range 3 East of the 6th. Principal Meridian N.T.

		West, on a random line between sections 6 & 7, Variation 11° 45' East,
40	00	Set a stone for temporary quarter section corner,
60	00	Enter rolling prairie,
80	20	Intersected West Boundary at the corner to sections 6 & 7, from which corner I run, East, on a true line between sections 6 & 7, Variation 11° 45' East,
40	20	Set a red flint stone 12 in. long, 8 in. wide & 6 in. thick for quarter secs. corner,
80	20	The corner to secs. 5, 6, 7 & 8. Land on West qr. rolling, East three qrs. level. Soil 1st rate.

		North, on a random line between sections 5 & 6, Variation 11° 45' East,
40	00	Set a red flint stone for temporary quarter section corner,
80	06	Intersected the North Boundary 16 lks. East of the corner to secs. 5 & 6, from which corner I run, South, on a true line between sections 5 & 6, Variation 11° 52 East
40	06	Set a red flint stone 12 in. long, 8 in. wide & 6 in. thick for quarter section corner,
80	06	The corner to sections 5, 6, 7 & 8 Land on last or North qr. gently rolling, remainder undulating. Soil 1st rate.

September 7th 1857

Township 5 N. Range 3 East of the

General Description

The uplands in this township are of the common average. The bottoms which are rather extensive along Turkey creek & its tributaries are very rich & always well situated for cultivation. There are some comparatively good backs of timber on Turkey creek particularly at its junction with Swan creek from the North West. These streams are clear & pure, fed by springs & generally skirted with narrow strips of timber, consisting chiefly of cottonwood, elm, ash, linn & hack=

berry. On the line between sections 13 & 24 I found two fine springs. One on the N. W. 1/4 of section 24 near where the line intersects the creek. The other on the South West 1/4 of section 13, near the line & on the left bank of the creek.

The several varieties of the flint stone abound in this township but I found no sand or lime stone such as is useful for building purposes.

There are no roads, trails or settlements in this township of any character whatever.

List of Names

A list of the names of the individuals employed to assist in running, measuring, or marking the lines & corners described in the foregoing field notes of Township No. 5 North of the base line of Range No. 3 East of the 6th Principal Meridian Nebraska Territory, showing the respective capacities in which they acted:

Edward Arntzen,	Chainman
Fredrick Höbyle,	Chainman
John W. Furrow,	Axeman & Marker
Enoch K. Bowers,	Flagman

We hereby certify that we assisted Divania Furrow Deputy Surveyor in surveying the subdivision Lines of Townships Numbers 5, 6, 7 & 8 North of Range Number 4 East, & Township Number 5 North of Range Number 3 East of the 6th Principal Meridian, Nebraska Territory, & that said Townships have been in all respects, & to the best of our knowledge & belief, well & faithfully surveyed according to the Instructions furnished by the Surveyor General.

Edward Arntzen	Chainman,
Friderick Höbyle	Chainman,
John W. Furrow	Stone Sleter
Enoch K. Bowers	Flagman

Subscribed & sworn to by the above named persons, before me, a Justice of the Peace for the County of Riley in the Territory of Kansas this day of , 1858.

John S. Badger

Justice of the Peace.

I, Divania Furrow, Deputy Surveyor, do solemnly swear, that in pursuance of a Contract with John Calhoun Surveyor of the Public Lands of the United States in the Territories of Kansas and Nebraska, bearing date the 24th day of May, 1857, in strict conformity to the Laws of the United States & the instructions of the said Surveyor General, I have faithfully surveyed the Subdivision Lines of Townships Numbers 5, 6, 7 & 8 North, of Range Number 4 East, and Township Number 5 North of Range Number 3 East of the 6th Principal Meridian

in the Territory of Nebraska aforesaid, & do further solemnly swear that the foregoing are the true & original field notes of such Survey.

Divania Furrow
Deputy Surveyor.

Subscribed by said Divania Furrow, Deputy Surveyor, & sworn to before me, a Justice of the Peace for Riley County in the Territory of Kansas this day of , 1858.

Samuel Badger
Justice of the Peace.

Surveyor Generals Office
Nebraska City, N.T. June 1858

The foregoing field Notes of the Survey of the subdivision lines of Townships No Five, six, seven, and eight North, of Range Four East, and Township No five North, of Range Three East, of the Sixth Principal Meridian in Nebraska Territory, executed by Diranie Furrow D.S. under his Contract No 174. dated the 21: day of May 1857. having been critically examined, the necessary correction and explanation being made, the said field notes, and the surveys they describe, are hereby approved.

J. Calhoun
Surveyor General

Compared By Sherrard +

The Field Notes of the Subdivision Lines and Centers of Township No. Six North of the Base line of Range No. 3 East of the Sixth Principal Meridian in the Territory of Nebraska. Surveyed by George W. Foster Deputy Surveyor. Under his contract No. 209 dated June 8 1857 Commenced August the 3d 1857. and completed Augt the 8th 1857.

209 June 8 1857

Contract 209 June 8 1857

Correct except Date of Contract
GHL

A list of the names of the individuals employed to assist in running, measuring or marking the lines and corners described in the following field notes of Township No. 4 North of the Base line of Range 5 East of the 6th Principal Md. in the Territory of Nebraska, showing the respective capacities in which they acted

Quintus A. Colvin, Chainman,
Edward Stephens, Chainman,
Demetrius T. Colvin, Flagheer,
Columbus C. Colvin Axeman,
William Stephens Axeman,

Township 6 N. Range 3 East

6	41	5	30	4	23	3	16	2	9	1
41		40		29		22		15		8
7	39	8	29	9	22	10	14	11	8	12
38		38		28		21		14		7
18	37	17	27	16	20	15	13	14	6	13
36		36		26		20		12		6
19	35	20	26	21	19	22	12	23	5	24
34		34		25		18		11		4
30	33	29	25	28	18	27	11	26	4	25
32		31		24		17		10		3
31	31	32	24	33	17	34	10	35	3	36

State of Missouri)
Clay County) ss.

We Quintus Colvin, Columbus Colvin, Clinton Colvin, Demelbum Colvin, Edward Stephens, and William Stephens, do solemly swear that we will well and truly perform the duties of Chainman, Axman, and Flag-bearer, according to instructions given us, and to the best of our skill and Ability, as they may be assigned to us.

Quintus A Colvin (Seal)
Columbus C Colvin (Seal)
Demelbum T Colvin (Seal)
Edward Stephens (Seal)
William his X mark Stephens (Seal)

Sworn and Subscribed to before me Thomas McCarty Clerk of the County Court within and for the County of Clay in the State of Missouri on this the 6th day of July A.D. 1857.

Given under my hand and the seal of said Court at office in Liberty in the County aforesaid the day and year above written.

Thomas McCarty Clerk

Field notes of the Subdivisions lines, and corners, of Township No. 6. North, of the Base line of Range 3, E of the Sixth Principal Meridian, in the Territory of Nebraska.

Chains

To determine the proper adjustment of my compass for subdividing this Township. I commence at the corner to Townships five, and six, Ranges 3 and 4 E. and run.

North, on a blank line along the East Boundary of Section 36.

Variation 11° 30' East.

40 00. To a point 30 links East of the quarter section corner,

80 04 To a point 70 links East of the corner to Sections 25 and 36.

To retrace this line or run parallel thereto I must adjust my compass to a variation of 12° East,

Subdivision commenced August the third, 1857.

From the corner to Sections 1, 2, 35 and 36, on the South Boundary of the Township, I run North, between Sections 35 and 36.

Variation 12° 00' East,

40.00 Set a Limestone Rock 22 in long, 8 in wide, and 3 in thick for quarter section corner,

80.00 Set a Limestone Rock, 24 in long, 18 in wide and 3 in thick, for corner to Sections 25, 26, 35 and 36,

Land rolling 2d rate Soil.

East on a random line between Sections 25 and 36,

Variation 11° 40' East,

40.00 Set a Rock for temporary quarter section corner,

79.90 Intersected the East Boundary of the Township 20 links North of Mound corner to Sections 25 and 36, from which corner I run

West, on a true line between Sections 25 and 36,

Variation 11° 31' East,

39.95 Set a Limestone Rock 24 in long, 10 in wide and 2½ in thick for quarter section corner,

79.90 The corner to Sections 25, 26, 35 and 36,

Land rolling 2d rate Soil,

North, between Sections 25 and 26.

Variation 12° 00' East,

40.00 Set a Limestone Rock, 20 in long, 9 in wide and 4 in thick for quarter section corner,

80.00 Set a Limestone Rock, 24 in long, 15 in wide, and 3 in thick for corner to Sections 23, 24, 25 and 26,

Land rolling 2d rate Soil,

East, on a random line between Sections 24 and 25,

Variation 11° 30' East,

40.00 Set a Rock for temporary quarter section corner,

77.50 Intersected the East Boundary of the Township 25 links North of mound corner to sections 24 and 25.
From which corner I run
West, on a true line between sections 24 and 25.
Variation 11° 19' East,
24.50 Set a limestone Rock 18 in long, 15 in wide and 4 in thick for quarter section corner,
78.50 The corner to sections 23, 24, 25 and 26, stand rolling Prairie soil,

North, between sections 23 and 24,
Variation 12° 00' East.
3.50 A Grade bears N. E. and S. W.
40.00 Set a limestone Rock, 18 in long, 12 in wide, abt 5 in thick for quarter sec corner,
80.00 Set a limestone Rock 24 in long, 12 in wide, and 4 in thick for corner to sections 13, 14, 23 and 24,
Land rolling Prairie soil.

East, on a random line between sections 13 and 24.
Variation 11° 20' East,
40.00 Set a Stake for temporary quarter section corner,
71.00 A Grade bears North & S. W.
79.75 Intersected the East Boundary of the Township 30 links North of mound corner to sections 13 and 24,
From which corner I run
West, on a true line between sections 13 and 24.
Variation 11° 07' East.
39.88 Set a limestone Rock 16 in long, 10 in wide and 5 in thick for quarter section corner,
79.75 The corner to sections 13, 14, 23 and 24.
Land rolling Prairie soil.

North, between sections 13 and 14.
Variation 12° 00' East,
40.00 Set a limestone Rock 17 in long,

Chs 10 in wide and 4 in thick for quarter section corner,
73.00 A Draw bears North East,
80.00 Set a Limestone Rock 25 in long, 12 in wide, and 4 in thick, for corner to Sections 11, 12, 13 and 14.
Land rolling 2d rate soil,

East. On a random line between Sections 12 and 13.
Variation 11° 15' East,
6.00 A Draw bears North,
40.00 Set a Rock for temporary quarter section corner,
79.90 Intersected the East Boundary of the Township 20 links North of mound corner to Sections 12 and 13. from which corner I run West, on a true line between Sections 12 & 13.
Variation 11° 06' East.
31.95 Set a Limestone Rock 18 in long, 10 in wide and 4 in thick for quarter section corner,
79.90 The corner to Sections 11, 12, 13 and 14,
Land rolling 2d rate soil,

Chains North, between Sections 11 and 12.
Variation 12° 00' East,
11.00 A Bairie Draw course East, (Some Black Ash brush)
40.00 Set a Limestone Rock 16 in long, 12 in wide and 3 in thick for quarter section corner,
80.00 Set a Limestone Rock 28 in long, 15 in wide, and 3 in thick for corner to Sections 1, 2, 11 and 12,
Land rolling 2d rate soil,

East, on a random line between Sections 1 and 12.
Variation 11° 00' East,
40.00 Set a Rock for temporary quarter section corner,
64.00 A Ravine (with some Pools of Water) runs South East,
79.50 Intersected the East Boundary of the Township at mound corner to Sections 1 and 12.

from which corner I run
West, on a true line between sections 1 & 12.
Variation 11° 00' East.
32.75 Set a limestone Rock 17 in long, 10 in wide
and 4 in thick for quarter section corner.
77.50 The corner to Sections 1, 2, 11 and 12.
Land rolling & rate Soil.

North, on a random line between Sections 1 & 12.
Variation 12° 20' East.
40.00 Set a Rock for temporary quarter sec corner.
63.00 A Draw course South East.
80.10 Intersected the North Bounding of the
Township 10 links East of Rock corner
to sections 1 and 2, from which corner I run
South, on a true line between
Sections 1 and 2.
Variation 12° 24' East.
11.10 Set a limestone Rock 16 in long, 8 in wide,
and 3 in thick for quarter section corner
80.00 The corner to Sections 1, 2, 11 and 12.
Land rolling, 2d rate Soil.

Observations Monday, August the 2d 1857.

North, between Sections 34 and 35.
Variation 12° 00' East.
10.00 A Trace bears N.E. and S.W.
40.00 Set a limestone Rock 15 in long, 10 in wide,
and 3 in thick for quarter section corner.
60.00 Set a limestone Rock 24 in long, 10 in
wide and 2½ in thick for corner to
Sections 26, 27, 34 and 35.
Land rolling, 2d rate Soil.

East on a random line between
Sections 26 and 35.
Variation 11° 30' East.
40.00 Set a Rock for temporary quarter sec corner.
80.20 Intersected North and South line 11 links
South of Rock corner to Sections 25, 26,
35 and 36, from which corner I run
West, on a true line between Sections
26 and 35.
Variation 11° 34' East.

40,00 Set a Limestone Rock 20 in long, 10 in wide, and 3 in thick for quarter section corner,
91,20 The corner to sections 26, 27, 34 and 35.
Land rolling, 2d rate Soil.

North, between sections 26 and 27,
Variation 12° 00' East,
46,00 Set a Limestone Rock No. 16 in long, 12 in wide, and 3 in thick for quarter section corner.
80,00 Set a Limestone Rock 28 in long 15 in wide, and 4 in thick for corner to sections 22, 23, 26 and 27.
Land rolling 2d rate Soil.

East, on a random line between sections 23 and 26,
Variation 11° 30' East,
41,00 Set a Limestone Rock for temporary quarter section corner
77,00 A Stake bears N. E. and S. W.
77,83 Intersected North and South line, 16 links North of Rock corner to sections 23, 24.

Closing 25 and 26. from which corner I run West, on a true line between sections 23 and 26.
Variation 11° 23' East.
35,92 Set a Limestone Rock No. 17 in long 12 in wide, and 3 in thick for quarter section corner.
77,83 The corner to sections 22, 23, 26 and 27.
Land rolling, 2d rate Soil.

North, between sections 22 and 23.
Variation 12° 00' East.
40,00 Set a Limestone Rock 18 in long 10 in wide, and 3 in thick for quarter sec corner
80,00 Set a Limestone Rock 24 in long 10 in wide and 4 in thick for corner to sections 14, 15, 22 and 23.
Land rolling 2d rate Soil.

East, on a random line between sections 14 and 23.
Variation 11° 30' East.

40.00 Set a Stake for temporary quarter sec. corner,
77.50 Intersected North and South line 33 links South of Stake corner to Sections 13, 14, 23 and 24. from which corner I run
West, on a true line between sections 14 and 23.
Variation 11° 40' East,
32.75 Set a Limestone Rock 17 in long, 12 in wide and 4 in thick for quarter section corner,
77.50 The corner to Sections 14, 15, 22 and 23.
Land rolling & rate soil,

North, between Sections 14 and 15,
Variation 12° 20' East,
40.00 Set a Limestone Rock 18 in long, 12 in wide and 3 in thick for quarter section corner;
56.00 A Draw course East,
80.00 Set a Limestone Rock 26 in long, 15 in wide and 3 in thick for ~~quarter section~~ corner to Sections 10, 11, 14 and 15,
Land rolling & rate soil,

Chains East, on a random line between Sections 11 and 14,
Variation 11° 40' East,
5.00 A Draw bears South East,
40.00 Set a Stake for temporary quarter section corner,
48.00 That same Draw bears North, (general course East)
77.50 Intersected North and South line 30 links North of Stake corner to Sections 11, 12, 13 and 14, from which corner I run,
West, on a true line, between sections 11 and 14,
Variation 11° 25' East,
32.75 Set a Limestone Rock 20 in long 11 in wide and 3 in thick for quarter section corner,
77.50 The corner to Sections 10, 11, 14 and 15
Land rolling & rate soil,

North, between sections 10 and 11,

Variation 12° 45' East.

5.50 A Cross bears East.

40.00 Set a limestone Rock 17 in long 10 in wide and 3 in thick for quarter section corner,

50.00 Set a limestone Rock 21 in long, 12 in wide and 3 in thick for corner to Sections 2, 3, 10 and 11.
Land rolling 2d rate Soil.

East, on a random line between Sections 2 and 11.

Variation 11° 40' East.

40.00 Set a Rock for temporary quarter section corner.

74.80 Intersected North and South line 10 links North of Rock corner to Sections 1, 2, 11 and 12, from which corner I run
West, on an a true line between Sections 2 and 11.

Variation 11° 36' East.

39.53 Set a limestone Rock 16 in long 10 in wide, and 3 in thick for quarter section corner,

79.06 The corner to Sections 2, 3, 10 and 11.
Land rolling 2d rate Soil.

North, on a random line between Sections 2 and 3.

Variation 12° 00' East.

40.00 Set a Rock for temporary quarter section corner,

74.95 Intersected the North Boundary of the Township at Rock corner to Sections 2 and 3, from which corner I run
South, on a true line between Sections 2 and 3.

Variation 12° 00' East.

39.75 Set a limestone Rock 17 in long 10 in wide and 3 in thick for quarter section corner,

79.95 The corner to Sections 2, 3, 10 and 11.
Land rolling 2d rate Soil.

Thursday August the 4th 1859.

North between sections 33 and 34.
Variation 12° 15' East.

40.00 Set a limestone Rock 20 in long 12 in wide and 3 in thick for quarter section corner.

80.00 Set a limestone Rock 24 in long 15 in wide and 3 in thick for corner to sections 27, 28, 33 and 34.
Land rolling 2nd rate soil.

East, on a random line between sections 27 and 34.
Variation 11° 40' East.

40.00 Set a Rock for temporary quarter section corner.

80.00 Intersected North and South line 12 links South of Rock corner to sections 26, 27, 34 and 35, from which corner I run
West, on a true line between sections 27 and 34.

Chains Variation 11° 45' East.

40.00 Set a limestone 21 in long 12 in wide and 3 in thick for quarter section corner.

80.00 The corner to sections 27, 28, 33 & 34.
Land rolling 2nd rate soil.

North between sections 27 and 28.
Variation 12° 15' East.

40.00 Set a limestone Rock 20 in long 11 in wide and 3 in thick for quarter section corner.

80.00 Set a limestone Rock 25 in long 15 in wide and 4 in thick for corner to sections 21, 22, 27 and 28.
Land rolling 2nd rate soil.

East on a random line between sections 22 and 27.
Variation 11° 40' East.

40.00 Set a Rock for temporary quarter section corner.

80.25 Intersected North and South line at Rock corner for sections 22, 23, 26 and 27, from which corner I run

West, on a true line between sections 22 and 27.

Variation 11° 50' East.

40.12 Set a limestone Rock 12 in long, 13 in wide and 3 in thick for quarter section corner,

80.25 The corner to sections 21, 22, 27 and 28. Land rolling 2nd rate soil.

North, between sections 21 and 22.

Variation 12° 10' East.

40.00 Set a Granite Rock 10 in long 8 in wide and 7 in thick for quarter section corner,

80.00 Set a Limestone Rock 30 in long 15 in wide and 5 in thick for corner to sections 15, 16, 21 and 22. Land rolling 2nd rate soil,

6 chains East, on a random line between sections 15 and 22.

Variation 11° 50' East.

40.00 Set a Rock for temporary quarter section corner,

80.50 Intersected North and South line 5 links South of Rock corner to sections 14, 15, 22 and 23, from which corner I run

West, on a true line between sections 15 and 22.

Variation 11° 42' East.

40.25 Set a limestone Rock 19 in long 9 in wide and 6 in wide for quarter section corner,

80.50 The corner to sections 15, 16, 21 and 22. Land rolling 2nd rate soil,

---

North, between sections 15 and 16.

Variation 12° 00' East.

40.00 Set a Granite Rock 9 in long 8 in wide and 7 in thick for quarter sec corner,

80.00 Set a limestone Rock 22 in long 14 in wide and 3 in thick for corner to sections 9, 10, 15 and 16.
Land rolling & Drate Soil.

East, on a random line between sections 10 and 15.
Variation 11° 40' East.
40.00 Set a Rock for temporary quarter section corner.
80.60 Intersected North and South line 5 links South of Rock corner to sections 10, 11, 14, and 15, from which corner I run
West, on a true line between Sections 10 and 15.
Variation 11° 45' East.
40.50 Set a limestone 18 in long, 12 in wide and 3 in thick for quarter section corner
80.60 The corner to Sections 9, 10, 15, and 16.
Land rolling & Drate Soil

Chains North, between Sections 9 and 10.
Variation 11° 30' East.
40.00 Set a limestone Rock 20 in long 12 in wide and 3 in thick for quarter section corner.
50.00 A Marine (with scattering timber) course East.
80.00 Set a limestone Rock 22 in long 14 in wide and 3 in thick for corner to Sections 3, 4, 9 and 10.
Land rolling & Drate Soil.

East, on a random line between Sections 3 and 10.
Variation 11° 40' East.
40.00 Set a Rock for temporary quarter Section Corner.
79.75 Intersected North and South line 25 links West of Rock corner to Sections 2, 3, 10 and 11, from which corner I run.
West, on a true line between

Chs Sections 3 and 10.

Variation 11°.25' East,

39.88 Set a Limestone Rock 24 in long, 6 in wide and 5 in thick for quarter Section corner,

79.75 The corner to Section 3.4.9 and 10.

Land rolling 2d rate Soil,

North, on a random line between Sections 3 and 4.

Variation 12°.00' East,

40.00 Set a Rock for temporary quarter Section corner,

80.40 Intersected the North Boundary of the Township at Rock corner to Sections 3 and 4, from which corner I run South, on a true line between Sections 3 and 4.

Variation 12°.00' East,

40.40 Set a Limestone Rock 17 in long, 11 in wide and 3 in thick for quarter Section corner,

80.40 The corner to Sections 3.4.9 and 10.

Land rolling 2d rate Soil.

Chains Wednesday Augst 5th 1857.

North, between Sections 32 and 33.

Variation 12°.15' East,

40.00 Set a Red Rock 10 in long 8 in wide and 7 in thick for quarter Section corner,

80.00 Set a Limestone Rock 23 in long 14 in wide and 3 in thick for corner to Sections 28.29.32 and 33.

Land rolling 2d rate Soil,

East on a random line between Sections 28 and 33.

Variation 11°.40' East,

40.00 Set a Rock for temporary quarter Section corner,

80.35 Intersected North and South line 40 links North of Rock corner to Sections 27.28.33 and 34 from which corner I run West, on ~~an~~ a true line

Chs between Sections 28 and 33.
Variation 11° 23' East,
40.17 Set a Granite Rock 10 in long, 8 in wide, and 6 in thick for quarter Section corner,
80.35 The corner to Sections 28, 29, 32 and 33.
Land rolling 2d rate Soil.

North, between Sections 28 and 29,
Variation 12° 00' East,
40.00 Set a Granite Rock 12 in long, 9 in wide and 6 in thick for quarter Section corner,
80.00 Set a Limestone Rock 25 in long, 14 in wide and 4 in thick for corner to Sections 20, 21, 28 and 29,
Land rolling 2d rate Soil,

East on a random line between Sections 21 and 28,
Variation 11° 40' East,
40.00 Set a Rock for temporary quarter Sec corner,

Chains 80.47 Intersected North and South, line 37 links North of Rock corner to Sections 21, 22, 27 and 28, from which corner I run West, on a true line between Sections 21 and 28,
Variation 11° 24' East,
40.23 Set a Quartz Rock 11 in long, 8 in wide and 7 in thick for quarter Section corner,
80.47 The corner to Sections 20, 21, 28 and 29,
Land rolling 2d rate Soil.

North, between Sections 20 and 21,
Variation 12° 00' East,
40.00 Set a Quartz Rock 12 in long 9 in wide and 6 in thick for quarter Section corner
80.00 Set a Limestone Rock 22 in long 14 in wide and 3 in thick for corner to Sections 16, 17, 20 and 21,
Land rolling 2d rate Soil,

East, on a random line between Sections 16 and 21,

Chs Variation 11° 40' East.

40.00 Set a Stock for temporary quarter section corner.

80.46 Intersected North and South line 70 links North of Rock corner to sections 15. 16. 21 and 22. from which corner I run

West, on a true line between sections 16 and 21.

Variation 11° 10' East

40.23 Set a Limestone Rock 17 in long, 11 in wide and 3 in thick, for quarter section corner,

80.46 The corner to sections 16. 17. 20 + 21. Land gently rolling 2nd rate soil,

North, between sections 16 and 17.

Variation 11° 30' East.

40.00 Set a Granite Rock 10 in long, 9 in wide and 8 in thick for quarter section corner,

80.00 Set a Limestone Rock 23 in long

Chains 15 in wide and 4 in thick, for corner to sections 8. 9. 16. and 17. Land rolling 2nd rate soil,

East, on a random line between sections 9 and 16.

Variation 11° 40' East.

40.00 Set a Rock for temporary quarter section corner,

79.76 Intersected North and South line 20 links South of Rock corner to sections 15. 16. 21 and 22. from which corner I run

West, on a true line between sections 9 and 16.

Variation 11° 49' East.

39.88 Set a Limestone Rock 18 in long 10 in wide and 3 in thick for quarter section corner,

79.76 The corner to sections 8. 9. 16 + 17. Land gently rolling 2nd rate soil,

Chs Northe, between Sections 8 and 9,
Variation 12° 00' East,
40.00 Set a Limestone Rock 20 in long 15 in wide and 3 in thick for quarter Section corner,
70.00 A Draw course East
80.00 Set a Limestone 22 in long, 14 in wide and 4 in thick for corner to Sections 4, 5, 8 and 9,
Land broken 3rd rate soil,

East, on a random line between Sections 4 and 9,
Variation 11° 40' E,
40.00 Set a Rock for temporary quarter Section corner,
60.00 A Ravine 10 links wide runs S.E.
79.90 Intersected North and South line 15 links South of Rock corner to Sections 3, 4, 9 and 10, from which corner I run
West, on a true line between

Chains Sections 4 and 9,
Variation 11° 55' East,
39.95 Set a Quartz Rock 12 in long, 9 in wide and 7 in thick for quarter Section corner, from which a Black Ash 8 in dia bears South 56 links dist, no other Tree convenient to mark,
79.90 The corner to Sections 4, 5, 8 and 9,
Land rolling 2d rate soil,

North, on a random line between Sections 4 and 5,
Variation 12° 00' East,
38.00 A Draw course South East,
40.00 Set a Rock for temporary quarter Section corner,
81.00 Intersected the North Boundary of the Township 18 links East of Rock corner to Sections 4 & 5, from which corner I run
South, on a true line between Sections 4 and 5,

Variation 12° 08' East,

41.00 Set a Limestone Rock 20 in long, 12 in wide and 3 in thick for quarter Section corner,

81.00 The corner to Sections 4, 5, 8 and 9, Land rolling 2d rate soil,

Thursday August the 6 (5).

North, between Sections 31 and 32,

Variation 12° 00' East,

40.00 Set a Limestone Rock 17 in long, 12 in wide, and 4 in thick for quarter Section corner,

80.00 Set a Limestone Rock 24 in long 15 in wide and 2 in thick for corner to Sections 29, 30, 31 and 32, Land rolling 2d rate soil.

East, on a random line between Sections 29 and 32,

Variation 11° 40' East,

Chains

40.00 Set a Rock for temporary quarter Section corner,

41.00 A Draw course South,

79.80 Intersected North and South line 20 links North of Rock corner to Sections 28, 29, 32 and 33, from which corner I run

West, on a true line between Sections 29 and 32,

Variation 11° 31' East,

39.90 Set a Limestone Rock 18 in long 10 in wide and 3 in thick for quarter Section corner,

79.80 The corner to Sections 29, 30, 31 & 32, Land broken 3d rate soil,

West, on a random line between Sections 30 and 31,

Variation 11° 40' East,

40.00 Set a Rock for temporary quarter Section corner,

80.10 Intersected the West Boundary of the Township 100 links South of Rock corner to Sections 30 and 31. from which corner I run
East, on a true line between Sections 30 and 31.
Variation 10°.57' East.
40.00 Set a Limestone Rock 16 in long 12 in wide and 4 in thick for quarter Sec. corner.
80.10 The corner to Sections 29. 30. 31 and 32.
Sand gently rolling 2d rate Soil.

North, between Sections 29 and 30.
Variation 12°.00' East.
40.00 Set a Limestone Rock 19 in long 10 in wide and 3 in thick for quarter Sec. corner
45.00 A Brass course South East.
80.00 Set a Limestone Rock 22 in long 16 in wide and 3 in thick for corner to Sections 19. 20. 29 and 30.
Sand rolling 2d rate Soil.

Chaines East, on a random line between Sections 20 and 29.
Variation 11°.40' East.
40.00 Set a Rock for temporary quarter Section corner.
79.70 Intersected North and South line 70 links South of Rock corner for Sections 20. 21. 28 and 29. from which corner I run
West, on a true line between Sections 20 and 29.
Variation 12°.10' East.
39.85 Set a Quart Rock 10 in long 9 in wide and 7 in thick for quarter Section corner.
79.70 The corner to Sections 19. 20. 29 & 30.
Sand gently rolling 2d rate Soil.

West, on a random line between Sections 19 and 30.
Variation 11°.00' East.
39.50 A Brass course South.

40.00 Set a Stake for temporary quarter section corner.

79.97 Intersected the West Boundary of the Township 50 links South of Stake corner to Sections 19 and 30 from which corner I run

East, on a true line between Sections 19 and 30.

Variation 16° 39' East,

39.98 Set a Limestone Rock 20 in long 12 in wide and 5 in thick for quarter section corner.

79.97 The corner to Sections 19, 20, 29 and 30.

Land gently rolling 2nd rate Soil.

North between Sections 19 and 20.

Variation 12° 00' East.

20.00 I Draw course South West.

40.00 Set a Limestone Rock 18 in long 12 in wide and 4 in thick for quarter section corner.

60.00 Set a Limestone Rock 24 in long 14 in wide and 3 in thick for corner to Sections 17, 18, 19 and 20.

Land rolling 2nd rate Soil.

Chains East, on a random line between Sections 17 and 20.

Variation 11° East.

40.00 Set a Stake for temporary quarter section corner.

79.50 Intersected North and South line 70 links South of Stake corner to Sections 16, 17, 20 and 21. from which corner I run

West, on a true line between Sections 17 and 20.

Variation 11° 30' East.

39.75 Set a Limestone Rock 20 in long 12 in wide and 3 in thick for quarter section corner.

79.50 The corner to Sections 17, 18, 19 and 20.

Land rolling 2nd rate Soil.

West, on a random line between Sections 18 and 19.

Variation 10° 30' East.

40.00 Set a Stake for temporary quarter sec. corner

79.80 Intersected the West Boundary of the Township 30 links South of Rock corner to Sections 18 and 19. from which corner I run
East, on a true line between Sections 18 and 19.
Variation 10° 17' East.
39.80 Set a Limestone Rock 21 in long 12 in wide and 3 in thick for quarter Section corner,
79.80 The corner to Sections 17, 18, 19 and 20.
Land rolling 2d rate Soil,

North, between Sections 17 and 18,
Variation 12° 00' East.
40.00 Set a Limestone Rock 15 in long 13 in wide and 3 in thick for quarter sec corner.
80.00 Set a Red Rock 18 in long 12 in wide and 6 in thick for corner to Sections 7, 8, 17 and 18,
Land rolling 2d rate Soil,

East, on a random line between Sections 8 and 17.
Variation 11° 40' East.
40.00 Set a Rock for temporary quarter Section corner.
79.90 Intersected North and South line 30 links North of Rock corner to Sections 8, 9, 16 and 17. from which corner I run
West, on a true line between Sections 8 and 17.
Variation 11° 25' East
39.95 Set a Limestone Rock 20 in long, 12 in wide and 4 in thick for quarter Section corner,
79.90 The corner to Sections 7, 8, 17 and 18.
Land rolling 2d rate Soil,

West, on a random line between Sections 7 and 18.
Variation 10° 50' East.
40.00 Set a Rock for temporary quarter Section corner,

76.00 A Ravine (some Pools of water in it) course South,

79.87 Intersected the West Boundary of the Township 8 links South of West corner to Sections 7 and 18. from which corner I run East, on a true line between Sections 7 and 18.

Variation 10° 35' East.

39.87 Set a Limestone Rock 18 in long 10 in wide and 5 in thick for quarter sec corner.

79.87 The corner to Sections 7, 8, 17 and 18.

Land rolling 2nd rate Soil.

Friday Augst. the 7th. 1857.

North, between Sections 7 and 6,

Variation 12° 00' East.

40.00 Set a Limestone Rock 21 in long 16 in wide and 2 in thick for quarter Section corner.

80.00 Set a Red Rock (flint) 18 in

long 10 in wide and 5 in thick for corner to Sections 5, 6, 7 & 8

Land rolling 2nd rate Soil.

East, on a random line between Sections 5 and 6.

Variation 11° 30' East.

40.00 Set a Rock for temporary quarter Section corner,

70.00 A Ravine, course S E.

79.90 Intersected North and South line 20 links North of Rock corner to Sections 4, 5, 8 and 9. from which corner I run West, on a true line between Sections 5 and 6.

Variation 11° 20' East.

39.95 Set a Limestone Rock 20 in long 12 in wide and 2 in thick for quarter sec corner.

79.90 The corner to Sections 5, 6, 7 & 8.

Land rolling 2nd rate Soil.

West, on on a random line between
Sections 6 and 7.

Variation 10°. 30' East.

40.00 Set a Rock for temporary quarter sec corner
79.40 Intersected the West Boundary of the
Township at Rock ~~Rock~~ corner for
Sections 6 and 7. from which cor-
ner I run
East, on a true line between
Sections 6 and 7.

Variation 10° 30' East,

39.40 Set a Quartz Rock 12 in long 8 in
wide and 6 in thick for quarter
Section corner,
79.40 The corner to Sections 5. 6. 7 & 8,
Land rolling 2d rate Soil,

North, on a random line between
Sections 5 and 6.

Variation 12°. 00'. East,

20.00 A Ravine, course S.E.
40.00 Set a Rock for temporary quarter Sec corner,

81.25 Intersected the North Boundary of the
Township 5 links East of Rock
corner to Sections 5 and 6.
from which corner I run
South, on a true line between
Sections 5 and 6.

Variation 12°. 02'. East,

41.25 Set a Limestone Rock 20 in long
11 in wide, and 2 in thick for quar-
ter Section corner,
81.25 The corner to Sections 5. 6. 7 and 8,
Land rolling 2d rate Soil,

Saturday Augt the 8th 1857,

General Description,
This Township has but little
variety in Soil, almost all
of it is good 2d rate Land,
generally pleasantly rolling,
Some small Ledges of Limestone
Rock. (of an inferior Character)

43/117 A List of names

A list of the names of the individuals employed to assist in running, measuring, or marking the lines and corners described in the foregoing field notes of Township No. 1 in North of the Base line of Range No. 3 East of the 6th principal Md., showing the respective capacities in which they acted:

Demetrius T. Colvin, Flagboard,
Quintus A. Colvin, Chainman,
Edward Stephens, Chainman,
Clinton C. Colvin, Axeman,
William Stephens, Axeman,

Comp[illegible]
By Sherrard

The field notes of the Sub-division Lines and corners of Township No. Seven North of the Base Line, of Range number 3 East of the Sixth principal Meridian, in the Territory of Nebraska. Surveyed by George W. Foster, Deputy Surveyor.

Under his contract No. 209 bearing June 8th 1857

Commenced Augst. the 8th 1857, and completed August the 13th 1857.

A list of names

A list of the names of the individuals employed to assist in running, measuring, or marking, the lines and corners described in the following field notes of Township No. 7 North of the Base line, of Range No. 3 East of the 6th Principal Meridian, in the Territory of Nebraska, showing the respective capacities in which they acted;

Quintus A. Colvin, Chainman,
Edward Stephens, Chainman,
Demetrius J. Colvin, Flagheaver,
Columbus C. Colvin, Axman,
William Stephens Axman,

Township 7 N. Range 3 East

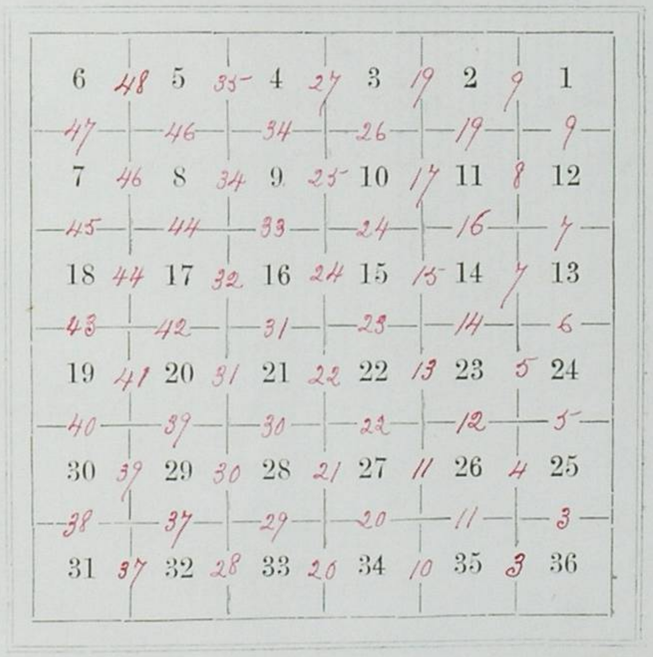

6	48	5	35	4	27	3	19	2	9	1
47		46		34		26		19		9
7	46	8	34	9	25	10	17	11	8	12
45		44		33		24		16		7
18	44	17	32	16	24	15	15	14	7	13
43		42		31		23		14		6
19	41	20	31	21	22	22	13	23	5	24
40		39		30		22		12		5
30	39	29	30	28	21	27	11	26	4	25
38		37		29		20		11		3
31	37	32	28	33	20	34	10	35	3	36

Chains To determine the proper adjustment of my compass for subdividing this Township, I commence at the corner to Township 6 and 7, N. R. 3 and 4 East and run

North, on a blank line along the East Boundary of Section 36.

Variation 12° 00' East.

40 08 To a point 12 links East of the quarter Section corner.

80 06 To a point 33 links East of the corner to Sections 25 and 36.

To retrace this line or run parallel thereto, my compass must be adjusted to a variation of 12° 15' East.

Subdivision commenced August the 8th 1857.—

From the corner to Sections 1, 2, 35 and 36. On the South Boundary of the Township. From

Township 7. N. R 3. E of the 6 pr. m.

Chs	North, between Sections 35 and 36. Variation 12° 15' East,
40.00	Set a Limestone Rock 18 in long 10 in wide and 3 in thick for quarter Section corner,
80.00	Set a Limestone Rock 28 in long 10 in wide and 2½ in thick for corner to Sections 25, 26, 35 and 36. Land rolling 2d rate soil,
	East, on a random line between Sections 25 and 36, Variation 11° 30' East,
40.00	Set a Rock for temporary quarter Section corner,
79.85	Intersected the East Boundary of the Township 70 links North of Rock corner to Sections 25 and 36, from which corner I run West, on a true line between Sections 25 and 36, Variation 11° 00' East,

Township 7. N. R 3. E. of the 6 pr. m.

Chs 39.93	Set a Limestone Rock 16 in long 14 in wide and 2 in thick for quarter Section corner,
79.85	The corner to Sections 25, 26, 35 and 36, Land rolling 2d rate soil,
	North, between Sections 25 and 26, Variation 12° 25' East,
25.00	Left up land and Entered Bottom, bears N. W. and S. E.
40.00	Set a Limestone Rock 17 in long 10 in wide and 3 in thick for quarter Section corner,
68.00	North Fork of Turkey Creek, 40 links wide, runs East, (general course S. E.) (Some Willow Brush)
80.00	Set a Limestone Rock 20 in long 12 in wide and 2½ in thick for corner to Sections 23, 24, 25 and 26, Up land rolling 2d rate soil, Bottom Land 1st rate soil,

Chs East, on a random line between Sections 24 and 25.
Variation 10° 40' East.
40.00 Set a Rock for temporary quarter Section corner,
80.30 Intersected the East Boundary of the Township 50 links South of Rock corner to Sections 24 and 25, from which corner I run West on a true line between Sections 24 and 25.
Variation 11° 01' East,
40.15 Set a Limestone Rock 18 in long, 11 in wide and 3 in thick for quarter Section corner,
80.30 The corner to Sections 23, 24, 25 & 26, Land level 2d rate Soil.

North, between Sections 23 and 24.
Variation 12° 15' East,
20.00 Left Bottom and Entered up land bears N.W. and S.E.

40.00 Set a Limestone Rock 20 in long 12 in wide, and 3 in thick for quarter Section corner,
80.00 Set a Limestone Rock 20 in long 15 in wide and 3 in thick for corner to Sections 13, 14, 23 and 24.
Bottom Level 1st rate Soil,
up Land rolling 2d rate Soil,

August the 8th 1857,

East, on a random line between Sections 13 and 24.
Variation 11° 00' East,
40.00 Set a Limestone Rock for temporary quarter Section corner,
79.40 Intersected the East Boundary of the Township 65 links North of Rock corner to Sections 13 and 24, from which corner I run West, on a true line between Sections 13 and 24.

Township 7 N. R. 3 E. of the 6th

10° 32' E

Chs Variation ~~11° 28'~~ East,

69.70 Set a Limestone Rock 18 in long 10 in wide and 3 in thick for quarter Section corner,

79.40 The corner to Sections 13, 14, 23 & 24, Land gently rolling 2d rate soil,

North, between Sections 13 and 14,

Variation 12° 45' East,

40.00 Set a Limestone Rock 19 in long 9 in wide and 4 in thick for quarter Section corner,

80.00 Set a Limestone Rock 19 in long 14 in wide and 2½ in thick for corner to Sections 11, 12, 13 and 14, Land level 2d rate soil,

East, on a random line between Sections 12 and 13,

Variation 10° 30' East,

40.00 Set a Rock for temporary quarter Section corner,

Township 7 N. R. 3 E.

Chs

80.00 Intersected the East Boundary of the Township 49 links North of Rock corner to Sections 12 and 13, from which corner I run

East, on a true line between Sections 12 and 13,

Variation 10° 05' East,

40.00 Set a Limestone Rock 18 in long 12 in wide and 3 in thick for quarter Section corner,

80.00 The corner to Sections 11, 12, 13 and 14. Land level 2d rate soil,

North, between Sections 11 and 12,

Variation 12° 15' East,

40.00 Set a Limestone Rock 19 in long 11 in wide and 3 in thick for quarter Section corner,

80.00 Set a Limestone Rock 19 in long 13 in wide and 3 in thick for corner to Sections 1, 2, 11 and 12.

Chs

Land level 2d rate soil,

East, on a random line between Sections 1 and 12,
Variation 10° 30' East.

40,00 Set a Rock for temporary quarter Section corner,

80,50 Intersected the East Boundary of the Township at Rock corner for Sections 1 and 12, from which corner I run

West, on a true line between Sections 1 and 12,
Variation 10° 30' East.

40,25 Set a Limestone Rock 17 in long 11 in wide and 4 in thick for quarter Section corner,

80,50 The corner to Sections 1, 2, 11 and 12,
Land gently rolling 2d rate soil,

North, between Sections 1 and 2.
(I set the sights of my instrument

Chs

on the mound from this station at a Variation of 12° East,

40,00 Set a Limestone Rock 17 in long 11 in wide and 3 in thick for quarter Section corner,

79,70 Intersected the North Boundary of the Township at mound corner for Sections 1 and 2,
Land level 2d rate soil,

North, between Sections 34 & 35,
Variation 12° 00' East,

05,00 A Draw course East,

40,00 Set a Limestone Rock 18 in long, 12 in wide and 3 in thick for quarter Section corner,

80,00 Set a Limestone Rock 22 in long 15 in wide and 2½ in thick for corner to Sections 26, 27, 34 and 35,
Land gently rolling 2d rate soil,

Township 7. N. R. 3. E.

Chs	
	East on a random line between Sections 26 and 35.
	Variation 10°. 30' East.
40.00	Set a Rock for temporary quarter Section Corner.
79.50	Intersected North and South line 25 links North of Rock corner to 25. 26. 35 and 36 from which corner I run
	West, on a true line between Sections 26 and 35.
	Variation 10°. 19' East.
39.75	Set a Limestone 17 in long 14 in wide and 2½ in thick for quarter Section corner
79.50	The corner to Sections 26. 27. 34 & 35. Land gently rolling 2d rate Soil.
	North, between Sections 26 and 27.
	Variation 12°. 15' East.
40.00	Set a Limestone Rock 18 in long 13 wide and 3 in for quarter Sec. corner

Township 7. N. R. 3. E.

Chs	
80.00	Set a Limestone 24 in long 12 in wide and 3 in thick for corner to Sections 22. 23. 26 and 27. Land rolling 2d rate Soil.
	East, on a random line between Sections 23 and 26.
	Variation 11°. 00' East.
39.50	A Drag course North.
40.00	Set a Rock for temporary quarter Section corner.
77.00	North fork of Turkey Creek 50 links wide, runs South. (general course South East.)
77.50	Left the Prairie and entered Timber, bears North and South.
79.00	Left Timber, and entered Prairie bears N. W. and S. E.
80.00	Intersected North and South line 50 links North of Rock corner to Sections 23. 24. 25. & 26. from which corner I run

Chs West, on a true line between Sections 23 and 26.

Variation 16°. 35' East.

40.00 Set a Limestone Rock 17 in long, 10 in wide and 3 in thick for quarter Section corner,

80.00 The corner to Sections 22. 23. 26 & 27.

Land level 1st rate Soil.

Timber, Cotton wood Ash & Maple.

North, between Sections 22. and 23.

Variation 12°. 15' East.

40.00 Set a Limestone Rock 25 in long 6 in wide, and 5 in thick for quarter Section corner,

80.00 Set a Limestone Rock 18 in long 12 in wide, and 3 in thick for corner to Sections 14. 15. 22 and 23.

Land rolling 2d rate Soil.

August the 9th 1857.

Chs East, on a random line between Sections 14 and 23.

Variation 11°. 00' East.

05 00 Left up land and entered Bottom bears N. W. and South.

12 50 Left Prairie and entered Timber, bears N. W. and South East.

16 50 North fork of Turkey Creek 40 links wide, runs South.

22 00 Touched a bend of ~~[illegible]~~ same Creek

22 50 left Timber and entered Prairie bears North and South,

40 00 Set a Rock for temporary quarter Section corner,

50 00 Left Bottom and entered up land bears North and South,

79 50 Intersected North and South line 70 links North of Rock corner to Sections 13. 14. 23 and 24. from which corner I run West, on a true line between Sections 14 and 23.

Township 7 N. R. 3 E.

Chs

Variation 10° 30' East

39.75 Set a Limestone Rock 20 in long 12 in wide and 3 in thick for quarter section corner.

79.50 The corner to Sections 14, 15, 22 and 23.
Up Land rolling 2d rate Soil,
Bottom Land 1st rate Soil,
Timber Walnut, Bur Oak and Ash,

North, between Sections 14 and 15,
Variation 12° 15' East,

4.00 Left up Land and entered Bottom bears N.W. and South,

32.00 Touched a bend of the North fork of Turkey Creek,

40.00 Set a Limestone Rock 18 in long 12 in wide and 4 in thick for quarter Section corner from which A Cotton Wood 24 in dia. bears South 68 links dist no other tree convenient to mark,

48.00 Left Prairie and entered Timber, bears N.W. and South East,

Township 7 N. R. 3 E.

Chs

51.00 A Creek 25 links wide runs East,

52.00 ~~That~~ Same Creek 22 links wide, runs South West,

56.00 ~~That~~ Same Creek 20 links wide, runs South East,

67.50 Touched a bend of the North fork of Turkey Creek,

70.00 Left Timber and entered Prairie, bears N.E. and S.W.

80.00 Set a Limestone Rock 24 in long 14 in wide and 4 in thick for corner to Sections 10, 11, 14 and 15.
Land Level 1st rate Soil,
Timber Walnut, Bur Oak, Elm, Cotton Wood and Maple,

East, on a random line between Sections 11 and 14.
Variation 10° 30' East.

9.50 Left Prairie and entered Timber bears North East and S.W.

13.50 North fork of Turkey Creek.

Township 7. N. R. 3. E.

Chs	
	40 links wide runs South West.
14.50	Left Timber and entered Prairie bears North and South.
16.00	Left Bottom and entered upland bears North and South.
40.00	Set a Stake for temporary quarter sec. corner.
80.60	Intersected North and South line 30 links South of Rock corner to Sections 11, 12, 13 and 14, from which corner I run West, on a true line between Sections 11 and 14.
	Variation 10° 43' East.
40.30	Set a Limestone Rock 20 in long 10 in wide and 3 in thick for quarter Section corner.
80.60	The corner to Sections 10, 11, 14 and 15. Up Land rolling 2d rate soil. Bottom 1st rate soil. Timber Elm, Hickory, Walnut and Black Ash.

North, between Sections 10 and 11.

Township 7. N. R. 3. E.

Chs	
	Variation 11° 15' East.
04.50	Left Prairie and entered Timber bears East and West.
08.50	North fork of Turkey Creek 40 links wide runs East.
12.00	~~That~~ Same Creek 35 links wide runs West.
28.00	~~That~~ Same Creek 50 links wide runs South East.
30.50	Left Timber and entered upland Prairie bears N. W. and East.
40.00	Set a Limestone Rock 18 in long 12 in wide and 3 in thick for quarter Section corner, from which. A Bur oak 16 in dia bears S. 34° West 37 links distant. A Bur oak 24 in dia bears N 35° E. 45 links distant.
80.00	Set a Limestone Rock 20 in long 10 in wide and 4 in thick for corner to Sections 2, 3, 10 and 11. Up land broken 3d rate soil.

Township 2 N. R. 3. East.

Chs

Bottom 1st rate soil.
Timber Beech, Walnut, Elm & Maple.

East, on a random line between Sections 2 and 11.
Variation 10° 30' East.

40.00 Set a Rock for temporary quarter sec. corner.
80.10 Intersected North and South line 16 links South of Rock corner to Sections 1, 2, 11 and 12. From which corner I run West, on a true line between 2 and 11.
— Variation 10° 34' East.
40.05 Set a limestone Rock 21 in. long 11 in. wide and 3 in. thick for quarter section corner.
80.10 The corner to Sections 2, 3, 10 and 11.
Land rolling 2nd rate soil.

North, between Sections 2 and 3.
(I set my instrument on the mound corner to Sections 2 and 3 being in plain view) to a variation of 11°.06 East.

Township 2 N. R. 3. East.

Chs

40.00 Set a limestone Rock 15 in. long 12 in. wide and 3 in. thick for quarter section corner.
80.03 Intersected the North boundary of the Township at mound corner to Sections 2 and 3.
Land gently rolling 2nd rate soil.

North, between Sections 33 and 34.
Variation 12° 15' East.

40.00 Set a limestone Rock 15 in. long 12 in. wide and 4 in. thick for quarter section corner.
50.00 A Grave, course South East.
80.00 Set a limestone Rock 20 in. long 15 in. wide and 3 in. thick for corner to Sections 27, 28, 33 and 34.
Prairie rolling 2nd rate soil.

East, on a random line between Sections 27 and 34.
Variation 10° 30' East.

Township 7 N. R. 3 E.

Chs	
40.00	Set a Rock for temporary quarter section corner,
80.60	Intersected North and South line 16 links North of Rock corner to sections 26.27.34 and 35. from which corner I run West, on a true line between sections 27 & 34,
	Variation 10° 23' East,
40.30	Set a Limestone Rock 18 in long 14 in wide and 3 in thick for quarter section corner,
80.60	The corner to sections 27.28.33 and 34. Prairie rolling 2d rate soil,

North, between sections 27 and 28,

Variation 12° 15' East,

40.00	Set a Limestone Rock 17 in long 10 in wide and 3 in thick for quarter section corner,
80.00	Set a Limestone Rock 20 in long 14 in wide and 2 in thick for corner to sections 21.22.27 and 28. Prairie rolling 2d rate soil.

Township 7 N. R. 3 E.

Chs	
	East, on a random line between sections 22 and 27,
	Variation 10° 30' East,
40.00	Set a Rock for temporary quarter section corner,
80.54	Intersected North and South line 38 links North of Rock corner to sections 22.23.26 and 27 from which corner I run West, on a true line between sections 22 and 27,
	Variation 10° 14' East,
40.27	Set a Limestone Rock 18 in long 12 in wide and 2½ in thick for quarter section corner,
80.54	The corner to sections 21.22.27 & 28. Prairie rolling 2d rate soil.

North, between sections 21 and 22

Variation 11° 30' East.

40.00	Set a Limestone Rock 19 in long 11 in wide and 4 in thick for quarter

Township 7 N. R. 3 E

Chs	
	Section corner,
80.00	Set a Limestone Rock 20 in long 15 in wide and 2½ in thick for corner to Sections 15, 16, 21 and 22. Prairie rolling 2d rate Soil.
	East, on a random line between Sections 15 and 22. "
	Variation 10° 30' East
40.00	Set a Rock for temporary quarter Section corner,
79.85	Intersected North and South line 30 links North of Rock corner to Sections 14, 15, 22 and 23, from which corner I run
	West, on a true line between Sections 15 and 22.
	Variation 10° 17' East.
39.93	Set a Limestone Rock 18 in long 12 in wide and 3 in thick for quarter Section corner,
79.85	The corner to Sections 15, 16, 21 & 22.

Township 7 N. R. 3 E

Chs	
	Prairie broken 3d rate Soil.

August the 10th 1857.

	North, between Sections 15 and 16,
	Variation 11° 30' East.
40.00	Set a Limestone Rock 18 in long 12 in wide and 3 in thick for quarter Section corner,
70.00	Left up land and entered Bottom bears N W and East,
80.00	Set a Limestone Rock 24 in long 12 in wide and 4 in thick for corner to Sections 9, 10, 15 and 16. Up land rolling 2d rate Soil. Bottom 1st rate Soil.
	East, on a random line between Sections 10 and 15.
	Variation 10° 15' East.
28.00	A Creek 25 links wide runs S.E. (Some Plum Brush and Hazzle)

Township 7 N. R. 3 E.

Chs	
40.00	Set a Rock for temporary quarter Section corner
79.40	Intersected North and South line 14 links North of Rock corner to Sections 10, 11, 14 and 15. from which Corner I run
	West on a true line between Sections 10 and 15.
	Variation 10° 09' East,
39.70	Set a Limestone Rock 19 in long 11 in wide and 4 in thick for quarter Section corner,
79.40	The corner to Sections 9, 10, 15 and 16, Land Level 1st rate Soil,
	North, between Sections 9 and 10.
	Variation 11° 30' East,
14.00	A Creek (fringed with Timber) 28 links wide runs East,
40.00	Set a Limestone Rock 18 in long 11 in wide and 3 in thick for quarter Section corner.
80.00	Set a Limestone Rock 19 in long 15 in wide and 3 in thick for corner

Township 7 N. R. 3 E.

Chs	
	to Sections 3, 4, 9 and 10.
	Bottom level 1st rate Soil,
	East, on a random line between Sections 3 and 10,
	Variation 10° 00' East,
06.00	North Fork of Turkey Creek 40 links wide runs South,
06.40	Left Creek and entered Timber bears North and South,
09.00	North Fork of Turkey 35 links wide runs North East,
11.00	~~That~~ Same Creek 40 links wide runs South East,
19.00	~~That~~ Same Creek, 40 links wide runs N.E.
34.00	~~That~~ Same Creek, 50 links wide runs South East, At this point left Timber and entered upLand Bairie, bears N.W. & S.E.
40.00	Set a Rock for temporary quarter Section corner.

Township 7 N. R. 3 E.

Chs	
79.68	Intersected North and South line 15 links South of Rock corner to Sections 2, 3, 10 and 11, from which corner I run West, on a true line between Sections 3 and 10.
	Variation 10° 06' East.
39.80	Set a Limestone Rock 19 in long 13 in wide and 4 in thick for quarter Section corner,
79.68	The corner to Sections 3, 4, 9 and 10. Up Land broken 3d rate Soil. Bottom land 1st class Soil, Timber Box Elder, Cotton Wood and Maple,

North, and random line between Sections 3 and 4,

Variation 11° 00' East,

9.00	North Fork of Turkey Creek 50 links wide runs South East, (Some Willow and Plum Bushes)

Township 7 N. R. 3 E.

Chs	
40.00	Set a Rock for temporary quarter Section corner,
41.00	Left Bottom and entered upland bears East and West,
79.80	Intersected the North Boundary of the Township at mound corner for Sections 3 and 4, from which corner I run South, on a true line between Sections 3 and 4.
	Variation 11° 00' East,
39.80	Set a Limestone Rock 21 in long 11 in wide and 2½ in thick for quarter Section corner,
79.80	The corner to Sections 3, 4, 9 and 10. Upland rolling 2d rate Soil, Bottom 1st rate Soil,

North, between Sections 32 and 33.

Variation 11° 20' East.

40.00	Set a Limestone Rock 17 in long 10 in wide and 3 in thick for quarter Sec corner,

Chs

80.00 Set a Limestone Rock 25 in long 22 in wide and 3½ in thick for corner to Sections 28, 29, 32 and 33. Drain rolling 2nd rate soil.

East, on a random line between Sections 28 and 33.

Variation 10°. 30' East.

40.00 Set a Rock for temporary quarter Section corner.

68.00 A Draw. course South East.

77.70 Intersected North and South line 70 links North of Rock corner to Sections 27, 28, 33 and 34. from which corner I run

West, on a true line between Sections 28 and 33.

Variation 10°. 00' East.

39.85 Set a Limestone Rock 22 in long 9 in wide and 3 in thick for quarter Section corner.

72.70 The corner to Sections 28, 29, 32 and 33.

Chs

Drain bottom 2nd rate soil.

North, between Sections 28 and 29.

Variation 11°. 30' East.

40.00 Set a Limestone Rock 18 in long 10 in wide and 3 in thick for quarter Section corner.

80.00 Set a Limestone Rock 24 in long 20 in wide and 3 in thick for corner to Sections 20, 21, 28 and 29. Drain rolling 2nd rate soil.

East, on a random line between Sections 21 and 28.

Variation 11°. 15' East.

40.00 Set a Rock for temporary quarter Section corner.

77.30 Intersected North and South line 57 links North of Rock corner to Sections 21, 22, 27 and 28. from which corner I run

West on a true line between

Township 7 N. R. 3. E

Chs

Sections 21 and 28.

Variation 9° 50' East.

[illegible].65 Set a Limestone Rock 17 in long, 11 in wide, and 3 in thick for quarter Section corner,

[illegible].30 The corner to Sections 20, 21, 28, and 29.
Prairie rolling 2d rate Soil.

North, between Sections 20 and 21.

Variation 12° 00' East.

40.00 Set a Limestone Rock 18 in long, 11 in wide and 5 in thick for quarter Section corner,

80.00 Set a Limestone Rock 20 in long, 14 in wide and 3 in thick for corner to Sections 16, 17, 20 and 21.
Prairie broken 3d rate Soil,

East, on a random line between Sections 16 and 21.

Variation 10° 00' East.

40.00 Set a Rock for temporary quarter

Township 7 N. R. 3. E.

Chs

Section corner,

80.40 Intersected North and South line at Rock corner to Sections 15, 16, 21 and 22, from which corner from West, on a true line between Sections 16 and 21.

Variation 10° 00' East.

40.20 Set a Limestone Rock 17 in long, 13 in wide, and 3 in thick for quarter Section corner.

80.40 The corner to Sections 16, 17, 20 & 21.
Prairie 3d rate Soil.

August the 11th 1857.

North, between Sections 16 and 17.

Variation 11° 30' East.

40.00 Set a Limestone Rock 19 in long 10 in wide and 3 in thick for quarter Section corner,

56.00 A Creek 20 links wide runs North East.

Township 7 N. R. 3 E

Chs

60.00 ~~That~~ Same Creek 24 links wide runs N.W.

64.00 ~~That~~ Same Creek 20 links wide runs North East,

80.00 Set a Granite Rock 18 in long 8 in wide and 8 in thick for corner to Sections 8. 9. 16 and 17.
Land rolling 2d rate soil.

East on a random line between Sections 9 and 16.
Variation 10°.15'. East.

08.50 A Creek (fringed with timber) 20 links wide North East,

13.00 Touched a bend of ~~that~~ same Creek,

40.00 Set a Rock for temporary quarter Section corner,

80.50 Intersected North and South line 35 links South of Rock corner for Sections 9. 10. 15 and 16, from which corner I run
West on a true line between

Township 7 N. R. 3 E.

Chs

Sections 9 and 16.
Variation 10°.30'. East,

40.25 Set a Limestone Rock 20 in long, 12 in wide and 3 in thick for quarter Section corner,

80.50 The corner to Sections 8. 9. 16 & 17.
Land level 1st rate soil,

North, between Sections 8 and 9.
Variation 11°.00'. East,

40.00 Set a Limestone Rock 14 in long, 12 in wide and 6 in thick for quarter Section corner,

80.00 Set a Limestone Rock 20 in long 12 in wide and 3 in thick for corner to Sections 4. 5. 8 and 9.
Prairie rolling 2d rate soil,

East, on a random line between Sections 4 and 9.
Variation 10°.30' East,

30.00 Left Ryes land and entered Bottom

Township 2 N. R. 3 E.

Chs	
	bears North and S. E.
40.00	Set a Rock for temporary quarter Section corner,
65.00	North Fork of Turkey Creek 40 links wide, runs South East;
72.00	~~That~~ Same Creek (fringed with Timber) 50 links wide runs N. E.
80.10	Intersected North and South line 15 links South of Rock corner to Sections 3, 4, 9 and 10. from which corner I run ~~W~~ West, on a true line between Sections 4 and 9,
	Variation 10° 36' East,
40.05	Set a Limestone Rock 21 in long 10 in wide, and 3 in thick for quarter Section corner,
80.10	The corner to Sections 4, 5, 8 and 9, Level lead 1st rate Soil;

North, on a random line between Sections 4 and 5,

Township 2 N. R. 3 E.

Chs	
	Variation 11° 00' East
05.00	Left up Land and entered Bottom N. W. and South East,
40.00	Set a Rock for temporary quarter Section corner,
41.00	North Fork of Turkey Creek 50 links wide runs South East, and entered Timber bears N. W. & S. E.
44.50	~~That~~ Same Creek 40 links wide runs South West,
50.50	~~That~~ Same Creek, 45 links wide runs South East,
54.00	Left Timber, and entered Land Prairie bears S. E. & W.
80.50	Intersected the North Boundary of the Township 70 links ~~W~~ East, of Mound corner to Sections 4 and 5 from which corner I run South, on a true line between Sections 4 and 5.
	Variation 11° 30' East,
40.50	Set a Limestone Rock 19 in long

Township 2 N. R. 3 E.

Chs	12 in wide, and 5 in thick for quarter Section corner.
80.50	The corner to Sections 4, 5, 8 and 9, Upland broken 3d rate Soil, Bottom 1st rate Soil,
	North, between Sections 31 and 32, Variation 12° 00' East,
40.00	Set a Red Rock 16 in long 10 in wide and 6 in thick for quarter Sec corner,
80.00	Set a Granite Rock 18 in long, 18 in wide and 8 in thick for corner to Sections 29, 30, 31 and 32. Prairie rolling 2d rate Soil,
	East, on a random line between Sections 29 and 32, Variation 10° 00' East,
40.00	Set a Rock for temporary quarter Section corner,
80.35	Intersected North and South line 13 links North of Rock corner to Sections

Township 2 N. R. 3 E.

Chs	28, 29, 32 and 33, from which corner I run West, on a true line between Sections 29 and 32, Variation 9° 54' East,
40.17	Set a Limestone Rock 18 in long, 10 in wide, and 3 in thick for quarter Section corner,
80.35	The corner to Sections 29, 30, 31 & 32, Prairie rolling 2d rate Soil,
	West, on a random line between Sections 30 and 31, — Variation 10° 00' East,
40.00	Set a Limestone Rock for temporary quarter Section corner,
78.20	Intersected the West Boundary of the Township 31 links North of Rock corner to Sections 30 and 31, from which corner I run East, on a true line between Sections 30 and 31,

Variation ~~1° 41'~~ 10° 13' East.

38.20 Set a Red Rock 14 in long, 9 in wide and 6 in thick for quarter Sec corner.

78.20 The corner to Sections 29. 30. 31 and 32. Prairie rolling 2d rate Soil.

North between Sections 29 and 30.

Variation 11° 40' East.

40.00 Set a Granite Rock 15 in long, 9 in wide and 6 in thick for quarter Sec corner.

80.00 Set a Red Rock 18 in long, 10 in wide and 6 in thick for corner to Sections 19, 20, 29 and 30. Prairie rolling 2d rate Soil.

East, on a random line between Sections 20 and 29.

Variation 10° 00' East.

40.00 Set a Rock for temporary quarter Section corner.

80.10 Intersected North and South line 40 links North of Rock corner to

Sections 20. 21. 28 and 29. from which corner I run

West, on a true line between Sections 20 and 29.

Variation 9° 43' East.

40.05 Set a Granite Rock 14 in long 8 in wide and 6 in thick for quarter Section corner.

80.10 The corner to Sections 19. 20. 29 & 30. Prairie rolling 2d rate Soil.

West, on a random line between Sections 19 and 30.

Variation 10° 00' East.

40.00 Set a Rock for temporary quarter Section corner.

78.00 Intersected the West Boundary of the Township 24 links North of Mound corner to Sections 19 and 30. from which corner I run

East, on a true line between

Chs Sections 19 and 30.
Variation 10°.10' East.
38,00 Set a Limestone Rock 19 in long 12 in wide and 3 in thick for quarter Sec corner,
78,00 The corner to Sections 19, 20, 29 and 30.
Land broken 3d rate Soil.

August the 12th A D 1857.

North, between Sections 19. and 20.
Variation 11° 30' East.
40,00 Set a Granite Rock 12 in long 10 in wide and 5 in thick for quarter Section corner { for corner to Sections 17, 18, 19 and 20.
80,00 The true point, lying under the Bank of a Creek, I set a Limestone Rock 50 links East of Said true point, 20 in long 10 in wide and 3 in thick for witness corner, from which an Elm, 15 in dia bears South 66° W. 54 links distant marked B. T. to W. C.

Chs (bearing tree to witness corner)
no other Tree convenient to mark,
Land rolling 2d rate Soil.

From true Point for corner to Secs 17, 18, 19 & 20 I run
East, on a random line between Sections 17 and 20.
Variation 10°.00' East.
07 50 I Draw course North,
19 00 Touched a Point of Timber, Lying on the North of Line,
30 00 I Draw bears North with a few Scattering Trees on it.
40 00 Set a Rock for temporary quarter Section corner,
80 50 Intersected North and South line at Rock corner to Sections 16, 17, 20 and 21. from which corner I run
West on a true line between Sections 17 and 20.
Variation 10°.00' East.
40 25 Set a Granite Rock 11 in long 9 in wide and 6 in thick for quarter Sec corner,

80.50 The corner to Sections 17. 18. 19 and 20. Land broken 3d rate Soil.

From the true point for corner to Sections 17. 18 & 19 and 20. Run West, on a random line between Sections 18 and 19.

Variation 10°. 00' East.

0.00 A Creek 20 links wide runs N. E.
15.00 Same Creek (fringed with Timber) runs South East, (22 links wide)
10.00 Same Creek 25 links wide runs North East,
40.00 Set a Rock for temporary quarter Section corner,
77.50 Intersected the West Boundary of the Township at mound corner for Sections 18 and 19, from which corner Run East, on a true line between Sections 18 and 19.

Variation 10°. 00' East.

37.50 Set a Red Rock 12 in long 10 in wide and 5 in thick for quarter Sec corner.
77.50 The corner to Sections 17. 18. 19 and 20. Land broken 3d class Soil.

From the true point for corner to Sections 17. 18. 19 and 20. Run North, between Sections 19 and 18.

Variation 11°. 30' East.

0.00 A Creek (fringed with Timber) 25 links wide, runs East,
40.00 Set a Granite Rock 11 in long, 8 in wide and 5 in thick for quarter Section corner,
80.00 Set a Red Flint Rock 17 in long 12 in wide and 10 in thick for corner to Sections 7. 8. 17 and 18, Prairie rolling 2d class Soil.

Former

East, on a random line between Sections 8 and 17.

Variation 10°. 00' East.

Township 7 N. R. 3 East.

Chs	
40,00	Set a Rock for temporary quarter Section corner.
80,00	Intersected North, and South line at Rock corner for Sections 8, 9, 16 and 17. From which corner I run West, on a true line between Sec 8 & 17. Variation 10° 00' East.
40,00	Set a Red flint Rock 10 in long 8 in wide and 6 in thick for quarter Sec corner.
80,00	The corner to Sections 7, 8, 17 and 18. Sand rolling 2d class Soil.

West, on a random line between Sections 7 and 18,

Variation 10° 00' East.

40,00	Set a Rock for temporary quarter Section corner,
77.85	Intersected the West Boundary of the Township 10 links South of mound corner to Sections 7 and 18 from which corner I run East, on a true line between

Township 7 N. R. 3 East.

Chs	
	Sections 7 and 18, Variation 09° 56' East.
37 85	Set a Limestone Rock 18 in long 10 in wide and 3 in thick for quarter Sec corner
77 85	The corner to Sections 7, 8, 17 and 18. Prairie rolling 2d class Soil,

North, between Sections 7 and 8,

Variation 11° 30' East.

40 00	Set a Limestone Rock 16 in long 12 in wide and 3 in thick for quarter Section corner,
80 00	Set a Limestone Rock 20 in long 13 in wide and 3 in thick for corner to Sections 5, 6, 7 and 8. Sand rolling 2d class Soil.

East, on a random line between Sections 5 and 8,

Variation 10° 00' East.

40 00	Set a Rock for temporary quarter Section corner.

Township 2 N. R 3 East

Chs	
80.25	Intersected North and South line 20 links North of Rock corner to Sections 4, 5, 8 and 9. from which corner I run West, on a true line between Sec 5 & 8,
	Variation 9° 51' East,
40.12	Set a Limestone Rock 18 in long 12 in wide and 2½ in thick for quarter Sec corner,
80.25	The corner to Sections 5, 6, 7 and 8, Prairie rolling 2d rate soil.
	West, on a random line between Sections 6 and 7.
	Variation 10° 00' East,
40.00	Set a Rock for temporary quarter Section corner,
77.85	Intersected the West Boundary of the Township 5 links South of Mound corner to Sections 6 and 7. from which corner I run East, on a true line between Sections 6 and 7.
	Variation 9° 58' East

Township 2 N. R 3 East

Chs	
37.85	Set a Limestone Rock 17 in long 10 in wide and 3 in thick for quarter Sec corner,
77.85	The corner to Sections 5, 6, 7 and 8, Prairie rolling 2d rate soil.
	North, on a random line between Sections 5 and 6.
	Variation 11° 30' East,
20.00	Left up land and entered Bottom bears N.W. and South, East,
40.00	Set a Rock for temporary quarter Section corner,
64.00	North fork of Turkey Creek 40 links wide, runs East (a few scattering Cotton Woods and Willows)
80.06	Intersected the North Boundary of the Township 25 links East of Mound corner to Sections 5 and 6 from which corner I run South, on a true line between Sections 5 and 6.
	Variation 11° 41' East,

Township 7. N. R. 3. East.

Chs	
40.06	Set a Limestone Rock 18 in long 12 in wide and 3 in thick for quarter Section corner
80.06	The corner to Sections 5, 6, 7 and 8. Land level 1st rate Soil.

August the 13th 1857.

General Description.

The quality of the land in this Township is very good, the upland is high, and generally gently rolling, good 2d class soil, - The Bottom land is first rate soil, sufficiently mixed with sand, to make it pleasant to cultivate,

The North Fork of Turkey Creek, is a beautiful stream, of clear water, rapid current. Rock Bottom in many places -

Timber, is not good. chiefly cotton Wood, Maple and Willow, Some Bur-
oak and Walnut

List of Names.

A list of the names of the individuals employed to assist in running, measuring, or marking the lines and corners described in the foregoing field notes of Township No 7. North of the Base line of Range No 3. East of the 6th Principal Meridian, Showing the respective capacities in which they acted;

Demetrius T. Colvin, Flagbearer,
Quintus A Colvin, Chainman,
Edward Stephens, Chainman,
Columbus C. Colvin, Axeman,
William Stephens, Axeman,

By Sherrard

The field notes of the Subdivision lines and corners of Township No. Eight North of the Base line, of Range no 3. East of the 6th Principal Meridian, in the Territory of Nebraska,

Surveyed by George W. Foster, Deputy Surveyor. Under his contract No. 209 Dated June 8 57.

Commenced August the 14th and compled August the 18th A.D. 1857.

A list of names.

A list of the names of the indian[illegible] employed to assist in running, measuring, & marking the lines and corners described in the following field notes of Township number Eight North of the Base line of Range number 3 East of the 6th Principal Meridian, in the Territory of Nebraska.
Showing the respective capacities in which they acted:

Quintus A. Colvin, Chainman,
Edward Stephens, Chainman,
Demetrius D. Colvin, Flagman,
Cornelius Colvin, Axman,
William Stephens, Axman,

Township 8 N. Range 3 East

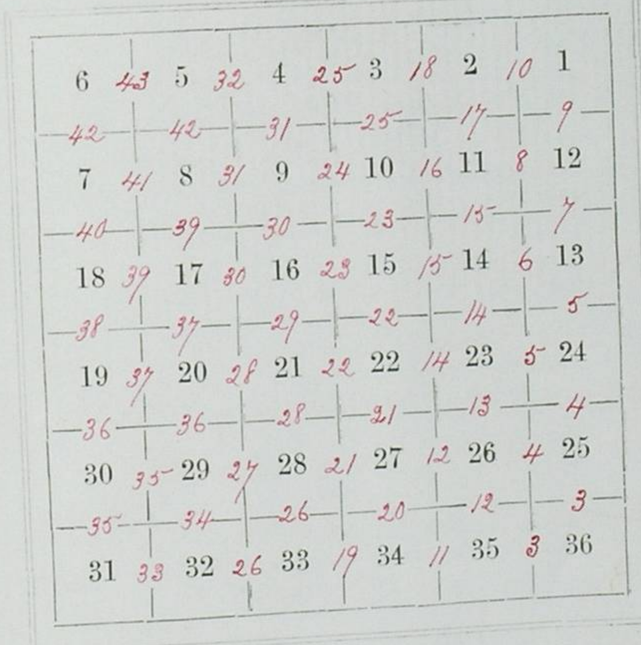

Field notes of the Subdivision lines and corners of Township no. 8 N. of R. 3 E of the 6th p.m. Md.

Chains To determine the proper adjustment of my compass for subdiving this Township, I commence at the corner to Townships 7 and 8 N R 3 and 4 E and run

North, on a blank line along the East Boundary of Section 36,

Variation 12° 00' East.

40 00 To a point 3 links East of the quarter Section corner,

80 07 The corner to Sections ~~Sections~~ 25 & 36,

To retrace this line or run parallel thereto, my compass must be adjusted to a variation of 12° 00' East,

Subdivision commenced August the 14th 1857.

From the corner to Sections 1, 2, 35, and 36, on the South Boundary

Township 8 N. R. 3 E.

Of the Township, I run
North, between Sections 35 and 36,
Variation 12° 00' East,

40.00 Set a Limestone Rock 21 in long 12 in wide and 3 in thick for quarter Sec corner,

80.00 Set a Limestone Rock 22 in long, 14 in wide and 3 in thick for corner to Sections 25, 26, 35 and 36,
Land live Soil 2d rate,

East on a random line between Sections 25 and 36,
Variation 10° 00' East,

40.00 Set a Rock for temporary quarter Sec corner

80.10 Intersected the East Boundary of the Township 25 links South of mound corner to Sections ~~corner~~ 25 and 36.
from which corner I run
West, on a true line between Sections 25 and 36,
Variation 10° 11' East,

Township 8 N. R. 3 East,

40.05 Set a Limestone Rock 18 in long 12 in wide and 3 in thick for quarter Section corner,

80.10 The corner to Sections 25, 26, 35 and 36,
Land rolling 2d rate Soil.

North, between Sections 25 and 26.
Variation 12° 00' East,

40.00 Set a Limestone Rock 20 in long 12 in wide and 3 in thick for quarter Sec corner

80.00 Set a Limestone Rock 23 in long, 14 in wide and 3 in thick for corner to Sections 23, 24, 25 and 26,
Land rolling 2d rate Soil,

East, on a random line between Sections 24 and 25,
Variation 10° 00' East,

40.00 Set a Rock for temporary quarter Section corner,

80.37 Intersected the East Boundary of the Township 70 links South

Township 8 N. R. 3 East

Chs Of mound corner to Sections 24 and 25; from which corner I run West, on a true line between Sections 24 and 25.

Variation, 10° 30' East.

40.19 Set a Limestone Rock 20 in long, 10 in wide, and 3 in thick for quarter sec corner.

80.37 The corner to Sections 23, 24, 25 and 26. Land rolling 2d rate Soil.

North, between Sections 23 and 24.

Variation 11° 30' East.

40.00 Set a Limestone Rock 20 in long, 15 in wide and 3 in thick for quarter sec corner.

80.00 Set a Limestone Rock 24 in long 15 in wide and 3 in thick for corner to Sections 13, 14, 23, and 24.

Prairie rolling 2d rate Soil.

East on a random line between Sections 13 and 24.

Variation 10° 30' East.

Township 8 N. R. 3 East.

Chs

40.00 Set a Rock for temporary quarter Section corner.

80.35 Intersected the East Boundary of the Township at mound corner to Section 13 and 24. from which corner I run West, on a true line between Sections 13 and 24.

Variation 10° 30' East.

40.17 Set a Limestone Rock 19 in long, 14 in wide thick and 3 in thick for quarter Section corner.

80.35 The corner to Sections 13, 14, 23 & 24. Land gently rolling 2d rate Soil.

North, between Sections 13 and 14.

Variation 11° 30' East.

40.00 Set a Limestone Rock 19 in long 13 in wide and 3 in thick for quarter Section corner.

80.00 Set a Limestone Rock 21 in long 11 in wide and 4 in thick.

Township 8 N. R. 3 E.

Chs

For corner to Sections 11, 12, 13 and 14.
Land gently rolling 2d rate Soil.

East, on a random line between Sections 12 and 13.

Variation 10° 30' East.

40.00 Set a Rock for temporary quarter Section corner.

79.85 Intersected the East Boundary of the Township at mound corner for Sections 12 and 13. from which corner I run

West, on a true line between Sections 12 and 13.

Variation 10° 30' East.

39.93 Set a Limestone Rock 18 in long 10 in wide and 3 in thick for quarter Section corner.

79.85 The corner to Sections 11, 12, 13 and 14.
Land rolling 2d rate Soil.

Township 8 N. R. 3 East.

Chs North, between Sections 11 and 12.

Variation 11° 40' East.

27.00 Left upland, and entered Bottom bears E & W.

40.00 Set a Limestone Rock 21 in long 11 in wide and 3 in thick for quarter Section corner.

47.00 A Stream 70 links wide (Some few Willow Trees) runs East.

65.00 ~~[illegible]~~ Same Stream 80 links wide, runs North West, and entered Timber, bears N W, and S East.

77.00 ~~[illegible]~~ Same Stream 100 links wide runs North East.

78.50 Left Timber and entered Prairie, bears N E and S W.

80.00 Set a Limestone Rock 24 in long 18 in wide and 4 in thick for corner to Sections 1, 2, 11 and 12.

Upland rolling 2d rate Soil.

Bottom 1d rate Soil.

Timber Black Ash, Elm, and Cotton Wood.

Township 8 N. R. 3. E

Chs East, on a random line between Sections 1 and 12.

Variation 10° 30' East,

4.00 A Stream 90 links wide, runs N. E. (Some 4 or 5 maple Trees)

11.00 ~~That~~ Same Stream, 100 links wide runs South East. (4 or 5 cotton Woods)

25.00 ~~That~~ Same Stream, 90 links wide runs North East,

30.00 ~~That~~ Same Stream 65 links wide runs South East,

40.00 Set a Rock for temporary quarter sec corner,

50.00 ~~That~~ Same Stream 80 links wide runs N. East,

60.00 ~~That~~ Same Stream 70 links wide runs S. E. (Some Willow Bushes)

63.00 Line enters ~~That~~ Same Stream,

68.00 Line left ~~That~~ Same Stream on left Bank

75.00 Touched a bend of ~~That~~ Same Stream,

80.00 Intersected the East Boundary of the Township 20 links North of mine

Township 8 N. R. 3. East,

Chs Corner to Sections 1 and 12 from which corner I run

West on a true line between Sections 1 and 12.

Variation 10° 21' East,

40.00 Set a Limestone Rock 20 in long 10 in wide and 3 in thick for quarter sec corner,

80.00 The corner to Sections 1, 2, 11 and 12, (This small quantity of Timber on, and near this line is Elm, Maple, cotton Wood, and Black Ash.

Undergrowth Same and Willow,

North, on a true line between Sections 1 and 2,

Variation 11° 00' East,

05.00 A Spring run 6 links wide runs South East,

40.00 Set a Limestone Rock 19 in long 13 in wide and 3 in thick for quarter Section corner

Township 8 N. R. 3 E

Chs

77.00 Left Bottom, and enter up land bears E.N.

82.60 Intersected the 2d Standard Parallel North, the North Boundary of the Township 7.71 Chains West of Morrow corner to Sections 35 and 36.
At which point I set a Limestone Rock 22 in long, 14 in wide and 4 in thick for corner to Sections 1 and 2,
Land level 1st rate Soil,

August the 24th 1857.

North, between Sections 34 and 35.
Variation 11° 30' East,

40.00 Set a Limestone 17 in long 11 in wide, and 3 in thick for quarter Section corner,

80.00 Set a Limestone Rock 19 in long 12 in wide and 3 in thick for corner to Sections 26, 27, 34 and 35,
Land gently rolling, 2d rate Soil,

Township 8 N. R. 3 E

Chs East, on a random line between Sections 26 and 35,
Variation 10° 00' East,

40.00 Set a Rock for temporary quarter Section corner,

75.80 Intersected North and South line at Rock corner for Sections 25, 26, 35 and 36, from which ~~Land rolling 2d rate Soil,~~ corner I run
West, on a true line between Sections 26 and 35,
Variation 10° 00' East,

39.90 Set a Limestone Rock 17 in long, 12 in wide and 3 in thick for quarter Sec corner,

79.80 The corner to Sections 26, 27, 34 & 35,
Land rolling 2d rate Soil,

North, between Sections 26 and 27,
Variation 11° 30' East,

40.00 Set a Limestone Rock 18 in long 11 in wide and 3 in thick for

13

80.00

Township 8. N. R. 3. East.

Set a Limestone Rock 20 in long 13 in wide and 3 in thick for corner to Sections 22, 23, 26, and 27.
Land level 2d rate Soil.

East, on a random line between Sections 23 and 26.
Variation 10°.00' East.

40.00 Set a Rock for temporary quarter Section corner.

80.25 Intersected North and South line 50 links North of Rock corner to Sections 23, 24, 25 and 26, from which corner I run
West, on a true line between Sections 23 and 26.
Variation 9°.35' East.

40.13 Set a Limestone Rock 17 in long, 12 in wide and 3 in thick for quarter Section corner.

80.25 The corner to Sections 22, 23, 26 and 27.
Land gently rolling 2d rate Soil.

Township 8. N. R. 3. East.

Cl. North, between Sections 22 and 23.
Variation 11°.15' East.

40.00 Set a Limestone Rock 19 in long 11 in wide and 3 in thick for quarter Section corner.

80.00 Set a Limestone Rock 21 in long, 13 in wide and 3 in thick for corner to Sections 14, 15, 22, and 23.
Land gently rolling 2d rate Soil.

East, on a random line between Sections 14 and 23.
Variation 10°.00' East.

40.00 Set a Rock for temporary quarter Section corner.

79.88 Intersected North and South line 12 links North of Rock corner to Sections 13, 14, 23 and 24, from which corner I run
West, on a true line between Sections 14 and 23.
Variation 9°.55' East.

Township 8 N. R. 3 East.

Chs

39.94 Set a Limestone Rock 19 in long, 11 in wide and 3 in thick for quarter section corner,

79.88 The corner to Sections 14, 15, 22 and 23. Land gently rolling 2d rate Soil.

North, between Sections 14 and 15.

Variation 11°.30' East.

40,00 Set a Limestone Rock 20 in long, 12 in wide and 3 in thick for quarter sec corner,

80,00 Set a Limestone Rock 27 in long 6 in wide and 6 thick for corner to Sections 10, 11, 14 and 15.

Land gently rolling 2d rate Soil.

East, on a random line between Sections 11 and 14.

Variation 10°.00' East.

40,00 Set a Rock for temporary quarter section corner,

80,50 Intersected North and South line

Township 8 N. R. 3 East.

Chs 20 links North of Rock corner to Sections 11, 12, 13 and 14, from which corner I run

West, on a true line between Sections 11 and 14.

Variation 9°.51' East.

40 25 Set a Limestone Rock 18 in long, 10 in wide and 2 in thick for quarter section corner,

80 50 The corner to Sections 10, 11, 14 and 15. Land rolling 2d class Soil.

North, between Sections 10 and 11.

Variation 11°.00' East.

40 00 Set a Limestone Rock 21 in long, 11 in wide and 3 in thick for quarter sec corner,

45 00 Left up land and enter Bottom, bears S.W. and S.E.

80 00 Set a Limestone Rock 22 in long 11 in wide and 3 in thick for corner to Sections 2, 3, 10 and 11 — Upland broken 3d rate Soil, Bottom 1st rate Soil.

Township 8. N. R. 3. East,

Chs

East on a random line between Sections 2 and 11.

Variation 10°. 00' East.

5.00 A Stream 70 links wide, runs S. E. (a few Cotton Woods)

12.00 ~~Hat~~ Same Stream 60 links wide runs N. E. (1 cotton Wood and Ash)

18.00 ~~Hat~~ Same Stream 70 links wide runs South East,

40.00 Set a Limestone Rock for temporary quarter Section corner,

45.00 ~~Hat~~ Same Stream 55 links wide runs N. E. (Some Small Willows)

58.00 ~~Hat~~ Same Stream 65 links wide runs S. E. (a few Maple Trees in line)

80.50 Intersected North and South, line 27 links North of Rock corner to Section 1. 2. 10 and 11, from which corner I run West, on a true line between Sections 2 & 11,

Variation 9°. 48' East,

Township 8. N. R. 3. East.

40 25 Set a Limestone Rock 17 in long, 11 in wide and 3 in thick for quarter Section corner,

80.50 The corner to Sections 2. 3. 10 and 11, Saved level 1st rate Soil,

Timber Maple, cotton wood and Willow Undergrowth same and Ash.

North on a true line between Sections 2 and 3.

Variation 10°. 45' East

15 00 Left Prairie and enter Timber, bears N. W. and South East,

7 50 A Stream 70 links wide runs S. E.

8 70 Left Timber and enter Prairie bears N. W. and S. East,

12 00 ~~Hat~~ Same Stream 75 links wide runs South West (3 cotton Wood Trees at crossing)

20 00 ~~Hat~~ Same Stream 90 links wide runs S. E.

35 00 A Ravine 10 links wide runs S. W.

40.00 The true point for quarter section corner being in a sink hole,
I set 20 links West, of true point a Limestone Rock 17 in long 10 in wide and 3 in thick for witness corner. (At Pit 18 in West of said Rock,)

82.50 Intersected the 2d Standard Parallel North, the North Boundary of the Township. 7.80 Chains West of member corner to Sections 34 and 35. At which point I set a Limestone Rock 21 in long, 11 in wide and 3 in thick for corner to Sections 2 and 3.
Land level 1st rate Soil.

North between Sections 33 and 34.
Variation 11° 30' East.

40.00 Set a Limestone Rock 18 in long 10 in wide and 3 in thick for quarter Sec corner.

80.00 Set a Limestone Rock 20 in long 10 in wide and 3 in thick for corner to Sections

27, 28, 33 and 34.
Land level 2d rate Soil.

East, on a random line between Sections 27 and 34.
Variation 10° 00' East.

40.00 Set a Rock for temporary quarter section corner,

79.50 Intersected North and South line 12 links North of Rock corner for Sections 26, 27, 34 and 35. from which corner I run
West, on on a true line between Sections 27 and 34.
Variation 9° 55' East.

39.75 Set a Limestone Rock 21 in long, 11 in wide and 3 in thick for quarter Sec corner

79.50 The corner to Sections 27, 28, 33 and 34.
Land level 1st rate Soil.

Township 8. N. W. 3. East.

6 hrs	North, between Sections 27 and 28.
	Variation 11° 40' East.
40.00	Set a Limestone Rock 16 in long, 12 in wide and 4 in thick for quarter Section corner.
80.00	Set a Limestone Rock 18 in long, 13 in wide and 3 in thick for corner to Sections 21, 22, 27 and 28.
	Land gently rolling 2d rate Soil.
	East, on a random line between Sections 22 and 27.
	Variation 10° 00' East.
40.00	Set a Rock for temporary quarter Section corner.
80.20	Intersected North and South line 7 links North of Rock corner to Sections 22, 23, 26 and 27. From which corner I now West, on a true line between Sections 22 and 27.
	Variation 9° 58' East.
40.10	Set a Limestone Rock 15 in long 14 in

Township 8. N. W. 3. East.

6 hrs	wide and 3 in thick for quarter Sec corner.
80.20	The corner to Sections 21, 22, 27 and 28.
	Land level 2d rate Soil.
	North, between Sections 21 and 22.
	Variation 11° 30' East.
40.00	Set a Limestone Rock 17 in long, 11 in wide and 3 in thick for quarter Sec corner.
80.00	Set a Limestone Rock 18 in long 12 in wide and 4 in thick for corner to Sections 15, 16, 21 and 22.
	Land level 2d rate Soil.
	August the ~~16~~ 15th 1857.
	East, on a random line between Sections 15 and 22.
	Variation 10° 00' East.
40.00	Set a Rock for temporary quarter Section corner.
79.54	Intersected North and South line

Township 8. N. R. 3. East.

Obs 15 links South of Rock corner to Sections 14, 15, 22 and 23. from which corner Run West, on a true line between Sections 15 and 22.

Variation 10°.06' East,

39.77 Set a Limestone Rock 18 in long 10 in wide and 3 in thick for quarter Section corner,

79.54 The corner to Sections 15, 16, 21 and 22.

Land level 2d rate Soil,

North, between Sections 15 and 16,

Variation 11°.30' East,

40.00 Set a Limestone Rock, 17 in long, 11 in wide and 3 in thick for quarter Section corner;

80.00 Set a Limestone Rock 20 in long, 12 in wide and 3 in thick for corner to Sections 9, 10, 15 and 16,

Land level 1st rate Soil

East, on a random line between Sections 10 and 15,

Variation 10°.00' East,

Township 8. N. R. 3 East.

40.00 Set a Rock for temporary quarter Section corner,

79.40 Intersected North and South line 30 links South of Rock corner to Sec 10, 11, 14 and 15 from which corner Run West, on a true line between Sections 10 and 15,

Variation 10°.15' East,

39.70 Set a Limestone Rock 18 in long 11 in wide and 3 in thick for quarter Sec corner,

79.40 The corner to Sections 9, 10, 15 and 16,

Land broken 3d rate Soil,

North, between Sections 9 and 10,

Variation 11°.30' East,

40.00 Set a Limestone Rock 19 in long 9 in wide and 4 in thick for quarter Sec corner,

80.00 Set a Limestone Rock 20 in long 12 in wide and 3 in thick for corner to Sections 3, 4, 9 and 10,

Land S½ broken 3d rate N½ level 1st rate Soil.

Township 8. N. R. 3. E.

Chs East, on a random line between Sections 3 and 10.

Variation 10°. 00' East,

40.00 Set a Rock for temporary quarter Sec. corner

79.77. Intersected North and South line 10 links South of Rock corner to Sections 2. 3. 10 + 11. From which corner I run

West, on a true line between Sections 3 and 10.

Variation 10°. 04' East,

39.89 Set a Limestone Rock 19 in long, 12 in wide and 3 in thick for quarter Section corner,

79.77 The corner to Sections 3. 4. 9 and 10,

Land level 1st rate Soil.

North, on a true line between Sections 3 + 4.

Variation 11°. 20' East,

38.50 A Stream 80 links wide, runs S. E.

40.00 Set a Limestone Rock 18 in long 11 in wide and 3 in thick for quarter Section corner,

82.30 Intersected the 2d Standard Parallel North, the North Boundary of the

Township 8. N. R. 3. East.

Chs Township 7. 59 Chains West of Mound corner to Sections 33 and 34, at which point I set a Limestone Rock 17 in long, 11 in wide and 3 in thick (with French) for corner for Sections 3 and 4.

Land level 1st rate Soil.

North, between Sections 32 and 33.

Variation 11°. 30' East,

40.00 Set a Limestone Rock 19 in long 11 in wide and 3 in thick for quarter Section corner,

80.00 Set a Limestone Rock 21 in long, 10 in wide and 3 in thick for corner to Sections 28. 29. 32 and 33.

Land gently rolling 2d rate Soil.

East, on a random line between Sections 28 and 33.

Variation 10°. 00' East,

Township 8. N. R. 5. East

40,00 Set a Rock for temporary quarter Section corner,

80,80 Intersected North and South line at Rock corner for Sections 27, 28, 33 and 34, from which corner I run

West, on a true line between Sections 28 and 33.

Variation 10°.00' East,

40,40 Set a Limestone Rock 16 in long, 14 in wide and 4 in thick for quarter Section corner,

80,80 The corner for Sections 28, 29, 32 and 33.

Land level 2d rate Soil,

North, between Sections 28 and 29,

Variation 11°.00' East,

40,00 Set a Limestone Rock 17 in long 10 in wide and 3 in thick for quarter Section corner,

80,00 Set a Limestone Rock 19 in long 10 in wide and 4 in thick for corner to Sections 20, 21, 28 and 29,

Land gently rolling 2d rate Soil,

Township 8. N. R. 5. East,

Chs East, on a random line between Sections 21 and 28,

Variation 10°.00' East,

40 00 Set a Limestone Rock for temporary quarter Section corner,

79 71 Intersected North and South line 47 links South of Rock corner to Sections 21, 22, 27 and 28, from which corner I run

West, on a true line between Sections Sections 21 and 28,

Variation 10°.30' East,

39 85 Set a Limestone Rock 18 in long, 10 in wide and 3 in thick for quarter Sec corner,

79 71 The corner to Sections 20, 21, 28 and 29.

Land gently rolling 2d rate Soil,

August the 16th 1857.

North, between Sections 20 and 21,

Variation 11°.40' East,

Township 8. N. R. 3. East

40.00 Set a Limestone Rock 17 in long, 11 in wide and 3 in thick for quarter section corner,

80.00 Set a Limestone Rock 20 in long, 10 in wide and 3 in thick for corner to sections 16, 17, 20 and 21.

Land gently rolling 2d rate soil.

East, on a random line between sections 16 and 21.

Variation 10° 16' East,

40.00 Set a Rock for temporary quarter sec corner,

80.25 Intersected North and South line 38 links North of Rock corner to sections 15, 16, 21 and 22, from which corner from West, on a true line between sections 16 and 21,

Variation 9° 59' East,

40.13 Set a Limestone Rock 18 in long, 11 in wide and 3 in thick for quarter section corner,

80.25 The corner to sections 16, 17, 20 and 21,

Land gently rolling 2d rate soil.

Township 8. N. R. 3. East,

Chs North, between sections 16 and 17.

Variation 11° 30' East,

40.00 Set a Limestone Rock 18 in long, 10 in wide and 4 in thick for quarter section corner,

80.00 Set a Limestone Rock 22 in long, 6 in wide and 6 in thick for corner to sections 8, 9, 16 and 17,

Land gently rolling 2d rate soil.

East, on a random line between sections 9 and 16,

Variation 10° 00' East,

40.00 Set a Rock for temporary quarter section corner,

80.00 Intersected North and South line 7 links North of Rock corner to sections 9, 10, 15 and 16, from which corner from West, on a true line between sections 9 and 16.

Variation 9° 58' East,

Township 8 N. R. 3 E.

Chs

40.00 Set a Limestone Rock 16 in long 13 in wide and 3 in thick for quarter Section corner,

80.00 The corner to Sections 8, 9, 16 and 17, Land broken 3d rate Soil.

North, between Sections 8 and 9,

Variation 11° 15' East,

40.00 Set a Limestone Rock 20 in long 11 in wide and 3 in thick for quarter Section corner,

75.00 Left up Land and enter Bottom, bears E & W,

80.00 Set a Limestone Rock 20 in long 16 in wide and 3 in thick for corner to Sections 4, 5, 8 and 9,

Land broken 3d rate Soil;

East, on a random line between Sections 4 and 9.

Variation 10° 00' East,

40.00 Set a Rock for temporary quarter Section corner,

Township 8 N. R. 3 East.

Chs

80.00 Intersected North and S line 16 links South of Rock corner to Sections 3, 4, 9 and 10, from which corner from West, on a true line between Sections 4 and 9,

Variation 10° 07' East,

40.00 Set a Limestone Rock 16 in long 14 in wide and 4 in thick for quarter Section corner,

80.00 The corner to Sections 4, 5, 8 and 9, Land level 1st rate Soil.

North, on a true line between Sections 4 and 5.

Variation 11° 15' East,

40.00 Set a Limestone Rock 16 in long 10 in wide, and 3 in thick for quarter Section corner,

68.00 A Stream 75 links wide runs East, (1 cotton wood, only)

81.50 ~~that~~ Same Stream 90 links wide runs South West.

Township 8. N. R. 3. East.

Chs

82.00 Intersected the 2d Standard Parallel North, the North Boundary of the Township, 7.68 Chains West, of Post, corner to Sections 32 and 33. This true Point being in a Spring of Quick Sand Bottom, on the Right Bank of the Stream, above refered to, Set a Limestone Rock 2.68 Chains, East, (on the left Bank of said Stream) 20 in long, 14 in wide, and 3 in thick, for ~~cor~~ witness corner to Sections 4 and 5. With Trench, and Pit, on East, side ~~Side~~ of Rock, Land Level 1st rate Soil,

North, between Sections 31 and 32.

Variation 11° 30' East.

40.00 Set a Limestone Rock 17 in long, 10 in wide and 3 in thick for quarter Section corner,

80.00 Set a Limestone Rock 22 in long,

Township 8. N. R. 3. East.

Chs

12 in wide and 3 in thick for corner to Sections 29, 30, 31 and 32, Land gently rolling 2d rate Soil.

East, on a random line between Sections 29 and 32.

Variation 10° 00' East.

40 00 Set a Rock for temporary quarter Section corner,

79 75 Intersected North and South line 6 links South of Rock corner to Sections 28, 29, 32 and 33. from which corner True

West, on a true line between Sections 29 and 32.

Variation 10° 05' East.

39.88 Set a Limestone Rock 16 in long, 12 in wide and 3 in thick for quarter Section corner,

79.75 The corner to Sections 29, 30, 31 and 32, Land level 2d rate Soil.

Township 8 N. R. 3. East,

Chs West, between Sections 30 and 31,
(The Mound being in Plain view) I
adjusted my Compass to a
Variation of 10°.00' East,
40.00 Set a Limestone Rock 16 in long, 10 in wide
and 4 in thick for quarter Section corner
77.90 Intersected the West Boundary of the
Township at mound corner for
Sections 30 and 31,
Land level 2d rate Soil,

North, between Sections 29 and 30,
Variation 11°.30' East,
40.00 Set a Limestone Rock 18 in long 10 in
wide and 3 in thick for quarter Section corner,
80.00 Set a Limestone Rock 14 in long, 12 in wide
and 2½ in thick for corner to Sections
19, 20, 29 and 30,
Land gently rolling 2d rate Soil,

August the 17th A.D. 1857.

Township 8 N. R. 3. East,

Chs East, on a random line between
Sections 20 and 29,
Variation 10°.00' East,
40.00 Set a Rock for temporary quarter
Section corner,
79.50 Intersected North, and South line 50
links North of Rock corner to Sec-
tions 20, 21, 28 and 29, from which
corner I run
West, on a true line between
20 and 29,
Variation 9°.39' East,
39.75 Set a Limestone Rock 17 in long
10 in wide and 3 in thick for
quarter Section corner,
79.50 the corner to Sections 19, 20, 29 and 30,
Land level 2d rate Soil,

West, between Sections 19 and 30,
(I adjusted my compass on mound
the corner for Sections 19 and 30,)
to a variation of 9°.55' East,

Township 5 N. R. 3 East,

chs

40.00 Set a Limestone Rock 21 in long, 9 in wide and 3 in thick for quarter Section corner,

72.50 Intersected the West Boundary of the Township at mound corner for Sections 19 and 30

Land level 2nd rate Soil.

North, between Sections 19 and 20,

variation 11°.15' East,

40.00 Set a Limestone Rock 18 in long, 9 in wide and 3 in thick for quarter Section corner,

80.00 Set a Limestone Rock 20 in long, 12 in wide and 3 in thick for corner to Sections 17, 16, 19 and 20,

Land rolling 2nd rate Soil.

East, on a random line between Sections 19 and 20,

variation 10°.00' East,

40.00 Set a Rock for temporary quarter Section corner,

Township 5 N. R. 3 East,

chs

80.25 Intersected North and South line 41 links North of North corner to Sections 16, 17, 20 and 21, from which corner 3 trees

West, on a true line between Sections 17 and 20,

variation 9°.42' East,

40.13 Set a Limestone Rock 17 in long 10 in wide and 3 in thick for quarter Section corner,

80.25 The corner to Sections 16, 17, 17 and 20,

Land level 2nd rate Soil.

West, on a random line between Sections 18 and 19,

variation 10°.00' East,

40.00 Set a Rock for temporary quarter Section corner,

77.62 Intersected the West Boundary of the Township 50 links South of mound corner to Sections 18 and 19,

Township 8. S. R. 3. East.

Chs

from which corner I run East, on a true line between Sections 18 and 19.

Variation 9°.39' East.

37.62 Set a Limestone Rock 19 in long, 11 in wide and 3 in thick for quarter Section corner,

77.62 The corner to Sections 17, 18, 19 and 20.

Land rolling 2d rate soil.

North, between Sections 17 and 18,

Variation 11°.00' East,

40.00 Set a Limestone Rock 20 in long, 11 in wide and 3 in thick for quarter Section corner,

80.00 Set a Limestone Rock 21 in long, 10 in wide and 3 in thick for corner to Sections 7, 8, 17 and 18,

Land gently rolling 2d rate soil,

East, on a random line between Sections 8 and 17,

Township 8. S. R. 3. East.

Chs

Variation 10°.00' East,

40.00 Set a Rock for temporary quarter Section corner,

79.60 Intersected North and South line 40 links North, of Rock corner to Sections 8, 9, 16 and 17, from which corner I run West, on a true line between Sections 8 and 17,

Variation 9°.43' East,

39.80 Set a Limestone Rock 18 in long, 12 in wide and 3 in thick for quarter Section corner,

79.60 The corner to Sections 7, 8, 17 & 18,

Land rolling 2d rate soil,

West, on a random line between Sections 7 and 18,

Variation 9°.45' East,

40.00 Set a Limestone Rock for temporary quarter Section corner,

77.85 Intersected the West Boundary of the

Township 8. N. R. 3. East,

Chs Township 24 links South of mound corner to Sections 7 and 18, from which corner true
East, on a true line between Sections 7 and 18,
Variation 9° 35' East,
37.85 Set a Limestone Rock 20 in long, 12 in wide and 3 in thick for quarter Section corner,
77.85 The corner to Sections 7, 8, 17 and 18.
Land rolling 2d rate Soil.

North, between Sections 7 and 8,
Variation 11° 00' East,
40.00 Set a Limestone Rock 19 in long, 11 in wide, and 3 in thick for quarter Sec corner,
80.00 Set a Limestone Rock 18 in long, 14 in wide, and 3 in thick for corner to Sections 5, 6, 7 and 8,
Land broken 3d rate Soil,

East, on a random line between

Township 8. N. R. 3. East,

Chs Sections 5 and 8,
Variation 10° 00' East,
40.00 Set a Rock for temporary quarter Section corner,
75.00 Left up land and entered Bottom bears North, West and South East,
79.80 Intersected North and South line 32 links South of Rock corner to Sections 4, 5, 8 and 9, from which corner true
West, on a true line between Sections 5 and 8,
Variation 10° 14' East,
39.90 Set a Limestone Rock 20 in long, 12 in wide and 3 in thick for quarter Section corner,
79.80 The corner to Sections 5, 6, 7 & 8.
Land rolling 2d rate Soil,

West, on a random line between Sections 6 and 7,
Variation 9° 30' East,

Township 8 N. R. 3 East,

40,00 Set a Rock for temporary quarter Section corner,

78,20 Intersected the West Boundary of the Township at mound corner for Sections 6 and 7, from which corner I run East, on a true line between Sections 6 and 7.

Variation 9° 30' East,

38,20 Set a Limestone Rock 17 in long 12 in wide and 3 in thick for quarter Section corner,

78,20 The corner to Sections 5, 6, 7 and 8 - Land broken 3d rate soil.

North, on a true line between Sections 5 and 6,

Variation 11° 30' East,

40,00 Set a Limestone Rock 17 in long, 12 in wide and 3 in thick for quarter Section corner,

65 00 Left up Land and entered Bottom bears E & W,

Township 8 N. R. 3 East,

78 00 A Creek 25 links wide runs East (Some Brush on it)

81 00 ~~That~~ Same Creek 40 links wide, runs South West, (Some Hazzle and Plum Brush)

81 80 Intersected the 2d Standard Parallel North, the North Boundary of the Township 7.50 Chains West of Post, corner to Sections 31 & 32, at which Point Set a Limestone Rock 20 in long, 12 in wide and 3 in thick for corner to Sections 5 & 6, from which corner

A Bear oak 30 in dia bears N 5° W. 140 links distance. No other Tree convenient to mark, Up broken 3d rate soil.

Bottom level 2d rate soil,

General description,

The up land of this Township, is generally level, and gently rolling, good 2d rate Soil. The Bottom, or Valley Land is 1st rate Soil,
The Stream of Water, which runs across the North end of this Township is clear, with a very rapid current, Mudy Bottom. considerable Quick Sand, (Producing very fine cat, and Buffalo Fish)
The Timber, is almost worthless, except for fuel, — the Stream above refered to is barly fringed with Timber in the majority of Places, in many places entirely bare, Cotton Wood and Maple ~~[illegible]~~ are the only classes except a few Swamp Willow, and Plum Bushes, ——

A list of names

A list of the names of the individuals employed to assist in running, measuring, or marking, the lines and corners described in the foregoing field notes of Township No. 1. ~~Range~~ ~~No~~ of the Base line of Range 3 East of the 6th Principal Md., Showing the respective capacities in which they acted:

Dometreus T. Colvin, Flagbearer,
Quintus A. Colvin, Chainman,
Edward Stephens, Chainman,
Columbus C. Colvin, Axeman,
William Stephens, Axeman,

General Land Office • Original Field Notes

Book Number

46

The images in this file are photographs of the notes of the original surveys of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The original surveys in Nebraska began in the mid 1850's and were completed in the mid 1880's. The Nebraska office of the Surveyor General was closed June 30, 1886.