General Land Office • Original Field Notes

Book Number

775

W.W. Alt - East boundary T 21 & 22 N, R 39 W

The images in this file are microfilm images of the notes of W.W. Alt resurveys of portions of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The W.W. Alt resurveys began in the mid 1890's and were completed in the early 1900's.

Names and Duties of Assistants.

Clarence P. Haggard, Chairman.
Sidney Blout, Chairman.
James G. Graver, Flagman.
James C. Rosengrun, Mounduman.
Theodore Neeland, Mounduman.

INDEX.
E. boundary T. 22 N., R 39 W.

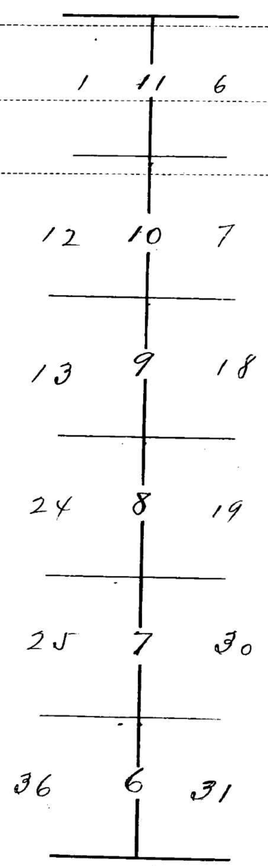

INDEX DIAGRAM.

East boundary
Township 21 N. Range 39 W

6	5	4	3	2	1	6
7	8	9	10	11	12	5
18	17	16	15	14	13	4
19	20	21	22	23	24	3
30	29	28	27	26	25	2
31	32	33	34	35	36	1

Meanders Page

Preliminary Oaths of Assistants.

We, Clarence P Haggard and Sidney Blunt do solemnly swear that we will well and faithfully execute the duties of chain~~men~~ carriers; that we will level the chain upon even and uneven ground, and plumb the tally pins either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true lengths of all lines that we assist in measuring, to the best of our skill and ability, and in accordance with instructions given us in the survey of the East and North Bendaries of Townships No 21, 22 and 23 North Ranges 39 and 40 West; and the North and East Bendaries of Townships 23 North Ranges 37 and 38 West and the East Bendaries of Townships 24 North, Ranges 37, 38, 39 and 40 West; and the North Bendaries of Fractional Townships 21, 22 and 23 North Range 41 West of the sixth Principal Meridian in the State of Nebraska, Chainman.

Subscribed and sworn to before me this ..... day of ....., 189 .

SEAL

We, ... and ..... do solemnly swear that we will well and truly perform the duties of moundmen in the establishment of corners, according to the instructions given us, to the best of our skill and ability, in the survey of .....

Clarence P Haggard, Chainman ~~Moundman~~.
Sidney Blunt, Chainman ~~Moundman~~.

Subscribed and sworn to before me this 30th day of March, 1895.

SEAL

E E Lowe
Co Clerk in and for Gent Co Neb.

~~We,~~ ..... ~~and~~ .....

We do solemnly swear that we will well and truly perform the duties of ~~axmen~~ moundmen in the establishment of corners and other duties, according to instructions given us, to the best of our skill and ability, in the survey of the East and North Bendaries of Townships No 21, 22 and 23 North Ranges 39 and 40 West; and the North and East bendaries of Townships 23 North Ranges 37 and 38 West, the East Bendaries of Townships 24 North, Ranges 37, 38, 39 and 40 West, and the North Bendaries of Fractional Townships, 21, 22, and 23 North Range 41 West of the sixth Principal Meridian in the State of Nebraska, Axman.

Subscribed and sworn to before me this ..... day of ....., 189 .

SEAL

I, ..., do solemnly swear that I will well and truly perform the duties of flagman according to instructions given me, to the best of my skill and ability in the survey of ..... , Flagman.

Subscribed and sworn to before me this 30th day of March, 1895.

SEAL

E. E. Lowe
Co Clerk in and for Gent Co Neb

James C. Rosenquist - Meadman
Theodore Neeland - Meadman

I James G. Grover, do solemnly swear that I will well and truly perform the duties of Flagman, according to instructions given me, to the best of my skill and ability, in the survey of the East and North Bendaries of Townships No 21, 22 and 23 North, Ranges 39 and 40 West; and the North and East Bendaries of Townships No 23 North, Ranges 37 and 38 West; and the East Bendaries of Townships No 24 North, Ranges 37, 38, 39 and 40 West; and the North Bendaries of Fractional Townships, 21, 22 and 23 North Range 41 West; of the Sixth Principal Meridian in the State of Nebraska

James G. Grover.
Flagman

Subscribed and sworn to before me this 30th day of March A.D. 1895

Seal

E E Lowe
Co Clerk
in and for Gent Co. Neb.

(Copy.)

Chicago, March 2nd 1895

Commissioner of The General Land Office
Washington, D.C.

~~Gentlemen~~ Sir

We hereby certify that we have repaired and put in perfect order a Gurley Transit #15 for Mr W. W. Alt, of Wahoo, Neb. and also placed on above instrument an Improved Saegmuller Solar Attachment - and that the above instrument had no instrumental error when it left our hands.

Very respectfully yours
Seelig & Kandler

I Theodore Neeland do solemnly swear that I will well and truly perform the duties of Flagman according to instructions given me, to the best of my skill and ability, in the Survey of the East and North boundaries of Townships No 23 N. Range 38 and 39 W, the East boundary of Township No 24 N Range 38 and 39 W, and the North boundary of Township No 23 N Range 37 W. of the 6th Principal Meridian State of Nebraska

Theodore Neeland
Flagman

Subscribed and sworn to before me this 30th day of September 1895
Willard W Alt
U S Surveyor

147

Chains

Survey commenced Apr. 11, 1895; and executed with a Gurley Transit No. 15 which is provided with two opposite verniers reading to single minutes.
The instrument was repaired, adjusted, and thoroughly overhauled by Seelig and Kandler, manufacturers; of Chicago, Ill.; preparatory to the commencement of this work.

At the Standard Cor. of Tp. 21 N., Rs. 38 and 39 W.; I observe Polaris on the meridian at 12h 47m by my watch, which is central standard time; on night of Apl. 11. being 1¾ minutes after the star "Delta, Cassiopeiae" was in plane of Polaris and mark the line thus determined. by a point in stake driven 5 chs. North of cor.
April. 11, 1895

April 12.; at 7h A.M. I drive tack in oak stake, which is firmly driven in ground 5 chains North of corner on the meridian as determined last night.
The magnetic bearing of the true meridian is N. 13°02' W.; which reduced by the table on page 100 of the Manual. gives the mean mag. decl. 13°06' E.
From the Standard Cor of T 21 N., Rs. 38 & 39 W.
I run

North. bet. secs. 31 and 36.
Over rolling ground; descending slightly
31.70 Trail to Hyannis. Course N. 80° E., S. 80° W.
Begin ascent along S. slope.
40.00 Deposit a chamed stake 12 ins in the ground for ¼ sec cor.; dug pits 18 x 15 x 12 ins N. & S. of cor. 4 ft. dist. and raised a mound of earth 3½ ft base 1½ ft high, over deposit. In S. pit drove an oak stake 2 ft. long 2 ins. sq. 12 ins. in the ground. marked ¼ S., on W. face.

E. boundary T. 21 N., R. 39 W.

Chains	
54.00	Top of ascent, 75 ft. above valley, on range of hills extending to West.
58.00	Begin gradual descent, along N. slope.
80.00	Deposit a chamed stake 12 ins in the ground for cor of secs 25. 30. 31. and 36. dug pits 18x18x12 ins. in each sec 4 ft dist and raised a mound of earth 4 ft base 2 ft high over deposit. In SE. pit drove an oak stake 2 ft. long 2 ins. sq. 12 ins. in the ground, marked T21N S 30. on NE. R38W S 31, on SE. S 36. on SW. and R39W S 25. on NW. faces. with 1 notch on S. and 5 notches on N. edges Land. rolling and broken. Soil. sandy; 3rd rate. Sand and bunch grass.

North. bet. secs. 25 and 30.
Descend gently along N. slope.

19.00	Bottom descent at foot of low hills. Course E. and W.; ascend.
39.00	Top of ascent, 50 ft. above valley. thence along E. slope of hills.
40.00	Deposit a chamed stake 12 ins in the ground for ¼ sec. cor.; dug pits 18x18x12 ins N. and S. of cor. 4 ft dist and raised a mound of earth 3½ ft base 1½ ft high, over deposit. In S. pit drove an oak stake 2 ft long 2 ins. sq. 12 ins. in the ground, marked ¼ S., on W. face.
	Descend along N. E. slope.
65.00	Bottom of descent, enter rolling land E. & W.
75.00	Foot of range of sand hills. Course about E. & W. ascend along S. slope.

E. boundary T. 21 N., R. 39 W., continued.

Chains	
80.00	Set an oak post 3 ft long 4 ins sq. with chamed stake 24 ins in the ground for cor of secs 19. 24. 25, and 30. marked T21N S 19. on NE. R38W S 30. on SE. S 25. on SW. and R39W S 24. on NW. faces. with 2 notches on S. and 4 on N. edges. dug pits 18x18x12 ins in each sec 5½ ft dist. and raised a mound of earth 4 ft base 2 ft high N. of cor. Land. rolling valley, and sand hills. Soil. sandy; 3rd rate. Sand. and bunch grass.

North. bet. secs. 19 and 24.
Ascend along S. slope range of hills.

16.00	Top of ascent on E. slope range which extends to W.; thence over rolling gro[illegible] w.
30.00	Begin descent along N. slope.
40.00	Deposit a chamed stake 12 ins in the ground for ¼ sec cor.; dug pits 18x18x12 ins N. and S. of cor 4 ft. dist. and raised a mound of earth 3½ ft base 1½ ft high, over deposit. In S. pit drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground. marked ¼ S., on W. face.
	Descend slightly
43.00	Bottom descent, at foot of low hills. Course E. & W.; ascend over rolling foot hills.
65.00	Top of ascent on low range. course E. & W. descend along N. slope.
80.00	Deposit a chamed stake 12 ins in the ground for cor of secs 13. 18 19. and 24.; dug pits 18x18x12 ins in each sec 4 ft dist. and raised a mound of earth 4 ft base 2 ft high over deposit.

E. boundary T. 21 N., R. 39 W., Continued.

chains

In S.E. pit drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked
T21N S18. on NE.
R38W S19. on SE.
S24. on SW. and
R39W S13. on NW. faces with 3 notches on N. and S. edges.
Land. rolling sand hills.
Soil. sandy: 3rd rate.
Bunch grass.

North, bet. secs 13. and 18.
ascend over rolling ground.
20.00 Top of ascent. 50 ft above valley, on range.
Course E. & W.; thence over broken ground.
31.50 Foot of sand bluff.; ascend abruptly.
35.30 Top of ascent 75 ft above valley, on S.E. face of range, ascend over rolling ground.
40.00 Deposit a chained stake 12 ins in the ground for ¼ sec cor: dug pits 18 x 18 x 12 ins N. & S. of cor 4 ft dist. and raised a mound of earth 3½ ft base 1½ ft high over deposit.
In S. pit, drove an oak stake. 2 ft long 2 ins sq. 12 ins. in the ground. marked ¼ S, on W. face.
ascend.
50.00 Top of range, 125 ft above valley; Course N. 80° E. S. 80° W., descend along N.E. face.
55.00 Begin abrupt descent.
71.00 Bottom descent, thence over rolling foot hills ascending slightly.
80.00 Set an oak post 3 ft long 4 ins sq. with chained stake 24 ins in the ground. for Cor. of secs 7. 12. 13. and 18. marked
T21N S 7. on NE.
R38W S18. on SE.
S13. on SW. and
R39W S12. on NW. faces. with 4 notches on S. and 2 on N. edges. dug pits 18 x 18 x 12 ins

E. boundary T. 21 N., R. 39 W. continued.

chains

in each sec. 5½ ft dist. and raised a mound of earth 4 ft base 2 ft high W. of cor.
Land. broken sand hills.
Soil, sandy: 3rd rate — Bunch grass.

North, bet. secs. 7 and 12.
Ascend over rolling ground
11.00 Top of ascent, thence over low rolling hills.
28.00 Begin descent over broken foothills.
40.00 Deposit a chained stake 12 ins in the ground for ¼ sec cor.: dug pits 18 x 18 x 12 ins. N. and S. of cor. 4 ft dist. and raised a mound of earth 3½ ft. base 1½ ft. high, over deposit.
In S. pit drove an oak stake 2 ft. long 2 ins. sq. 12 ins in the ground, marked ¼ S. on W. face.
43.00 Bottom descent, in neck of valley: E & W.
45.00 Ascend along S. slope.
47.50 Begin abrupt ascent.
50.00 Sand bluff. 75 ft above valley, ascend along S. face of range.
80.00 Deposit a chained stake 12 ins in the ground for cor. of secs. 1. 6. 7. and 12 dug pits 18 x 18 x 12 ins. in each sec. 4 ft. dist. and raised a mound of earth. 4 ft base 2 ft high. over deposit.
In SE. pit, drove an oak stake 2 ft long 2 ins. sq. 12 ins in the ground. marked
T21N S6. on NE.
R38W S7. on SE.
S12. on SW. and
R39W S1. on NW. faces. with 5 notches on S. and 1 on N. edges.
Land, rolling sand hills.
Soil. sandy: 3rd rate.
Bunch grass.

E. boundary T. 21 N., R. 39 W., concluded.

Chains	
	North, bet. secs. 1 and 6.
	Ascend along S. face of range.
7.00	Top of range 100 ft above valley, course N.E. and S.W.; descend over rolling ground.
40.00	Deposit a charred stake 12 ins in the ground for ¼ sec cor.; dug pits 18 x 18 x 12 ins. N. & S. of cor. 4 ft. dist. and raised a mound of earth 3½ ft. base 1½ ft high over deposit.
	In S. pit drove an oak stake 2 ft long 2 ins. sq. 12 ins. in the ground, marked ¼ S., on W. face
77.00	Begin abrupt descent along N.E. slope.
80.00	Set an oak post 3 ft long 4 ins sq. with a charred stake 24 ins. in the ground for cor of Tps. 21 and 22 N., Rs. 38 and 39 W., marked T 22 N S 31. on NE.
	R 38 W S 6. on SE.
	T 21 N S 1. on SW. and
	R 39 W S 36. on NW. faces, with 6 notches on each edge. dug pits 24 x 24 x 12 ins on each line N.E. and W., 4 ft. and S. of post 8 ft dist., and raised a mound of earth 5 ft base 2½ ft high S. of cor.
	Land. rolling sand hills.
	Soil. sandy; 3rd rate.
	Bunch grass.

At this cor. at 4 o'clock P.M., the magnetic bearing of the range line is N. 13° W., which reduced by the table on page 100 of the Manual, gives the mean mag. decl. 13° 04' E.

Thence I run through T. 22 N.

	North bet. secs. 31 and 36.
	Descend along N.E. slope.
14.60	Trail: course E. & W.; at foot of descent.
	ascend along S.E. slope

E. boundary T. 22 N., R. 39 W., continued.

Chains	
23.00	Top of ascent 75 ft above trail. on E. face of range; descend along N.E. face.
40.00	Deposit a charred stake 12 ins in the ground for ¼ sec cor. dug pits 18 x 18 x 12 ins N. & S. of cor. 4 ft. dist. and raised a mound of earth 3½ ft. base 1½ ft high, over deposit.
	In S. pit, drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground. marked ¼ S., on W. face.
	Ascend.
42.00	Top of bluff. 25 ft above cor.; descend along N.E. slope over rolling ground.
60.00	Bottom descent, thence over rolling foot hills.
80.00	Deposit a charred stake 12 ins in the ground for cor of secs 25. 30. 31. and 36. dug pits 18 x 18 x 12 ins. in each sec. 4 ft. dist. and raised a mound of earth 4 ft. base 2 ft. high, over deposit.
	In S.E. pit, drove an oak stake 2 ft long 2 ins. sq. 12 ins in the ground, marked T 22 N S 30. on NE.
	R 38 W S 31. on SE.
	S 36. on SW. and
	R 39 W S 25. on NW. faces. with 1 notch on S. and 5 notches on N. edges.
	Land. rolling sand hills.
	Soil. sandy; 3rd rate.
	Bunch grass.

	North, bet. secs. 25 and 30.
	Ascend over rolling foot hills.
8.00	Top of ascent 25 ft above cor.
16.00	Begin descent along E. slope of foot hills.
32.00	Enter N. end valley or basin; extends to E.
40.00	Deposit a charred stake 12 ins in the ground for ¼ sec. cor. dug pits 18 x 18 x 12 ins N. and S. of cor. 4 ft. dist., and raised a

E. boundary T. 22 N. R. 39 W. Continued.

Chains

mound of earth 3½ ft base 1½ ft high over deposit.
In S. pit drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked
¼ S. on W. face
Over level land.

44.00 Leave valley, E & W.; ascend along S. slope.

57.00 Top of ascent. 40 ft; on low range. E & W; descend.

65.00 Enter basin-like valley. Course E. & W.

80.00 Set an oak post 3 ft long 4 ins sq. with a chamed stake 24 ins in the ground for cor of secs 19. 24. 25. and 30, marked
T 22 N S 19. on NE.
R 38 W S 30. on SE.
S 25. on SW. and
R 39 W S 24. on NW. faces, with 2 notches on S. and 4 on N. edges. dug pits 18x18x12 ins. in each sec. 5½ ft dist. and raised a mound of earth 4 ft base 2 ft high W. of corner.
Land. low sand hills and level valley.
Soil. sandy; 2nd and 3rd rates.
Bunch and sand grass.
April 12, 1895.

North; bet. secs. 19 and 24.
Over level land.

5.00 Foot of range of hills. Course N. 40° E.; S. 40° W. ascend.

18.00 Top of ascent. 50 ft above valley. on E. face of range; thence descend along E. face.

35.00 Bottom of descent. in depression; ascend.

40.00 Deposit a chamed stake 12 ins in the ground for ¼ sec. cor. dug pits 18x18x12 ins. N & S of cor 4 ft dist; and raised a mound of earth 3½ ft base 1½ ft. high. over deposit.
In S. pit. drove an oak stake 2 ft long. 2 ins sq. 12 ins in the ground marked
¼ S, on W. face.
Ascend along S. E. slope.

E. boundary T. 22 N. R. 39 W., continued.

Chains.

49.00 Top of ascent on E. face of range; descend along N. E. slope.

75.00 Bottom descent, in neck of valley. extending to the East.

80.00 Deposit a chamed stake 12 ins in the ground for cor. of secs. 13. 18. 19. and 24. dug pits 18x18x12 ins in each sec. 4 ft dist. and raised a mound of earth 4 ft base 2 ft high, over deposit.
In S. E. pit, drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground. marked
T 22 N. S 18. on NE.
R 38 W S 19. on SE.
S 24. on SW. and
R 39 W S 13. on NW. faces, with 3 notches on N. and S. edges.
Land, rolling sand hills, and level valleys.
Soil. sandy; 2nd and 3rd rates.
Sand and bunch grass.

North, bet. secs. 13 and 18.
Ascend along S. E. slope.

13.00 Top of ascent. 40 ft above cor. thence over broken ground, along top of low range.

28.00 Begin descent along N. slope.

33.00 Bottom of descent in pass. or depression; ascend over rolling foot hills.

40.00 Deposit a chamed stake 12 ins in the ground for ¼ sec. cor.; dug pits 18x18x12 ins. N. & S. of cor. 4 ft. dist. and raised a mound of earth 3½ ft base 1½ ft high, over deposit.
In S. pit. drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked
¼ S, on W. face.
Ascend.

63.00 Top of ascent. 40 ft above cor., on ridge Course E. and W., descend along N. slope.

80.00 Set an oak post 3 ft. long 4 ins sq. with a chamed stake 24 ins in the ground for cor of secs 7. 12. 13. and 18. marked

E. boundary T. 22 N., R. 39 W. continued.

Chains	
	T22N S7. on NE.
	R38W S18. on SE.
	S13. on SW. and
	R39W S12. on NW. faces, with 4 notches on S. and 2 on N. edges. dug pits 18x18x12 ins in each sec. 5½ ft dist. and raise a mound of earth 4 ft base 2 ft high W. of corner.
	Land. rolling sand hills.
	Soil. sandy: 3rd rate.
	Sand and bunch grass.
	North, bet. secs. 7 and 12.
	Descend along N. slope over rolling ground
10.00	Bottom descent, thence over rolling foot hills.
20.00	Ravine or pass: Course E. and W.: ascend over foot hills.
40.00	Deposit a charred stake 12 ins in the ground for ¼ sec cor.: dug pits 18x18x12 ins N. & S. of cor 4 ft. dist. and raised a mound of earth 3½ ft base 1½ ft high. over deposit. In S. pit. drove an oak stake 2 ft. long 2 ins sq. 12 ins in the ground. marked ¼ S, on W. face.
	Ascend along S. slope.
48.00	Top of ascent. on range: extends to W.: and to the E. about ¼ mile. 150 ft high.
58.00	Begin abrupt descent along N. slope
75.00	Enter valley. E. and W.
80.00	Deposit a charred stake 12 ins in the ground for cor. of secs. 1, 6, 7, and 12.: dug pits 18x18x12 ins. in each sec. 4 ft dist. and raised a mound of earth 4 ft base 2 ft high. over deposit. In SE. pit drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground, marked T22N S6. on NE. R38W S7. on SE. S12. on SW. and R39W S1. on NW. faces, with 5 notches on S. and

E. boundary T. 22 N., R. 39 W. continued.

Chains	
	1 notch on N. edges.
	Land. level - and rolling sand hills.
	Soil. sandy: 1st and 3rd rates.
	Prairie and bunch grass.
	North, bet. secs 1 and 6.
	Over level land, in W. end of valley.
19.00	Foot of range. Course E. and W.; ascend over low bluffs.
40.00	Deposit a charred stake 12 ins. in the ground for ¼ sec. cor.; dug pits 18x18x12 ins N & S of cor 4 ft dist. and raised a mound of earth 3½ ft base 1½ ft high over deposit. In S. pit drove an oak stake 2 ft long 2 ins sq. 12 ins in the ground. marked ¼ S, on W. face.
41.00	Top of ascent on range; Course E. and W. 75 ft. above valley.; descend along N. slope.
60.00	Enter valley. Course N. 78° W., S. 70° E.
67.00	Trail to Heyannis. Course N. 80° W., S. 50° E.
67.80	Enter low wet land. Course E. and W.
80.00	Set an oak post 3 ft long 4 ins sq. with a charred stake 24 ins in the ground for Cor of Tps. 22 and 23 N. Rs. 38 and 39 W.; marked T23N S31. on NE. R38W S6. on SE. T22N S1. on SW. and R39W S36. on NW. faces, with 6 notches on each edge. dug pits 24x24x12 ins. on each line N. E. and W. 4 ft., and S. of post 8 ft dist., and raised a mound of earth 5 ft base 3½ ft high. S. of corner.
	Land. level and broken.
	Soil. sandy: 1st and 3rd rates.
	Prairie and sand grass.
	April. 13, 1895.

E. boundaries of Tps. 21 and 22 N. R. 39 W. concluded

General Description.

This line runs over a series of sand bluffs or ranges, which are very broken; with narrow valleys between ranges, most of which are dry valleys. — in the N.E. cor of T 22 N. the valleys are subject to overflow of water causing a prolific growth of grass. The vegetation consists of a thin sand grass and a bunch grass. — No timber of any description on any part of the line. Soil is almost pure sand on the hills and slopes. - and is unfit for cultivation; but very good for grazing purposes

Milland N. Alt.
U. S. ~~Deputy~~ Surveyor.

April 13, 1895

Final Oaths of Deputy Surveyors and their Assistants.

LIST OF NAMES.

A list of the names of the individuals employed by .....

....., United States Deputy Surveyor, to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of .....

showing the respective capacities in which they acted:

....., *Chainman.*

....., *Chainman.*

....., *Moundman.*

....., *Moundman.*

....., *Axman.*

....., *Axman.*

....., *Flagman.*

FINAL OATH OF ASSISTANTS.

We hereby certify that we assisted .....

..... United States Deputy Surveyor, in surveying all those parts or portions of the .....

.....

.....

..... of the ..... base and ..... meridian, ... of ....., which are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the United States Surveyor General for .....

....., *Chainman.*

....., *Chainman.*

....., *Moundman.*

....., *Moundman.*

....., *Axman.*

....., *Axman.*

....., *Flagman.*

.....

Subscribed and sworn to before me this .....
day of ....., 189 .

.....

.....

SEAL

14/165

Final Oath of United States Deputy Surveyor.

I, ..., United States Deputy Surveyor, do solemnly swear that, in pursuance of instructions received from ....., United States Surveyor General for ....., bearing date of the ..... day of ....., 189 , I have well, faithfully, and truly, in my own proper person, and in strict conformity with the instructions furnished by the United States Surveyor General for ....., the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of .....

..... of the ..... base and ..... meridian, in the ..... of ....., which are represented in the foregoing field notes as having been surveyed by me, and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the United States Surveyor General for ..... and in the specific manner described in the field notes, and that the foregoing are the *true* field notes of such survey; and should any fraud be detected, I will suffer the penalty of perjury under the provisions of an Act of Congress approved August 8, 1846.

.....
United States Deputy Surveyor.

Subscribed by said ....., United States Deputy Surveyor, and sworn to before me this ..... day of ....., 189 .

SEAL

.....

.....

APPROVAL.

Office of the ~~United States Surveyor General~~ Commissioner of the General Land Office,

Washington D.C. April 30th, 1897.

The foregoing field notes of the survey of the East-bending line of townships 21 and 22 North Range 39 West of the 6th Principal Meridian State of Nebraska

..... executed by Willard W. Alt - U.S. Deputy Surveyor under his Contract No. ....., dated October 26, 1894, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Binger Hermann
~~United States Surveyor General.~~
Commissioner ex officio Surveyor General for Nebraska

I certify that the foregoing transcript of the field notes of the above-described surveys ~~in~~ of the East-bending line of Tps 21 & 22 N R 39 W, has been correctly copied from the original notes on file in this office.

Binger Hermann
~~United States Surveyor General.~~
Commissioner ex officio Surveyor General for Nebraska

1/172

General Land Office • Original Field Notes

Book Number

775

W.W. Alt - East boundary T 21 & 22 N, R 39 W

The images in this file are microfilm images of the notes of W.W. Alt resurveys of portions of the State of Nebraska on file in the Office of the Nebraska State Surveyor located in Lincoln, Nebraska.

The W.W. Alt resurveys began in the mid 1890's and were completed in the early 1900's.